

Letter of Approval

SPECIFICATION FOR APPROVAL

Customer	
CUSTOMER:	
Product Name:	TX-Wireless Charging Transceiver Coil Module
CUST P/N:	
Product Model Number:	MPP25W
FINE P/N:	
Product Specifications Desc:	TX42.5*0.6-11TS-0.08*80P*1-8.3uH-7mm
Date	2026/06/05
DATE:	
Page Original:	
Version:	A.0

Proposed PREPARED BY	Reviewed by: CHECKED BY	Approved by:	Customer Confirmation: CUSTOMER APPROVE

Shenzhen yongman digital Co., LTD.

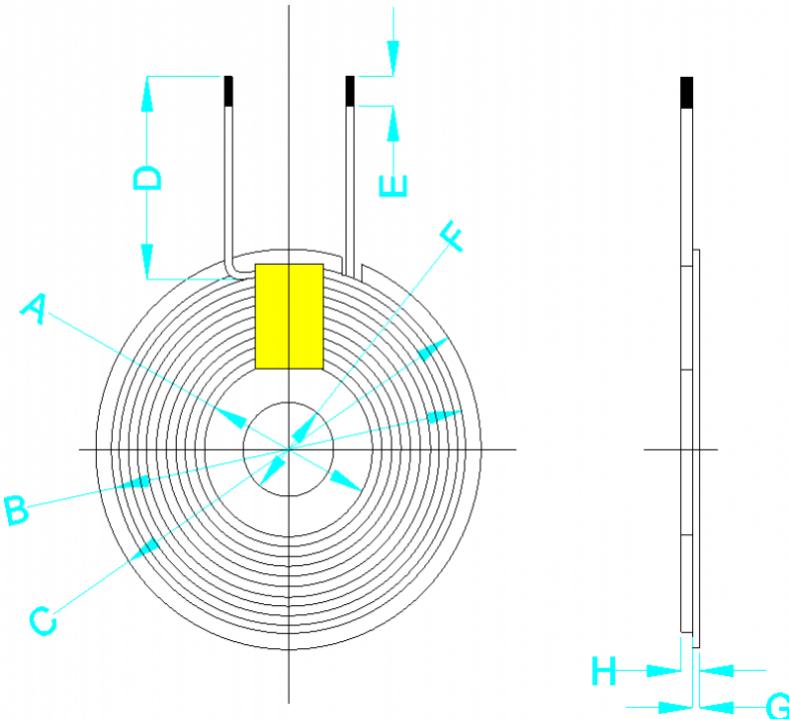
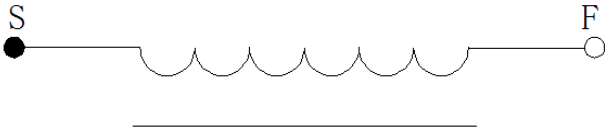
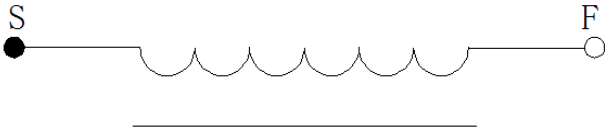
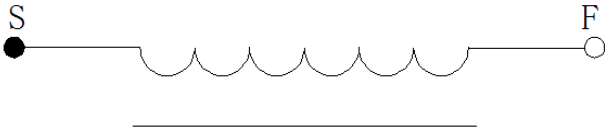
Address: 5/F, Building A, Jinshenghui
Science Park, 3 Dafu Road, Guanlan Street,
Longhua District, Shenzhen

Version Change History

Version Change History

[illegible]

SPECIFICATION

Product Specifications DESC	TX42.5*0.6-11TS-0.08*80P*1 -8.3uH-7mm Rev. Edition: A.0	Page	Customer CUST:		Yongman																																																																																			
			Customer Part Number CUST P/N:		MPP25W																																																																																			
1. Dimension (DIMENSION): (mm)  <tr><td>A</td><td>21.2±0.5</td></tr> <tr><td>B</td><td>39±1</td></tr> <tr><td>C</td><td>42.5Max</td></tr> <tr><td>D</td><td>7±2</td></tr> <tr><td>E</td><td>3±2</td></tr> <tr><td>F</td><td>5.3±0.3</td></tr> <tr><td>G</td><td>0.6±0.06</td></tr> <tr><td>H</td><td>2.5MAX</td></tr> <tr><td></td><td></td></tr> <tr><td colspan="5"> Note: 1. The coil rotates counterclockwise. 2. The back of the coil is coated with double-sided adhesive. 3. Apply a 4-mm high-temperature adhesive at the connection point. Gel 4. Insert a 20×1.0 small magnetic chip in the middle, and apply 10 mm of high-temperature adhesive. </td></tr> <tr><td colspan="5"> II. Schematic Diagram  </td></tr> <tr><td colspan="5"> III. Winding Specifications: <table><tr><td>Number NO.</td><td colspan="2">Terminal</td><td>Wire Diameter</td><td>Number of Turns</td><td>Winding Direction</td></tr><tr><td>1</td><td>S</td><td>F</td><td>0.08*80P*1</td><td>11Ts</td><td>CCW</td></tr></table></td></tr> <tr><td colspan="5"> IV. Electrical Characteristics (ELECTRICAL CHARACTERISTICS): Temperature: 25±10°C; Relative Humidity: 65±20% <table><tr><td>Number NO.</td><td>Project Item</td><td>Terminal</td><td>Standard SPECIFICATION</td><td>Testing Conditions</td><td>Testing Instrument</td></tr><tr><td>1</td><td>IND.</td><td>S-F</td><td>4.0 μH ± 10% single coil</td><td>TEST FREQUENCY</td><td>TEST EQUIPMENTS</td></tr><tr><td>2</td><td>IND.</td><td>S-F</td><td>8.3 μH ± 10% with magnetic core</td><td>100KHz/1.0V</td><td>TH2832 LCR</td></tr><tr><td>3</td><td>DCR</td><td>S-F</td><td>120mΩ Max</td><td>100KHz/1.0V</td><td>TH2832 LCR</td></tr></table></td></tr> <tr><td colspan="3">Prepared by/date</td><td colspan="2">Review/Date CHECKED BY/DATE</td></tr> <tr><td colspan="3"></td><td colspan="2"></td></tr>					A	21.2±0.5	B	39±1	C	42.5Max	D	7±2	E	3±2	F	5.3±0.3	G	0.6±0.06	H	2.5MAX			Note: 1. The coil rotates counterclockwise. 2. The back of the coil is coated with double-sided adhesive. 3. Apply a 4-mm high-temperature adhesive at the connection point. Gel 4. Insert a 20×1.0 small magnetic chip in the middle, and apply 10 mm of high-temperature adhesive.					II. Schematic Diagram 					III. Winding Specifications: <table><tr><td>Number NO.</td><td colspan="2">Terminal</td><td>Wire Diameter</td><td>Number of Turns</td><td>Winding Direction</td></tr><tr><td>1</td><td>S</td><td>F</td><td>0.08*80P*1</td><td>11Ts</td><td>CCW</td></tr></table>					Number NO.	Terminal		Wire Diameter	Number of Turns	Winding Direction	1	S	F	0.08*80P*1	11Ts	CCW	IV. Electrical Characteristics (ELECTRICAL CHARACTERISTICS): Temperature: 25±10°C; Relative Humidity: 65±20% <table><tr><td>Number NO.</td><td>Project Item</td><td>Terminal</td><td>Standard SPECIFICATION</td><td>Testing Conditions</td><td>Testing Instrument</td></tr><tr><td>1</td><td>IND.</td><td>S-F</td><td>4.0 μH ± 10% single coil</td><td>TEST FREQUENCY</td><td>TEST EQUIPMENTS</td></tr><tr><td>2</td><td>IND.</td><td>S-F</td><td>8.3 μH ± 10% with magnetic core</td><td>100KHz/1.0V</td><td>TH2832 LCR</td></tr><tr><td>3</td><td>DCR</td><td>S-F</td><td>120mΩ Max</td><td>100KHz/1.0V</td><td>TH2832 LCR</td></tr></table>					Number NO.	Project Item	Terminal	Standard SPECIFICATION	Testing Conditions	Testing Instrument	1	IND.	S-F	4.0 μH ± 10% single coil	TEST FREQUENCY	TEST EQUIPMENTS	2	IND.	S-F	8.3 μH ± 10% with magnetic core	100KHz/1.0V	TH2832 LCR	3	DCR	S-F	120mΩ Max	100KHz/1.0V	TH2832 LCR	Prepared by/date			Review/Date CHECKED BY/DATE						
					A	21.2±0.5																																																																																		
					B	39±1																																																																																		
					C	42.5Max																																																																																		
					D	7±2																																																																																		
					E	3±2																																																																																		
					F	5.3±0.3																																																																																		
					G	0.6±0.06																																																																																		
					H	2.5MAX																																																																																		
Note: 1. The coil rotates counterclockwise. 2. The back of the coil is coated with double-sided adhesive. 3. Apply a 4-mm high-temperature adhesive at the connection point. Gel 4. Insert a 20×1.0 small magnetic chip in the middle, and apply 10 mm of high-temperature adhesive.																																																																																								
II. Schematic Diagram 																																																																																								
III. Winding Specifications: <table><tr><td>Number NO.</td><td colspan="2">Terminal</td><td>Wire Diameter</td><td>Number of Turns</td><td>Winding Direction</td></tr><tr><td>1</td><td>S</td><td>F</td><td>0.08*80P*1</td><td>11Ts</td><td>CCW</td></tr></table>					Number NO.	Terminal		Wire Diameter	Number of Turns	Winding Direction	1	S	F	0.08*80P*1	11Ts	CCW																																																																								
Number NO.	Terminal		Wire Diameter	Number of Turns	Winding Direction																																																																																			
1	S	F	0.08*80P*1	11Ts	CCW																																																																																			
IV. Electrical Characteristics (ELECTRICAL CHARACTERISTICS): Temperature: 25±10°C; Relative Humidity: 65±20% <table><tr><td>Number NO.</td><td>Project Item</td><td>Terminal</td><td>Standard SPECIFICATION</td><td>Testing Conditions</td><td>Testing Instrument</td></tr><tr><td>1</td><td>IND.</td><td>S-F</td><td>4.0 μH ± 10% single coil</td><td>TEST FREQUENCY</td><td>TEST EQUIPMENTS</td></tr><tr><td>2</td><td>IND.</td><td>S-F</td><td>8.3 μH ± 10% with magnetic core</td><td>100KHz/1.0V</td><td>TH2832 LCR</td></tr><tr><td>3</td><td>DCR</td><td>S-F</td><td>120mΩ Max</td><td>100KHz/1.0V</td><td>TH2832 LCR</td></tr></table>					Number NO.	Project Item	Terminal	Standard SPECIFICATION	Testing Conditions	Testing Instrument	1	IND.	S-F	4.0 μH ± 10% single coil	TEST FREQUENCY	TEST EQUIPMENTS	2	IND.	S-F	8.3 μH ± 10% with magnetic core	100KHz/1.0V	TH2832 LCR	3	DCR	S-F	120mΩ Max	100KHz/1.0V	TH2832 LCR																																																												
Number NO.	Project Item	Terminal	Standard SPECIFICATION	Testing Conditions	Testing Instrument																																																																																			
1	IND.	S-F	4.0 μH ± 10% single coil	TEST FREQUENCY	TEST EQUIPMENTS																																																																																			
2	IND.	S-F	8.3 μH ± 10% with magnetic core	100KHz/1.0V	TH2832 LCR																																																																																			
3	DCR	S-F	120mΩ Max	100KHz/1.0V	TH2832 LCR																																																																																			
Prepared by/date			Review/Date CHECKED BY/DATE																																																																																					