



TEST REPORT

Applicant Name: Shenzhen VCOS Technology Co., Ltd.
Address: Room 1602, Building 1, Qianhai Kexing Science Park, Laodong Community, Bao'an District, Shenzhen, China
Report Number: 2604R22885E-RF-00C
FCC ID: 2BVCT-MO-76

Test Standard (s)

FCC PART 15.249

Sample Description

Product Name: SayRose Vitality Meow Claw Wireless Mouse
Model No.: MO-76
Trade Mark: SayRose
Date Received: 2026-03-25
Report Date: 2026-04-24

Test Result:	The EUT complied with the standards above.
--------------	--

Prepared and Checked By:

Jason Fan

Jason Fan
EMC Engineer

Approved By:

Bob Liao

Bob Liao
EMC Engineer

Note: This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA, or any agency of the Federal Government. The information marked “#” is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included but no need marked.
This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

Floor 1, KuMaKe Building, Dongzhou Community, Guangming Street, Guangming District, Shenzhen, Guangdong, China.

Tel: +86 755-26503290

Web: www.atc-lab.com

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY..... 3

GENERAL INFORMATION..... 4

 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) 4

 OBJECTIVE 4

 TEST METHODOLOGY 4

 TEST FACILITY 5

SYSTEM TEST CONFIGURATION 6

 DESCRIPTION OF TEST CONFIGURATION..... 6

 EUT EXERCISE SOFTWARE AND POWER LEVEL[#] 6

 SPECIAL ACCESSORIES AND EQUIPMENT MODIFICATIONS 6

SUMMARY OF TEST RESULTS 9

TEST EQUIPMENT LIST 10

ANTENNA REQUIREMENT 11

 APPLICABLE STANDARD..... 11

 ANTENNA CONNECTOR CONSTRUCTION 11

AC LINE CONDUCTED EMISSIONS 12

 APPLICABLE STANDARD..... 12

 EUT SETUP 12

 EMI TEST RECEIVER SETUP 12

 TEST PROCEDURE 12

 CALCULATION 13

 TEST DATA 13

RADIATED EMISSIONS & OUTSIDE OF BAND EMISSION 16

 APPLICABLE STANDARD..... 16

 EUT SETUP 16

 EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP 18

 TEST PROCEDURE 18

 CALCULATION 19

 TEST DATA 19

20DB EMISSION BANDWIDTH..... 45

 APPLICABLE STANDARD..... 45

 TEST PROCEDURE 45

 TEST DATA 46

EXHIBIT A-EUT PHOTOGRAPHS 48

EXHIBIT B-TEST SETUP PHOTOGRAPHS 49

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
Rev.00	2604R22885E-RF-00C	Original Report	2026-04-24

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product Name	SayRose Vitality Meow Claw Wireless Mouse
Tested Model	MO-76
Voltage Range [#]	DC 5V from USB Type-C port or DC 3.7V from battery

Frequency Range	2403-2480MHz
Maximum E-Field Strength (Peak)	88.25dBuV/m@3m
Modulation Technique	GFSK
Antenna Specification [#]	Internal Antenna (It is provided by the applicant.)
Sample Serial Number	3IUW-4 (Assigned by ATC, Shenzhen)
Sample/EUT Status	Good condition

Objective

This type approval report is in accordance with Part 2-Subpart J, and Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.249 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2020, American National Standard of Procedures for Compliant Testing of Unlicensed Wireless Devices.

Unless otherwise stated there are no any additions to, deviations, or exclusions from the method.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the Floor 1, KuMaKe Building, Dongzhou Community, Guangming Street, Guangming District, Shenzhen, Guangdong, China.

Accredited by American Association for Laboratory Accreditation (A2LA). The Certificate Number is 4297.01.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5 %
RF Frequency		0.064×10^{-7}
AC Power Lines Conducted Emissions		2.7 dB
Emissions, Radiated	9kHz - 30MHz	2.1 dB
	30MHz - 1GHz	4.3 dB
	1GHz - 18GHz	4.9 dB
	18GHz - 26.5GHz	5.2 dB
Temperature		1 °C
Humidity		2 %
Supply voltages		0.4 %

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a typical fashion (as normally used by a typical user).

Frequency list[#]:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
1	2403	5	2407	9	2414	13	2419
2	2426	6	2422	10	2436	14	2439
3	2441	7	2445	11	2459	15	2453
4	2463	8	2466	12	2473	16	2480

EUT was tested with Channel 1, 3 and 16.

Note: The frequency list and test channel were provided by applicant.

EUT belongs to FHSS equipment.

EUT Exercise Software and Power Level[#]

Exercise Software:	N/A
Power Level:	Default

Note: The information in the above table is provided by the applicant.

Special Accessories and Equipment Modifications

No special accessories or modifications were used on the device under test (EUT) during the test.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Kunxing	Adapter	ACCR0323 Input: 100-240V~50/60Hz,0.8A Output: DC3.3-11.0V-2.72A	Unknown

External I/O Cable


Cable Description	Shielding Type	Length (m)	From Port	To
Detachable USB Cable	NO	0.34	EUT	Adapter

Block Diagram of Test Setup


For Conducted Emission:

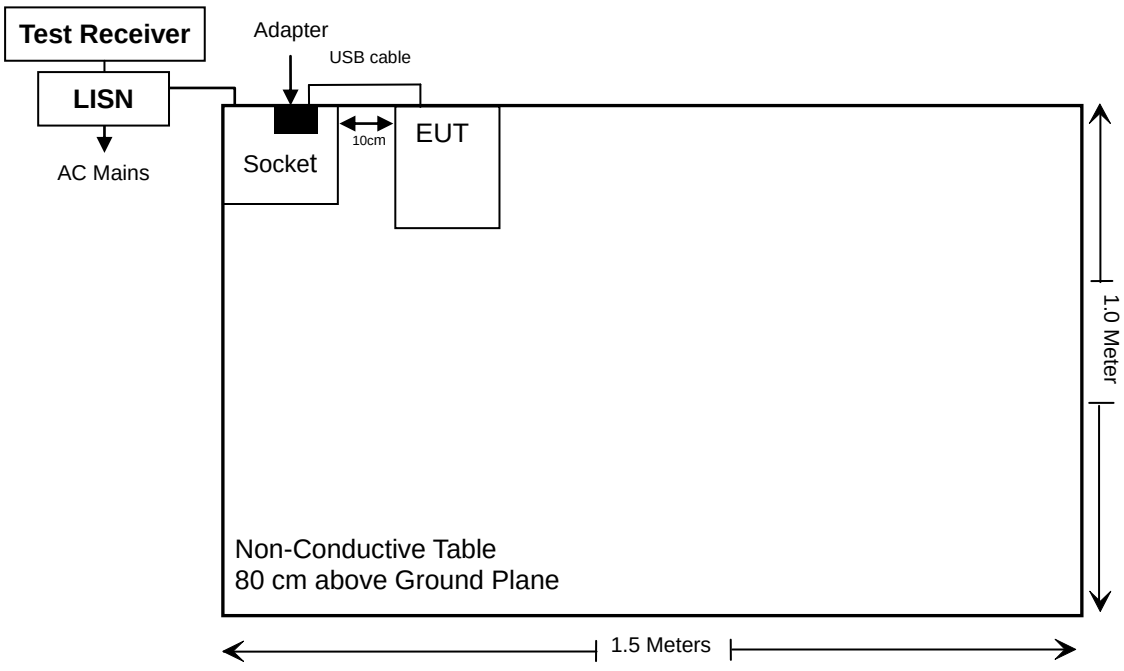

For Radiated Emission Below 1GHz:

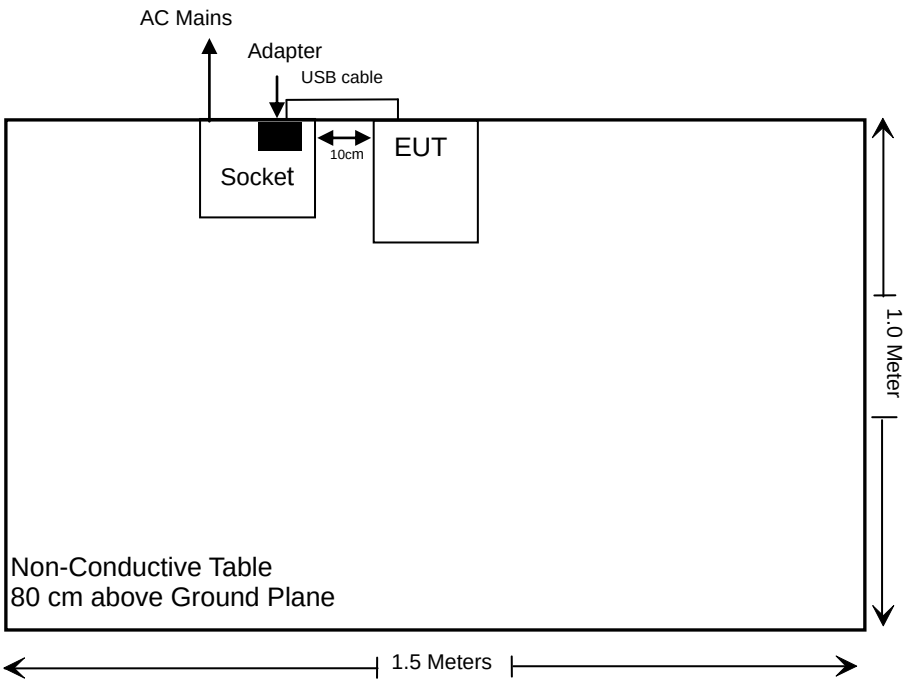

For Radiated Emission Above 1GHz:

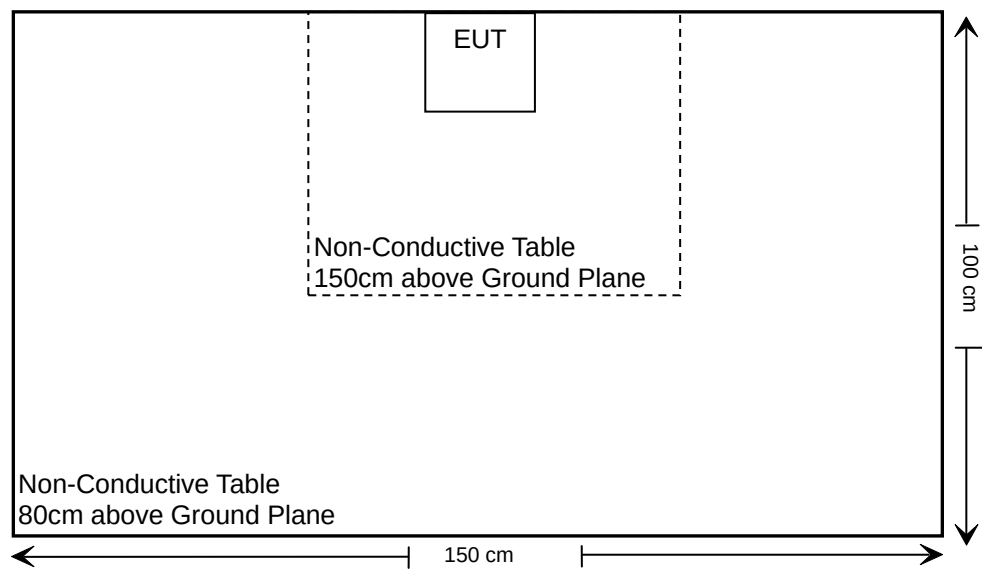

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.249(a)(c)(d)	Radiated Emissions & Outside of Band Emission	Compliance
§15.215(c)	20dB Emission Bandwidth	Compliance

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	100784	2025/09/17	2026/09/16
Rohde & Schwarz	L.I.S.N.	ENV216	101314	2025/09/17	2026/09/16
Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2025/09/18	2026/09/17
Rohde & Schwarz	Pulse Limiter	ESH3-Z2	100312	2025/05/30	2026/05/29
Unknown	RF Coaxial Cable	No.17	N0350	2025/05/30	2026/05/29
Test Software: e3 191218 (V9)					
Radiated Spurious Emission Test(Below 1GHz)					
Rohde & Schwarz	Test Receiver	ESR	102725	2025/09/18	2026/09/17
SONOMA INSTRUMENT	Amplifier	310N	186131	2026/01/20	2027/01/19
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2024/08/08	2027/08/07
Unknown	RF Coaxial Cable	No.12	N040	2025/05/30	2026/05/29
Unknown	RF Coaxial Cable	No.13	N300	2025/05/30	2026/05/29
Unknown	RF Coaxial Cable	No.14	N800	2025/05/30	2026/05/29
BACL	LOOP ANTENNA	1313-1A	3110711	2024/01/16	2027/01/15
Test Software: e3 191218 (V9)					
Radiated Spurious Emission Test(Above 1GHz) / 20dB Emission Bandwidth					
Rohde & Schwarz	Spectrum Analyzer	FSV40	101949	2025/09/17	2026/09/16
Decentest	Filter Switch Unit	DT7220FSU	DQ77927	2025/09/18	2026/09/17
Decentest	Multiplex Switch Test Control Set	DT7220CSU	DQ77924	2025/09/18	2026/09/17
COM-MW	Band Reject Filter	ZBSF8	12232062	2025/10/13	2026/10/12
A.H. Systems, inc.	Preamplifier	PAM-0118	226	2026/01/20	2027/01/19
Schwarzbeck	Horn Antenna	BBHA9120D	837	2026/01/29	2029/01/30
Unknown	RF Coaxial Cable	No.10	N050	2025/05/30	2026/05/29
Unknown	RF Coaxial Cable	No.11	N1000	2025/05/30	2026/05/29
Unknown	RF Coaxial Cable	No.19	N500	2025/05/30	2026/05/29
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2023/12/12	2026/12/11
BACL	Amplifier	BACL-1313-A1840	4012521	2025/05/30	2026/05/29
Unknown	RF Coaxial Cable	No.15	N600	2025/05/30	2026/05/29
Unknown	RF Coaxial Cable	No.16	N650	2025/05/30	2026/05/29
Test Software: e3 191218 (V9)					

*** Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has one internal antenna which was permanently attached, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

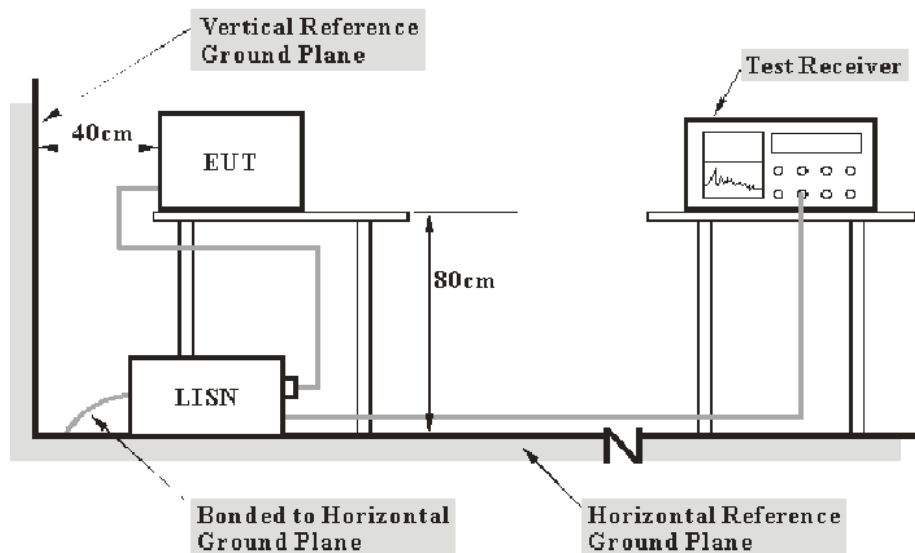

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2020. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss} + 10\text{dB Attenuation(Limiter)}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\text{Over Limit} = \text{Level} - \text{Limit}$$

$$\text{Level} = \text{Read Level} + \text{Factor}$$

Test Data


Environmental Conditions

Temperataure:	24.6℃
Relative Humidity:	50 %
ATM Pressure:	100.7 kPa
Test Engineer:	Homelander Dai
Test Date:	2026-04-07
EUT Operation Mode:	2.4G SRD Transmitting

Test Result: Compliance, please refer to the below data.

Note: The pre-scan maximum E-Field strength channel: 2.4G SRD High Channel was tested.


AC 120V/60Hz, Line:

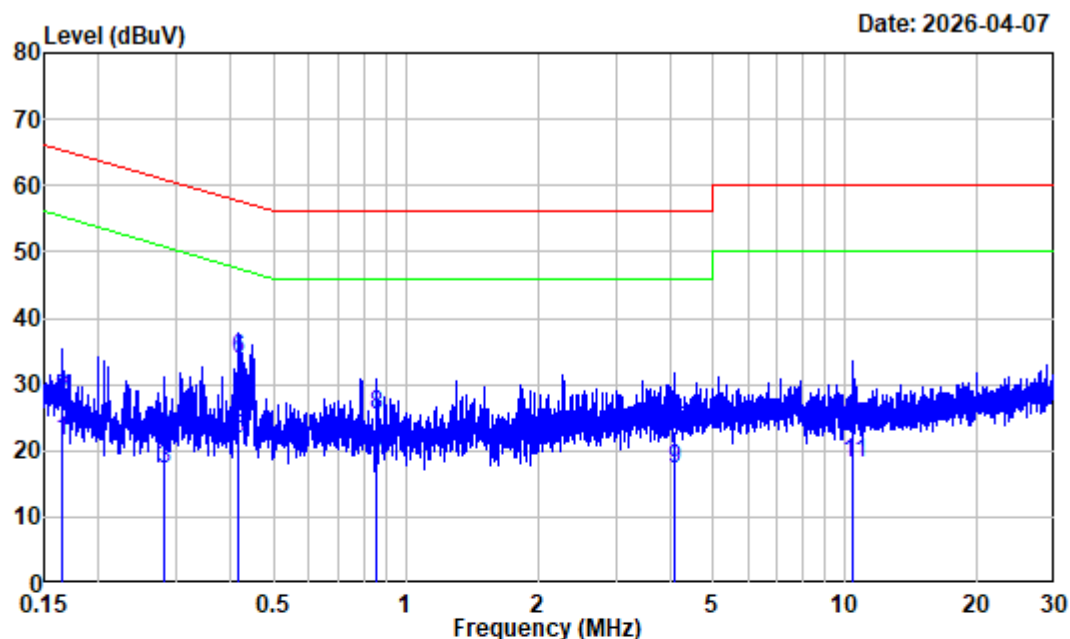

Site : Shielding Room
 Condition : Line
 Job No. : 2604R22885E-RF
 Test Mode : 2.4G SRD Transmitting
 Tester : Homelander Dai
 Receiver Setting: IF B/W 9kHz PK/AV

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.165	19.87	1.54	21.41	55.21	-33.80	Average
2	0.165	19.87	8.02	27.89	65.21	-37.32	QP
3	0.281	19.94	-2.67	17.27	50.78	-33.51	Average
4	0.281	19.94	1.70	21.64	60.78	-39.14	QP
5	0.415	20.03	1.61	21.64	47.56	-25.92	Average
6	0.415	20.03	13.86	33.89	57.56	-23.67	QP
7	0.856	20.23	-2.36	17.87	46.00	-28.13	Average
8	0.856	20.23	5.08	25.31	56.00	-30.69	QP
9	4.092	21.50	-4.21	17.29	46.00	-28.71	Average
10	4.092	21.50	1.52	23.02	56.00	-32.98	QP
11	10.432	22.85	-4.78	18.07	50.00	-31.93	Average
12	10.432	22.85	0.63	23.48	60.00	-36.52	QP

AC 120V/60Hz, Neutral:

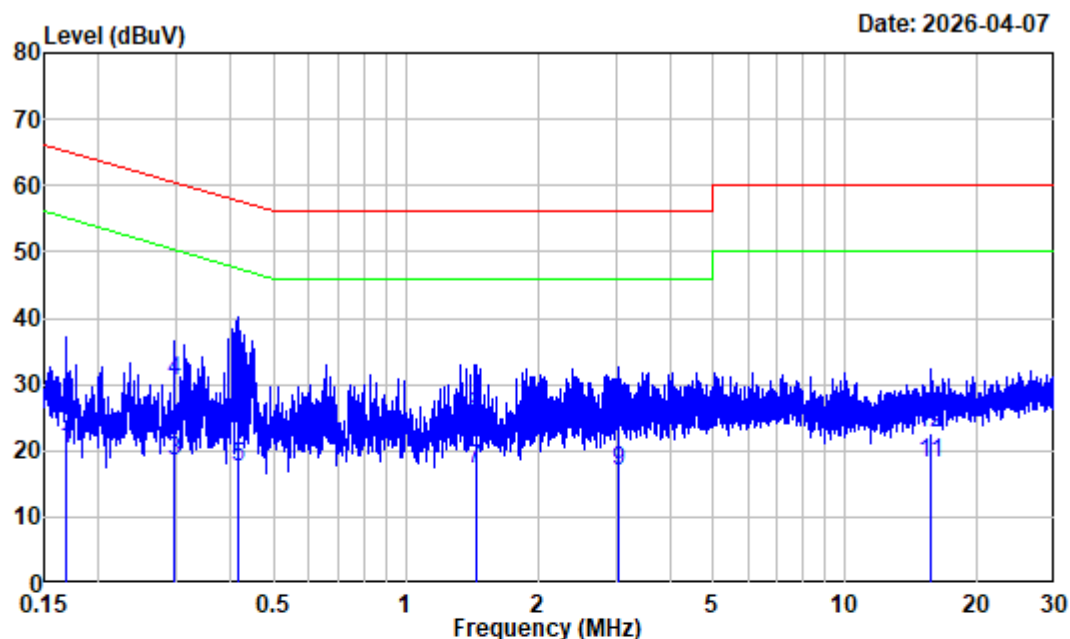

Site : Shielding Room
 Condition : Neutral
 Job No. : 2604R22885E-RF
 Test Mode : 2.4G SRD Transmitting
 Tester : Homelander Dai
 Receiver Setting: IF B/W 9kHz PK/AV

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.168	19.80	0.28	20.08	55.05	-34.97	Average
2	0.168	19.80	4.91	24.71	65.05	-40.34	QP
3	0.298	20.00	-1.44	18.56	50.31	-31.75	Average
4	0.298	20.00	10.54	30.54	60.31	-29.77	QP
5	0.413	20.00	-2.62	17.38	47.58	-30.20	Average
6	0.413	20.00	9.09	29.09	57.58	-28.49	QP
7	1.439	20.69	-3.40	17.29	46.00	-28.71	Average
8	1.439	20.69	4.49	25.18	56.00	-30.82	QP
9	3.035	21.18	-4.41	16.77	46.00	-29.23	Average
10	3.035	21.18	2.67	23.85	56.00	-32.15	QP
11	15.583	23.62	-5.48	18.14	50.00	-31.86	Average
12	15.583	23.62	-1.01	22.61	60.00	-37.39	QP

RADIATED EMISSIONS & OUTSIDE OF BAND EMISSION

Applicable Standard

FCC§15.205, §15.209 & §15.249(a)(c)(d)

As per FCC§15.249 (a), except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:


Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902–928 MHz	50	500
2400–2483.5 MHz	50	500
5725–5875 MHz	50	500
24.0–24.25 GHz	250	2500



As per FCC§15.249 (c), Field strength limits are specified at a distance of 3 meters.

As per FCC§15.249 (d), Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

EUT Setup

9kHz - 30MHz:

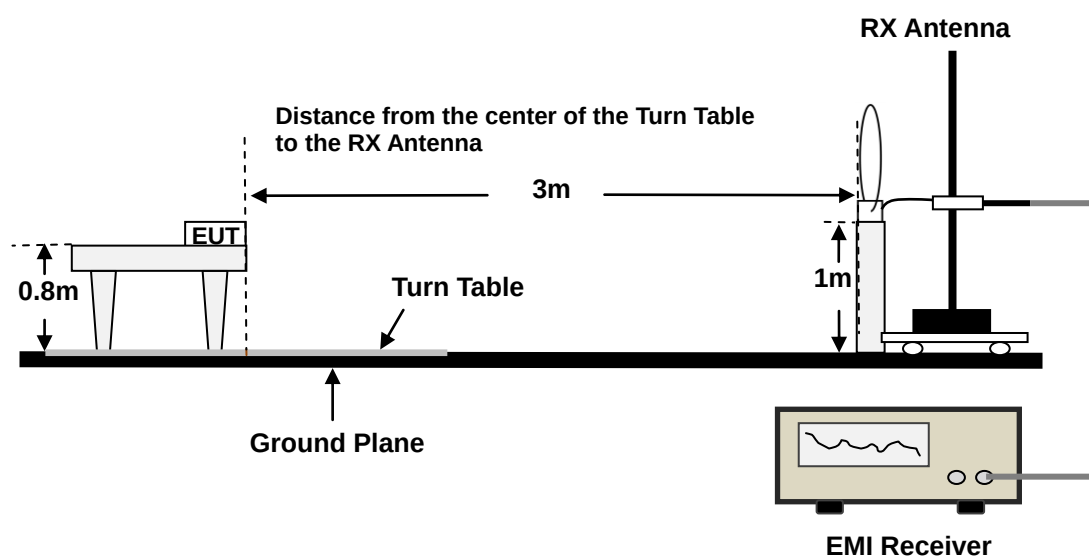

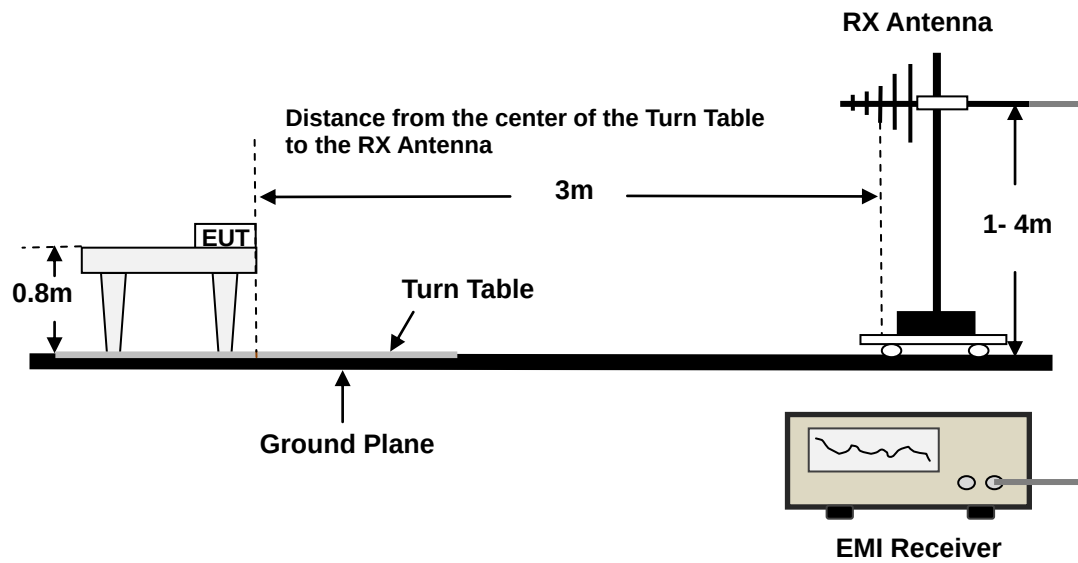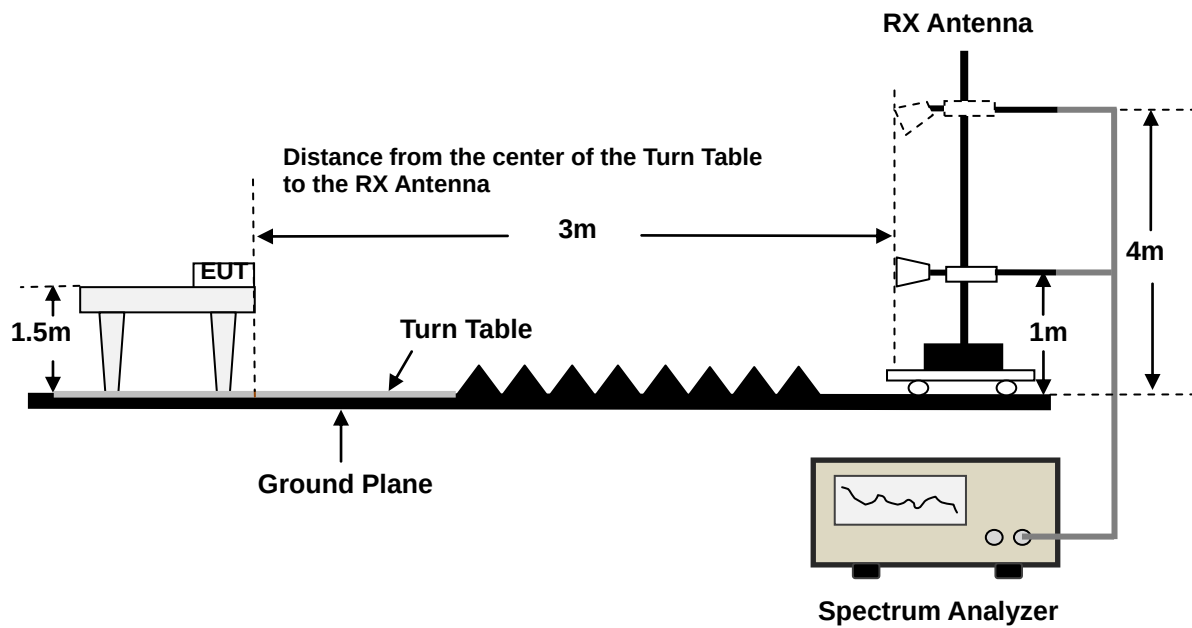30MHz - 1GHz:**Above 1GHz:**

The radiated emission performed in the 3 meters, using the setup accordance with the ANSI C63.10-2020. The specification used was the FCC 15.209/15.205 and FCC 15.249 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9kHz to 25GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9kHz - 1000MHz:

Frequency Range	Measurement	RBW	Video B/W	IF B/W	Detector
9kHz - 150kHz	PK	0.3kHz	1kHz	/	PK
	QP/AV	/	/	200Hz	QP/AV
150kHz - 30MHz	PK	10kHz	30kHz	/	PK
	QP/AV	/	/	9kHz	QP/AV
30MHz - 1000MHz	PK	100kHz	300kHz	/	PK
	QP	/	/	120kHz	QP

1GHz -25GHz:

Pre-scan:

Measurement	Detector	RBW	Video B/W
PK	Peak	1MHz	3MHz
Ave.	Peak	1MHz	5kHz

Final measurement for emission identified during the pre-scan:

Measurement	Detector	RBW	Video B/W
PK	Peak	1MHz	3MHz
Ave.	Peak	1MHz	10Hz

Note 1: The 1GHz-4GHz testing use the notch filter and the 4GHz-18GHz testing use high-pass filter.

Note 2: The band edge testing use 10dB attenuator.

Note 3: The filters and attenuators are all integrated within the filter switch unit.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

According to FCC §15.209(e), the provisions in §15.31, 15.33, and 15.35 for measuring emissions at distances other than the distances specified in the above table, determining the frequency range over which radiated emissions are to be measured, and limiting peak emissions apply to all devices operated under this part.

According to FCC§15.31 measurement standard (f)(2), at frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). This paragraph (f) shall not apply to Access BPL devices operating below 30 MHz.

For 9kHz-30MHz, test distance is 3m, extrapolation limit shall be calculated using Equation:

$$E_{\text{limit-measure}} = E_{\text{limit-Standard}} + 40 \times \log_{10}\left(\frac{d_{\text{Standard}}}{d_{\text{measure}}}\right)$$

Note 1: If the maximized peak measured value is under the QP/Average limit by more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Note 2: For above 1GHz, the test result of peak was 20dB below to the limit of peak, which can be compliant to the average limit, so just peak value was recorded.

Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an over limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit/Margin} &= \text{Level / Corrected Amplitude} - \text{Limit} \\ \text{Level / Corrected Amplitude} &= \text{Read Level} + \text{Factor}\end{aligned}$$

Test Data

For Radiated Spurious Emissions, after pre-scan testing in the X, Y and Z axes of orientation, the worst case as setup photos was recorded.

9kHz-1GHz

Environmental Conditions


Temperature:	25.1℃
Relative Humidity:	50%
ATM Pressure:	100.7kPa
Test Engineer:	Jayden Luo
Test Date:	2026-04-07
EUT Operation Mode:	Transmitting

Test Result: Compliance, please refer to the below data.

Note 1: The Loop Antenna were tested in parallel, perpendicular, and ground-parallel. The worst orientation was parallel and the data was recorded in report.


Note 2: The pre-scan maximum E-Field strength channel: 2.4G SRD High Channel was tested.

9kHz~30MHz:

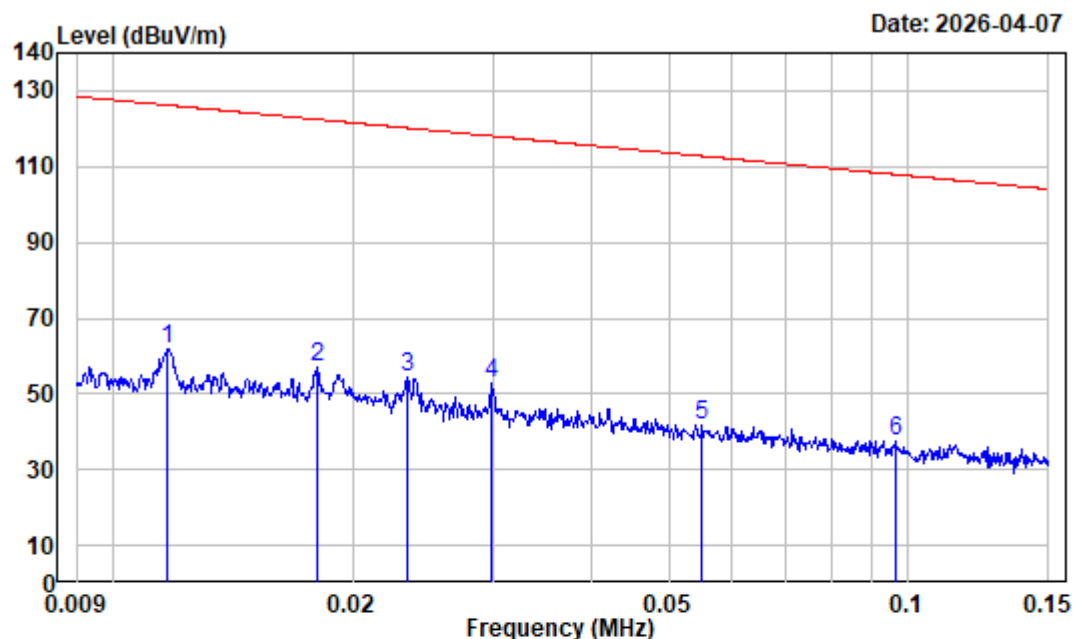

Site : chamber
Condition : 3m
Job No. : 2604R22885E-RF
Polarization : Parallel Tester: Jayden Luo
Test Mode : 2.4GHz SRD Transmitting
Receiver Setting: RBW:300Hz VBW:1kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.012	35.06	26.76	61.82	126.22	-64.40	Peak
2	0.018	32.27	24.67	56.94	122.48	-65.54	Peak
3	0.023	29.84	24.74	54.58	120.19	-65.61	Peak
4	0.030	26.99	25.83	52.82	118.09	-65.27	Peak
5	0.055	22.08	19.67	41.75	112.78	-71.03	Peak
6	0.096	16.84	20.44	37.28	107.94	-70.66	Peak

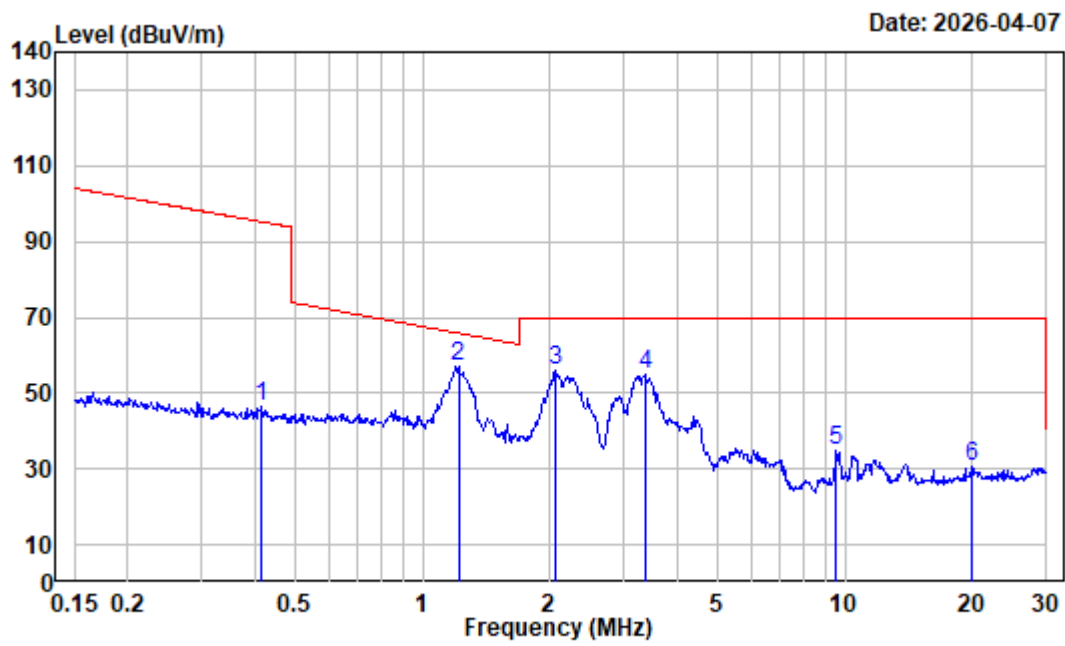

Site : chamber

Condition : 3m

Job No. : 2604R22885E-RF


Polarization : Parallel Tester: Jayden Luo

Test Mode : 2.4GHz SRD Transmitting

Receiver Setting: RBW:10kHz VBW:30kHz


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.417	4.94	41.35	46.29	95.20	-48.91	Peak
2	1.216	-2.60	59.60	57.00	65.74	-8.74	Peak
3	2.055	-5.41	61.31	55.90	69.54	-13.64	Peak
4	3.364	-6.00	60.72	54.72	69.54	-14.82	Peak
5	9.552	-5.42	40.29	34.87	69.54	-34.67	Peak
6	20.056	-3.36	33.79	30.43	69.54	-39.11	Peak

30MHz~1GHz:

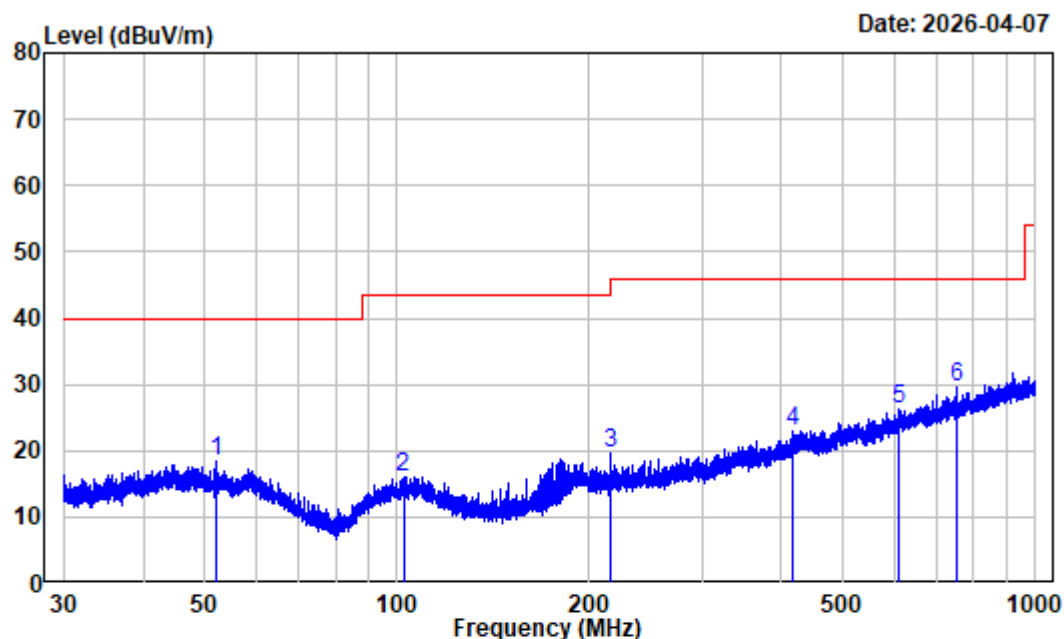

Site : chamber
 Condition : 3m HORIZONTAL
 Job No. : 2604R22885E-RF Tester: Jayden Luo
 Test Mode : 2.4GHz SRD Transmitting
 Receiver Setting: RBW:100kHz VBW:300kHz

	Freq	Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	52.185	-10.21	28.77	18.56	40.00	-21.44	Peak
2	102.270	-11.22	27.30	16.08	43.50	-27.42	Peak
3	215.646	-10.46	30.15	19.69	43.50	-23.81	Peak
4	416.179	-5.28	28.29	23.01	46.00	-22.99	Peak
5	612.870	-1.75	27.87	26.12	46.00	-19.88	Peak
6	752.084	0.05	29.46	29.51	46.00	-16.49	Peak

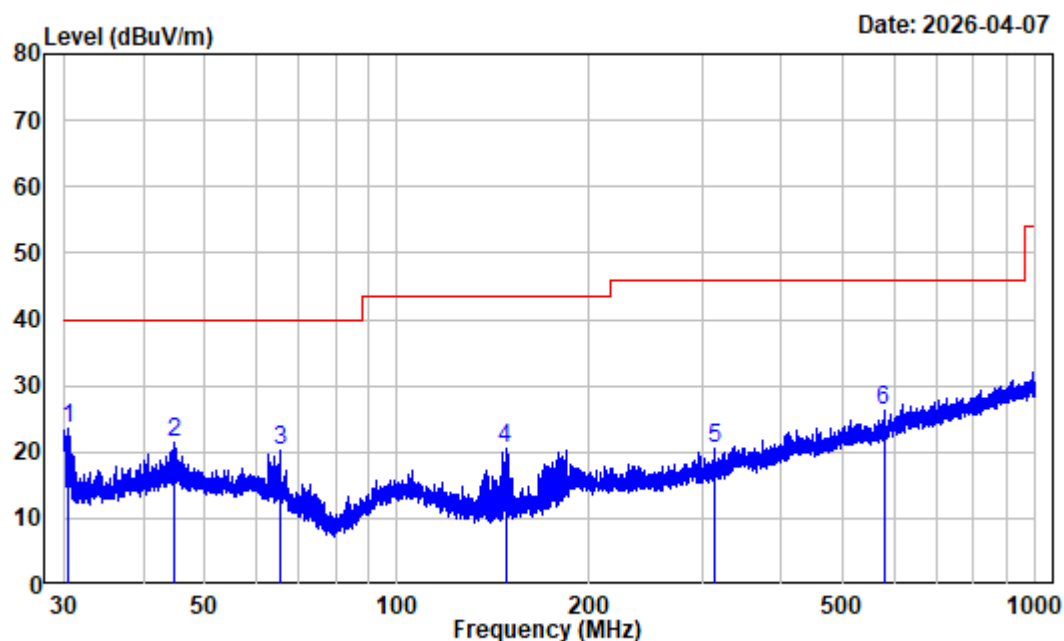

Site : chamber
Condition : 3m VERTICAL
Job No. : 2604R22885E-RF Tester: Jayden Luo
Test Mode : 2.4GHz SRD Transmitting
Receiver Setting: RBW:100kHz VBW:300kHz

	Freq		Read		Limit	Over	Remark
	Factor		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	30.424	-11.82	35.38	23.56	40.00	-16.44	Peak
2	44.822	-9.78	31.31	21.53	40.00	-18.47	Peak
3	65.688	-12.66	32.99	20.33	40.00	-19.67	Peak
4	147.792	-14.78	35.30	20.52	43.50	-22.98	Peak
5	314.652	-8.60	29.15	20.55	46.00	-25.45	Peak
6	578.670	-2.86	29.12	26.26	46.00	-19.74	Peak

1GHz-25GHz


Environmental Conditions

Temperature:	23.1 to 24.3℃
Relative Humidity:	46 to 53 %
ATM Pressure:	100.7 kPa
TestEngineer:	Max Tao
TestDate:	2026-04-07 to 2026-04-23
EUT Operation Mode:	Transmitting

Test Result: Compliance, please refer to the below data.

Note : For 18GHz-25GHz, the pre-scan maximum E-Field strength channel: 2.4G SRD High Channel was tested.


2.4G SRD Low Channel 1GHz-4GHz_HORIZONTAL

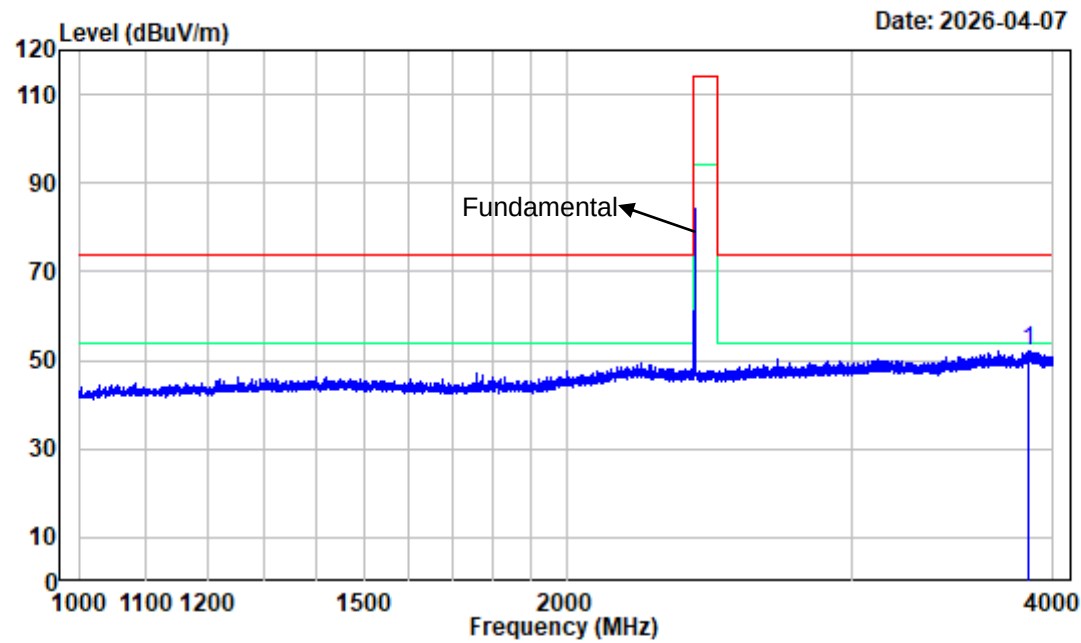

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2604R22885E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G SRD Low Channel 2403MHz 1GHz-4GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3865.750	-8.23	60.50	52.27	74.00	-21.73 Peak


2.4G SRD Low Channel 1GHz-4GHz_VERTICAL

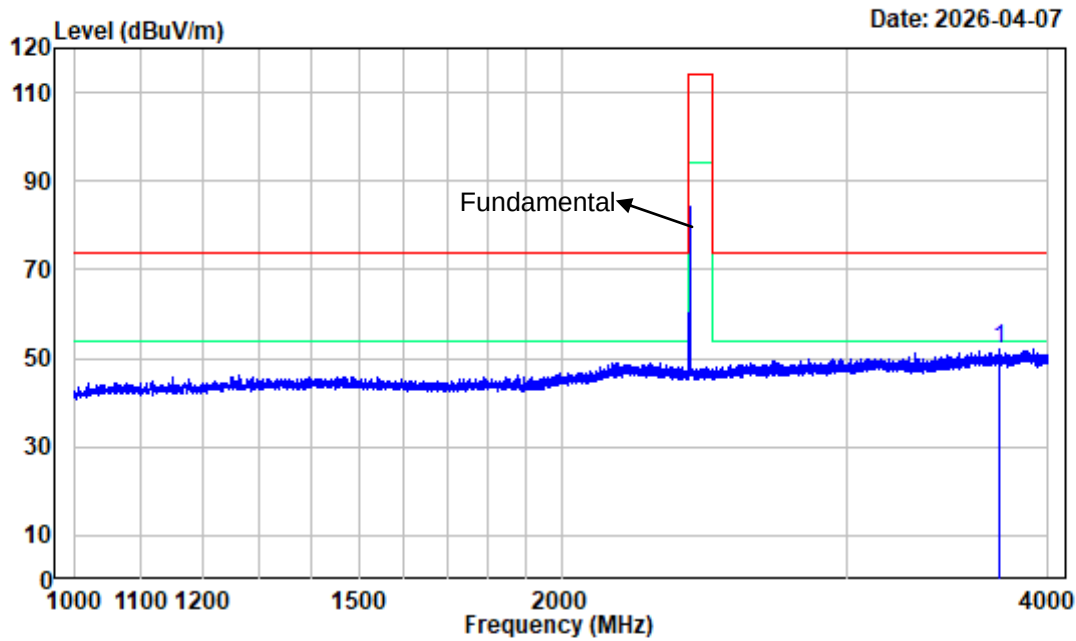

Site : chamber
Condition : 3m VERTICAL
Project No.: 2604R22885E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G SRD Low Channel 2403MHz 1GHz-4GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3736.375	-8.79	60.81	52.02	74.00	-21.98 Peak

2.4G SRD Low Channel 4GHz-18GHz_HORIZONTAL

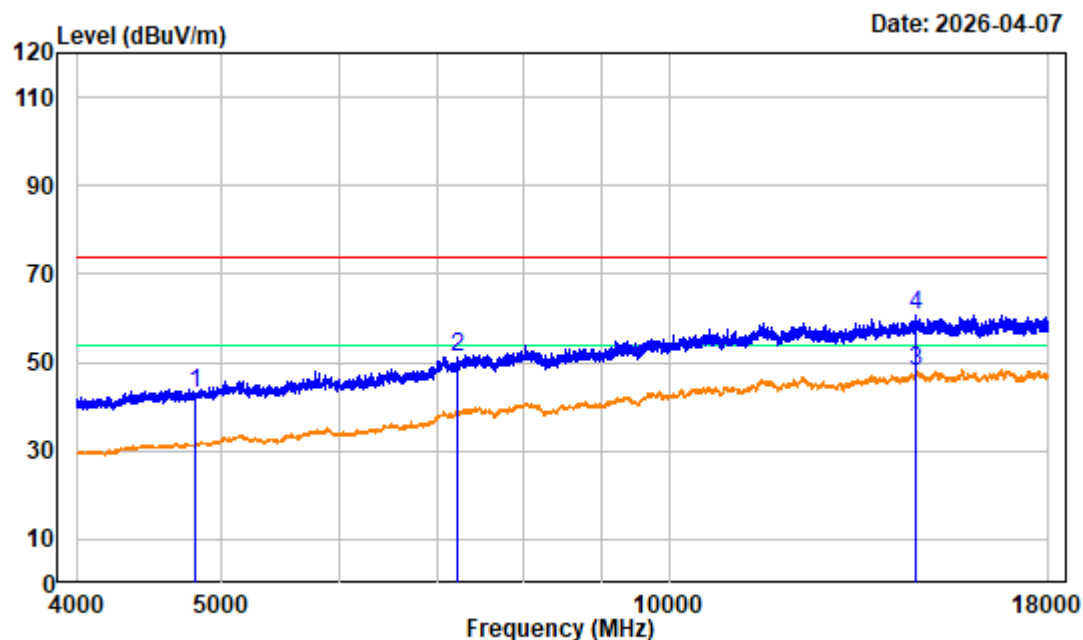

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2604R22885E-RF

Test Mode : Transmitting


Tester:Max Tao

Note : 2.4G SRD Low Channel 2403MHz 4GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4806.000	-6.95	49.86	42.91	74.00	-31.09	Peak
2	7209.000	-1.67	52.93	51.26	74.00	-22.74	Peak
3	14678.500	7.71	40.18	47.89	54.00	-6.11	Average
4	14678.500	7.71	53.19	60.90	74.00	-13.10	Peak

2.4G SRD Low Channel 4GHz-18GHz_VERTICAL

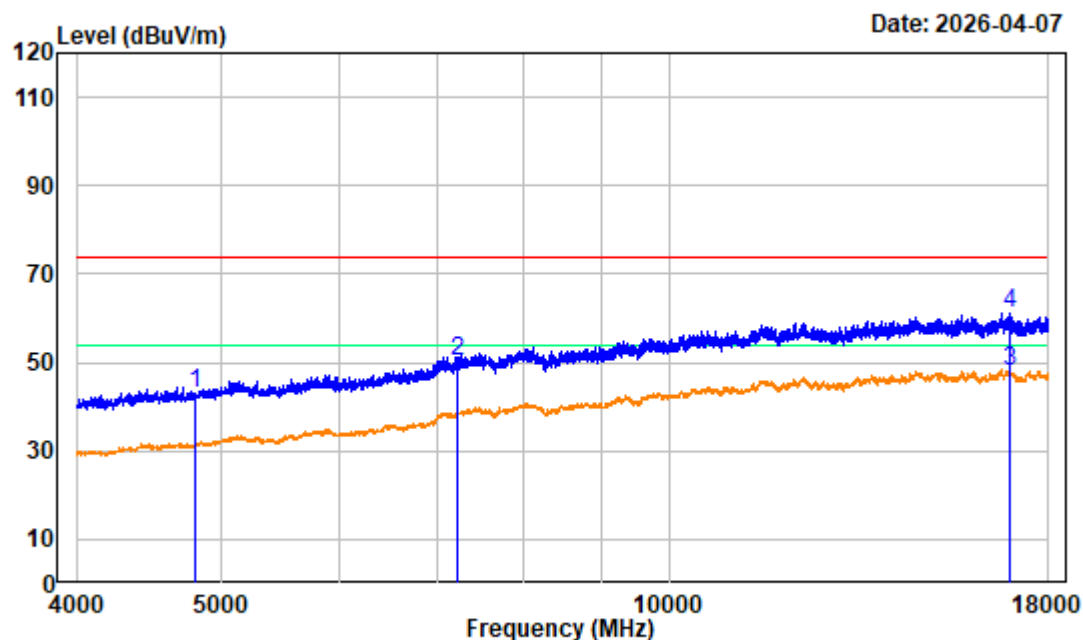

Site : chamber

Condition : 3m VERTICAL

Project No.: 2604R22885E-RF

Test Mode : Transmitting


Tester:Max Tao

Note : 2.4G SRD Low Channel 2403MHz 4GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4806.000	-6.95	50.00	43.05	74.00	-30.95	Peak
2	7209.000	-1.67	51.73	50.06	74.00	-23.94	Peak
3	16955.250	8.11	39.81	47.92	54.00	-6.08	Average
4	16955.250	8.11	53.11	61.22	74.00	-12.78	Peak


2.4G SRD Low Channel_HORIZONTAL

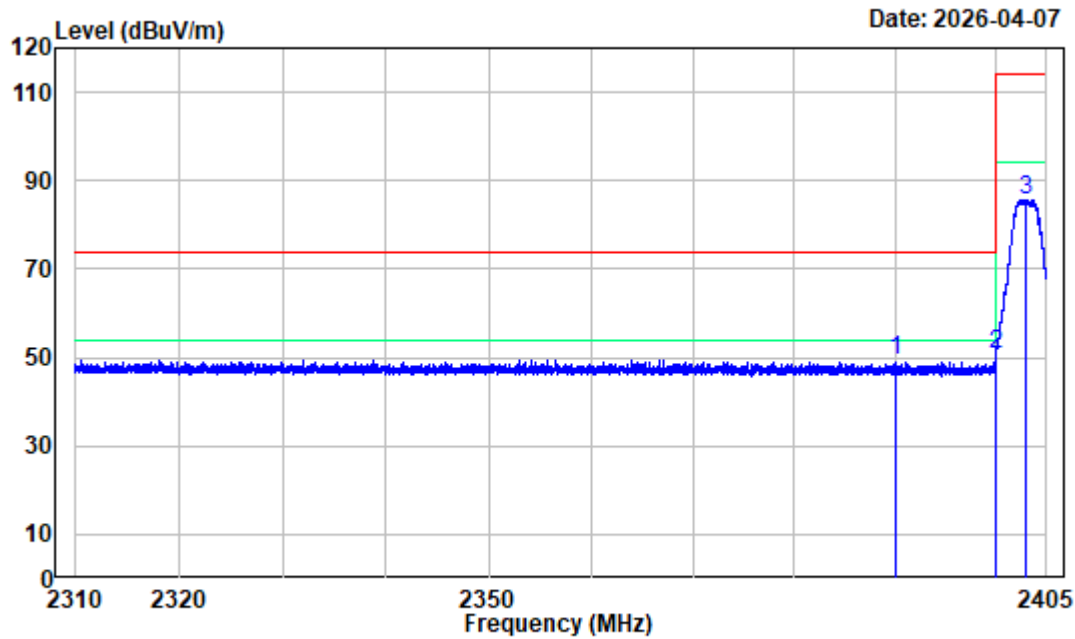

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2604R22885E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G SRD Low Channel 2403MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	-10.93	60.48	49.55	74.00	-24.45 Peak
2	2400.000	-11.01	61.70	50.69	74.00	-23.31 peak
3	2402.981	-11.01	96.44	85.43	114.00	-28.57 Peak


2.4G SRD Low Channel_VERTICAL

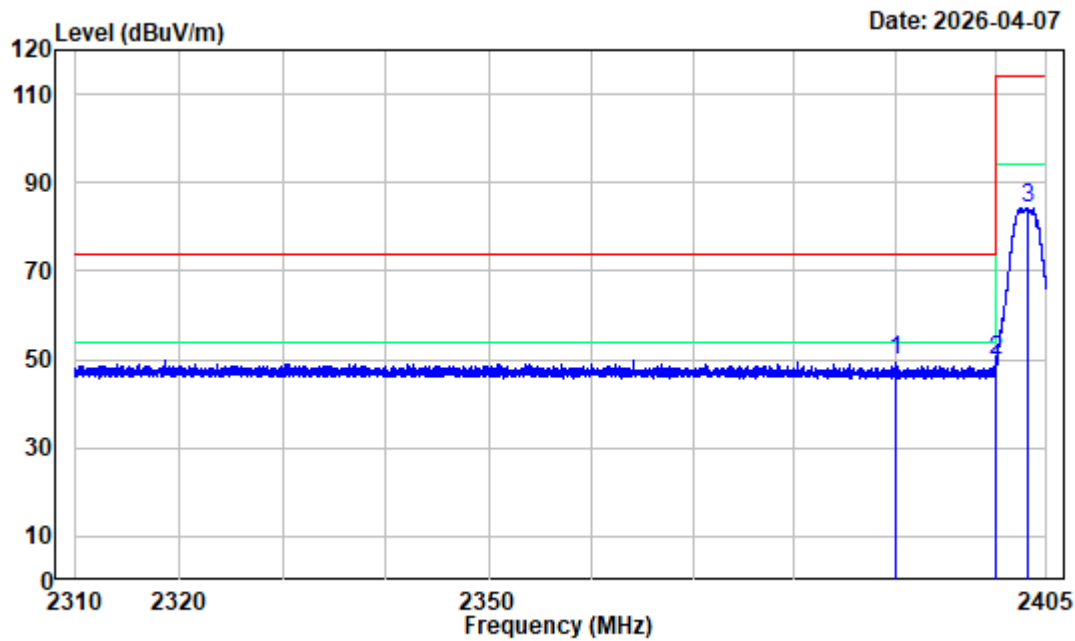

Site : chamber
Condition : 3m VERTICAL
Project No.: 2604R22885E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G SRD Low Channel 2403MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	-10.93	60.75	49.82	74.00	-24.18	Peak
2	2400.000	-11.01	60.95	49.94	74.00	-24.06	peak
3	2403.100	-11.01	95.07	84.06	114.00	-29.94	Peak


2.4G SRD Middle Channel 1GHz-4GHz_HORIZONTAL

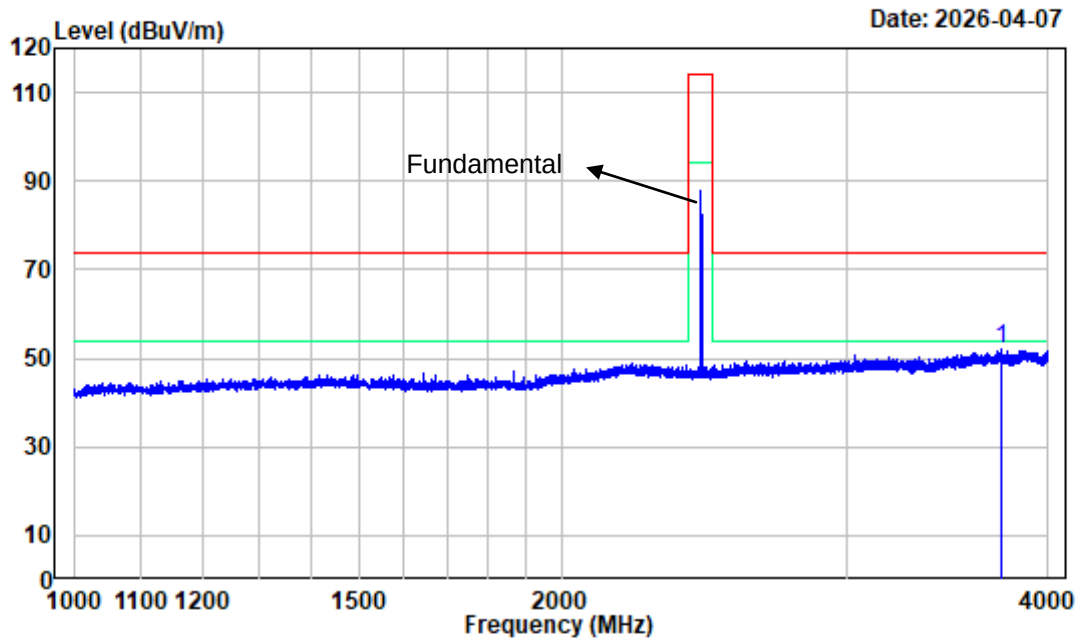

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2604R22885E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G SRD Middle Channel 2441MHz 1GHz-4GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3745.750	-8.77	60.78	52.01	74.00	-21.99 Peak


2.4G SRD Middle Channel 1GHz-4GHz_VERTICAL

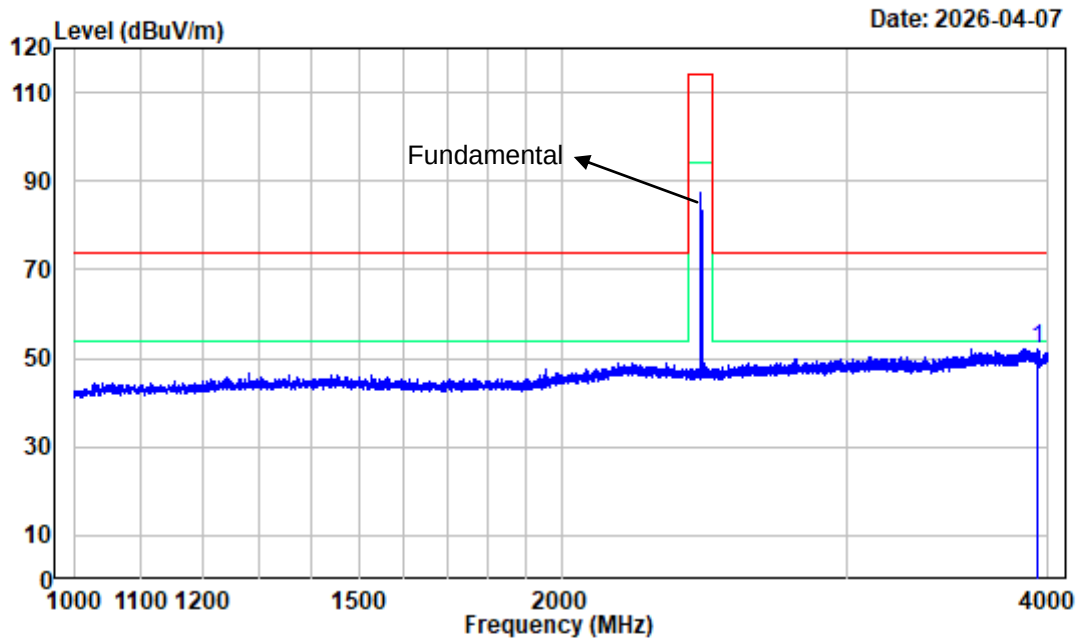

Site : chamber
Condition : 3m VERTICAL
Project No.: 2604R22885E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G SRD Middle Channel 2441MHz 1GHz-4GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3945.625	-8.82	60.87	52.05	74.00	-21.95 Peak

2.4G SRD Middle Channel 4GHz-18GHz_HORIZONTAL

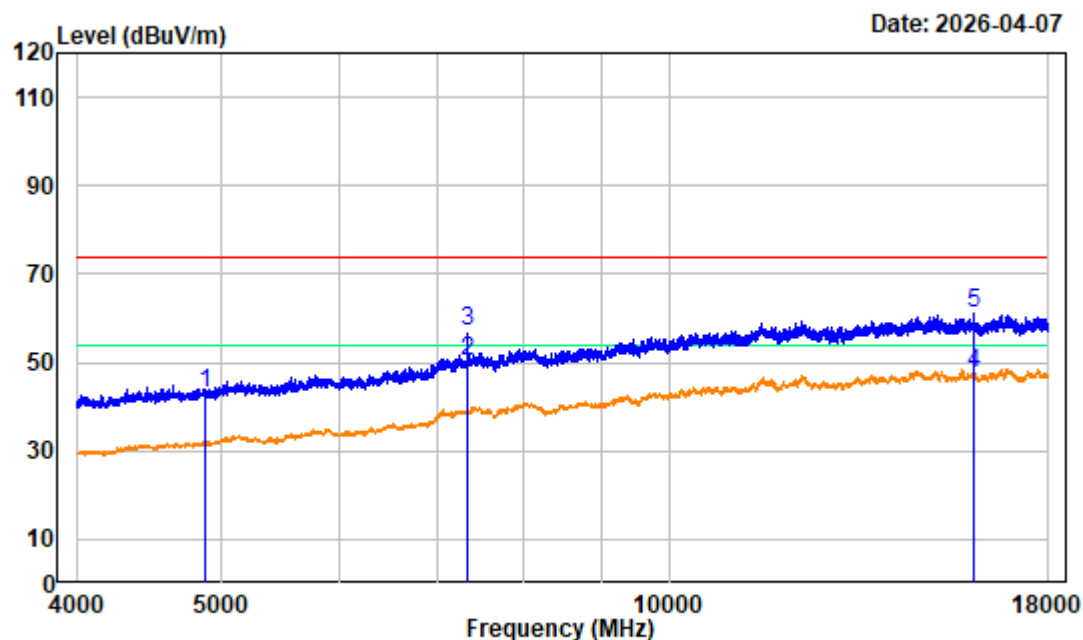

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2604R22885E-RF

Test Mode : Transmitting


Tester:Max Tao

Note : 2.4G SRD Middle Channel 2441MHz 4GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4882.000	-6.99	49.87	42.88	74.00	-31.12	Peak
2	7323.000	-1.28	51.76	50.48	54.00	-3.52	Average
3	7323.000	-1.28	58.14	56.86	74.00	-17.14	Peak
4	16048.750	6.95	40.47	47.42	54.00	-6.58	Average
5	16048.750	6.95	54.29	61.24	74.00	-12.76	Peak

2.4G SRD Middle Channel 4GHz-18GHz_VERTICAL

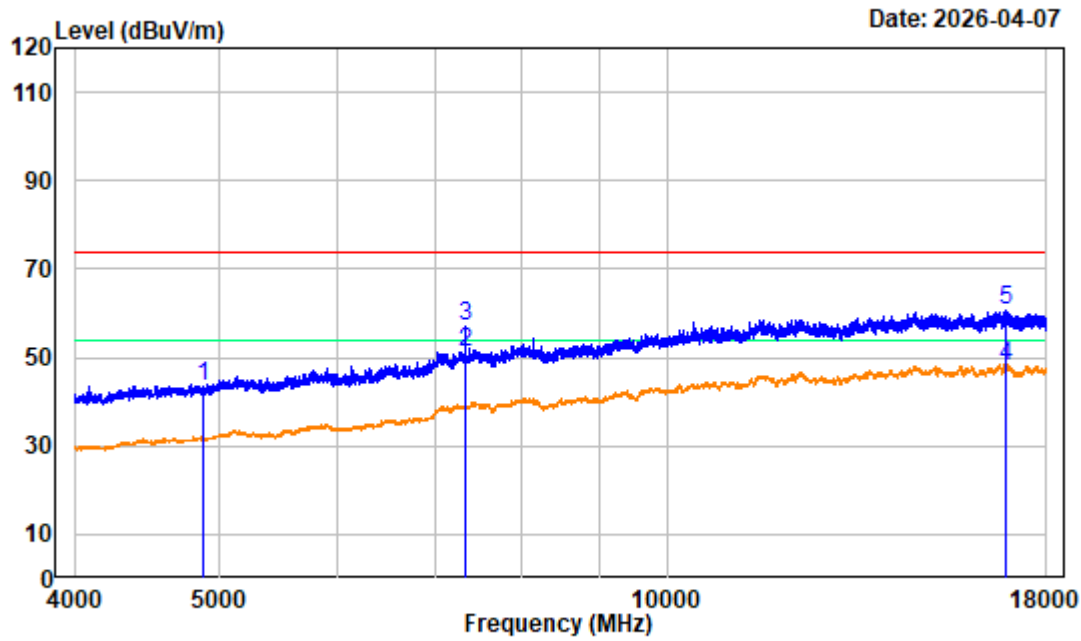

Site : chamber

Condition : 3m VERTICAL

Project No.: 2604R22885E-RF

Test Mode : Transmitting


Tester:Max Tao

Note : 2.4G SRD Middle Channel 2441MHz 4GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 4882.000	-6.99	50.68	43.69	74.00	-30.31	Peak
2 7323.000	-1.28	52.65	51.37	54.00	-2.63	Average
3 7323.000	-1.28	58.47	57.19	74.00	-16.81	Peak
4 16922.000	8.07	39.82	47.89	54.00	-6.11	Average
5 16922.000	8.07	52.51	60.58	74.00	-13.42	Peak

2.4G SRD Middle Channel_HORIZONTAL

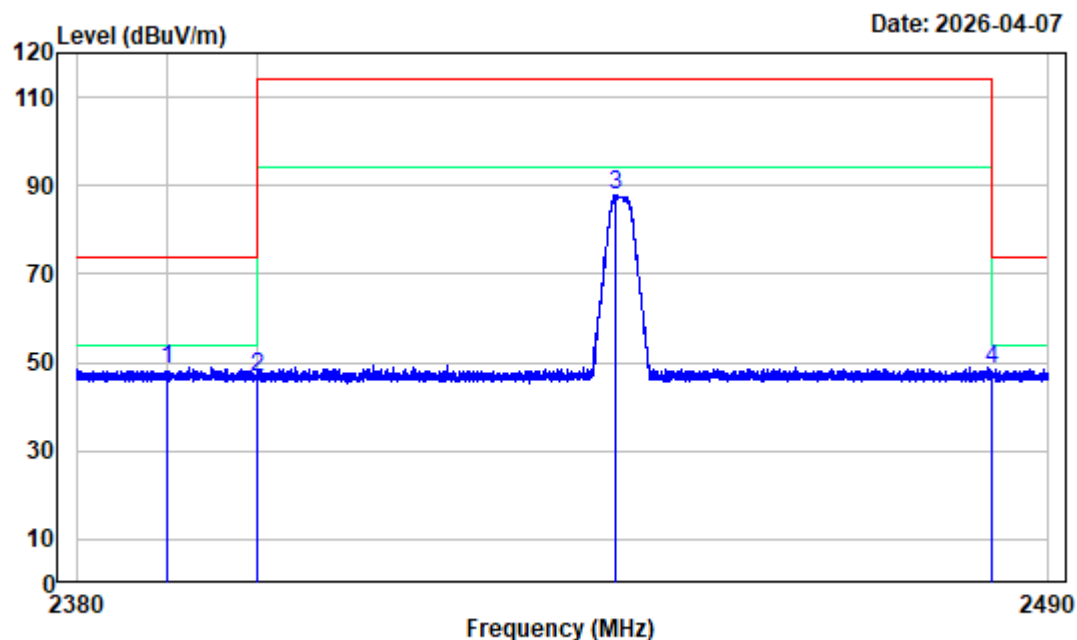

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2604R22885E-RF

Test Mode : Transmitting


Tester:Max Tao

Note : 2.4G SRD Middle Channel 2441MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	-10.93	59.17	48.24	74.00	-25.76	Peak
2	2400.000	-11.01	57.71	46.70	74.00	-27.30	peak
3	2440.404	-10.92	98.89	87.97	114.00	-26.03	Peak
4	2483.500	-10.97	59.44	48.47	74.00	-25.53	Peak

2.4G SRD Middle Channel_VERTICAL

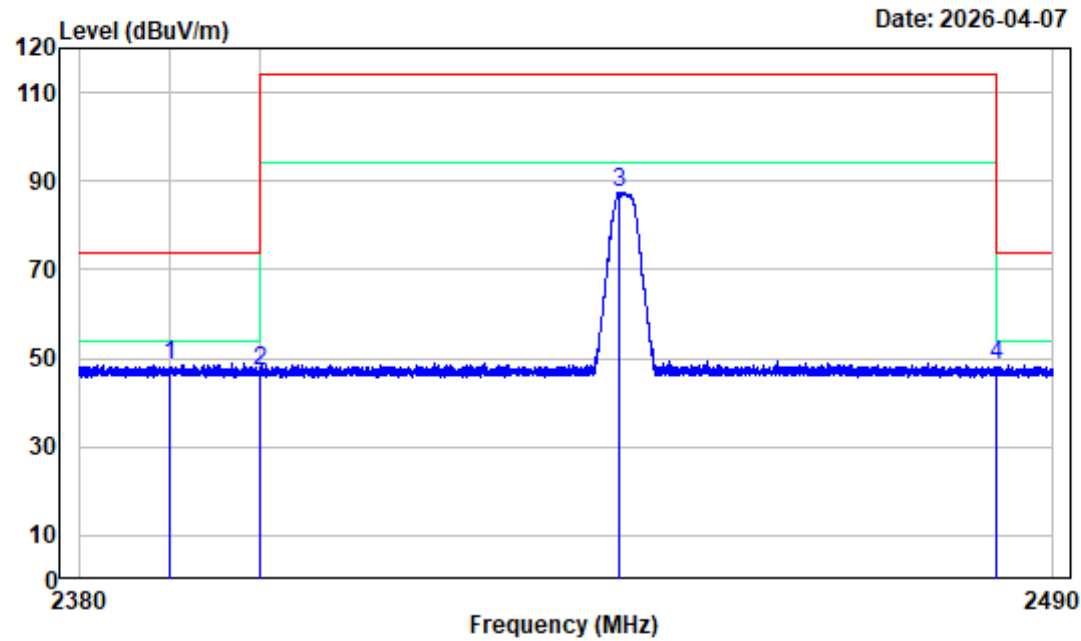

Site : chamber

Condition : 3m VERTICAL

Project No.: 2604R22885E-RF


Test Mode : TransmittingTester:Max Tao

Note : 2.4G SRD Middle Channel 2441MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	-10.93	59.26	48.33	74.00	-25.67 Peak
2	2400.000	-11.01	57.88	46.87	74.00	-27.13 peak
3	2440.404	-10.92	98.40	87.48	114.00	-26.52 Peak
4	2483.500	-10.97	59.34	48.37	74.00	-25.63 Peak

2.4G SRD High Channel 1GHz-4GHz_HORIZONTAL

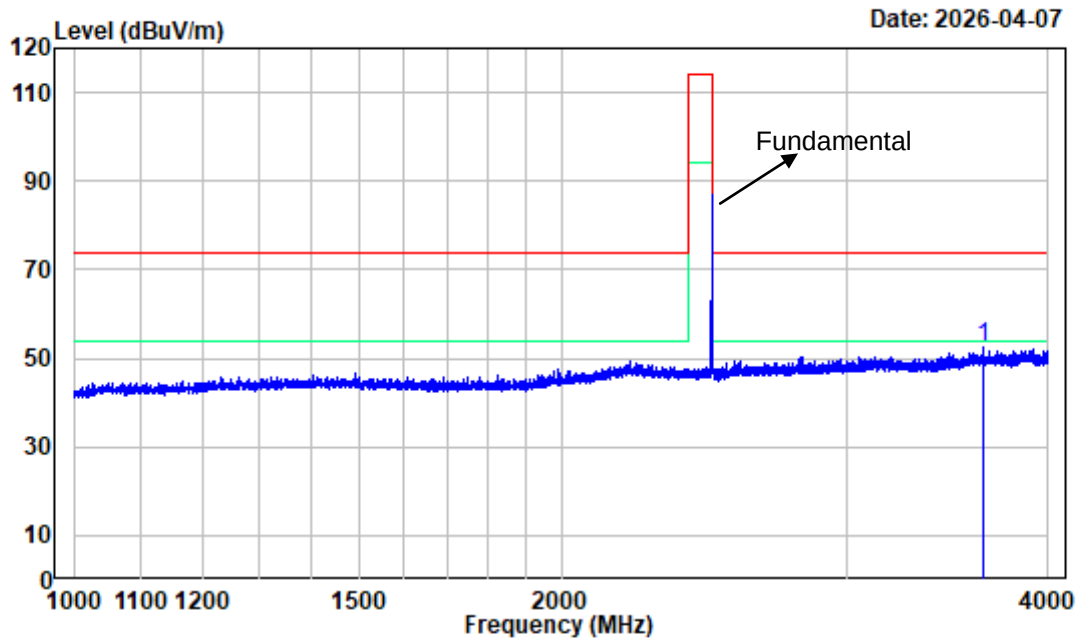

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2604R22885E-RF

Test Mode : Transmitting


Tester:Max Tao

Note : 2.4G SRD High Channel 2480MHz 1GHz-4GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3647.500	-8.84	61.30	52.46	74.00	-21.54 Peak

2.4G SRD High Channel 1GHz-4GHz_VERTICAL

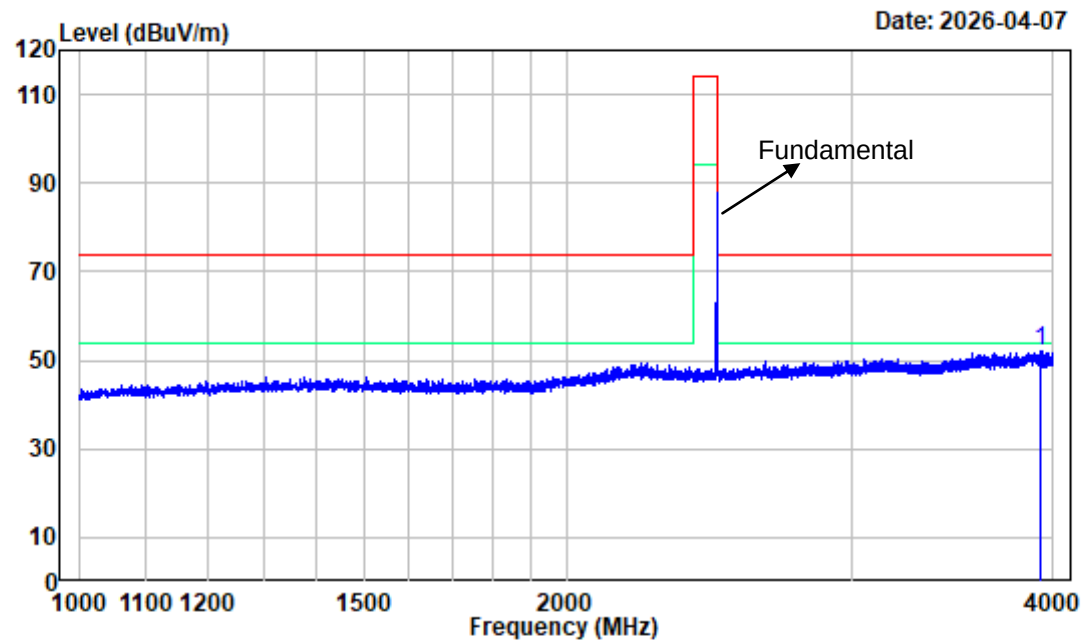

Site : chamber

Condition : 3m VERTICAL

Project No.: 2604R22885E-RF

Test Mode : Transmitting


Tester:Max Tao

Note : 2.4G SRD High Channel 2480MHz 1GHz-4GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3934.375	-8.65	60.94	52.29	74.00	-21.71 Peak

2.4G SRD High Channel 4GHz-18GHz_HORIZONTAL

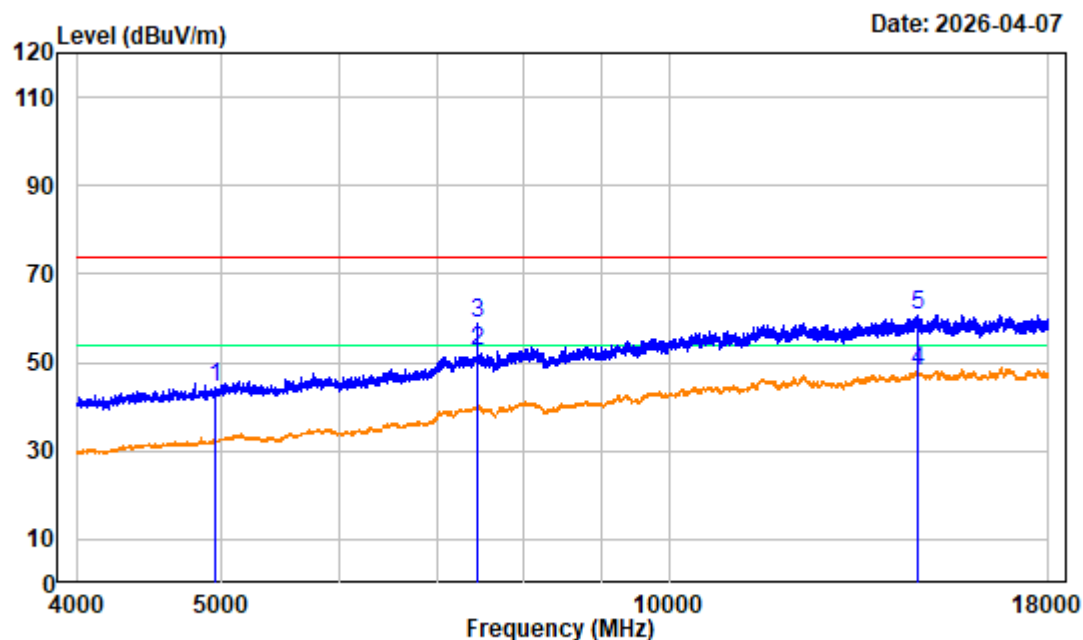

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2604R22885E-RF

Test Mode : Transmitting


Tester:Max Tao

Note : 2.4G SRD High Channel 2480MHz 4GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4960.000	-6.70	51.27	44.57	74.00	-29.43	Peak
2	7440.000	-0.85	53.45	52.60	54.00	-1.40	Average
3	7440.000	-0.85	59.75	58.90	74.00	-15.10	Peak
4	14720.500	7.51	40.36	47.87	54.00	-6.13	Average
5	14720.500	7.51	53.28	60.79	74.00	-13.21	Peak


2.4G SRD High Channel 4GHz-18GHz_VERTICAL

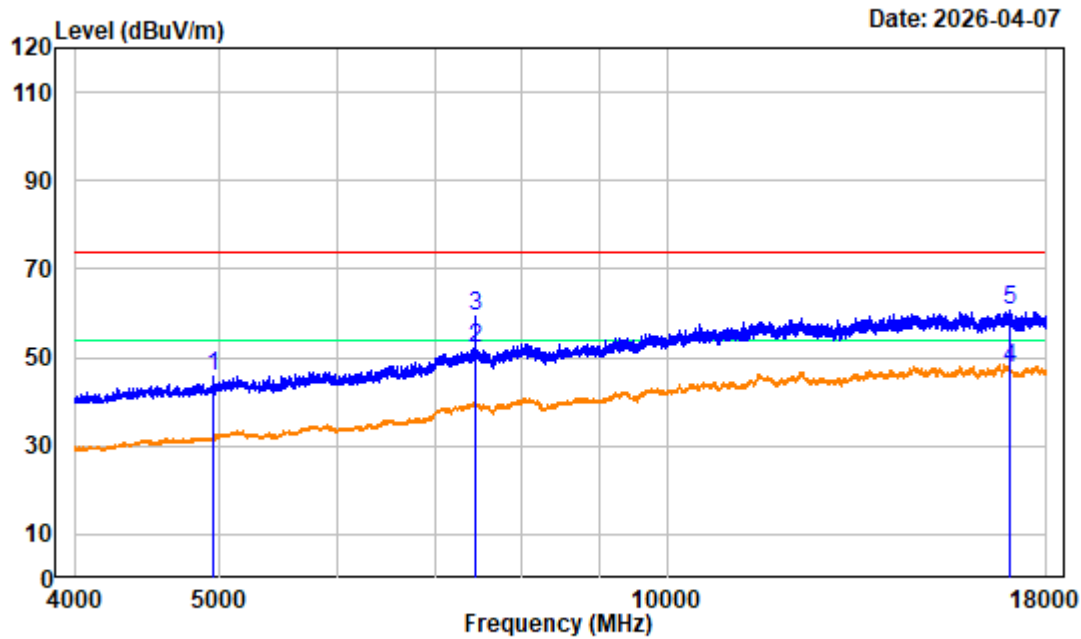

Site : chamber
Condition : 3m VERTICAL
Project No.: 2604R22885E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G SRD High Channel 2480MHz 4GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4960.000	-6.70	52.46	45.76	74.00	-28.24	Peak
2	7440.000	-0.85	53.03	52.18	54.00	-1.82	Average
3	7440.000	-0.85	60.29	59.44	74.00	-14.56	Peak
4	17013.000	7.42	39.96	47.38	54.00	-6.62	Average
5	17013.000	7.42	53.48	60.90	74.00	-13.10	Peak


2.4G SRD High Channel 18GHz-25GHz_HORIZONTAL

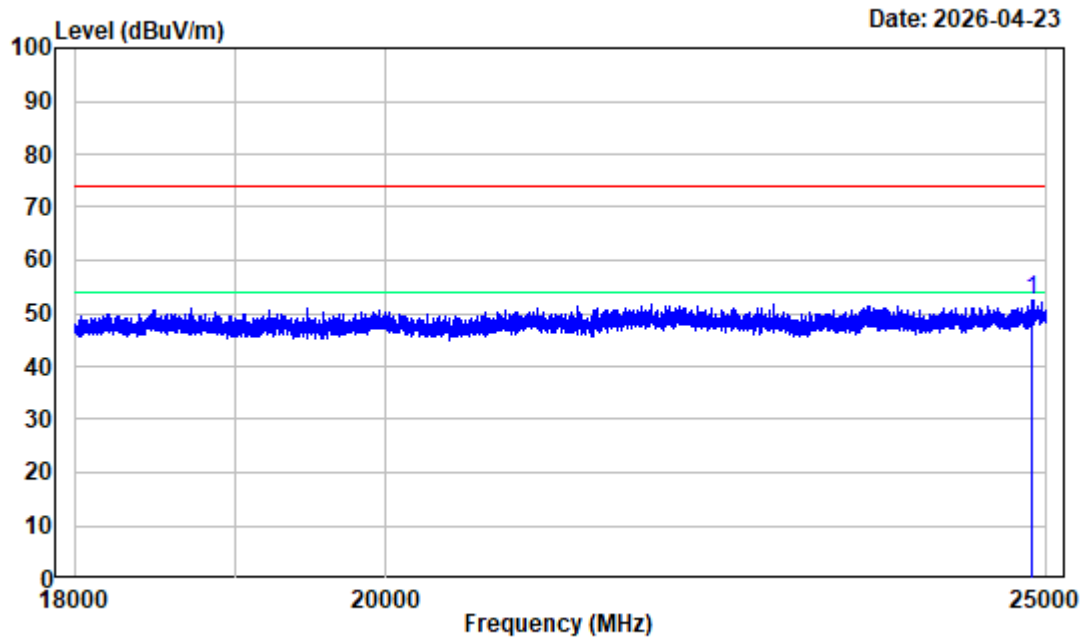

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2604R22885E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G SRD High Channel 2480MHz 18GHz-25GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 24877.500	4.04	48.43	52.47	74.00	-21.53	Peak


2.4G SRD High Channel 18GHz-25GHz_VERTICAL

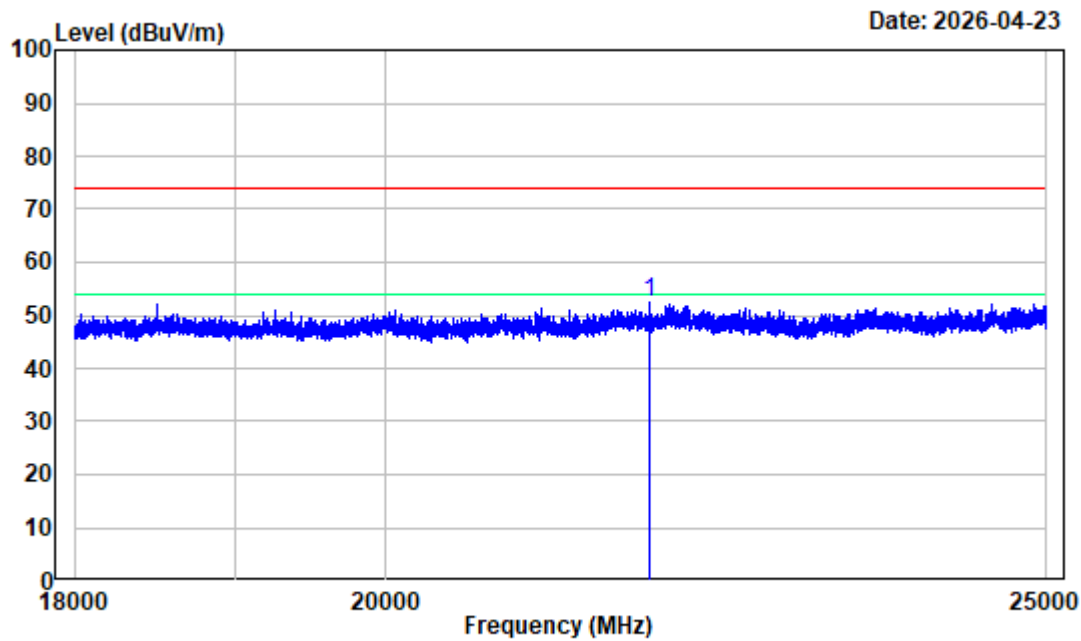

Site : chamber
Condition : 3m VERTICAL
Project No.: 2604R22885E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G SRD High Channel 2480MHz 18GHz-25GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 21857.880	0.31	51.96	52.27	74.00	-21.73	Peak


2.4G SRD High Channel_HORIZONTAL

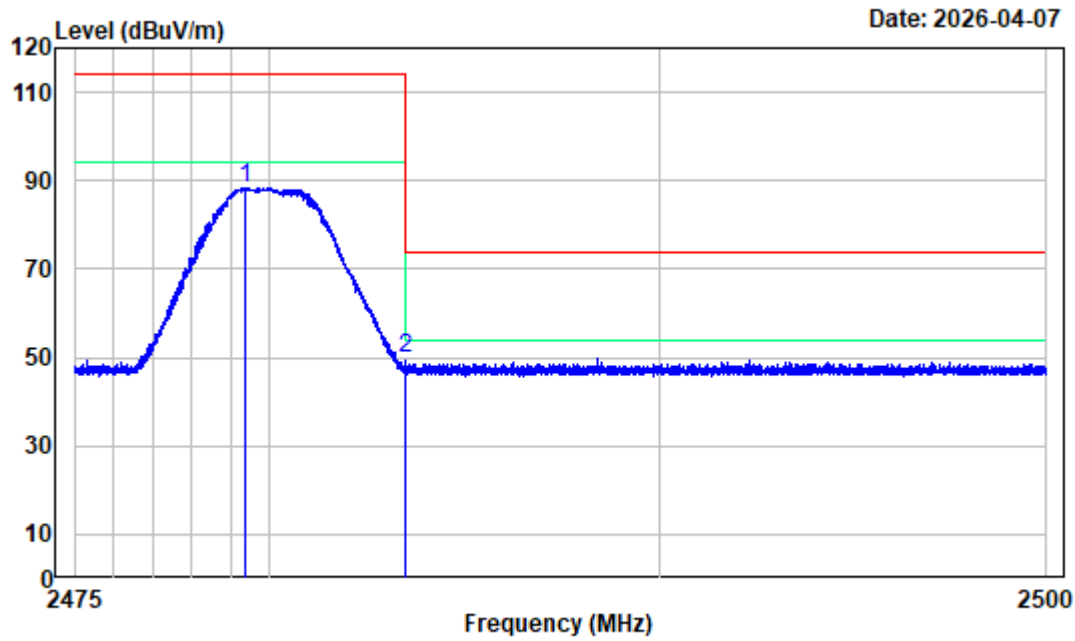

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2604R22885E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G SRD High Channel 2480MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 2479.356	-10.96	99.21	88.25	114.00	-25.75	Peak
2 2483.500	-10.97	60.57	49.60	74.00	-24.40	Peak

2.4G SRD High Channel_VERTICAL

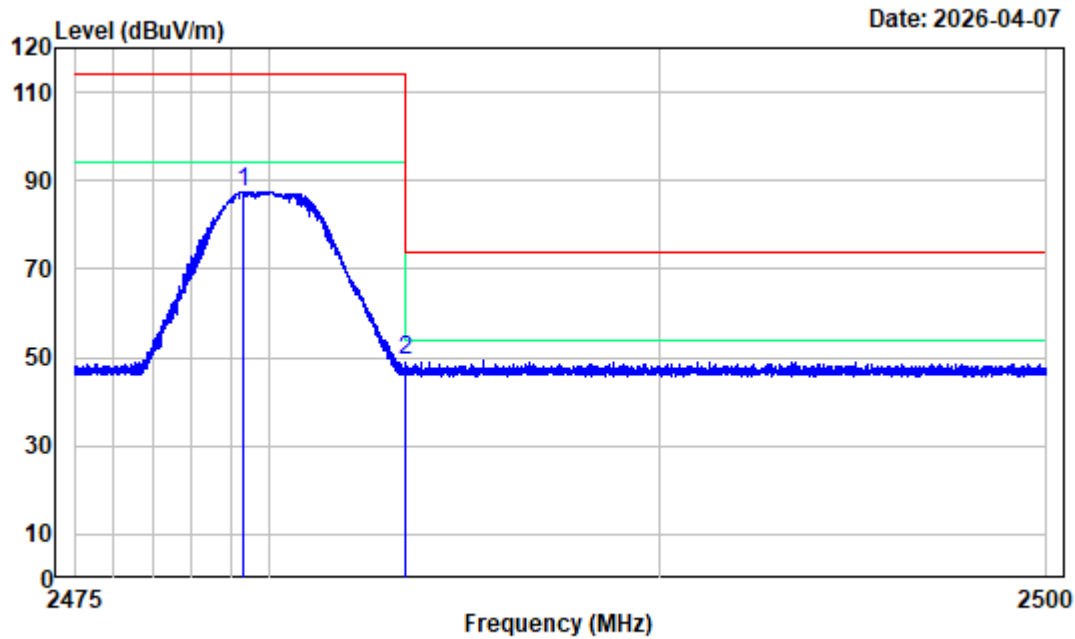

Site : chamber
Condition : 3m VERTICAL
Project No.: 2604R22885E-RF
Test Mode : Transmitting Tester:Max Tao
Note : 2.4G SRD High Channel 2480MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2479.319	-10.96	98.52	87.56	114.00	-26.44 Peak
2	2483.500	-10.97	60.11	49.14	74.00	-24.86 Peak

20dB EMISSION BANDWIDTH

Applicable Standard


According to FCC§15.215(c),

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. The EUT is setting to the transmit mode, the waveform was received by the test antenna which was connected to the spectrum analyzer, plot the 20 dB bandwidth.
3. Repeat above procedures until all frequencies measured were complete.

EUT Setup

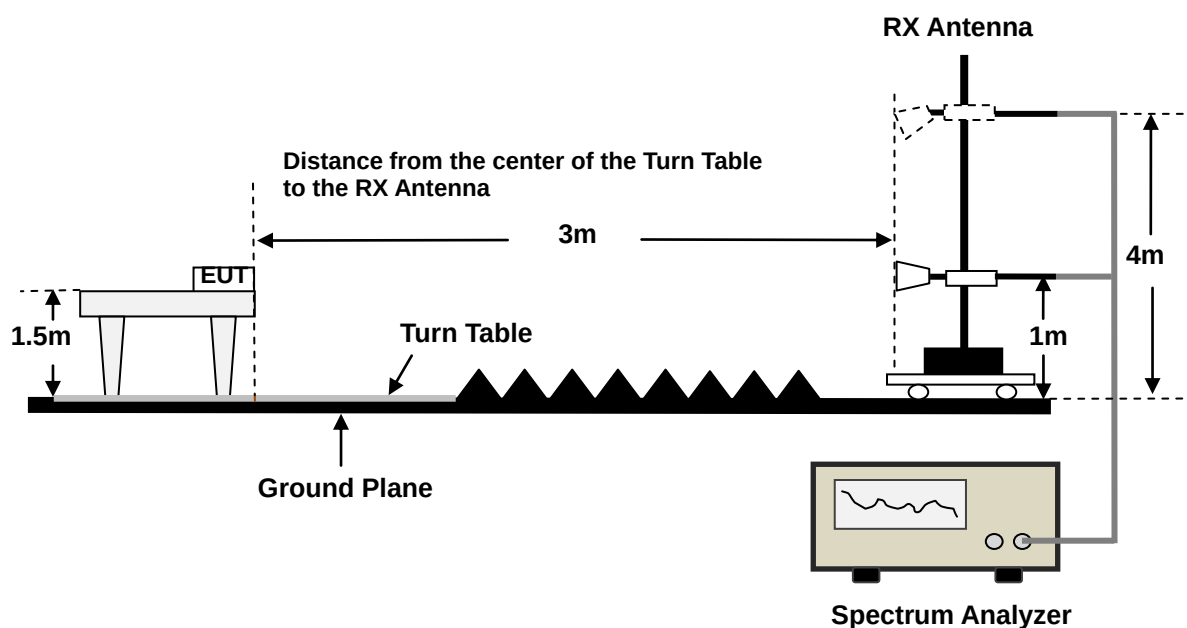

Test Data


Environmental Conditions

Temperature:	24.3℃
Relative Humidity:	46 %
ATM Pressure:	100.7 kPa
TestEngineer:	Max Tao
TestDate:	2026-04-07
EUT Operation Mode:	Transmitting (Radiated Measurement)

Test Result: Compliance, please refer to the below data.


Channel	Frequency (MHz)	20dB Bandwidth (MHz)
Low	2403	2.2430
Middle	2441	2.2406
High	2480	2.2410

Low Channel

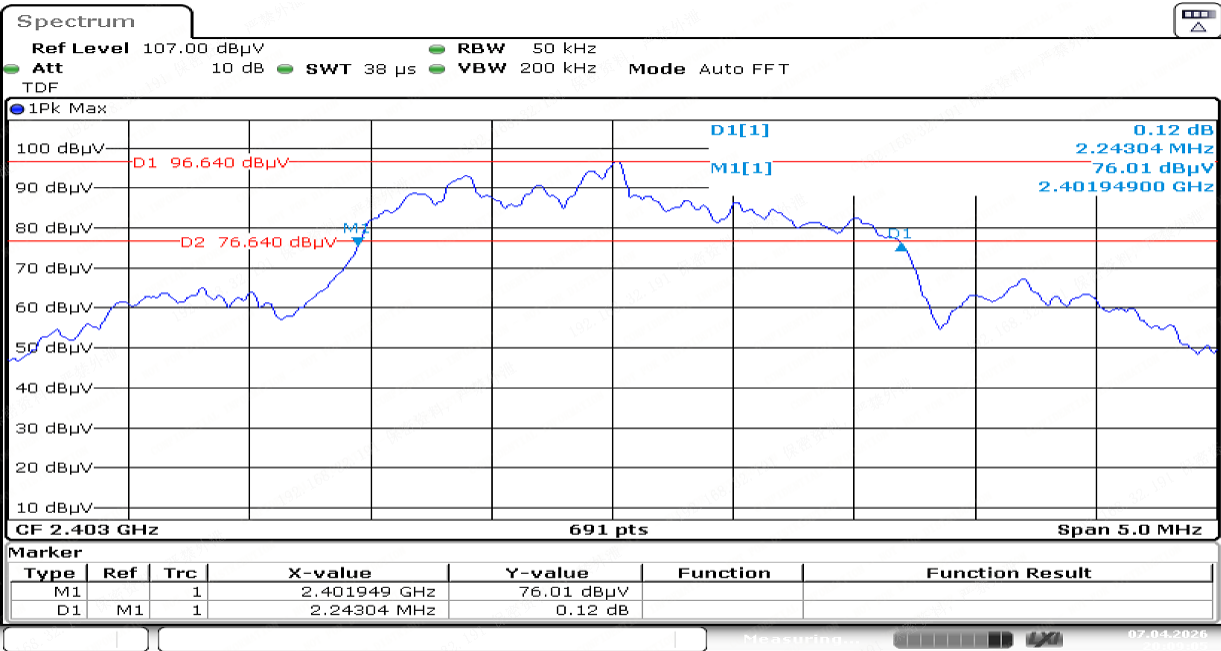


ProjectNo.:2604R22885E-RF Tester:Max Tao
Date: 7.APR.2026 20:09:05

Middle Channel

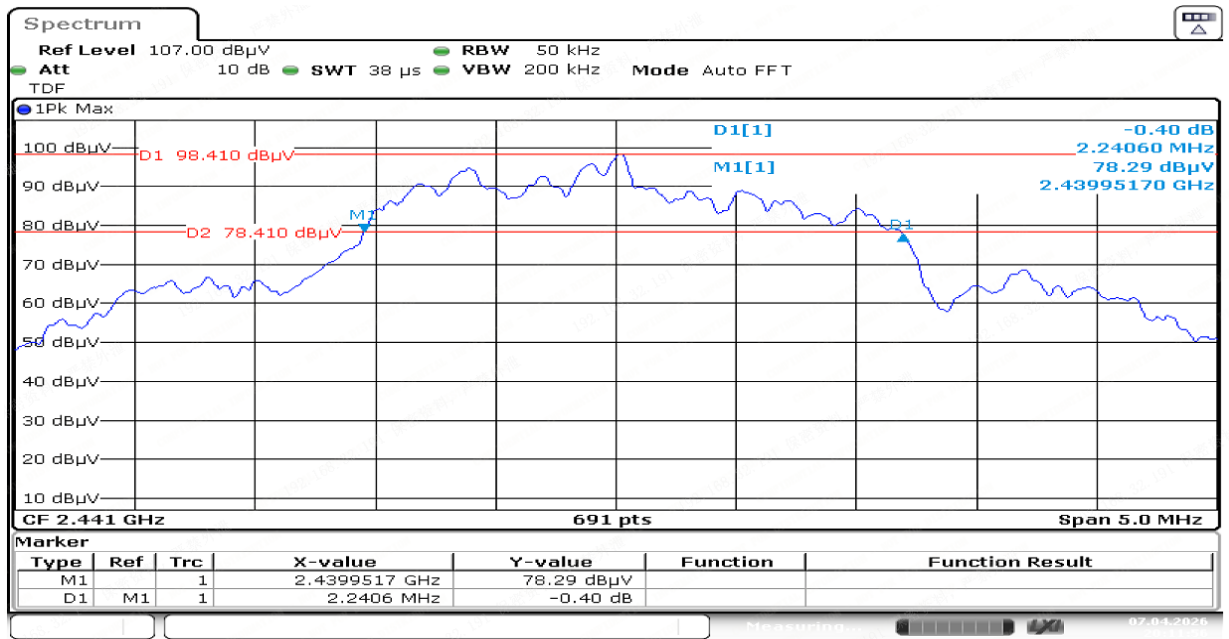

ProjectNo.:2604R22885E-RF Tester:Max Tao
Date: 7.APR.2026 20:11:56

High Channel

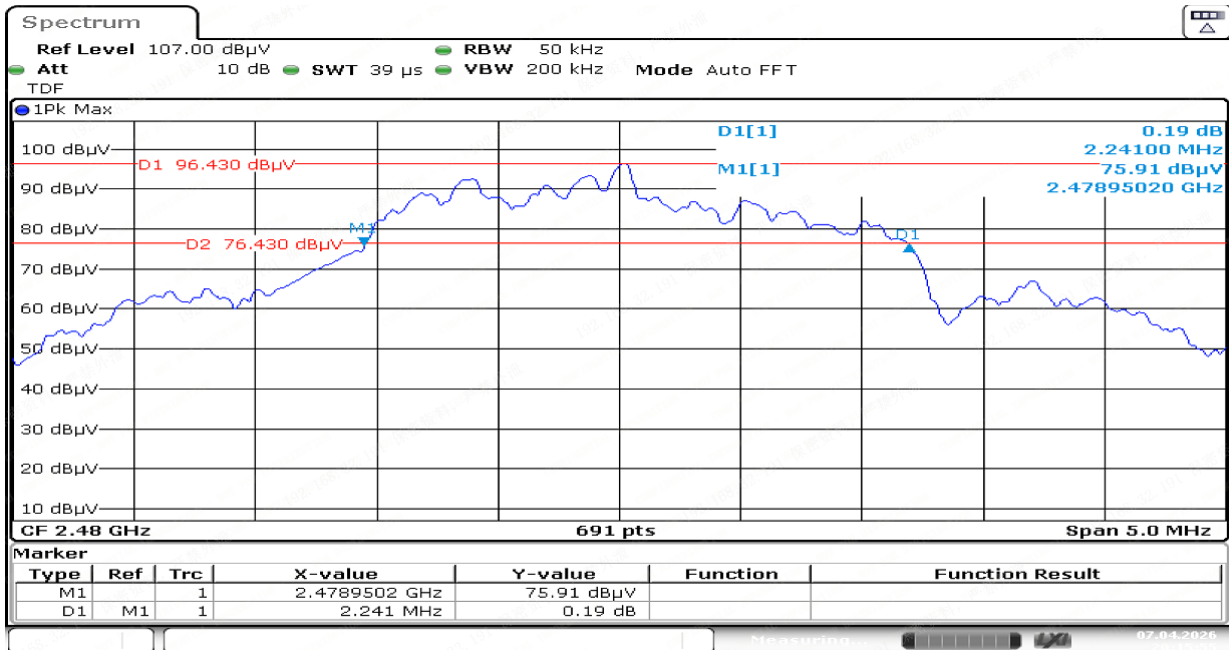

ProjectNo.:2604R22885E-RF Tester:Max Tao
Date: 7.APR.2026 20:15:55

EXHIBIT A-EUT PHOTOGRAPHS

Please refer to the Attachment No.1 2604R22885E-RF EUT External Photos and Attachment No.2 2604R22885E-RF EUT Internal Photos.

EXHIBIT B-TEST SETUP PHOTOGRAPHS

Please refer to the Attachment No.3 2604R22885E-RF Test Photos.

******* END OF REPORT *******