



TEST REPORT

FCC ID:2BVCX-M8800US9

Product : 802.11a/b/g/n/ac/ax WiFi6 & BT5.4 module
Model Name : BL-M8800US9-80I
Brand : YLINK
Report No. : NCT260051181E1-4

Prepared for

Shenzhen Ylink Technology Co., Ltd.

**801-5, Block C, Building 3, Huaqiang Creative Industry Park, Guangming Street,
Guangming District, Shenzhen, China**

Prepared by

Shenzhen NCT Testing Technology Co., Ltd.

**A101, B2, Fuqiao 6th Area, Xintian Community, Fuhai Street, Baoan
District, Shenzhen, China**

TEL: 400-8868-419

1 TEST RESULT CERTIFICATION

Applicant's name : Shenzhen Ylink Technology Co., Ltd.
Address : 801-5, Block C, Building 3, Huaqiang Creative Industry Park, Guangming Street, Guangming District, Shenzhen, China
Manufacture's name : Shenzhen Ylink Technology Co., Ltd.
Address : 801-5, Block C, Building 3, Huaqiang Creative Industry Park, Guangming Street, Guangming District, Shenzhen, China
Product name : 802.11a/b/g/n/ac/ax WiFi6 & BT5.4 module
Model name : BL-M8800US9-80I
Standards : FCC CFR Title 47 Part 15 Subpart C Section 15.407
ANSI C63.10-2020+Cor 1-2023
KDB 789033 D02 v02r01
Test procedure : ANSI C63.10-2020+Cor 1-2023
Test Date : Jan. 16, 2026 to Apr. 16, 2026
Date of Issue : Apr. 16, 2026
Test Result : Pass

This device described above has been tested by NCT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NCT, this document may be altered or revised by NCT, personal only, and shall be noted in the revision of the document.

Prepared by:

Shine Wu

Shine Wu

Reviewer:

Keven Wu

Keven Wu

Approved:

Henry Wang

Henry Wang



Contents

Page

1 TEST RESULT CERTIFICATION	2
2 TEST SUMMARY	5
3 TEST FACILITY	6
4 GENERAL INFORMATION	7
4.1 GENERAL DESCRIPTION OF E.U.T.	7
4.2 TEST SETUP CONFIGURATION	15
4.3 TEST MODE	15
5 EQUIPMENT DURING TEST	17
5.1 EQUIPMENTS LIST	17
5.2 MEASUREMENT UNCERTAINTY	19
5.3 DESCRIPTION OF SUPPORT UNITS	19
6 CONDUCTED EMISSION	20
6.1 E.U.T. OPERATION	20
6.2 EUT SETUP	20
6.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	21
6.4 MEASUREMENT PROCEDURE:	21
6.5 CONDUCTED EMISSION LIMIT	21
6.6 MEASUREMENT DESCRIPTION	21
6.7 CONDUCTED EMISSION TEST RESULT	21
7 RADIATED SPURIOUS EMISSIONS	24
7.1 EUT OPERATION	25
7.2 TEST SETUP	26
7.3 SPECTRUM ANALYZER SETUP	27
7.4 TEST PROCEDURE	28
7.5 SUMMARY OF TEST RESULTS	29
8 POWER SPECTRAL DENSITY TEST	51
8.1 TEST STANDARD AND LIMIT	51
8.2 TEST SETUP	52
8.3 TEST PROCEDURE	52

8.4 TEST DATA.....	53
9 26DB & 6DB & 99% EMISSION BANDWIDTH TEST	54
9.1 TEST STANDARD	54
9.2 TEST SETUP	54
9.3 TEST PROCEDURE	54
9.4 TEST DATA.....	56
10 MAXIMUM CONDUCTED OUTPUT POWER	57
10.1 TEST STANDARD AND LIMIT	57
10.2 TEST SETUP	58
10.3 TEST PROCEDURE	58
10.4 TEST DATA.....	58
11 OUT OF BAND EMISSIONS AND SPURIOUS EMISSION	59
11.1 TEST STANDARD AND LIMIT	59
11.2 TEST SETUP	61
11.3 TEST PROCEDURE	61
11.4 TEST DATA.....	61
12 FREQUENCY STABILITY MEASUREMENT	62
12.1 TEST STANDARD AND LIMIT	62
12.2 TEST SETUP	62
12.3 TEST PROCEDURE	62
12.4 TEST DATA.....	63
13 ANTENNA REQUIREMENT	64
13.1 TEST STANDARD AND REQUIREMENT	64
13.2 ANTENNA CONNECTED CONSTRUCTION	64
14 DFS TEST	65
14.1 DFS TEST REQUIREMENT	65
14.2 DFS DETECTION THRESHOLDS	68
14.3 RADAR TEST WAVEFORMS	68
14.4 TEST ITEM	72
15 TEST SETUP & EUT PHOTOGRAPH	75

2 Test Summary

FCC Part15 (15.407) , Subpart E			
Standard Section	Test Item	Judgment	Remark
Part 15.203	Antenna requirement	Pass	
47 CFR Part 15.207(a)	Conducted Emission at AC power line	PASS	
47 CFR Part 15.407(a)	Maximum conducted output power	Pass	
47 CFR Part 15.407(a)	Power spectral density	Pass	
47 CFR Part 15.407(e)	Emission bandwidth and occupied bandwidth	Pass	
47 CFR Part 15.407(h)(2)(ii)	Channel Availability Check Time	N/A	
47 CFR Part 15.407(h)(2)	U-NII Detection Bandwidth	N/A	
KDB 905462 D02, Clause 5.1 Table 2	Statistical Performance Check	N/A	
47 CFR Part 15.407(h)(2)(iii)	Channel Move Time, Channel Closing Transmission Time	Pass	The test results are reflected in the DFS report
47 CFR Part 15.407(h)(2)(iv)	Non-Occupancy Period Test	Pass	
KDB 905462 D02, Clause 5.2 Table 3	DFS Detection Thresholds	Pass	The test results are reflected in the DFS report
47 CFR Part 15.407(b)	Band edge emissions	Pass	
47 CFR Part 15.407(b)	Undesirable emission limits	Pass	

Remark:

1. "N/A" denotes test is not applicable in this Test Report.

3 TEST FACILITY

Site Description

EMC Lab. : Accredited by CNAS, 2022-09-27

The certificate is valid until 2028.01.07

The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2006 (identical to ISO/IEC 17025:2017)

The Certificate Registration Number is L8251

Designation Number: CN1347

Test Firm Registration Number: 894804

Accredited by A2LA, June 14, 2023

The Certificate Registration Number is 6837.01

Accredited by Industry Canada, November 09, 2018

The Conformity Assessment Body Identifier is CN0150

Company Number: 30806

Name of Firm : Shenzhen NCT Testing Technology Co., Ltd.

Site Location : A101,B2,Fuqiao 6th Area ,xintian Community,Fuhai Street,Baoan District,Shenzhen,China

4 General Information

4.1 General Description of E.U.T.

Product Name:	802.11a/b/g/n/ac/ax WiFi6 & BT5.4 module
Model No.:	BL-M8800US9-80I
HVIN:	20260116A-001#
Sample ID	Engineer sample
Operation Frequency Range:	U-NII Band 1: 5.18~5.24 GHz U-NII Band 2A: 5.26~5.32 GHz U-NII Band 2C: 5.50~5.70 GHz U-NII Band 3: 5.745~5.825 GHz
Frequency Block	U-NII Band 1: 5.15~5.25 GHz U-NII Band 2A: 5.25~5.35 GHz U-NII Band 2C: 5.47~5.725 GHz U-NII Band 3: 5.725~5.85 GHz
Modulation type:	OFDM with BPSK/QPSK/16QAM/64QAM for 802.11a/n OFDM with BPSK/QPSK/16QAM/64QAM/256QAM for 802.11ac OFDMA with BPSK/QPSK/16QAM/64QAM/256QAM/1024QAM for 802.11ax
Antenna Type:	FPC Antenna
Channel Bandwidth	802.11a: 20 MHz 802.11n: 20 MHz, 40 MHz 802.11ac: 20 MHz, 40 MHz, 80 MHz 802.11ax: 20 MHz, 40 MHz, 80 MHz
TPC:	☒ Supported ☐ Unspported
Channel Puncturing Function:	☐ Supported ☒ Unspported
Support RU:	☒ Full RU ☐ Partial RU
Antenna gain:	U-NII Band 1:3.57 dBi U-NII Band 2A:3.57 dBi U-NII Band 2C:2.37 dBi U-NII Band 3:2.37 dBi
Power supply	DC 3.3V
Hardware Version:	V1.0
Software Version:	N/A
Remark:	the Antenna gain is provided by customer from Antenna spec. and the laboratory will not be responsible for the accumulated calculation results which covers the information provided by the applicant.

☒ Wifi 5G with U-NII - 1

Frequency and Channel list for 802.11a/n (HT20)/802.11ac (VHT20)/802.11ax(H20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220		
40	5200	48	5240		

Frequency and Channel list for 802.11n (HT40)/ 802.11ac (VHT40)/802.11ax(HE40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190				
46	5230				

Test Frequency and Channel for 802.11a/n (HT20)/802.11ac (VHT20)/802.11ax(HE20):


Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	40	5200	48	5240

Test Frequency and channel for 802.11n (HT40)/ 802.11ac (VHT40)/802.11ax(HE40):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	N/A	N/A	46	5230

Test Frequency and Channel for 802.11ac (VHT80)/802.11ax(HE80):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210				

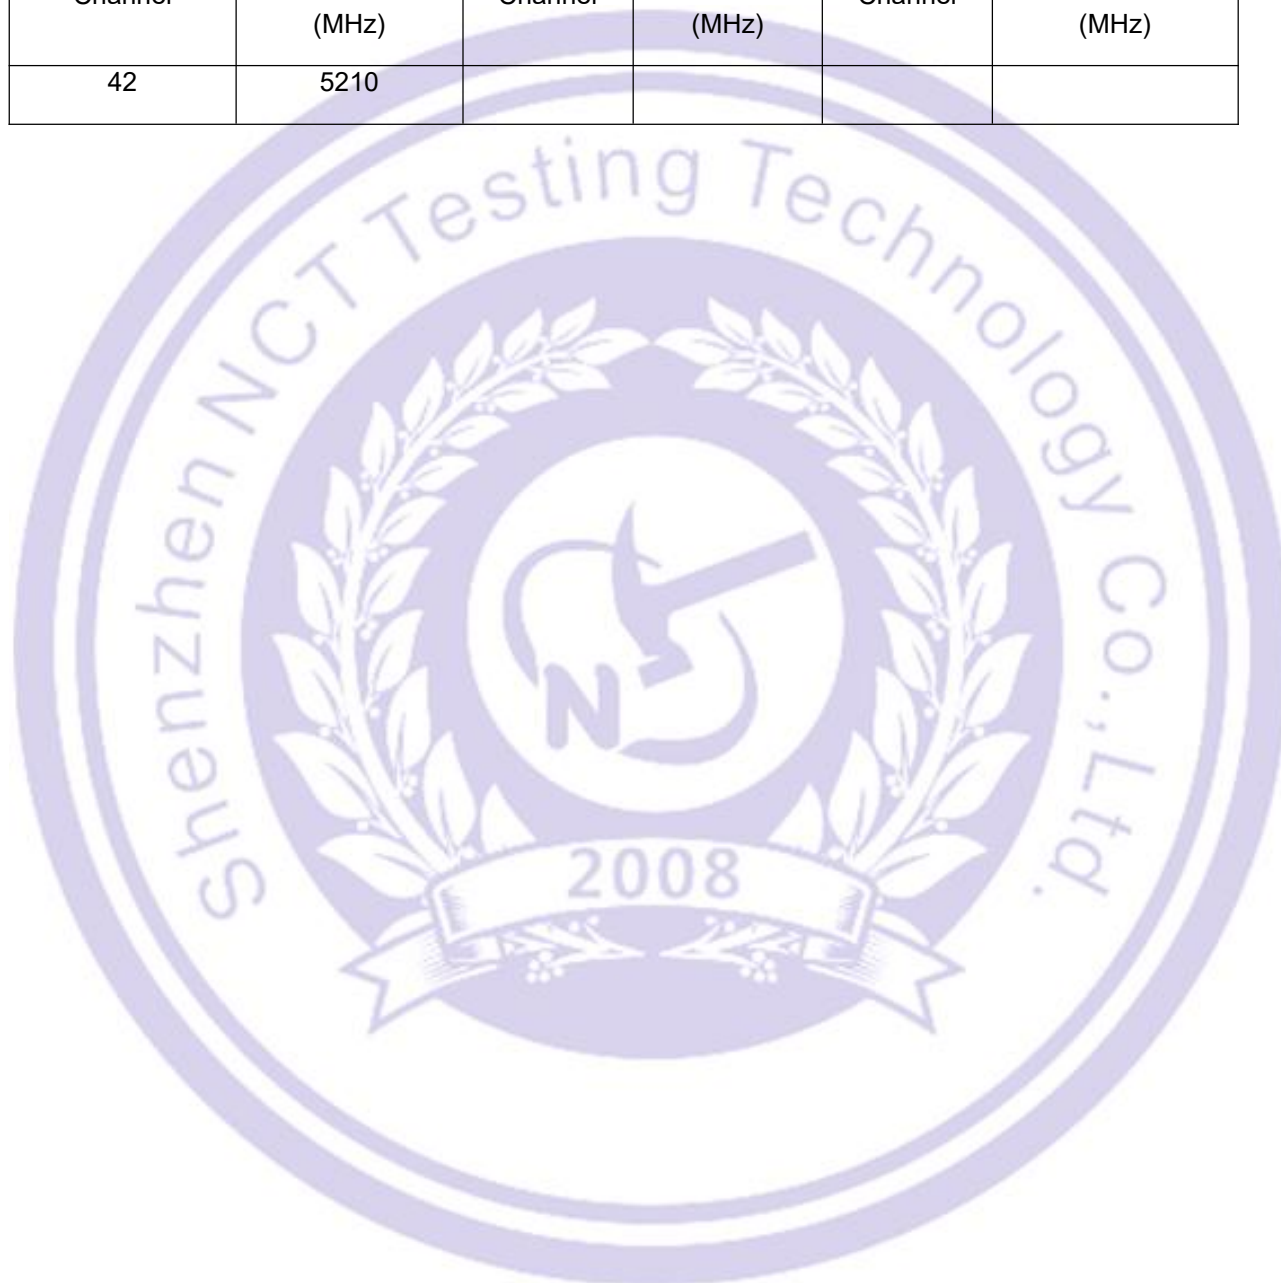

☒ Wifi 5G with U-NII -2A

Frequency and Channel list for 802.11a/n (HT20)/802.11ac (VHT20)/802.11ax(HE20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	60	5300		
56	5280	64	5320		

Frequency and Channel list for 802.11n (HT40)/ 802.11ac (VHT40)/802.11ax(HE40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
54	5270				
62	5310				

Test Frequency and Channel for 802.11a/n (HT20)/802.11ac (VHT20)/802.11ax(HE20):


Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	60	5300	64	5320

Test Frequency and channel for 802.11n (HT40)/ 802.11ac (VHT40)/802.11ax(HE40):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
54	5270	N/A	N/A	62	5310

Test Frequency and Channel for 802.11ac (VHT80)/802.11ax(HE80):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
58	5290				

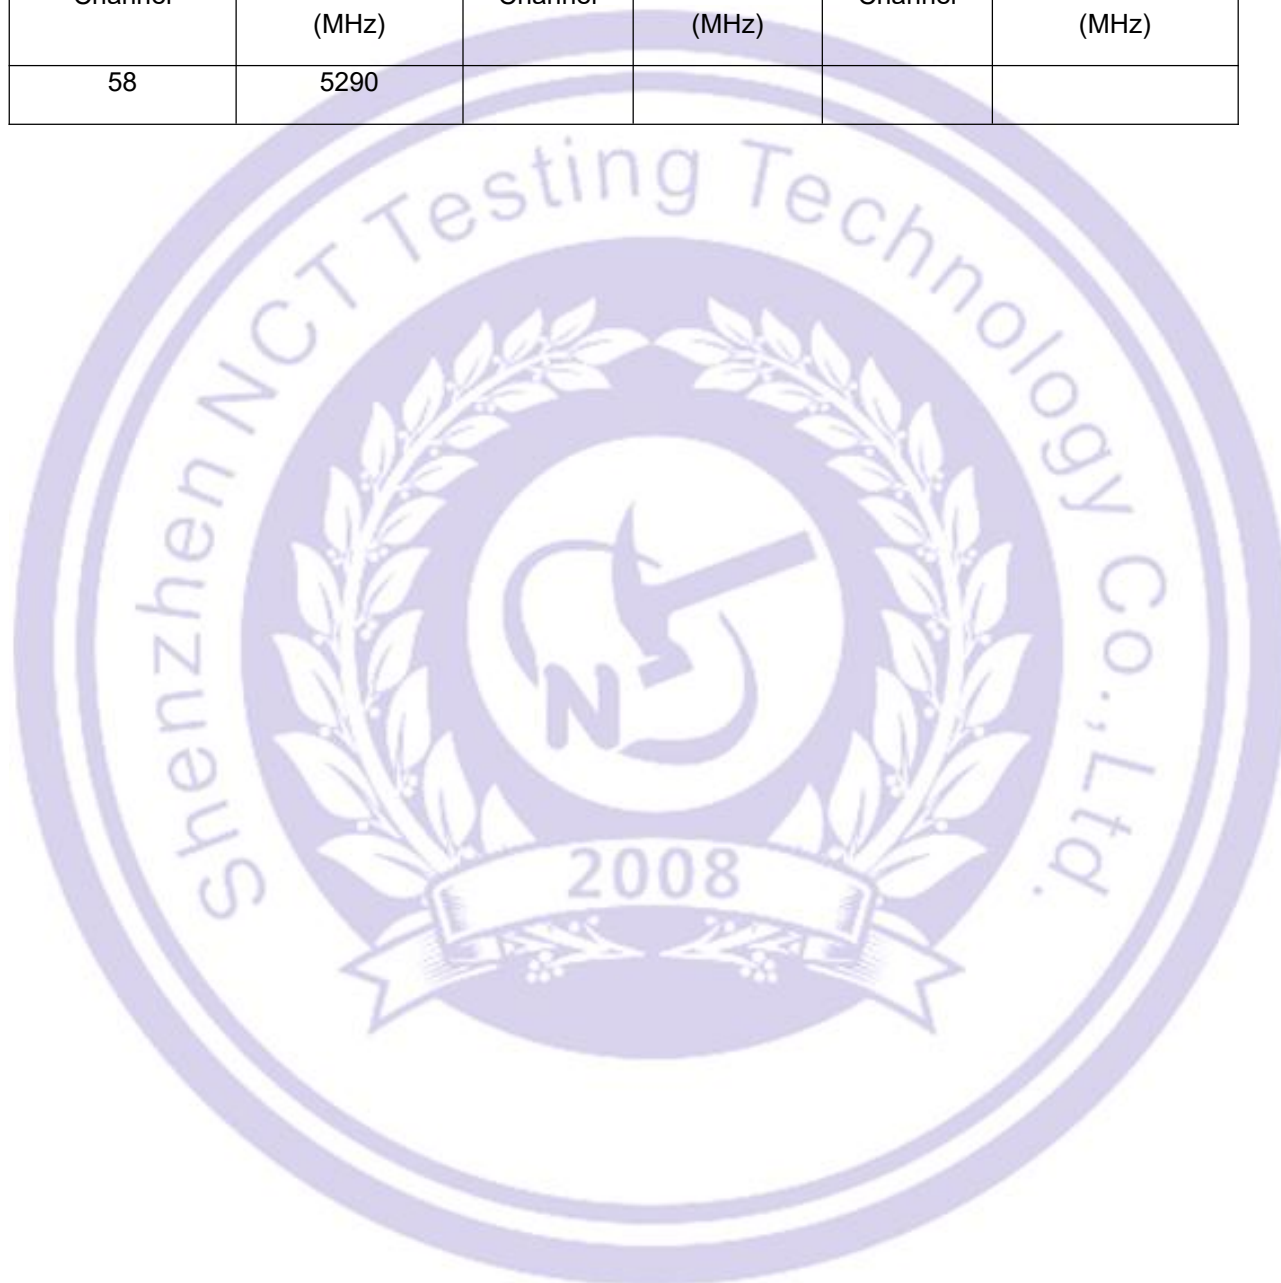

☒ Wifi 5G with U-NII -2C

Frequency and Channel list for 802.11a/n (HT20)/802.11ac (VHT20)/802.11ax(HE20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	116	5580	132	5660
104	5520	120	5600	136	5680
108	5540	124	5620	140	5700
112	5560	128	5640		

Frequency and Channel list for 802.11n (HT40)/ 802.11ac (VHT40)/802.11ax(HE40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
102	5510	118	5590	134	5670
110	5550	126	5630		

Test Frequency and Channel for 802.11a/n (HT20)/802.11ac (VHT20)/802.11ax(HE20):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	120	5600	140	5700

Test Frequency and channel for 802.11n (HT40)/ 802.11ac (VHT40)/802.11ax(HE40):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
102	5510	118	5590	134	5670

Test Frequency and Channel for 802.11ac (VHT80)/802.11ax(HE80):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)		
106	5530	122	5610		

☒ Wifi 5G with U-NII -3

Frequency and Channel list for 802.11a/n (HT20)/802.11ac (VHT20)/802.11ax(HE20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	157	5785	165	5825
153	5765	161	5805		

Frequency and Channel list for 802.11n (HT40)/ 802.11ac (VHT40)/802.11ax(HE40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755				
159	5795				

Test Frequency and Channel for 802.11a/n (HT20)/802.11ac (VHT20)/802.11ax(HE20):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	157	5785	165	5825

Test Frequency and channel for 802.11n (HT40)/ 802.11ac (VHT40)/802.11ax(HE40):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755	N/A	N/A	159	5795

Test Frequency and Channel for 802.11ac (VHT80)/802.11ax(HE80):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
155	5755	N/A	N/A	N/A	N/A

4.2 Test Setup Configuration

Radiated Emission



Conducted Emission


AC Line



Radiated Spurious



Conducted Spurious



4.3 Test Mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

Test Software	Aic rf test_2024_0509
Power level setup	20 dBm;



5 Equipment During Test

5.1 Equipments List

Conducted emission Test Equipment

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
944 Shielded Room	944 Room	/	EMToni	2025/1/17	2028/1/16
EMI Test Receiver	ESPI	101604	Rohde & Schwarz	2025/6/10	2026/6/09
liminator	ESH3-Z2	NA	Ronde&Schwarz	2025/6/10	2026/6/09
Attenuation	PCL-10dB	221126	HTEC	2025/6/10	2026/6/09
LISN	ENV 216	102796	Rohde & Schwarz	2025/6/10	2026/6/09
LISN	VN1-13S	004023	CRANAGE	2025/6/10	2026/6/09
Cable	RG223-1500MM	NA	RG	2025/6/10	2026/6/09

Radiated emission & Radio Frequency Test Equipment

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date	Date of Cal.	Due Date
966 Shielded Room	966 Room	/	EMToni	/	/	2025/1/17	2028/1/16
EMI Test Receiver	ESCI	101178	Rohde & Schwarz	/	/	2025/6/10	2026/6/09
Amplifier (30MHz-1GHz)	BBV 9743 B	00374	SCHNWARZBECK	/	/	2025/6/10	2026/6/09
Power Meter	ML2495A	10084	Anritu	/	/	2025/6/10	2026/6/09
Bilog Antenna (30MHz-1GHz)	VULB9162	00473	SCHNWARZBECK	2025/3/08	2026/3/07	2026/3/07	2027/3/06
Horn antenna (1GHz-18GHz)	BBHA 9120 D	02622	SCHNWARZBECK	2025/3/10	2026/3/09	2026/3/07	2027/3/06
Preamplifier (1GHz-18GHz)	BBV 9718D	0024	SCHNWARZBECK	/	/	2025/6/10	2026/6/09
Spectrum Analyzer (10Hz-40GHz)	FSV 40	100952	Rohde & Schwarz	/	/	2025/6/10	2026/6/09

Pream plifier (18GHz-40GHz)	BBV 9721	0056	SCHNWARZB ECK	/	/	2025/6/10	2026/6/09
Double Ridge Guide Horn Antenna (18GHz-40GHz)	SAS-574	588	A.H.System	2025/3/10	2026/3/09	2026/3/09	2027/3/08
Loop Antenna (9KHz-30MHz)	FMZB1519 B	014	SCHNWARZB ECK	/	/	2025/6/10	2026/6/09
Comprehensiv e tester	CWM500	104995	Rohde & Schwarz	/	/	2025/6/10	2026/6/09
Amplifier (9KHz-30MHz)	BBV 9745	00109	CHNWARZBE CK	/	/	2025/6/10	2026/6/09
MXG Signal Analyzer	N9020A	MY5051020 2	Agilent	/	/	2025/6/10	2026/6/09
MXG Vector Signal Generator	N5182A	MY5014002 0	Agilent	/	/	2025/6/10	2026/6/09
MXG Analog Signal Generator	N5181A	MY4742091 9	Agilent	/	/	2025/6/10	2026/6/09
Power Sensor	TR1029-2	512364	Techoy	/	/	2025/6/10	2026/6/09
constant temperature and humidity chamber	OJN-9606	/	Zhongheng	2025/2/16	2026/2/15	2026/2/17	2027/2/16
RF Swith	TR1029-1	512364	Techoy	/	/	2025/6/10	2026/6/09
Cable	DA800- 4000MM	NA	DA	/	/	2025/6/10	2026/6/09
Cable	DA800- 11000MM	NA	DA	/	/	2025/6/10	2026/6/09

Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	FALA	EZ-EMC	Ver.EMC-CON 3A1.1+
2	EMC radiation test system	FALA	EZ-EMC	Ver.FA-03A2 RE+
3	RF test system	TACHOY	RFTest	V1.0.0
4	RF communication test system	TACHOY	RFTest	V1.0.0

5.2 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	±1.0dB
Power Spectral Density, conducted	±2.2dB
Radio Frequency	± 1 x 10 ⁻⁶
Bandwidth	± 1.5 x 10 ⁻⁶
Time	±2%
Duty Cycle	±2%
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±3%
Conducted Emissions (150kHz~30MHz)	±3.24dB
Radiated Emission(9KHz~30MHz)	±4.51dB
Radiated Emission(30MHz~1GHz)	±5.03dB
Radiated Emission(1GHz~25GHz)	±4.74dB
Radiated Emission(25GHz~40GHz)	±3.38dB
Remark: The coverage Factor (k=2), and measurement Uncertainty for a level of Confidence of 95%	

5.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	802.11a/b/g/n/ac/ax WiFi6 & BT5.4 module	N/A	BL-M8800US9-80I	N/A	EUT
E-2	Notebook	/	X1502Z	N/A	Auxiliary
E-3	Test Board	BILIAN	BL-A1003PCB	N/A	Auxiliary

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

6 Conducted Emission

Test Requirement: : FCC CFR 47 Part 15 Section 15.207
Test Method: : ANSI C63.10-2020+Cor 1-2023
Test Result: : PASS
Frequency Range: : 150kHz to 30MHz
Class/Severity: : Class B
Detector: : Peak for pre-scan (9kHz Resolution Bandwidth)


6.1 E.U.T. Operation

Operating Environment :


Temperature: : 23.2°C
Humidity: : 51 % RH
Atmospheric Pressure: : 101.2 kPa
Test Voltage : AC 120V/60Hz

6.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10-2020+Cor 1-2023

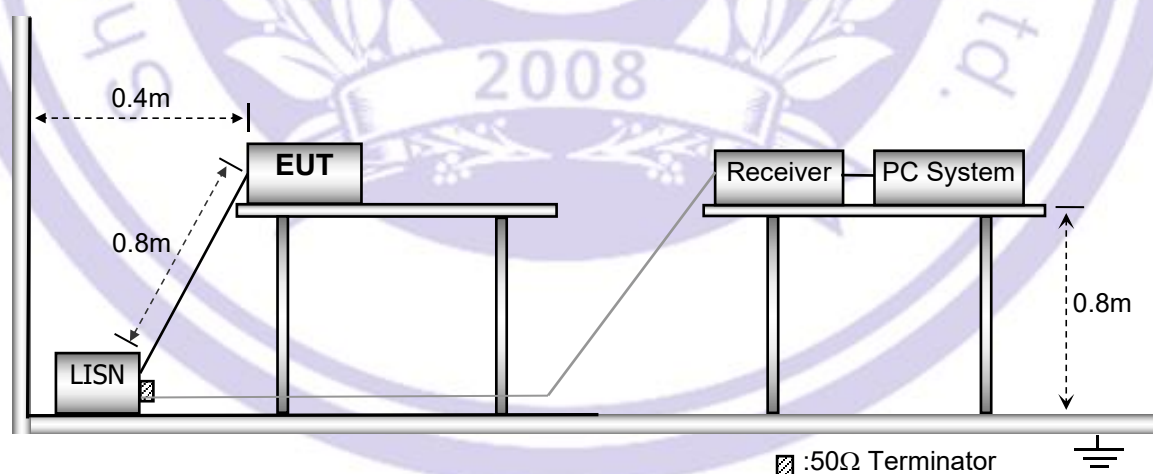

6.3 Test SET-UP (Block Diagram of Configuration)

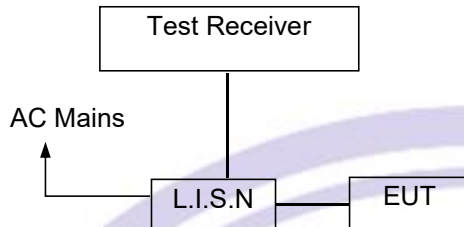

6.4 Measurement Procedure:

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

6.5 Conducted Emission Limit

Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.


6.6 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

6.7 Conducted Emission Test Result


All the modes have been tested, and only the data of the worst mode 802.11a 5180MHz.

Temperature:	23.2 °C	Relative Humidity:	51%
Pressure:	101.2kPa	Phase :	L
Test Voltage :	AC 120V/60Hz		802.11a 5180MHz

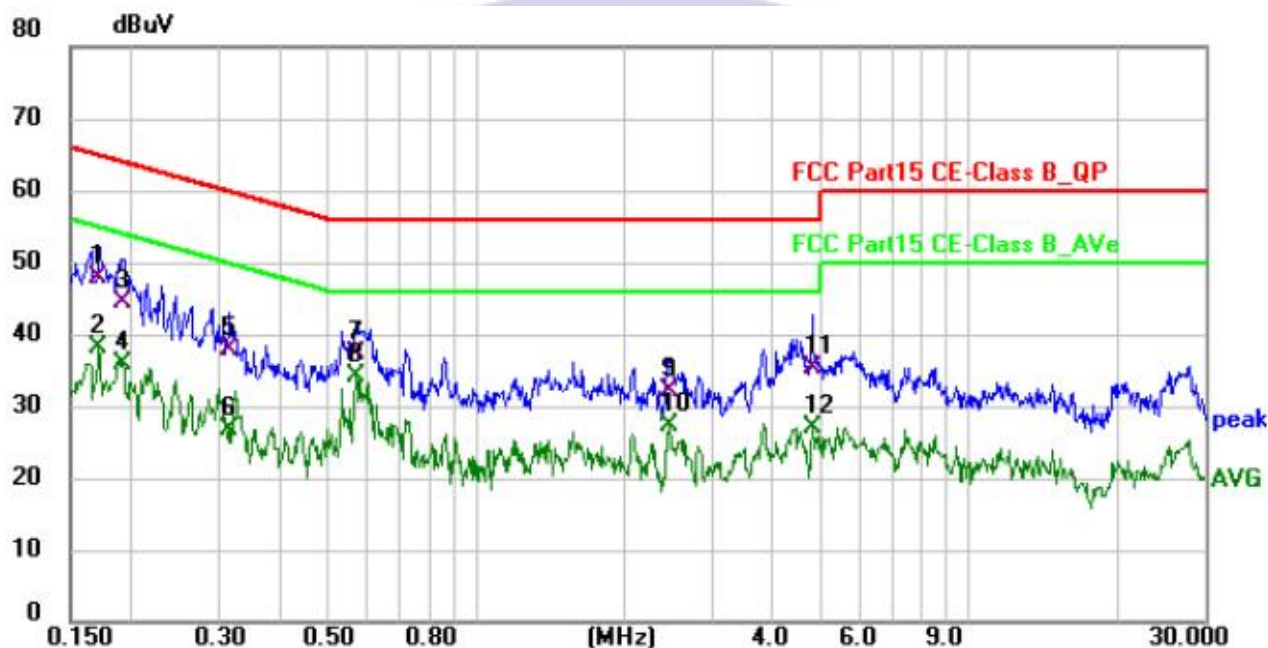

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1711	28.43	19.42	47.85	64.91	-17.06	QP
2	0.1711	18.86	19.42	38.28	54.91	-16.63	AVG
3	0.1912	24.81	19.55	44.36	63.98	-19.62	QP
4	0.1912	16.34	19.55	35.89	53.98	-18.09	AVG
5	0.3140	18.50	19.40	37.90	59.86	-21.96	QP
6	0.3140	7.43	19.40	26.83	49.86	-23.03	AVG
7	0.5670	17.69	19.51	37.20	56.00	-18.80	QP
8 *	0.5670	14.58	19.51	34.09	46.00	-11.91	AVG
9	2.4660	12.70	19.36	32.06	56.00	-23.94	QP
10	2.4660	7.79	19.36	27.15	46.00	-18.85	AVG
11	4.8060	15.80	19.40	35.20	56.00	-20.80	QP
12	4.8260	7.64	19.40	27.04	46.00	-18.96	AVG

Temperature:	23.2 °C	Relative Humidity:	51%
Pressure:	101.2kPa	Phase :	N
Test Voltage :	AC 120V/60Hz		802.11a 5180MHz

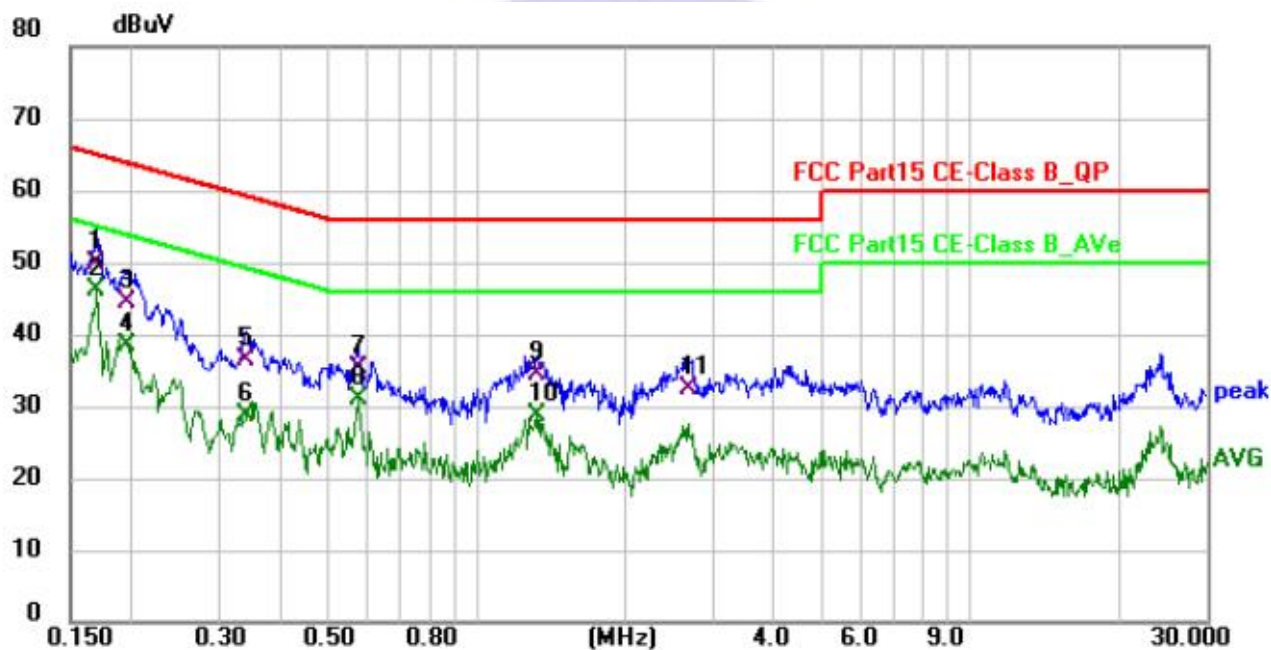

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1693	30.20	19.54	49.74	64.99	-15.25	QP
2 *	0.1693	26.48	19.54	46.02	54.99	-8.97	AVG
3	0.1940	24.77	19.53	44.30	63.86	-19.56	QP
4	0.1952	18.98	19.53	38.51	53.81	-15.30	AVG
5	0.3379	16.89	19.52	36.41	59.25	-22.84	QP
6	0.3410	9.26	19.52	28.78	49.18	-20.40	AVG
7	0.5740	15.73	19.47	35.20	56.00	-20.80	QP
8	0.5780	11.44	19.47	30.91	46.00	-15.09	AVG
9	1.3300	14.74	19.55	34.29	56.00	-21.71	QP
10	1.3300	9.24	19.55	28.79	46.00	-17.21	AVG
11	2.6860	12.94	19.53	32.47	56.00	-23.53	QP

Remark:

Margin = Limit – Level, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor

7 Radiated Spurious Emissions

Test Requirement : FCC CFR47 Part 15 Section 15.209 & 15.407
RSS-Gen §8.9, RSS-Gen §8.10

Test Method : ANSI C63.10-2020+Cor 1-2023

Test Result : PASS

Measurement Distance : 3m

Limit : See the follow table

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

FCC Part 15.407 (b) Undesirable emission limits. Except as shown in paragraph (b)(10) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating solely in the 5.725-5.850 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

7.1 EUT Operation


Operating Environment :

Temperature : 24.5 °C
Humidity : 55.5% RH
Atmospheric Pressure : 101.3kPa
Test Voltage : AC 120V60Hz


7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site


The test setup for emission measurement below 30MHz.

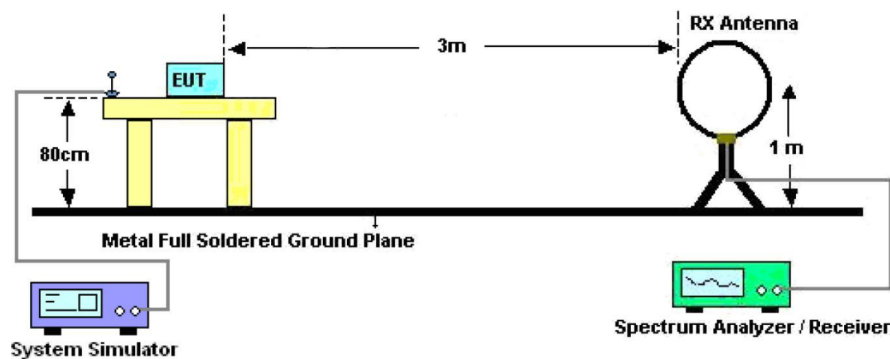

The test setup for emission measurement from 30 MHz to 1 GHz.

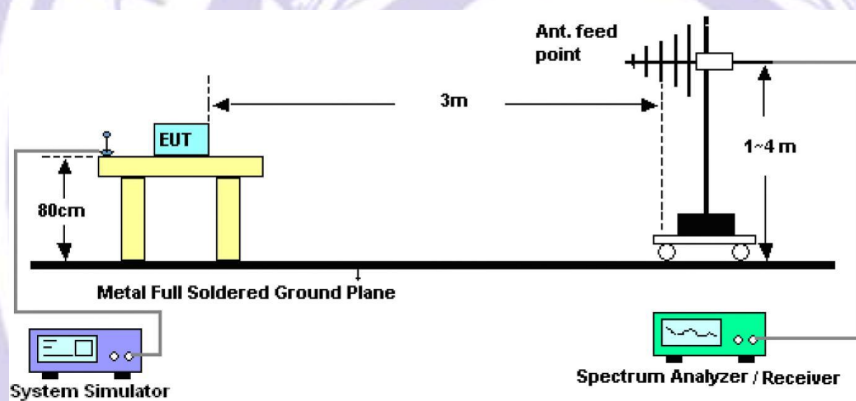

The test setup for emission measurement above 1 GHz.

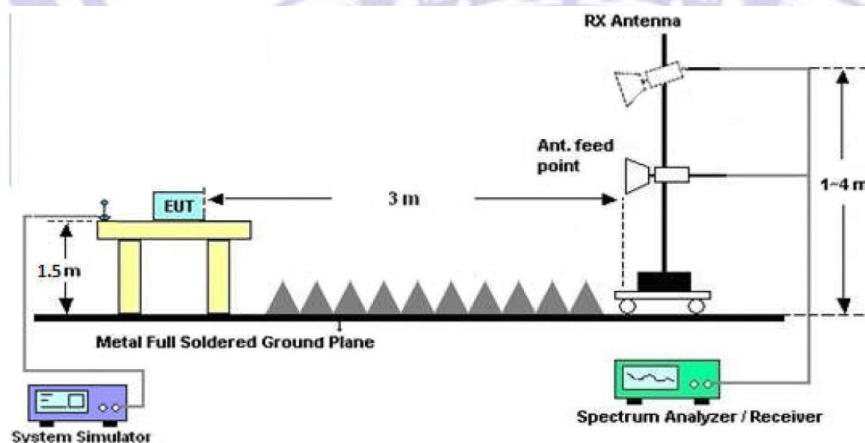

7.3 Spectrum Analyzer Setup

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

7.4 Test Procedure

1. The testing follows the guidelines in Spurious Radiated Emissions of ANSI C63.10-2020+Cor 1-2023.
2. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane. And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (From 1m to 4m) and turntable (from 0 degree to 360 degree) to find the maximum reading. A pre-amp and a filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Final measurement (Above 1GHz): The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to peak and average mode and a resolution bandwidth of 1MHz. The measurement will be performed in horizontal and vertical polarization of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 degree to 360 degree in order to have the antenna inside the cone of radiation.
7. Test Procedure of measurement (For Above 1GHz):
 - 1) Monitor the frequency range at horizontal polarization and move the antenna over all sides of the EUT(if necessary move the EUT to another orthogonal axis).
 - 2) Change the antenna polarization and repeat 1) with vertical polarization.
 - 3) Make a hardcopy of the spectrum.
 - 4) Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
 - 5) Change the analyser mode to Clear/ Write and found the cone of emission.
 - 6) Rotate and move the EUT, so that the measuring distance can be enlarged to 3m and the antenna will be still inside the cone of emission.
 - 7) Measure the level of the detected frequency with the correct resolution bandwidth, with the antenna polarization and azimuth and the peak and average detector, which causes the maximum emission.
 - 8) Repeat steps 1) to 7) for the next antenna spot if the EUT is larger than the antenna beamwidth.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

7.5 Summary of Test Results

Test Frequency: 9KHz-30MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	>20

Note:

The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40\log(\text{Specific distance} / \text{test distance})$ (dB);

Limit line = Specific limits (dBuV) + distance extrapolation factor.

Test Frequency: 30MHz ~ 1GHz

Please refer to the following test plots, Low Channel Worst case 802.11a for record:


Temperature:	24.5℃	Relative Humidity:	55.5%
Pressure:	101.3kPa	Polarization:	Horizontal
Test Voltage:	DC 3.3V		



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	206.3975	43.45	-16.18	27.27	43.50	-16.23	QP
2	218.3084	48.73	-15.69	33.04	46.00	-12.96	QP
3	239.1470	50.49	-15.10	35.39	46.00	-10.61	QP
4	252.9481	51.06	-14.93	36.13	46.00	-9.87	QP
5	329.0390	39.92	-13.25	26.67	46.00	-19.33	QP
6	375.9384	39.11	-11.98	27.13	46.00	-18.87	QP

Remark: Emission Level = Reading + Cable Loss + ANT Factor - AMP Factor

Temperature:	24.5℃	Relative Humidity:	55.5%
Pressure:	101.3kPa	Polarization:	Vertical
Test Voltage:	DC 3.3V		

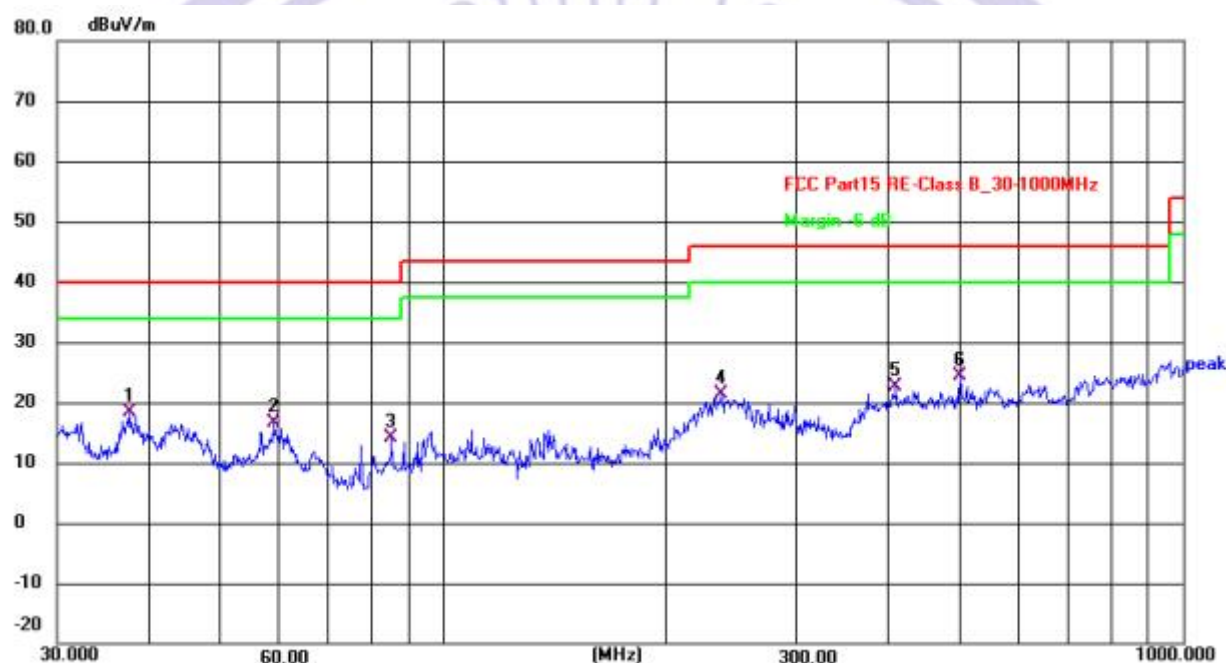

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	37.5478	34.03	-15.66	18.37	40.00	-21.63	QP
2	58.8185	31.43	-14.92	16.51	40.00	-23.49	QP
3	84.9993	33.30	-19.17	14.13	40.00	-25.87	QP
4	237.4760	36.60	-15.15	21.45	46.00	-24.55	QP
5	408.9460	34.07	-11.50	22.57	46.00	-23.43	QP
6	499.4245	33.90	-9.62	24.28	46.00	-21.72	QP

Remark: Emission Level = Reading + Cable Loss + ANT Factor - AMP Factor

Test Frequency 1GHz-40GHz

802.11a

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
Low Channel:5180MHz									
V	10360	41.1	32.70	7.72	38.59	54.71	74.00	-19.29	PK
V	10360	21.68	32.70	7.72	38.59	35.29	54.00	-18.71	AV
V	15540	44.3	31.74	9.44	39.29	61.29	68.20	-12.71	PK
V	15540	20.7	31.74	9.44	39.29	37.69	54.00	-16.31	AV
V	20720	41.31	26.93	6.64	37.94	58.96	68.20	-15.04	PK
V	20720	15.64	26.93	6.64	37.94	33.29	54.00	-20.71	AV
V	25900	38.74	27.10	7.90	39.32	58.86	74.00	-15.14	PK
V	25900	20.56	27.10	7.90	39.32	40.68	54.00	-13.32	AV
H	10360	39.44	32.70	7.72	38.59	53.05	74.00	-20.95	PK
H	10360	25.57	32.70	7.72	38.59	39.18	54.00	-14.82	AV
H	15540	35.67	31.74	9.44	39.29	52.66	68.20	-21.34	PK
H	15540	20.95	31.74	9.44	39.29	37.94	54.00	-16.06	AV
H	20720	38.97	26.93	6.64	37.94	56.62	68.20	-17.38	PK
H	20720	16.85	26.93	6.64	37.94	34.5	54.00	-19.5	AV
H	25900	36.57	27.10	7.90	39.32	56.69	74.00	-17.31	PK
H	25900	19.77	27.10	7.90	39.32	39.89	54.00	-14.11	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
Middle Channel:5200MHz									
V	10400	43.4	32.69	7.73	38.62	57.06	74.00	-16.94	PK
V	10400	21.52	32.69	7.73	38.62	35.18	54.00	-18.82	AV
V	15600	39.99	31.72	9.45	39.28	57	68.20	-17	PK
V	15600	18.75	31.72	9.45	39.28	35.76	54.00	-18.24	AV
V	20800	36.49	26.93	6.73	37.96	54.25	68.20	-19.75	PK
V	20800	19.84	26.93	6.73	37.96	37.6	54.00	-16.4	AV
V	26000	35.74	27.10	7.94	39.30	55.88	74.00	-18.12	PK
V	26000	14.64	27.10	7.94	39.30	34.78	54.00	-19.22	AV
H	10400	45.02	32.69	7.73	38.62	58.68	74.00	-15.32	PK
H	10400	24.51	32.69	7.73	38.62	38.17	54.00	-15.83	AV
H	15600	40.02	31.72	9.45	39.28	57.03	68.20	-16.97	PK
H	15600	21.64	31.72	9.45	39.28	38.65	54.00	-15.35	AV
H	20800	38.61	26.93	6.73	37.96	56.37	68.20	-17.63	PK
H	20800	19.74	26.93	6.73	37.96	37.5	54.00	-16.5	AV
H	26000	34.2	27.10	7.94	39.30	54.34	74.00	-19.66	PK
H	26000	15.36	27.10	7.94	39.30	35.5	54.00	-18.5	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
High Channel:5240MHz									
V	10480	45.06	32.66	7.74	38.68	58.82	74.00	-15.18	PK
V	10480	25.09	32.66	7.74	38.68	38.85	54.00	-15.15	AV
V	15720	41.02	31.68	9.48	39.26	58.08	68.20	-15.92	PK
V	15720	17.97	31.68	9.48	39.26	35.03	54.00	-18.97	AV
V	20960	38.16	26.94	6.91	37.99	56.12	68.20	-17.88	PK
V	20960	21.8	26.94	6.91	37.99	39.76	54.00	-14.24	AV
V	26200	36.59	27.10	7.89	39.50	56.88	74.00	-17.12	PK
V	26200	18.07	27.10	7.89	39.50	38.36	54.00	-15.64	AV
H	10480	42.29	32.66	7.74	38.68	56.05	74.00	-17.95	PK
H	10480	21.84	32.66	7.74	38.68	35.6	54.00	-18.4	AV
H	15720	39.72	31.68	9.48	39.26	56.78	68.20	-17.22	PK
H	15720	21.37	31.68	9.48	39.26	38.43	54.00	-15.57	AV
H	20960	37.42	26.94	6.91	37.99	55.38	68.20	-18.62	PK
H	20960	16.99	26.94	6.91	37.99	34.95	54.00	-19.05	AV
H	26200	36.33	27.10	7.89	39.50	56.62	74.00	-17.38	PK
H	26200	17.67	27.10	7.89	39.50	37.96	54.00	-16.04	AV

Polar	Frequency		Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)		(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5260MHz									
V	10520	42.27	32.64	7.75	38.70	56.08	74.00	-17.92	PK
V	10520	20.82	32.64	7.75	38.70	34.63	54.00	-19.37	AV
V	15780	35.63	31.67	9.49	39.24	52.69	74.00	-21.31	PK
V	15780	16.91	31.67	9.49	39.24	33.97	54.00	-20.03	AV
H	10520	37.01	32.64	7.75	38.70	50.82	74.00	-23.18	PK
H	10520	16.65	32.64	7.75	38.70	30.46	54.00	-23.54	AV
H	15780	36.90	31.67	9.49	39.24	53.96	74.00	-20.04	PK
H	15780	15.84	31.67	9.49	39.24	32.90	54.00	-21.10	AV

Polar	Frequency		Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)		(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5300MHz									
V	10600	42.78	32.61	7.77	38.72	56.66	74.00	-17.34	PK
V	10600	24.50	32.61	7.77	38.72	38.38	54.00	-15.62	AV
V	15900	40.37	31.63	9.51	39.22	57.47	74.00	-16.53	PK
V	15900	24.82	31.63	9.51	39.22	41.92	54.00	-12.08	AV
H	10600	40.42	32.61	7.77	38.72	54.30	74.00	-19.70	PK
H	10600	27.78	32.61	7.77	38.72	41.66	54.00	-12.34	AV
H	15900	42.79	31.63	9.51	39.22	59.89	74.00	-14.11	PK
H	15900	22.25	31.63	9.51	39.22	39.35	54.00	-14.65	AV

Polar	Frequency		Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)		(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5320MHz									
V	10640	43.12	32.60	7.78	38.73	57.03	74.00	-16.97	PK
V	10640	25.24	32.60	7.78	38.73	39.15	54.00	-14.85	AV
V	15960	44.55	31.61	9.52	39.21	61.67	74.00	-12.33	PK
V	15960	22.56	31.61	9.52	39.21	39.68	54.00	-14.32	AV
H	10640	44.67	32.60	7.78	38.73	58.58	74.00	-15.42	PK
H	10640	26.65	32.60	7.78	38.73	40.56	54.00	-13.44	AV
H	15960	40.34	31.61	9.52	39.21	57.46	74.00	-16.54	PK
H	15960	23.06	31.61	9.52	39.21	40.18	54.00	-13.82	AV

Polar	Frequency		Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)		(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5500MHz									
V	11000	39.83	32.47	7.85	38.80	54.01	68.20	-14.19	PK
V	11000	22.48	32.47	7.85	38.80	36.66	54.00	-17.34	AV
V	16500	37.92	31.50	9.52	39.60	55.54	74.00	-18.46	PK
V	16500	23.75	31.50	9.52	39.60	41.37	54.00	-12.63	AV
H	11000	43.08	32.47	7.85	38.80	57.26	68.20	-10.94	PK
H	11000	29.07	32.47	7.85	38.80	43.25	54.00	-10.75	AV
H	16500	40.26	31.50	9.52	39.60	57.88	74.00	-16.12	PK
H	16500	26.44	31.50	9.52	39.60	44.06	54.00	-9.94	AV

Polar	Frequency		Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)		(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5600MHz									
V	11200	40.44	32.39	8.07	38.84	54.96	74.00	-19.04	PK
V	11200	23.29	32.39	8.07	38.84	37.81	54.00	-16.19	AV
V	16800	47.71	31.44	9.51	39.78	65.56	74.00	-8.44	PK
V	16800	28.74	31.44	9.51	39.78	46.59	54.00	-7.41	AV
H	11200	46.87	32.39	8.07	38.84	61.39	74.00	-12.61	PK
H	11200	26.49	32.39	8.07	38.84	41.01	54.00	-12.99	AV
H	16800	44.06	31.44	9.51	39.78	61.91	74.00	-12.09	PK
H	16800	27.46	31.44	9.51	39.78	45.31	54.00	-8.69	AV

Polar	Frequency		Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)		(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5700MHz									
V	11400	43.34	32.32	8.29	38.88	58.19	74.00	-15.81	PK
V	11400	25.52	32.32	8.29	38.88	40.37	54.00	-13.63	AV
V	17100	40.24	31.31	9.56	40.10	58.59	74.00	-15.41	PK
V	17100	26.30	31.31	9.56	40.10	44.65	54.00	-9.35	AV
H	11400	41.88	32.32	8.29	38.88	56.73	74.00	-17.27	PK
H	11400	24.65	32.32	8.29	38.88	39.50	54.00	-14.50	AV
H	17100	43.52	31.31	9.56	40.10	61.87	74.00	-12.13	PK
H	17100	26.69	31.31	9.56	40.10	45.04	54.00	-8.96	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
Low Channel:5745MHz									
V	11490	48.88	32.29	8.39	38.90	63.88	74.00	-10.12	PK
V	11490	29.1	32.29	8.39	38.90	44.10	54.00	-9.90	AV
V	17235	43.79	31.19	9.62	40.37	62.59	74.00	-11.41	PK
V	17235	23.8	31.19	9.62	40.37	42.60	54.00	-11.40	AV
V	22980	43.25	27.02	7.20	38.98	62.41	74.00	-11.59	PK
V	22980	22.08	27.02	7.20	38.98	41.24	54.00	-12.76	AV
V	28725	42.42	27.10	7.56	40.18	63.06	74.00	-10.94	PK
V	28725	21.6	27.10	7.56	40.18	42.24	54.00	-11.76	AV
H	11490	45.77	32.29	8.39	38.90	60.77	74.00	-13.23	PK
H	11490	26.33	32.29	8.39	38.90	41.33	54.00	-12.67	AV
H	17235	41.05	31.19	9.62	40.37	59.85	74.00	-14.15	PK
H	17235	21.35	31.19	9.62	40.37	40.15	54.00	-13.85	AV
H	22980	42.13	27.02	7.20	38.98	61.29	74.00	-12.71	PK
H	22980	20.6	27.02	7.20	38.98	39.76	54.00	-14.24	AV
H	28725	41.55	27.10	7.56	40.18	62.19	74.00	-11.81	PK
H	28725	21.79	27.10	7.56	40.18	42.43	54.00	-11.57	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
Middle Channel:5785MHz									
V	11570	40.63	32.26	8.48	38.90	55.75	74.00	-18.25	PK
V	11570	23.54	32.26	8.48	38.90	38.66	54.00	-15.34	AV
V	17355	37.26	31.08	9.67	40.61	56.46	74.00	-17.54	PK
V	17355	20.87	31.08	9.67	40.61	40.07	54.00	-13.93	AV
V	23140	39.15	27.03	7.24	39.03	58.39	74.00	-15.61	PK
V	23140	19.49	27.03	7.24	39.03	38.73	54.00	-15.27	AV
V	28925	39.67	27.10	7.58	40.34	60.49	74.00	-13.51	PK
V	28925	16.56	27.10	7.58	40.34	37.38	54.00	-16.62	AV
H	11570	44.76	32.26	8.48	38.90	59.88	74.00	-14.12	PK
H	11570	20.96	32.26	8.48	38.90	36.08	54.00	-17.92	AV
H	17355	38.26	31.08	9.67	40.61	57.46	74.00	-16.54	PK
H	17355	16.98	31.08	9.67	40.61	36.18	54.00	-17.82	AV
H	23140	38.93	27.03	7.24	39.03	58.17	74.00	-15.83	PK
H	23140	18.2	27.03	7.24	39.03	37.44	54.00	-16.56	AV
H	28925	40.21	27.10	7.58	40.34	61.03	74.00	-12.97	PK
H	28925	19.1	27.10	7.58	40.34	39.92	54.00	-14.08	AV

Polar	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
(H/V)	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5825MHz									
V	11650	45.56	32.23	8.56	38.90	60.79	74.00	-13.21	PK
V	11650	30.83	32.23	8.56	38.90	46.06	54.00	-7.94	AV
V	17473.3	41.41	30.97	9.73	40.85	61.02	74.00	-12.98	PK
V	17473.3	25.89	30.97	9.73	40.85	45.50	54.00	-8.50	AV
V	23300	39.43	27.03	7.26	39.06	58.72	74.00	-15.28	PK
V	23300	24.11	27.03	7.26	39.06	43.40	54.00	-10.60	AV
V	29123.3	37.48	27.10	7.61	40.40	58.39	74.00	-15.61	PK
V	29123.3	19.84	27.10	7.61	40.40	40.75	54.00	-13.25	AV
H	11650	46.64	32.23	8.56	38.90	61.87	74.00	-12.13	PK
H	11650	25.81	32.23	8.56	38.90	41.04	54.00	-12.96	AV
H	17473.3	39.34	30.97	9.73	40.85	58.95	74.00	-15.05	PK
H	17473.3	25.92	30.97	9.73	40.85	45.53	54.00	-8.47	AV
H	23300	43.71	27.03	7.26	39.06	63.00	74.00	-11.00	PK
H	23300	21.53	27.03	7.26	39.06	40.82	54.00	-13.18	AV
H	29123.3	35.46	27.10	7.61	40.40	56.37	74.00	-17.63	PK
H	29123.3	19.99	27.10	7.61	40.40	40.90	54.00	-13.10	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss - Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. The worst mode is 802.11a, only the worst data is recorded.

Restricted bands:

Frequency	Meter Reading	antenna Factor	cable loss	preamp factor	Emission Level	Limit	Margin	Polar	Detector Type	Result
(MHz)	(dBuV/m)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	(H/V)		
802.11a:5180MHz										
5150	52.01	33.14	5.29	33.88	56.56	74	-17.44	V	PK	Pass
5150	34.55	33.14	5.29	33.88	39.10	54	-14.90	V	AV	Pass
5145	52.80	33.14	5.29	33.88	57.35	74	-16.65	V	PK	Pass
5145	34.82	33.14	5.29	33.88	39.37	54	-14.63	V	AV	Pass
5150	53.26	33.14	5.29	33.88	57.81	74	-16.19	H	PK	Pass
5150	35.22	33.14	5.29	33.88	39.77	54	-14.23	H	AV	Pass
5145	50.85	33.14	5.29	33.88	55.40	74	-18.60	H	PK	Pass
5145	33.80	33.14	5.29	33.88	38.35	54	-15.65	H	AV	Pass
802.11a:5240MHz										
5350	54.78	33.06	5.44	33.72	59.56	74	-14.44	V	PK	Pass
5350	34.61	33.06	5.44	33.72	39.39	54	-14.61	V	AV	Pass
5370	51.80	33.05	5.45	33.70	56.60	74	-17.40	V	PK	Pass
5370	33.86	33.05	5.45	33.70	38.66	54	-15.34	V	AV	Pass
5350	55.65	33.06	5.44	33.72	60.43	74	-13.57	H	PK	Pass
5350	36.44	33.06	5.44	33.72	41.22	54	-12.78	H	AV	Pass
5370	51.52	33.05	5.45	33.70	56.32	74	-17.68	H	PK	Pass
5370	34.14	33.05	5.45	33.70	38.94	54	-15.06	H	AV	Pass
802.11n20:5180MHz										
5150	53.56	33.14	5.29	33.88	58.11	74	-15.89	V	PK	Pass

5150	35.76	33.14	5.29	33.88	40.31	54	-13.69	V	AV	Pass
5145	51.92	33.14	5.29	33.88	56.47	74	-17.53	V	PK	Pass
5145	34.38	33.14	5.29	33.88	38.93	54	-15.07	V	AV	Pass
5150	54.07	33.14	5.29	33.88	58.62	74	-15.38	H	PK	Pass
5150	35.73	33.14	5.29	33.88	40.28	54	-13.72	H	AV	Pass
5145	52.28	33.14	5.29	33.88	56.83	74	-17.17	H	PK	Pass
5145	34.54	33.14	5.29	33.88	39.09	54	-14.91	H	AV	Pass
802.11n20:5240MHz										
5350	54.80	33.06	5.44	33.72	59.58	74	-14.42	V	PK	Pass
5350	37.56	33.06	5.44	33.72	42.34	54	-11.66	V	AV	Pass
5370	51.02	33.05	5.45	33.70	55.82	74	-18.18	V	PK	Pass
5370	35.14	33.05	5.45	33.70	39.94	54	-14.06	V	AV	Pass
5350	55.11	33.06	5.44	33.72	59.89	74	-14.11	H	PK	Pass
5350	41.05	33.06	5.44	33.72	45.83	54	-8.17	H	AV	Pass
5370	53.50	33.05	5.45	33.70	58.30	74	-15.70	H	PK	Pass
5370	36.93	33.05	5.45	33.70	41.73	54	-12.27	H	AV	Pass
802.11ac20:5180MHz										
5150	53.72	33.14	5.29	33.88	58.27	74	-15.73	V	PK	Pass
5150	36.81	33.14	5.29	33.88	41.36	54	-12.64	V	AV	Pass
5145	53.40	33.14	5.29	33.88	57.95	74	-16.05	V	PK	Pass
5145	35.69	33.14	5.29	33.88	40.24	54	-13.76	V	AV	Pass
5150	53.81	33.14	5.29	33.88	58.36	74	-15.64	H	PK	Pass
5150	35.80	33.14	5.29	33.88	40.35	54	-13.65	H	AV	Pass
5145	51.70	33.14	5.29	33.88	56.25	74	-17.75	H	PK	Pass
5145	37.15	33.14	5.29	33.88	41.70	54	-12.30	H	AV	Pass

802.11ac20:5240MHz										
5350	53.76	33.06	5.44	33.72	58.54	74	-15.46	V	PK	Pass
5350	39.50	33.06	5.44	33.72	44.28	54	-9.72	V	AV	Pass
5370	52.24	33.05	5.45	33.70	57.04	68.2	-11.16	V	PK	Pass
5370	37.21	33.05	5.45	33.70	42.01	54	-11.99	V	AV	Pass
5350	54.39	33.06	5.44	33.72	59.17	74	-14.83	H	PK	Pass
5350	41.87	33.06	5.44	33.72	46.65	54	-7.35	H	AV	Pass
5370	53.83	33.05	5.45	33.70	58.63	68.2	-9.57	H	PK	Pass
5370	38.54	33.05	5.45	33.70	43.34	54	-10.66	H	AV	Pass
802.11n40:5190MHz										
5150	54.17	33.14	5.29	33.88	58.72	74	-15.28	V	PK	Pass
5150	38.09	33.14	5.29	33.88	42.64	54	-11.36	V	AV	Pass
5145	51.31	33.14	5.29	33.88	55.86	74	-18.14	V	PK	Pass
5145	37.44	33.14	5.29	33.88	41.99	54	-12.01	V	AV	Pass
5150	55.00	33.14	5.29	33.88	59.55	74	-14.45	H	PK	Pass
5150	41.42	33.14	5.29	33.88	45.97	54	-8.03	H	AV	Pass
5145	53.55	33.14	5.29	33.88	58.10	74	-15.90	H	PK	Pass
5145	37.91	33.14	5.29	33.88	42.46	54	-11.54	H	AV	Pass
802.11n40:5230MHz										
5350	55.35	33.06	5.44	33.72	60.13	74	-13.87	V	PK	Pass
5350	37.44	33.06	5.44	33.72	42.22	54	-11.78	V	AV	Pass
5370	54.89	33.05	5.45	33.70	59.69	74	-14.31	V	PK	Pass
5370	33.97	33.05	5.45	33.70	38.77	54	-15.23	V	AV	Pass
5350	52.55	33.06	5.44	33.72	57.33	74	-16.67	H	PK	Pass
5350	41.28	33.06	5.44	33.72	46.06	54	-7.94	H	AV	Pass

5370	52.50	33.05	5.45	33.70	57.30	74	-16.70	H	PK	Pass
5370	34.07	33.05	5.45	33.70	38.87	54	-15.13	H	AV	Pass
802.11ac40:5190MHz										
5150	55.49	33.14	5.29	33.88	60.04	74	-13.96	V	PK	Pass
5150	35.52	33.14	5.29	33.88	40.07	54	-13.93	V	AV	Pass
5145	51.29	33.14	5.29	33.88	55.84	74	-18.16	V	PK	Pass
5145	33.94	33.14	5.29	33.88	38.49	54	-15.51	V	AV	Pass
5150	55.18	33.14	5.29	33.88	59.73	74	-14.27	H	PK	Pass
5150	37.11	33.14	5.29	33.88	41.66	54	-12.34	H	AV	Pass
5145	52.91	33.14	5.29	33.88	57.46	74	-16.54	H	PK	Pass
5145	35.49	33.14	5.29	33.88	40.04	54	-13.96	H	AV	Pass
802.11ac40:5230MHz										
5350	52.99	33.06	5.44	33.72	57.77	74	-16.23	V	PK	Pass
5350	36.48	33.06	5.44	33.72	41.26	54	-12.74	V	AV	Pass
5370	51.93	33.05	5.45	33.70	56.73	74	-17.27	V	PK	Pass
5370	34.58	33.05	5.45	33.70	39.38	54	-14.62	V	AV	Pass
5350	54.23	33.06	5.44	33.72	59.01	74	-14.99	H	PK	Pass
5350	36.54	33.06	5.44	33.72	41.32	54	-12.68	H	AV	Pass
5370	50.94	33.05	5.45	33.70	55.74	74	-18.26	H	PK	Pass
5370	34.90	33.05	5.45	33.70	39.70	54	-14.30	H	AV	Pass
802.11ax:5180MHz										
5150	57.02	33.14	5.29	33.88	61.57	74	-12.43	V	PK	Pass
5150	39.10	33.14	5.29	33.88	43.65	54	-10.35	V	AV	Pass
5145	52.91	33.14	5.29	33.88	57.46	74	-16.54	V	PK	Pass
5145	39.51	33.14	5.29	33.88	44.06	54	-9.94	V	AV	Pass

5150	57.18	33.14	5.29	33.88	61.73	74	-12.27	H	PK	Pass
5150	42.98	33.14	5.29	33.88	47.53	54	-6.47	H	AV	Pass
5145	55.33	33.14	5.29	33.88	59.88	74	-14.12	H	PK	Pass
5145	38.41	33.14	5.29	33.88	42.96	54	-11.04	H	AV	Pass
802.11ax:5240MHz										
5350	57.37	33.06	5.44	33.72	62.15	74	-11.85	V	PK	Pass
5350	37.19	33.06	5.44	33.72	41.97	54	-12.03	V	AV	Pass
5370	56.53	33.05	5.45	33.70	61.33	74	-6.87	V	PK	Pass
5370	33.40	33.05	5.45	33.70	38.20	54	-15.80	V	AV	Pass
5350	54.24	33.06	5.44	33.72	59.02	74	-14.98	H	PK	Pass
5350	42.51	33.06	5.44	33.72	47.29	54	-6.71	H	AV	Pass
5370	53.94	33.05	5.45	33.70	58.74	74	-9.46	H	PK	Pass
5370	35.03	33.05	5.45	33.70	39.83	54	-14.17	H	AV	Pass
802.11ax40:5190MHz										
5150	56.45	33.14	5.29	33.88	61.00	74	-13.00	V	PK	Pass
5150	36.25	33.14	5.29	33.88	40.80	54	-13.20	V	AV	Pass
5145	52.21	33.14	5.29	33.88	56.76	74	-17.24	V	PK	Pass
5145	35.87	33.14	5.29	33.88	40.42	54	-13.58	V	AV	Pass
5150	56.23	33.14	5.29	33.88	60.78	74	-13.22	H	PK	Pass
5150	38.21	33.14	5.29	33.88	42.76	54	-11.24	H	AV	Pass
5145	52.87	33.14	5.29	33.88	57.42	74	-16.58	H	PK	Pass
5145	36.68	33.14	5.29	33.88	41.23	54	-12.77	H	AV	Pass
802.11ax40:5230MHz										
5350	54.85	33.06	5.44	33.72	59.63	74	-14.37	V	PK	Pass
5350	36.13	33.06	5.44	33.72	40.91	54	-13.09	V	AV	Pass

5370	54.14	33.05	5.45	33.70	58.94	74	-15.06	V	PK	Pass
5370	36.28	33.05	5.45	33.70	41.08	54	-12.92	V	AV	Pass
5350	53.27	33.06	5.44	33.72	58.05	74	-15.95	H	PK	Pass
5350	37.43	33.06	5.44	33.72	42.21	54	-11.79	H	AV	Pass
5370	53.81	33.05	5.45	33.70	58.61	74	-15.39	H	PK	Pass
5370	34.64	33.05	5.45	33.70	39.44	54	-14.56	H	AV	Pass
802.11ac80:5210MHz										
5145	53.58	33.09	5.36	33.81	58.22	74	-15.78	V	PK	Pass
5145	34.85	33.09	5.36	33.81	39.49	54	-14.51	V	AV	Pass
5150	53.88	33.09	5.36	33.81	58.52	74	-15.48	V	PK	Pass
5150	37.04	33.09	5.36	33.81	41.68	54	-12.32	V	AV	Pass
5145	52.85	33.09	5.36	33.81	57.49	74	-16.51	H	PK	Pass
5145	34.27	33.09	5.36	33.81	38.91	54	-15.09	H	AV	Pass
802.11ax80:5210MHz										
5350	55.90	33.06	5.44	33.72	60.68	74	-13.32	V	PK	Pass
5350	39.47	33.06	5.44	33.72	44.25	54	-9.75	V	AV	Pass
5370	51.63	33.05	5.45	33.70	56.43	74	-17.57	V	PK	Pass
5370	36.67	33.05	5.45	33.70	41.47	54	-12.53	V	AV	Pass
5350	56.02	33.06	5.44	33.72	60.80	74	-13.20	H	PK	Pass
5350	37.66	33.06	5.44	33.72	42.44	54	-11.56	H	AV	Pass

Frequency	Meter Reading	antenna Factor	cable loss	preamp factor	Emission Level	Limit	Margin	Polar	Detector Type	Result
(MHz)	(dBuV/m)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	(H/V)		
802.11a:5500MHz										
5450	54.40	33.03	5.47	33.91	58.99	74	-15.01	V	PK	Pass
5450	34.60	33.03	5.47	33.91	39.19	54	-14.81	V	AV	Pass
5460	54.00	33.03	5.47	33.91	58.59	74	-15.41	V	PK	Pass
5460	34.20	33.03	5.47	33.91	38.79	54	-15.21	V	AV	Pass
5450	54.04	33.03	5.47	33.91	58.63	74	-15.37	H	PK	Pass
5450	40.16	33.03	5.47	33.91	44.75	54	-9.25	H	AV	Pass
5460	53.58	33.03	5.47	33.91	58.17	74	-15.83	H	PK	Pass
5460	33.25	33.03	5.47	33.91	37.84	54	-16.16	H	AV	Pass
802.11n20:5500MHz										
5450	55.47	33.03	5.47	33.91	60.06	74	-13.94	V	PK	Pass
5450	38.13	33.03	5.47	33.91	42.72	54	-11.28	V	AV	Pass
5460	53.18	33.03	5.47	33.91	57.77	74	-16.23	V	PK	Pass
5460	34.74	33.03	5.47	33.91	39.33	54	-14.67	V	AV	Pass
5450	56.72	33.03	5.47	33.91	61.31	74	-12.69	H	PK	Pass
5450	38.95	33.03	5.47	33.91	43.54	54	-10.46	H	AV	Pass
5460	52.16	33.03	5.47	33.91	56.75	74	-17.25	H	PK	Pass
5460	37.53	33.03	5.47	33.91	42.12	54	-11.88	H	AV	Pass
802.11n40:5510MHz										

5450	53.76	33.03	5.47	33.91	58.35	74	-15.65	V	PK	Pass
5450	36.66	33.03	5.47	33.91	41.25	54	-12.75	V	AV	Pass
5460	52.75	33.03	5.47	33.91	57.34	74	-16.66	V	PK	Pass
5460	30.89	33.03	5.47	33.91	35.48	54	-18.52	V	AV	Pass
5450	53.27	33.03	5.47	33.91	57.86	74	-16.14	H	PK	Pass
5450	39.60	33.03	5.47	33.91	44.19	54	-9.81	H	AV	Pass
5460	51.88	33.03	5.47	33.91	56.47	74	-17.53	H	PK	Pass
5460	31.65	33.03	5.47	33.91	36.24	54	-17.76	H	AV	Pass
802.11ac20:5500MHz										
5450	53.48	33.03	5.47	33.91	58.07	74	-15.93	V	PK	Pass
5450	39.23	33.03	5.47	33.91	43.82	54	-10.18	V	AV	Pass
5460	48.73	33.03	5.47	33.91	53.32	74	-20.68	V	PK	Pass
5460	36.58	33.03	5.47	33.91	41.17	54	-12.83	V	AV	Pass
5450	51.92	33.03	5.47	33.91	56.51	74	-17.49	H	PK	Pass
5450	40.13	33.03	5.47	33.91	44.72	54	-9.28	H	AV	Pass
5460	52.32	33.03	5.47	33.91	56.91	74	-17.09	H	PK	Pass
5460	35.78	33.03	5.47	33.91	40.37	54	-13.63	H	AV	Pass
802.11ac40:5510MHz										
5450	53.59	33.03	5.47	33.91	58.18	74	-15.82	V	PK	Pass
5450	36.57	33.03	5.47	33.91	41.16	54	-12.84	V	AV	Pass
5460	49.16	33.03	5.47	33.91	53.75	74	-20.25	V	PK	Pass
5460	33.10	33.03	5.47	33.91	37.69	54	-16.31	V	AV	Pass
5450	51.19	33.03	5.47	33.91	55.78	74	-18.22	H	PK	Pass
5450	40.33	33.03	5.47	33.91	44.92	54	-9.08	H	AV	Pass

5460	52.01	33.03	5.47	33.91	56.60	74	-17.40	H	PK	Pass
5460	34.18	33.03	5.47	33.91	38.77	54	-15.23	H	AV	Pass
802.11ac80:5530MHz										
5450	55.52	33.03	5.47	33.91	60.11	74	-13.89	V	PK	Pass
5450	34.86	33.03	5.47	33.91	39.45	54	-14.55	V	AV	Pass
5460	51.01	33.03	5.47	33.91	55.60	74	-18.40	V	PK	Pass
5460	34.35	33.03	5.47	33.91	38.94	54	-15.06	V	AV	Pass
5450	54.70	33.03	5.47	33.91	59.29	74	-14.71	H	PK	Pass
5450	37.55	33.03	5.47	33.91	42.14	54	-11.86	H	AV	Pass
5460	52.24	33.03	5.47	33.91	56.83	74	-17.17	H	PK	Pass
5460	33.48	33.03	5.47	33.91	38.07	54	-15.93	H	AV	Pass
802.11ax20:5500MHz										
5450	52.56	33.03	5.47	33.91	57.15	74	-16.85	V	PK	Pass
5450	35.26	33.03	5.47	33.91	39.85	54	-14.15	V	AV	Pass
5460	50.22	33.03	5.47	33.91	54.81	74	-19.19	V	PK	Pass
5460	31.07	33.03	5.47	33.91	35.66	54	-18.34	V	AV	Pass
5450	50.29	33.03	5.47	33.91	54.88	74	-19.12	H	PK	Pass
5450	37.53	33.03	5.47	33.91	42.12	54	-11.88	H	AV	Pass
5460	50.73	33.03	5.47	33.91	55.32	74	-18.68	H	PK	Pass
5460	30.97	33.03	5.47	33.91	35.56	54	-18.44	H	AV	Pass
802.11ax40:5510MHz										
5450	51.94	33.03	5.47	33.91	56.53	74	-17.47	V	PK	Pass
5450	31.16	33.03	5.47	33.91	35.75	54	-18.25	V	AV	Pass
5460	49.90	33.03	5.47	33.91	54.49	74	-19.51	V	PK	Pass

5460	32.53	33.03	5.47	33.91	37.12	54	-16.88	V	AV	Pass
5450	53.41	33.03	5.47	33.91	58.00	74	-16.00	H	PK	Pass
5450	33.39	33.03	5.47	33.91	37.98	54	-16.02	H	AV	Pass
5460	49.21	33.03	5.47	33.91	53.80	74	-20.20	H	PK	Pass
5460	32.56	33.03	5.47	33.91	37.15	54	-16.85	H	AV	Pass
802.11ax80:5530MHz										
5450	53.18	33.03	5.47	33.91	57.77	74	-16.23	V	PK	Pass
5450	33.18	33.03	5.47	33.91	37.77	54	-16.23	V	AV	Pass
5460	49.78	33.03	5.47	33.91	54.37	74	-19.63	V	PK	Pass
5460	31.92	33.03	5.47	33.91	36.51	54	-17.49	V	AV	Pass
5450	53.28	33.03	5.47	33.91	57.87	74	-16.13	H	PK	Pass
5450	35.40	33.03	5.47	33.91	39.99	54	-14.01	H	AV	Pass
5460	50.75	33.03	5.47	33.91	55.34	74	-18.66	H	PK	Pass
5460	34.88	33.03	5.47	33.91	39.47	54	-14.53	H	AV	Pass

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss - Pre-amplifier,
Margin= Emission Level - Limit

8 POWER SPECTRAL DENSITY TEST


8.1 Test Standard and Limit

According to FCC §15.407(3)

- (1) For the band 5.15-5.25 GHz.
- (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
 - (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
 - (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
 - (iv) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

- (3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

8.2 Test Setup



8.3 Test Procedure

Method AVGPS-1 uses trace averaging with EUT transmitting at full power throughout each sweep.

The following procedure may be used when the maximum (average) conducted output power was used to determine compliance to the fundamental output power limit. This is the baseline method for determining the maximum (average) conducted PSD level. If the instrument has a power averaging (rms) detector, then

it must be used; otherwise, use the sample detector. The EUT must be configured to transmit continuously ($D \geq 98\%$), or else sweep triggering/signal gating must be implemented to help ensure that measurements are made only when the EUT is transmitting at its maximum power control level (no transmitter OFF time to be considered):

- Set instrument center frequency to DTS channel center frequency.
- Set span to > 1.5 times the OBW.
- Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set VBW $\geq [3 \times \text{RBW}]$.
- Detector = power averaging (rms) or sample detector (when rms not available).
- Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span} / \text{RBW}]$.
- Sweep time = auto couple.
- Employ trace averaging (rms) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.
- If the measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat (note that this might require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced).

8.4 Test Data

Please Refer to Appendix data 5.2G and 5.3G and 5.6G and 5.8G for Details.




9 26DB & 6DB & 99% Emission Bandwidth Test

9.1 Test Standard

Test Standard	FCC Part15 C Section 15.407
	The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band, the minimum bandwidth 6 dB bandwidth of U-NII devices shall be at least 500KHz. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

9.2 Test Setup



9.3 Test Procedure

Emission bandwidth:

The emission bandwidth (EBW) is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least the specified amount below the maximum level of the modulated carrier.

The following procedure shall be used for measurement of the bandwidth for millimeter-wave devices:

a) Use the following spectrum analyzer settings:

- 1) Span equal to approximately 1.5 times the EBW, centered on the carrier frequency
- 2) RBW, prefer 1% to 5% of EBW
- 3) VBW approximately $3 \times \text{RBW}$
- 4) Set the reference level of the instrument as required to reduce the chance of the signal amplitude exceeding the maximum spectrum analyzer input mixer level for linear operation.

See guidance provided in 4.1.6.

5) Sweep = No faster than coupled (auto) time.

6) Detector function = peak.

7) Trace = max-hold.

b) The EUT shall be transmitting at its maximum data rate. Allow the trace to stabilize.

c) Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure the specified dB down one side of the emission.

d) Reset the marker-delta function, and move the marker to the other side of the emission, until the delta marker amplitude is at the same level as the reference marker amplitude. The marker-delta frequency reading at this point is the specified emission bandwidth. The spectral envelope can cross the “-X dB amplitude” at multiple points. The lowest or highest frequency shall be selected as the frequencies that are the farthest away from the center frequency at which the spectral envelope crosses the “-X dB amplitude.”

e) The EBW shall be reported by providing plot(s) of the measuring instrument display, to include markers depicting the relevant frequency and amplitude information (e.g., marker table). The frequency and amplitude axis and scale shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

f) Repeat this test for each modulation scheme using the guidance of 5.6.2.1.

Occupied bandwidth:

The following procedure shall be used for measuring 99% power bandwidth: Use the following spectrum analyzer settings:

1) Span equal to approximately 1.5 times the OBW, centered on the carrier frequency

2) RBW, prefer 1% to 5% of OBW

3) VBW approximately $3 \times$ RBW

4) Set the reference level of the instrument as required to reduce the chance of the signal amplitude exceeding the maximum spectrum analyzer input mixer level for linear operation.

See guidance provided in 4.1.6.

5) Sweep = No faster than coupled (auto) time.

6) Detector function = peak.

7) Trace = max-hold.

b) The EUT shall be transmitting at its maximum data rate. Allow the trace to stabilize.

c) If the instrument does not have a 99% OBW function, recover the trace data points and sum directly in linear power terms. Place the recovered amplitude data points, beginning at the lowest frequency, in a running sum until 0.5% of the total is reached. Record that frequency as the lower OBW frequency. Repeat the process until 99.5% of the total is reached and record that frequency as the upper OBW frequency. The 99% power OBW can be determined by computing the difference these two frequencies.

d) The OBW shall be reported and plot(s) of the measuring instrument display shall be provided with the test report. The frequency and amplitude axis and scale shall be clearly labeled. Tabular data can be reported in addition to the plot(s).

e) Repeat this test for each modulation scheme using the guidance of 5.6.2.1.

9.4 Test Data

Please Refer to Appendix data 5.2G and 5.3G and 5.6G and 5.8G for Details.



10 Maximum Conducted Output Power

10.1 Test Standard and Limit

For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.

If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.

If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power.

For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power is required for each 1 dB of antenna gain in excess of 23 dBi.

Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi.

If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz.

If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna


exceeds 6 dBi.

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

10.2 Test Setup



10.3 Test Procedure

Method PM is Measurement using an RF average power meter. The procedure for this method is as follows:

- a) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied:
 - 1) The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.
 - 2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
 - 3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- b) If the transmitter does not transmit continuously, measure the duty cycle D of the transmitter output signal as described in 12.2.
- c) Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.
- d) Correct the measurement in dBm by adding $[10 \log (1 / D)]$, where D is the duty cycle {e.g., $[10 \log (1 / 0.25)]$, if the duty cycle is 25%}.

10.4 Test Data

Please Refer to Appendix data 5.2G and 5.3G and 5.6G and 5.8G for Details.

11 Out of Band Emissions and Spurious Emission

11.1 Test Standard and Limit

FCC

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

IC

For transmitters with operating frequencies in the band 5150-5250 MHz:

- a. all emissions outside the 5150-5350 MHz band shall not exceed -27 dBm/MHz peak e.i.r.p. spectral density;
- b. any unwanted emissions that falls between the upper edge of the 26 dB bandwidth and 5350 MHz shall be attenuated below the channel power by at least 26 dB, when measured using a resolution bandwidth between 1 and 5% of the occupied bandwidth.
- c. if the occupied bandwidth also falls within the 5250-5350 MHz band, the transmission is considered as intentional and the devices shall comply with all requirements in the band 5250-5350 MHz including implementing DFS (see section 7.3.6) and TPC, on the portion of the emission that resides in the 5250-5350 MHz band.

Devices shall comply with the following:

- a. all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz peak e.i.r.p. spectral density.
- b. all emissions inside the band 5150-5250 MHz shall either:

- i. not exceed -27 dBm/MHz peak e.i.r.p spectral density, or
- ii. comply with the power spectral density for operation in section 7.3.1.2.


Equipment operating in the bands 5470-5725 MHz shall comply with the following unwanted emission limits:

- a. for devices with fundamental emissions fully contained within the 5470-5725 MHz band, all unwanted emissions outside the band 5470-5725 MHz shall not exceed -27 dBm/MHz peak e.i.r.p. spectral density.
- b. for devices with bandwidth overlapping the band edge of 5725 MHz, all unwanted emissions shall not exceed -27 dBm/MHz peak e.i.r.p. spectral density at 5850 MHz instead of 5725 MHz.

Equipment operating in the band 5725-5850 MHz shall comply with the following peak e.i.r.p. spectral density limits:

- a. 27 dBm/MHz at frequencies from the band edges decreasing linearly to 15.6 dBm/MHz at 5 MHz above or below the band edges;
- b. 15.6 dBm/MHz at 5 MHz above or below the band edges decreasing linearly to 10 dBm/MHz at 25 MHz above or below the band edges;
- c. 10 dBm/MHz at 25 MHz above or below the band edges decreasing linearly to -27 dBm/MHz at 75 MHz above or below the band edges; and
- d. -27 dBm/MHz at frequencies more than 75 MHz above or below the band edges.

11.2 Test Setup



11.3 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

11.4 Test Data

Please Refer to Appendix data 5.2G and 5.3G and 5.6G and 5.8G for Details.

12 Frequency Stability Measurement

12.1 Test Standard and Limit

FCC


Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification).

IC

If the frequency stability of the licence-exempt radio apparatus is not specified in the applicable RSS, the fundamental emissions of the radio apparatus should be kept within at least the central 80% of its permitted operating frequency band in order to minimize the possibility of out-of-band operation. In addition, its occupied bandwidth shall be entirely outside the restricted bands and the prohibited TV bands of 54-72 MHz, 76-88 MHz, 174-216 MHz, and 470-602 MHz, unless otherwise indicated.

12.2 Test Setup



12.3 Test Procedure

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6$ ppm and the limit is less than ± 20 ppm (IEEE 802.11n specification).

6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value

7. Extreme temperature is -20°C~50°C.

12.4 Test Data

Please Refer to Appendix data 5.2G and 5.3G and 5.6G and 5.8G for Details.



13 Antenna Requirement

13.1 Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. According to RSS-GEN section 6.8 The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list. For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below). When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer. The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

13.2 Antenna Connected Construction

The antenna is FPC Antenna which permanently attached, and the best case gain of the antenna is U-NII Band 1: 3.57 dBi, U-NII Band 2A: 3.57 dBi, U-NII Band 2C:2.37 dBi, U-NII Band 3: 2.37 dBi. It complies with the standard requirement.

14 DFS TEST

14.1 DFS test Requirement

The following table from FCC KDB905462 D02 UNII DFS Compliance procedures new rules list the applicable requirements for the DFS testing.

Table 1: Applicability of DFS Requirements Prior to Use of a Channel

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation

Requirement	Operational Mode	
	Master Device or Client with Radar Detection	Client Without Radar Detection
DFS Detection Threshold	Yes	Not required
Channel Closing Transmission	Yes	Yes
Channel Move Time	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required

Additional requirements for devices with multiple bandwidth modes	Master Device or Client with Radar Detection	Client Without Radar Detection
U-NII Detection Bandwidth and	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required

Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.

Master Devices

- a) The Master Device will use DFS in order to detect Radar Waveforms with received signal strength above the DFS Detection Threshold in the 5250~5350 MHz and 5470~5725 MHz bands. DFS is not required in the 5150~5250 MHz or 5725~5825 MHz bands.
- b) Before initiating a network on a Channel, the Master Device will perform a Channel Availability Check for a specified time duration (Channel Availability Check Time) to ensure that there is no radar system operating on the Channel, using DFS described under subsection a) above.
- c) The Master Device initiates a U-NII network by transmitting control signals that will enable other U-NII devices to Associate with the Master Device.
- d) During normal operation, the Master Device will monitor the Channel (In-Service Monitoring) to ensure that there is no radar system operating on the Channel, using DFS described under a).
- e) If the Master Device has detected a Radar Waveform during In-Service Monitoring as described under d), the Operating Channel of the U-NII network is no longer an Available Channel. The Master Device will instruct all associated Client Device(s) to stop transmitting on this Channel within the Channel Move Time. The transmissions during the Channel Move Time will be limited to the Channel Closing Transmission Time.
- f) Once the Master Device has detected a Radar Waveform it will not utilize the Channel for the duration of the Non-Occupancy Period.
- g) If the Master Device delegates the In-Service Monitoring to a Client Device, then the combination will be tested to the requirements described under d) through f) above.

Client Devices

- a) A Client Device will not transmit before having received appropriate control signals from a Master Device.
- b) A Client Device will stop all its transmissions whenever instructed by a Master Device to which it is associated and will meet the Channel Move Time and Channel Closing Transmission Time requirements. The Client Device will not resume any transmissions until it has again received control signals from a Master Device.
- c) If a Client Device is performing In-Service Monitoring and detects a Radar Waveform above the DFS Detection Threshold, it will inform the Master Device. This is equivalent to the

Master Device detecting the Radar Waveform and d) through f) of section 5.1.1 apply.

- d) Irrespective of Client Device or Master Device detection the Channel Move Time and Channel Closing Transmission Time requirements remain the same.
- e) The client test frequency must be monitored to ensure no transmission of any type has occurred for 30 minutes. Note: If the client moves with the master, the device is considered compliant if nothing appears in the client non-occupancy period test. For devices that shut down (rather than moving channels), no beacons should appear.

Table 4: DFS Response Requirement Values

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.
Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.	
Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required facilitating a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.	
Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.	

14.2 DFS Detection Thresholds

Table 3: DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection

Maximum Transmit Power	Value (See Notes 1, 2, and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.

14.3 Radar Test Waveforms

This section provides the parameters for required test waveforms, minimum percentage of successful detections, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

Table 5 Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a	Roundup $\left\{ \left\{ \frac{1}{360} \right\} \cdot \left\{ \frac{19 \cdot 10^6}{PRI_{\mu sec}} \right\} \right\}$	60%	30
		Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A			
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B.

For example if in Short Pulse Radar Type 1 Test B a PRI of 3066 µsec is selected, the number of

pulses would be Round up $\left\{ \left(\frac{1}{360} \right) \cdot \left(\frac{19 \cdot 10^6}{3066} \right) \right\} = \text{Round up } \{17.2\} = 18.$

Table 5a - Pulse Repetition Intervals Values for Test A

Pulse Repetition Frequency Number	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (Microseconds)
1	1930.5	518
2	1858.7	538
3	1792.1	558
4	1730.1	578
5	1672.2	598
6	1618.1	618
7	1567.4	638
8	1519.8	658
9	1474.9	678
10	1432.7	698
11	1392.8	718
12	1355	738
13	1319.3	758
14	1285.3	778
15	1253.1	798
16	1222.5	818
17	1193.3	838
18	1165.6	858
19	1139	878
20	1113.6	898
21	1089.3	918
22	1066.1	938
23	326.2	3066

Table 6 – Long Pulse Radar Test Waveform

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Number of Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

The parameters for this waveforms are randomly chosen. Thirty unique waveforms are required for the Long Pulse Radar Type waveforms. If more than 30 waveforms are used for the Long Pulse Radar Type wave forms, then each additional waveform must also be unique and not repeated from the previous waveforms.

Table 7 – Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30

For the Frequency Hopping Radar Type, the same Burst parameters are used for each wave form. The hopping sequence is different for each wave form and a 100-length segment is selected from the hopping sequence defined by the following algorithm:

The first frequency in a hopping sequence is selected randomly from the group of 475 integer frequencies from 5250–5724MHz. Next, the frequency that was just chosen is removed from the group and a frequency is randomly selected from the remaining 474 frequencies in the group. This process continues until all 475 frequencies are chosen for the set. For selection of a random frequency, the frequencies remaining within the group are always treated as equally likely.

14.4 Test Item

14.4.1 Calibration of Radar Waveform

14.4.1.1 Test Configuration

7.2.1 Setup for Master with injection at the Master

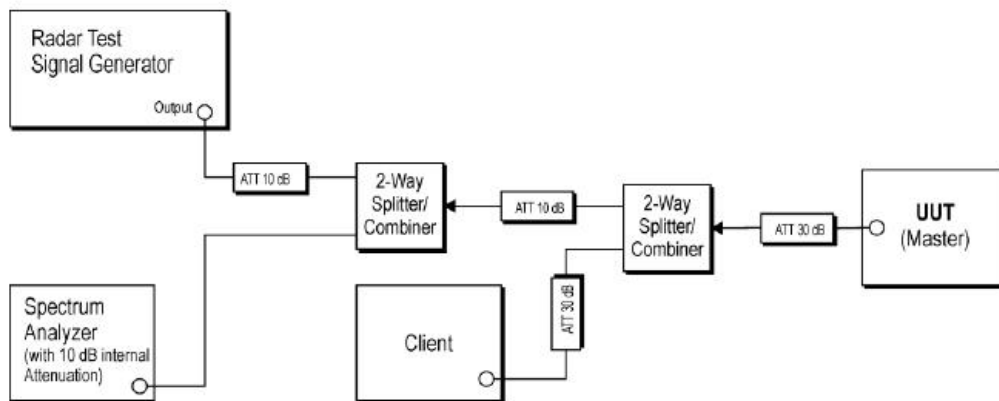


Figure 2: Example Conducted Setup where UUT is a Master and Radar Test Waveforms are injected into the Master

14.4.1.2 Test Procedure

- A 50 ohm load is connected in place of the spectrum analyzer, and the spectrum analyzer is connected to place of the master
- The interference Radar Detection Threshold Level is $-62\text{dBm} + 0\text{dBi} + 1\text{dB} = -61\text{dBm}$ that had been taken into account the output power range and antenna gain.
- The following equipment setup was used to calibrate the conducted radar waveform. A vector signal generator was utilized to establish the test signal level for radar type 0. During this process there were no transmissions by either the master or client device. The spectrum analyzer was switched to the zero spans (time domain) at the frequency of the radar waveform generator. Peak detection was used. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) were set to 3MHz. The spectrum analyzer had offset -1.0dB to compensate RF cable loss 1.0dB.

d) The vector signal generator amplitude was set so that the power level measured at the spectrum analyzer was $-62\text{dBm} + 0\text{dBi} + 1\text{dB} = -61\text{dBm}$. Capture the spectrum analyzer plots on short pulse radar waveform.

14.4.1.3 Test Result

Please Refer to DFS report

14.4.2 Channel Move Time, Channel Closing Transmission Time

14.4.2.1 Test Configuration

7.2.1 Setup for Master with injection at the Master

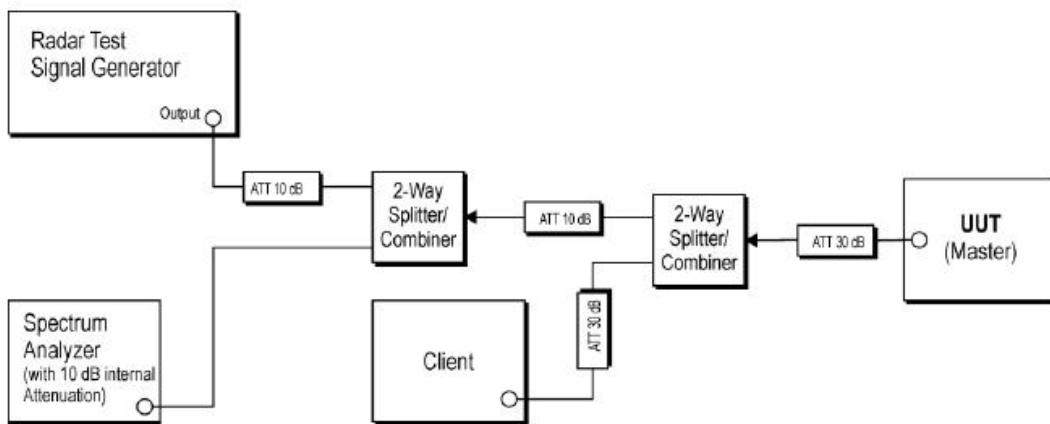


Figure 2: Example Conducted Setup where UUT is a Master and Radar Test Waveforms are injected into the Master

14.4.2.2 Test Procedure

a) The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a $1\mu\text{s}$ pulse width and a $1428\mu\text{s}$ PRI is used for the testing.

b) The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device.

c) A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.

d) EUT will associate with the master at channel. The file "iperf.exe" specified by the FCC is streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using Media Player Classic Ver. 6.4.8.6 in order to properly load the network for the entire period of the test.

e) When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.

f) Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel Measure and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom in 600ms plot of the Short Pulse Radar Type

g) Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: $Dwell (0.3ms) = S (12000ms) / B (4000)$; where Dwell is the dwell time per spectrum analyzer sampling bin, S is sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by: $C (ms) = N \times Dwell (0.3ms)$; where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.

Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

14.4.2.3 Test Result

Please Refer to DFS report

15 TEST SETUP & EUT PHOTOGRAPH

Please see the attachment for details.

----- End of Report -----

