

TEST REPORT

Report No.....: AB26040362FW03
FCC ID.....: **2BVEP-CP1000**
Applicant.....: CLICKS TECHNOLOGY LTD
Address.....: 2 Stone Buildings, London, England
Manufacturer.....: CLICKS TECHNOLOGY LTD
Address.....: 2 Stone Buildings, London, England
Product Name.....: Power Keyboard
Trade Mark.....: Clicks
Model/Type reference.....: CP-1000
Listed Model(s).....: /
Standard.....: FCC CFR Title 47 Part 15 Subpart C
Date of Receipt.....: 2026.04.21
Date of Test Date.....: 2026.04.21-2026.05.08
Date of issue.....: 2026.05.08
Test result.....: Pass

Compiled by:
(Printed name+signature) Huaijie Li



Supervised by:
(Printed name+signature) David Huang



Approved by:
(Printed name+signature) Jay Liu



Testing Laboratory Name.....: Aibo Standard Technology (Shenzhen) Co., Ltd.

101, Building B, Tuori New Energy Industrial Park, High-tech Park,
Tianliao Community, Yutang Street, Guangming District, Shenzhen
Address.....: City, Guangdong Province, China

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by Aibo. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to Aibo within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit. The test report merely correspond to the test sample.

Aibo Standard Technology (Shenzhen) Co., Ltd.

101, Building B, Tuori New Energy Industrial Park, High-tech Park, Tianliao Community, Yutang Street,
Guangming District, Shenzhen City, Guangdong Province, China

Tel.: +(86) 755 85250797

E-mail: aibo@aibonorm.com

Website: www.aibonorm.com

TEST REPORT

EUT.....	: Power Keyboard
Test Model.....	: CP-1000
Applicant.....	: CLICKS TECHNOLOGY LTD
Address.....	: 2 Stone Buildings, London, England
Manufacturer.....	: CLICKS TECHNOLOGY LTD
Address.....	: 2 Stone Buildings, London, England

Test Result	Positive
--------------------	-----------------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

TABLE OF CONTENTS

1. TEST SUMMARY	4
1.1. TEST STANDARDS	4
1.2. REPORT VERSION	4
1.3. TEST DESCRIPTION	5
1.4. TEST FACILITY	6
1.5. MEASUREMENT UNCERTAINTY	7
1.6. ENVIRONMENTAL CONDITIONS	7
2. GENERAL INFORMATION	8
2.1. GENERAL DESCRIPTION OF EUT	8
2.2. DESCRIPTION OF SUPPORT EQUIPMENT	8
2.3. DESCRIPTION OF EXTERNAL I/O	8
TEST MODE	9
2.4. MEASUREMENT INSTRUMENTS LIST	10
TEST SOFTWARE	10
3. TEST ITEM AND RESULTS	11
3.1. ANTENNA REQUIREMENT	11
3.2. CONDUCTED EMISSION	12
3.3. OCCUPIED BANDWIDTH	16
3.4. SPURIOUS EMISSION (RADIATED)	18
4. TEST SETUP PHOTOGRAPHS OF EUT	25
5. PHOTOGRAPHS OF THE EUT	26

1. TEST SUMMARY

1.1. Test standards

The tests were performed according to following standards:

FCC Part 15, Subpart C: Intentional Radiators.

ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024: American National Standard for Testing Unlicensed Wireless Devices.

1.2. Report version

Revised No.	Date of issue	Description
01	2026.05.08	Original

1.3. Test description

FCC Rules Part 15, Subpart C			
Test Item	Standard Section	Result	Test Engineer
	FCC		
Antenna requirement	15.203	Pass	He Chen
Conducted Emissions	15.207	Pass	He Chen
Radiated Spurious Emissions	15.209	Pass	He Chen
Occupied Bandwidth	15.215(c)	Pass	He Chen

Note: 1. The measurement uncertainty is not included in the test result.

2.N/A: means this test item is not applicable

1.4. Test facility

Test Lab: Aibo Standard Technology (Shenzhen) Co., Ltd.

Address: 101, Building B, Tuori New Energy Industrial Park, High-tech Park, Tianliao Community, Yutang Street, Guangming District, Shenzhen City, Guangdong Province, China

Tel.: +86 755 85250797

E-mail: aibonorm@aibonorm.com

Website: www.aibonorm.com

The test facility is recognized, certified, or accredited by the following organizations:

FCC Accredited Lab.

Designation Number: CN1411

Test Firm Registration Number: 567066

Aibo Standard Technology (Shenzhen) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromaagnetic emission measurement.

A2LA-Lab Certificate No.: 7514.01

Aibo Standard Technology (Shenzhen) Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

ISED Wireless Device Testing Laboratories

ISED#:33924

CAB identifier: CN0185

Aibo Standard Technology (Shenzhen) Co., Ltd. has been listed by Innovation, Science and Economic Development Canada to perform electromagnetic emission measurement.

1.5. Measurement uncertainty

The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Items	Measurement Uncertainty
Radiated Emission (9kHz~30MHz)	$\pm 3.10\text{dB}$
Radiated Emission (30MHz~1GHz)	$\pm 4.90\text{dB}$
Radiated Emission (1GHz~18GHz)	$\pm 3.88\text{dB}$
Radiated Emission (8GHz~40GHz)	$\pm 5.32\text{dB}$
RF Conducted Power	$\pm 0.57\text{dB}$

Note: All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.

1.6. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35°C
Relative Humidity:	30~60 %
Air Pressure:	950~1050mba

2. GENERAL INFORMATION

2.1. General description of EUT

Product Name:	Power Keyboard
Model/Type reference:	Clicks
Trademark:	CP-1000
Listed models:	/
Model Difference:	/
Power supply:	DC 5V
Power supply(Battery):	DC3.87V/2300mAh
Hardware version:	N/A
Software version:	N/A
RF Specification	
Operation frequency:	114-149kHz
Modulation Type:	ASK
Test Frequency	127 KHz
Power Rating	Output: 5W(Wireless charger)
Test Sample ID	AB26040362-01
Antenna Type	Coil Antenna
Note:For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.	

2.2. DESCRIPTION OF SUPPORT EQUIPMENT

Description	Manufacturer	Model	Serial Number	Supplied by
Adapter	Shenzhen Keyu Power Technology Co., Ltd.	KA20A-CN	2415	Applicant
Wireless charging load	AVID	Qi	/	Applicant

2.3. DESCRIPTION OF EXTERNAL I/O

I/O Port Description	Quantity	Cable
USB Type-C Interface	1	0.8m, unshielded

Test mode

The EUT was operated at continuous transmitting mode that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Modes:		
Mode 1	Wireless Charging	Record

2.4. Measurement instruments list

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
1	Loop Antenna	Schwarzbeck	FMZB 1519	1519-025	01/18/2026	01/17/2028
2	ESCI EMI TEST RECEIVER	ROHDE & SCHWARZ	ESPI 7	/	01/20/2026	01/19/2027
3	Power Amplifier	HZEMC	HPA-9K0133	HYP A23029	01/20/2026	01/19/2027
4	Broadband Antenna	Schwarzbeck	VULB 9168	01763	01/29/2026	01/28/2028
5	Attenuator	PRM	ATT50-6-3	ATT50-6-3	01/20/2026	01/19/2027
6	Spectrum Analyzer	R&S	FSV40-N	101365	01/20/2026	01/19/2027
7	Horn Antenna	Schwarzbeck	BBHA 9120 D	02786	02/19/2026	02/18/2028
8	Horn Antenna	Schwarzbeck	ZLB7-18-40G-77	072410839	02/19/2026	02/18/2028
9	Power Amplifier	HZEMC	PA0118-43	HYP A23030	01/20/2026	01/19/2027
10	Power Amplifier	HZEMC	PA01840-45	HYP A23031	01/20/2026	01/19/2027
11	EMI Test Receiver	R&S	ESCI	101196	01/20/2026	01/19/2027
12	LISN	R&S	ENV216	102374	01/20/2026	01/19/2027
13	Pulse Limiter	Schwarzbeck	ESH3-Z2	0357.8810.54	01/20/2026	01/19/2027
14	MXA Signal Analyzer	Keysight	N9020A	MY52091389	01/20/2026	01/19/2027
15	Power Sensor	Agilent	U2021XA	MY54110007	01/20/2026	01/19/2027
16	Power Sensor	Agilent	U2021XA	MY54110009	01/20/2026	01/19/2027
17	MXG Vector Signal Generator	Agilent	N5182A	MY47070153	01/20/2026	01/19/2027
18	Analog Signal Source	Keysight	N5173B	MY60403029	01/20/2026	01/19/2027
19	Vector Signal Generator	R&S	SMCV100B	106103	01/20/2026	01/19/2027
20	WIDEBAND RADIO COMMUNICATION TESTER	R&S	CMW500	118780	01/20/2026	01/19/2027
21	DC POWER SUPPLY	MAISHENG	MT-305DS	2021040016	02/28/2026	02/27/2027
22	Const Temp. & Humidity Chamber	GRT	GR-HWX-150L	GR25010601	01/20/2026	01/19/2027

Note:

- 1) The cable loss has calculated in test result which connection between each test instruments.

Test software

Software name	Model	Version
Conducted emission Measurement Software	HzEMC	V4.1
Radiated emission Measurement Software	HzEMC	V4.1

3. TEST ITEM AND RESULTS

3.1. Antenna requirement

Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Test Result

The directional gain of the antenna less than 6dBi, please refer to the EUT internal photographs antenna photo.

Note: The antenna is permanently fixed to the EUT.


3.2. Conducted emission

Limit

Frequency	Maximum RF Line Voltage (dB μ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Conducted Emission Test Limit

Test Configuration

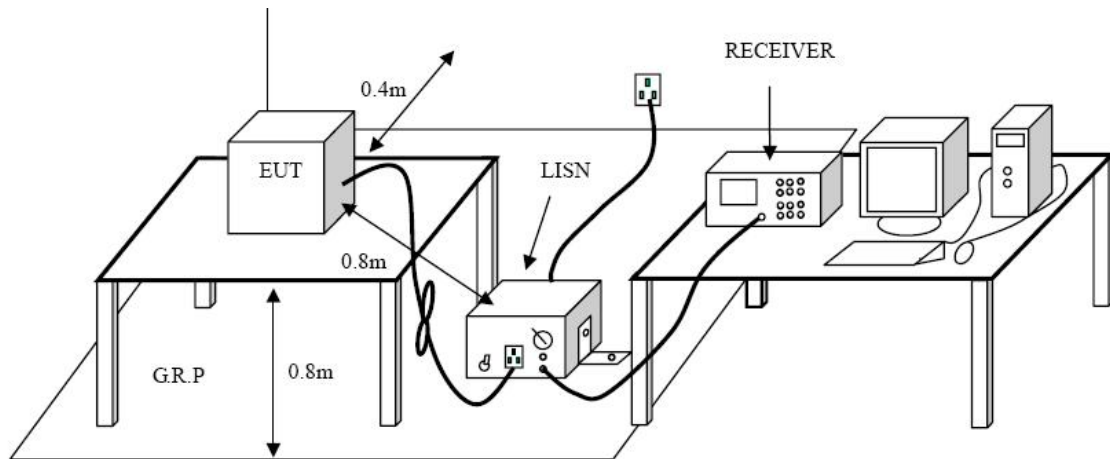

Notes:

- (1) *Decreasing linearly with logarithm of the frequency.
- (2) The lower limit shall apply at the transition frequencies.
- (3) The limit decrease in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

Test Procedure

1. The EUT was setup according to ANSI C63.10:2020 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
4. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
5. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
6. Conducted Emissions were investigated over the frequency range from 0.15MHz to 30MHz using a

receiver bandwidth of 9 kHz.

7. During the above scans, the emissions were maximized by cable manipulation.

Test Mode:


Please refer to the clause 2.2.

Test Results

☒ Passed ☐ Not Applicable

Test Plots and Data of Conducted Emissions

Environmental Conditions	24.6°C, 53.4% RH	Test Engineer	He Chen
Test Voltage:	AC 120V/60Hz	Test Power Line:	Line

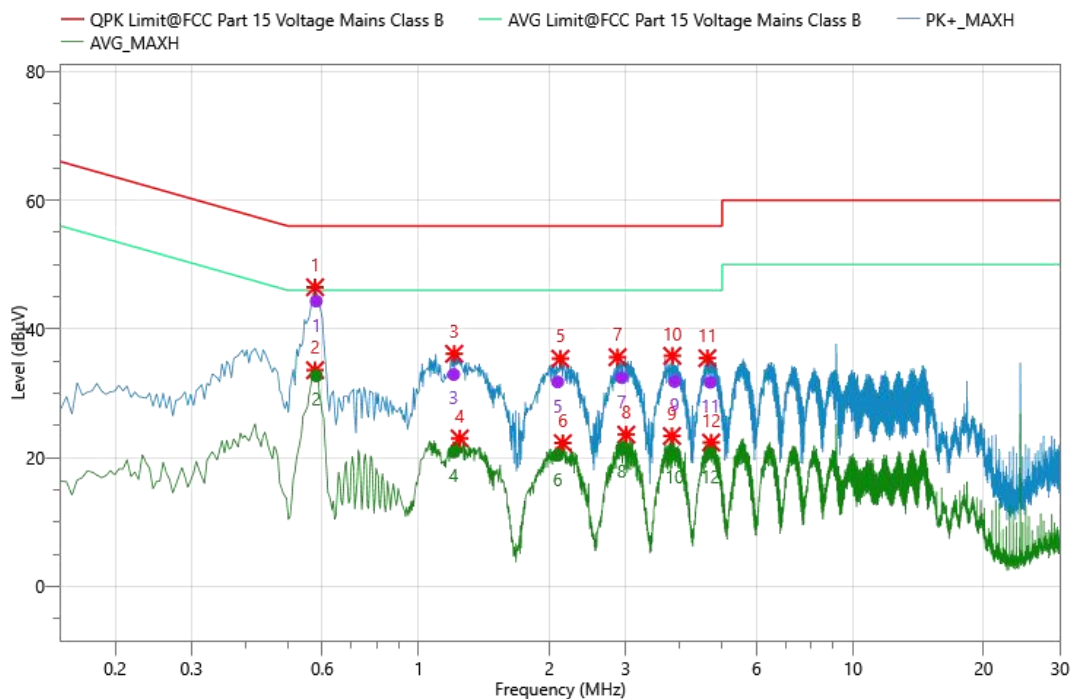

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV)	Limit (dBμV)	Margin (dB)	Det.	Line	PE
1	0.581	34.19	10.13	44.32	56.00	11.68	QPK	L1	GND
2	0.581	22.59	10.13	32.72	46.00	13.28	AVG	L1	GND
3	1.204	22.66	10.26	32.92	56.00	23.08	QPK	L1	GND
4	1.204	10.62	10.26	20.88	46.00	25.12	AVG	L1	GND
5	2.090	21.43	10.34	31.77	56.00	24.23	QPK	L1	GND
6	2.090	10.00	10.34	20.34	46.00	25.66	AVG	L1	GND
7	2.936	21.99	10.43	32.42	56.00	23.58	QPK	L1	GND
8	2.936	11.06	10.43	21.49	46.00	24.51	AVG	L1	GND
9	3.884	21.32	10.52	31.84	56.00	24.16	QPK	L1	GND
10	3.884	10.18	10.52	20.70	46.00	25.30	AVG	L1	GND
11	4.696	20.96	10.75	31.71	56.00	24.29	QPK	L1	GND
12	4.696	9.95	10.75	20.70	46.00	25.30	AVG	L1	GND

Remark:


Emission Level = Reading + Correct Factor;

Correct Factor = LISN Factor + Cable Loss + Pulse Limiter Attenuation Factor

Margin= Limit - Emission Level.

Test Plots and Data of Conducted Emissions

Environmental Conditions	24.6°C, 53.4% RH	Test Engineer	He Chen
Test Voltage:	AC 120V/60Hz	Test Power Line:	Neutral

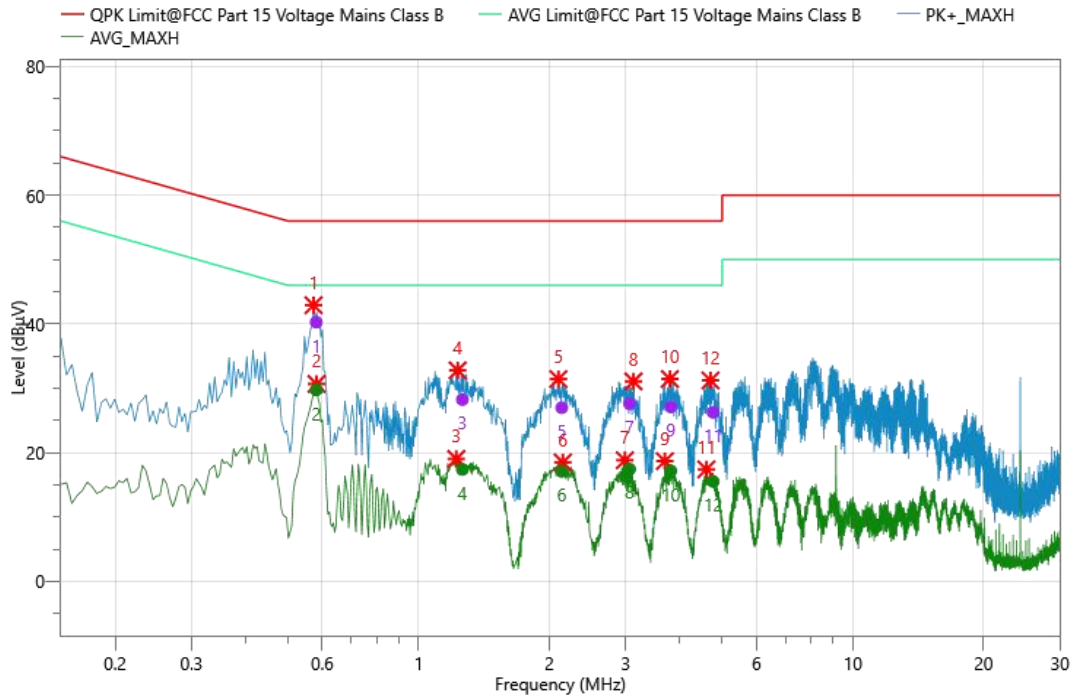

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV)	Limit (dBμV)	Margin (dB)	Det.	Line	PE
1	0.581	30.15	10.13	40.28	56.00	15.72	QPK	N	GND
2	0.581	19.62	10.13	29.75	46.00	16.25	AVG	N	GND
3	1.261	17.99	10.26	28.25	56.00	27.75	QPK	N	GND
4	1.261	7.14	10.26	17.40	46.00	28.60	AVG	N	GND
5	2.136	16.65	10.34	26.99	56.00	29.01	QPK	N	GND
6	2.136	6.75	10.34	17.09	46.00	28.91	AVG	N	GND
7	3.060	17.16	10.44	27.60	56.00	28.40	QPK	N	GND
8	3.060	7.00	10.44	17.44	46.00	28.56	AVG	N	GND
9	3.808	16.59	10.51	27.10	56.00	28.90	QPK	N	GND
10	3.808	6.66	10.51	17.17	46.00	28.83	AVG	N	GND
11	4.767	15.65	10.62	26.27	56.00	29.73	QPK	N	GND
12	4.767	4.90	10.62	15.52	46.00	30.48	AVG	N	GND

Remark:

Emission Level = Reading + Correct Factor;

Correct Factor = LISN Factor + Cable Loss + Pulse Limiter Attenuation Factor


Margin= Limit - Emission Level.

3.3. Occupied bandwidth

Limit

N/A

Test Configuration

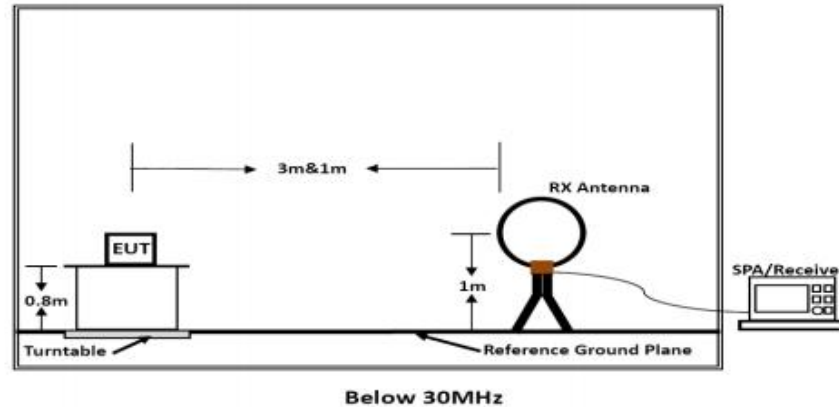


Test Procedure

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in subpart E of this part, must be designed to ensure that 20dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment compliance with the 20dB attenuation specification may base on measurement at the intentional radiator's antenna output terminal unless the intentional radiator uses a permanently attached antenna, in which case compliance shall be demonstrated by measuring the radiated emissions.

Test Mode

Please refer to the clause 2.2.

Test Results

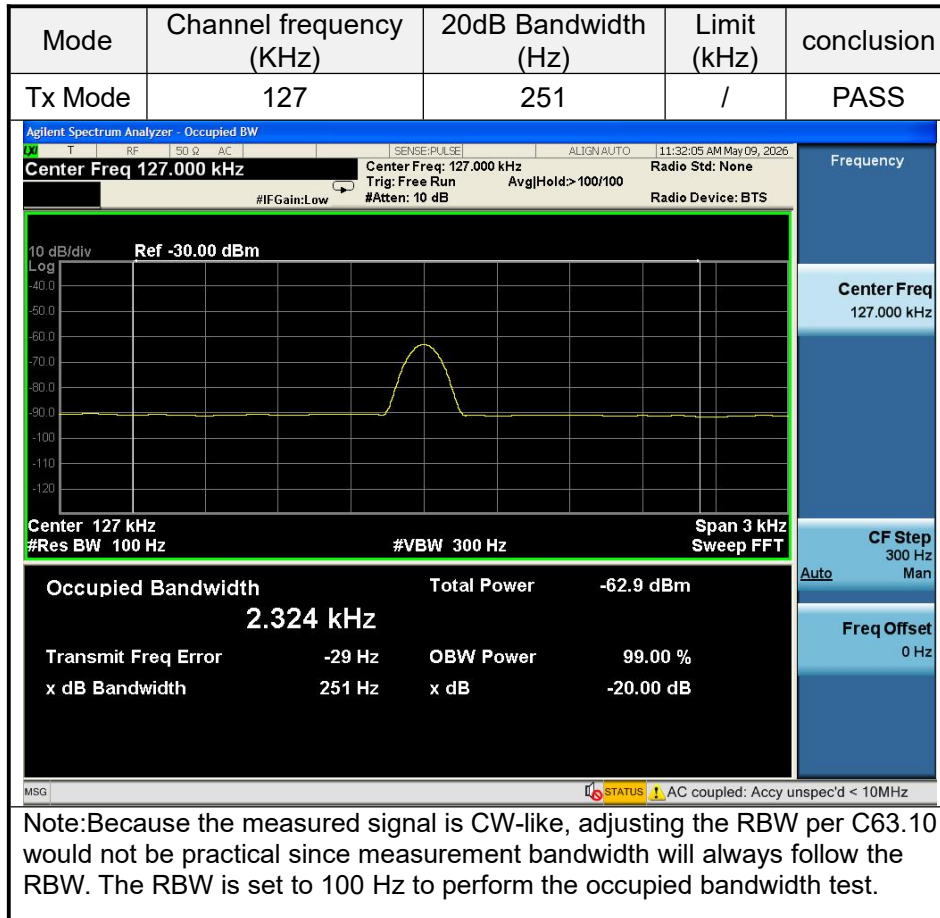

3.4. Spurious emission (radiated)


Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.209


Radiated Emission Limits (9 kHz~1000 MHz)

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Test Configuration

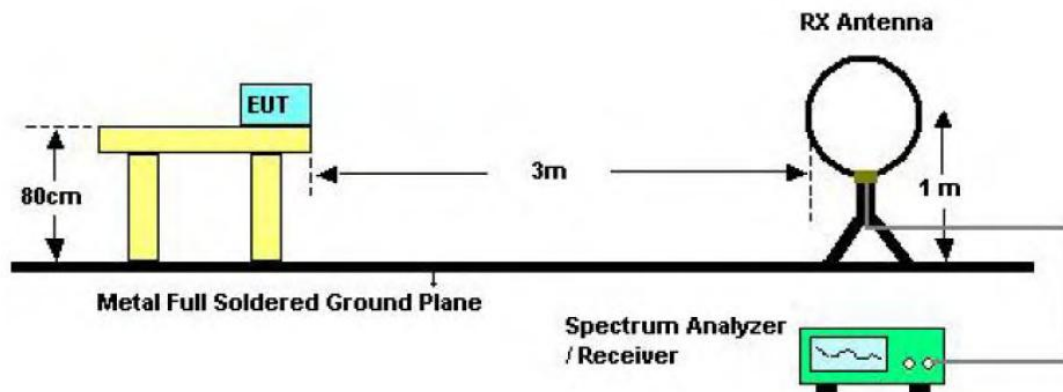

Below 30MHz Test Setup

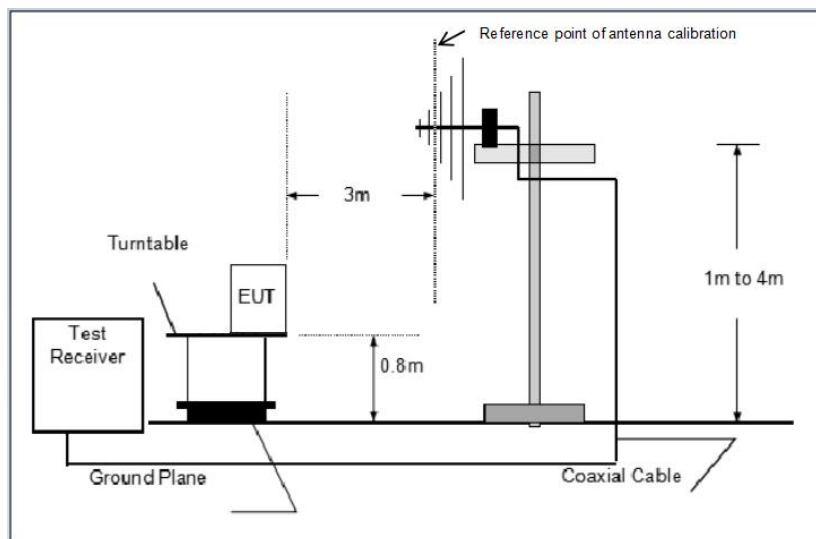

30M - 1000MHz Test Setup

Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2020
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Below 1 GHz:
RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;
If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
 - (3) From 1 GHz to 10th harmonic:
RBW=1MHz, VBW=3MHz Peak detector for Peak value.
RBW=1MHz, VBW=10Hz RMS detector for Average value.

Test Mode

Please refer to the clause 2.2.


Test Result


9 KHz~30 MHz , 30MHz-1GHz


From 9 KHz~30 MHz and 30MHz-1GHz : Conclusion: PASS

Note:

- 1) Final level = Reading level + Correct Factor
Correct Factor=Antenna Factor + Cable Loss -Preamplifier Factor.
- 2) The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3) The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

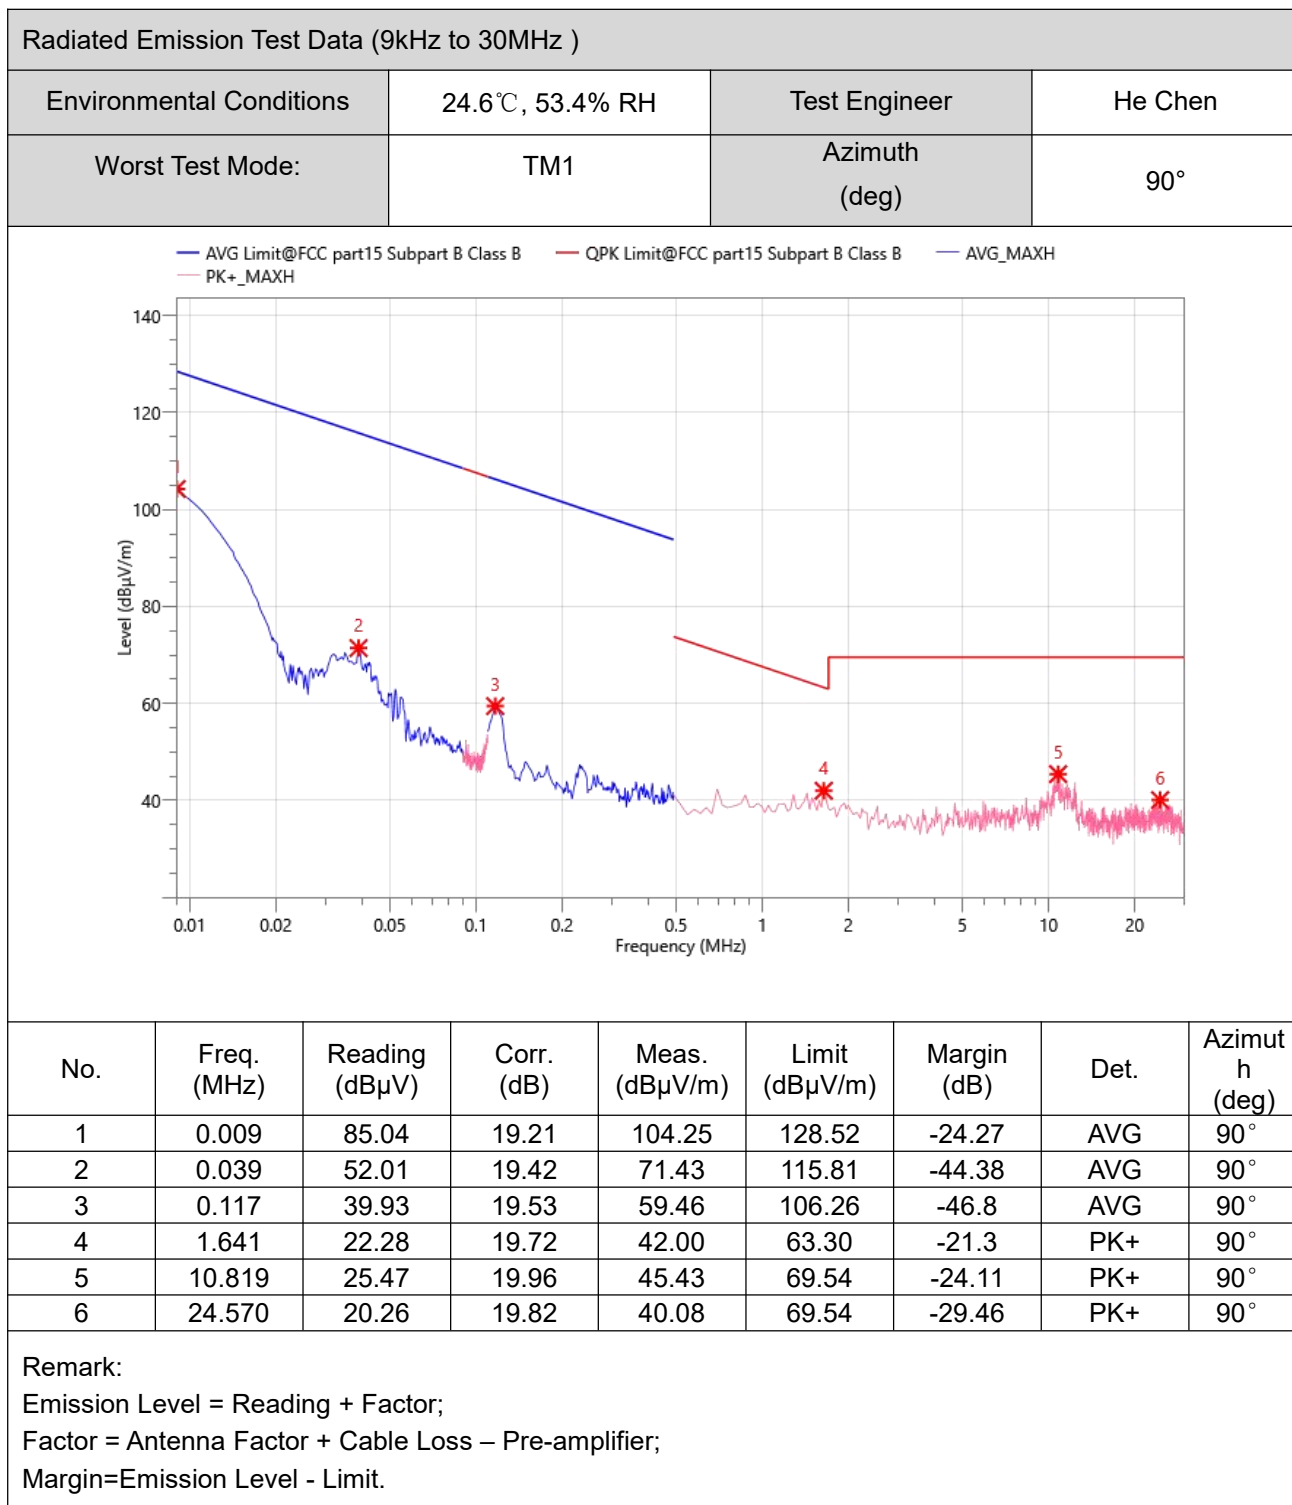


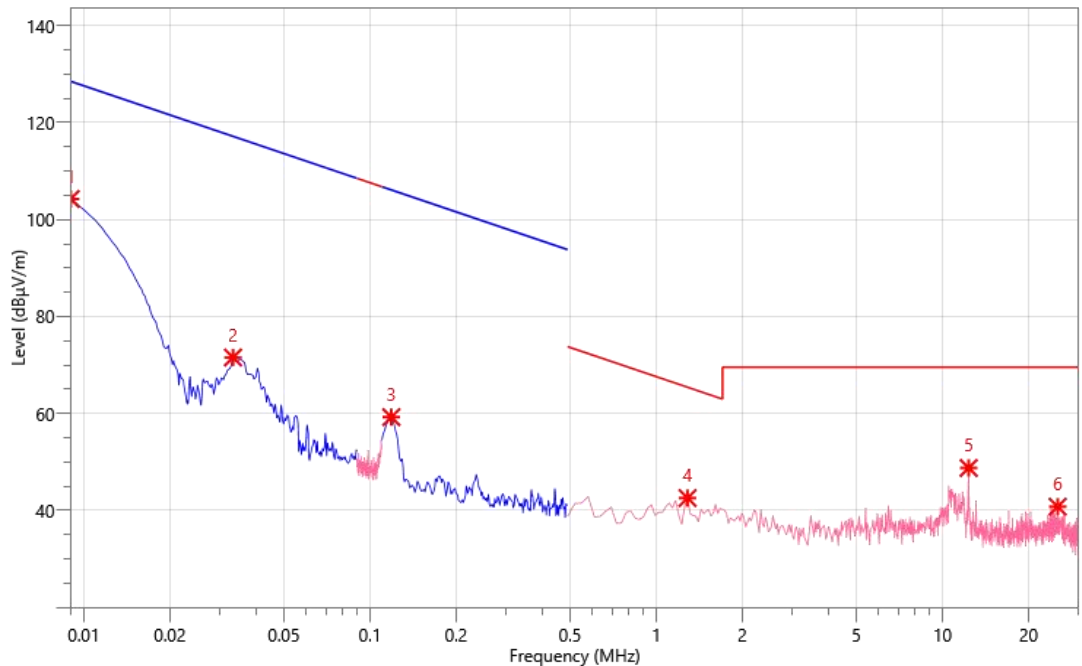Radiated Emission Test Data (9kHz to 30MHz)								
Environmental Conditions		24.6℃, 53.4% RH		Test Engineer		He Chen		
Worst Test Mode:		TM1		Azimuth (deg)		180°		
— AVG Limit@FCC part15 Subpart B Class B — QPK Limit@FCC part15 Subpart B Class B — AVG_MAXH — PK+_MAXH  The graph displays the radiated emission level in dBμV/m on the y-axis (ranging from 40 to 140) against frequency in MHz on a logarithmic x-axis (ranging from 0.01 to 30). A blue line represents the AVG Limit, which decreases from approximately 128 dBμV/m at 0.01 MHz to 95 dBμV/m at 0.5 MHz, then drops to 70 dBμV/m and remains constant up to 30 MHz. A red line represents the QPK Limit, which follows the blue line until 0.5 MHz, then drops to 65 dBμV/m and remains constant. A green line represents the AVG_MAXH, which starts at 104 dBμV/m at 0.01 MHz and decreases to approximately 40 dBμV/m at 30 MHz. A pink line represents the PK+_MAXH, which follows the green line with some noise. Six points are marked with red asterisks and numbered 1 through 6, corresponding to the data in the table below.								
No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Azimuth (deg)
1	0.009	85.04	19.21	104.25	128.52	-24.27	AVG	180°
2	0.033	52.13	19.42	71.55	117.18	-45.63	AVG	180°
3	0.119	39.71	19.53	59.24	106.12	-46.88	AVG	180°
4	1.287	22.85	19.71	42.56	65.41	-22.85	PK+	180°
5	12.353	28.79	19.97	48.76	69.54	-20.78	PK+	180°
6	25.278	20.97	19.8	40.77	69.54	-28.77	PK+	180°
Remark: Emission Level = Reading + Factor; Factor = Antenna Factor + Cable Loss – Pre-amplifier; Margin=Emission Level - Limit.								

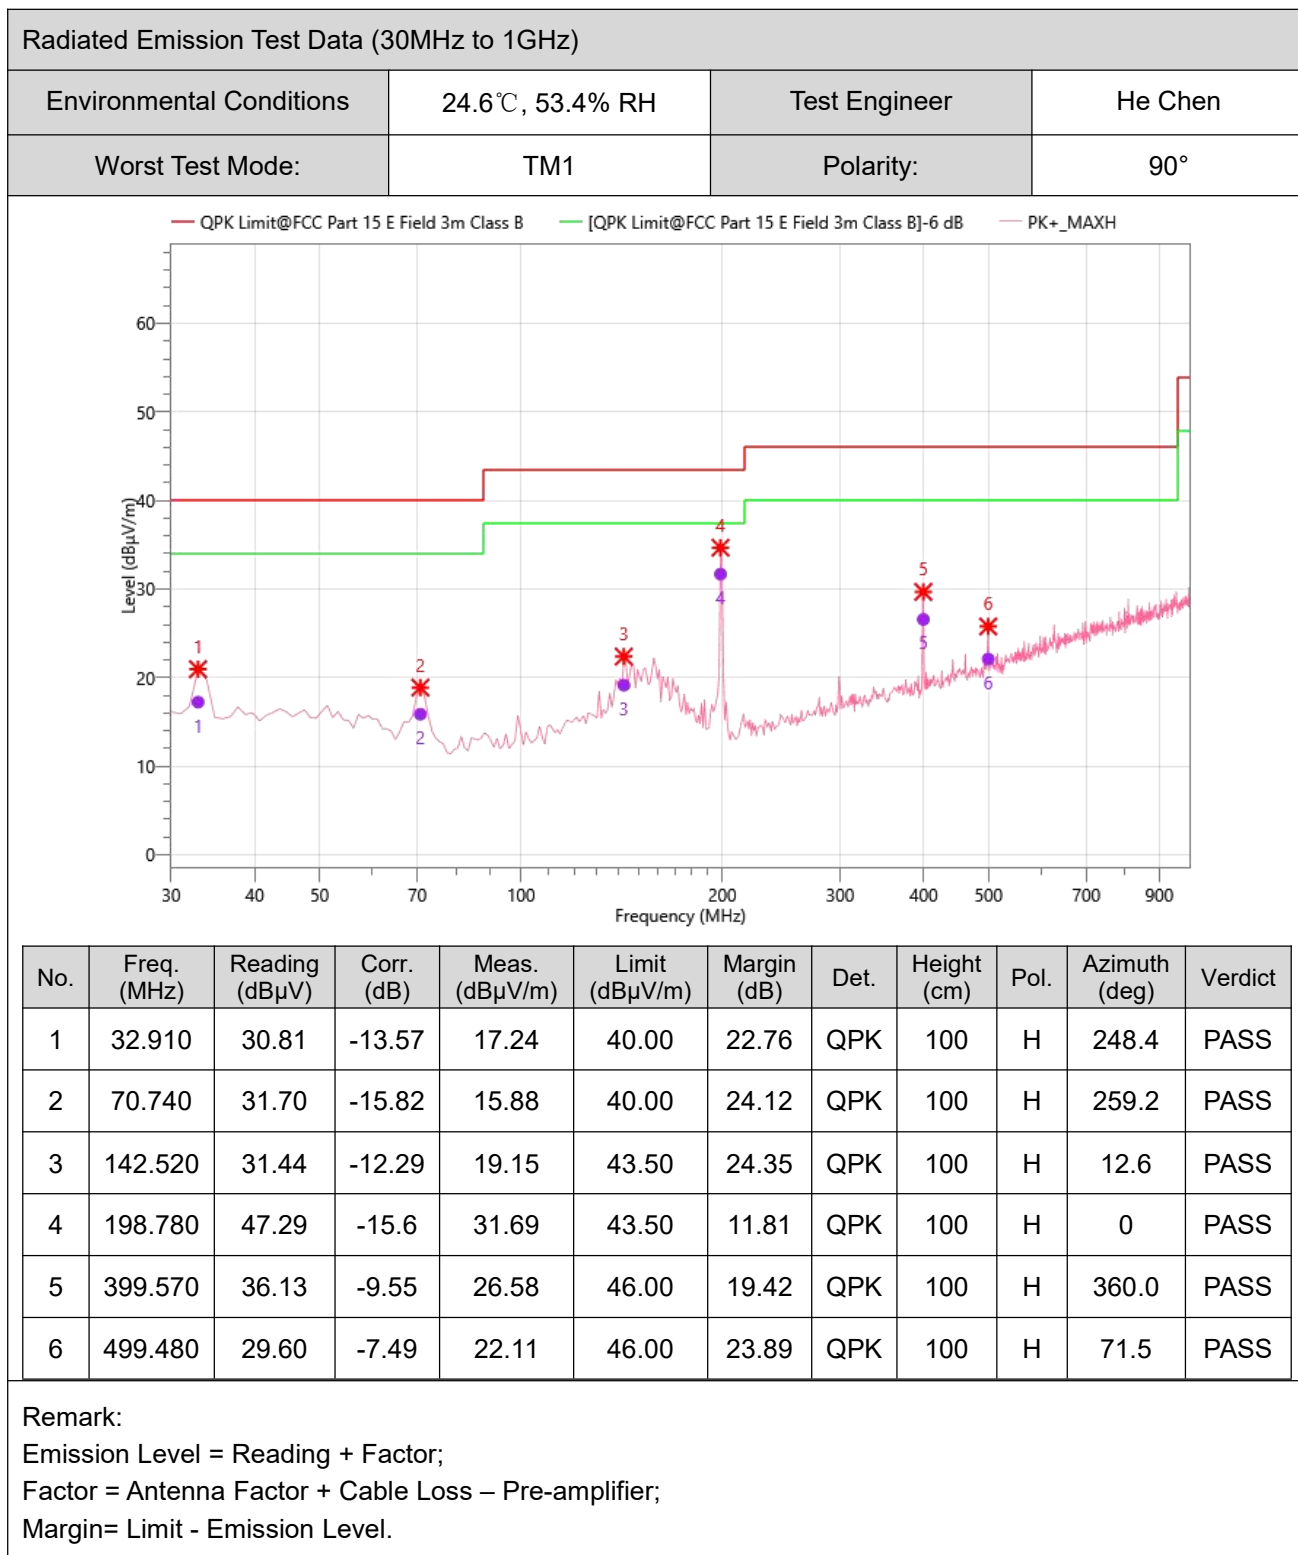

Radiated Emission Test Data (30MHz to 1GHz)

Environmental Conditions	24.6°C, 53.4% RH	Test Engineer	He Chen
Worst Test Mode:	TM1	Polarity:	180°

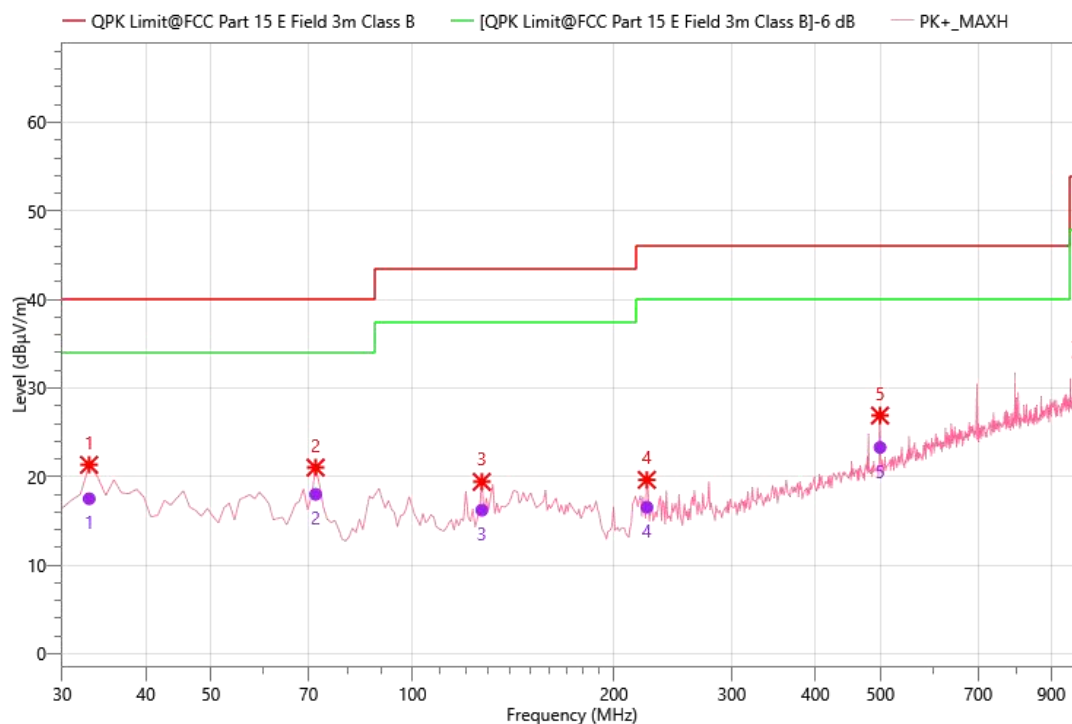

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Height (cm)	Pol.	Azimuth (deg)	Verdict
1	32.910	31.08	-13.57	17.51	40.00	22.49	QPK	100	V	0.0	PASS
2	71.710	34.04	-16.03	18.01	40.00	21.99	QPK	100	V	30.6	PASS
3	127.000	29.66	-13.44	16.22	43.50	27.28	QPK	100	V	222.2	PASS
4	224.000	31.19	-14.64	16.55	46.00	29.45	QPK	100	V	259.6	PASS
5	499.480	30.79	-7.49	23.30	46.00	22.70	QPK	100	V	360.0	PASS
6	999.030	31.59	-0.1	31.49	53.90	22.41	QPK	100	V	314.5	PASS

Remark:

Emission Level = Reading + Factor;

Factor = Antenna Factor + Cable Loss – Pre-amplifier;

Margin= Limit - Emission Level.

4. TEST SETUP Photographs of EUT

Please refer to Appendix A_Test Photos.

5. Photographs of the EUT

Please refer to Appendix B EUT Photos.

***** THE END *****