


TEST REPORT

Report No.: MTi260320019-0102E4

Mode14 / Polarization: Horizontal / CH: L

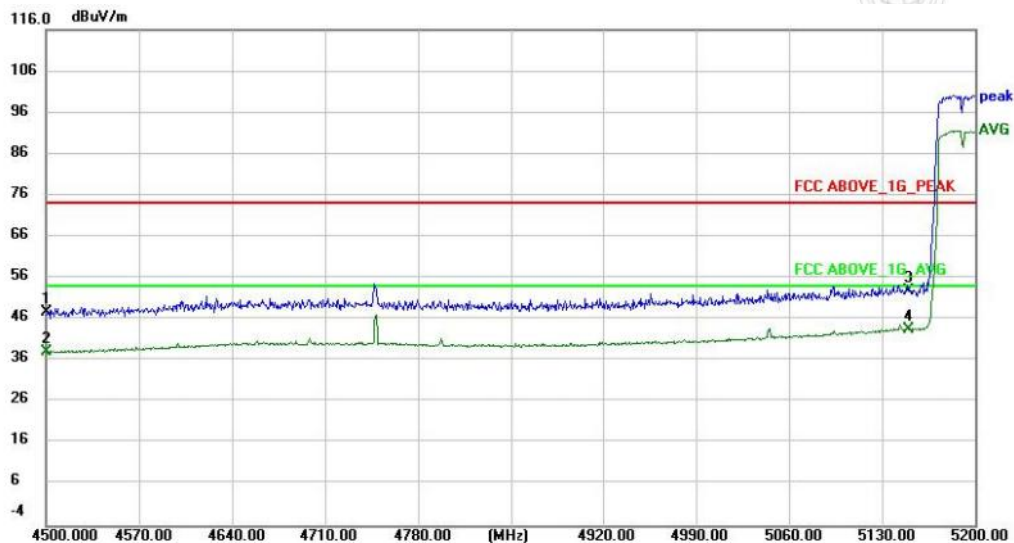


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
		MHz	Level	Factor	ment				
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		4500.000	46.71	1.09	47.80	74.00	-26.20	peak	
2		4500.000	37.04	1.09	38.13	54.00	-15.87	AVG	
3		5150.000	50.13	2.77	52.90	74.00	-21.10	peak	
4	*	5150.000	40.87	2.77	43.64	54.00	-10.36	AVG	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode14 / Polarization: Vertical / CH: L

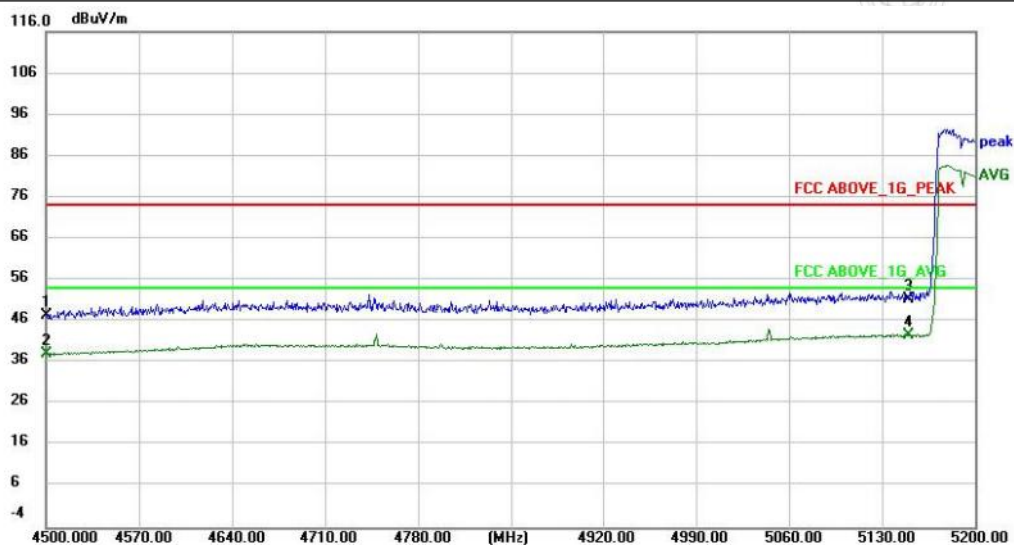


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4500.000	46.22	1.09	47.31	74.00	-26.69	peak	
2		4500.000	36.96	1.09	38.05	54.00	-15.95	AVG	
3		5150.000	48.63	2.77	51.40	74.00	-22.60	peak	
4	*	5150.000	39.83	2.77	42.60	54.00	-11.40	AVG	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode14 / Polarization: Horizontal / CH: H

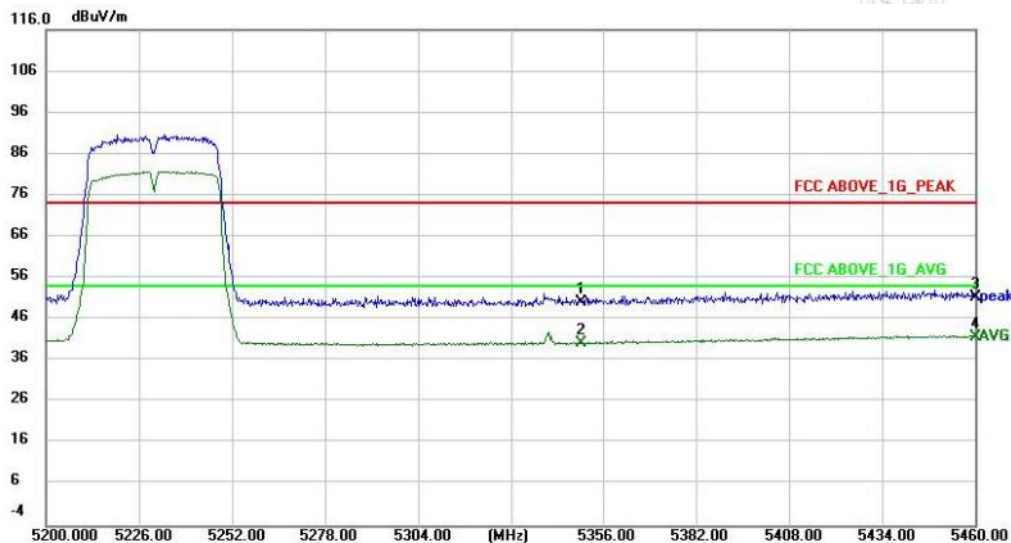


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5350.000	47.42	2.64	50.06	74.00	-23.94	peak	
2		5350.000	37.68	2.64	40.32	54.00	-13.68	AVG	
3		5460.000	48.50	2.98	51.48	74.00	-22.52	peak	
4	*	5460.000	38.88	2.98	41.86	54.00	-12.14	AVG	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode14 / Polarization: Vertical / CH: H

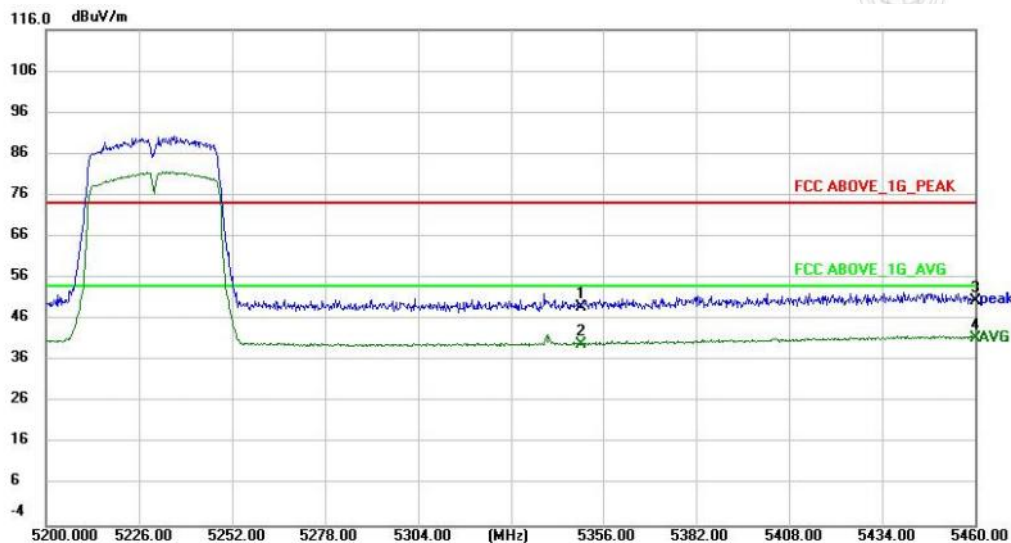

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5350.000	46.38	2.64	49.02	74.00	-24.98	peak	
2		5350.000	37.43	2.64	40.07	54.00	-13.93	AVG	
3		5460.000	47.62	2.98	50.60	74.00	-23.40	peak	
4	*	5460.000	38.60	2.98	41.58	54.00	-12.42	AVG	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode14 / Polarization: Horizontal / CH: L



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5650.000	47.08	3.29	50.37	68.20	-17.83	peak	
2		5700.000	46.63	3.61	50.24	105.20	-54.96	peak	
3		5720.000	45.94	3.59	49.53	110.80	-61.27	peak	
4		5725.000	46.33	3.58	49.91	122.20	-72.29	peak	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode14 / Polarization: Vertical / CH: L



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5650.000	46.28	3.29	49.57	68.20	-18.63	peak	
2		5700.000	45.36	3.61	48.97	105.20	-56.23	peak	
3		5720.000	46.30	3.59	49.89	110.80	-60.91	peak	
4		5725.000	45.49	3.58	49.07	122.20	-73.13	peak	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode14 / Polarization: Horizontal / CH: H



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5850.000	46.76	4.00	50.76	122.20	-71.44	peak	
2		5855.000	46.89	4.01	50.90	110.80	-59.90	peak	
3		5875.000	46.19	4.11	50.30	105.20	-54.90	peak	
4	*	5920.000	46.35	4.32	50.67	71.90	-21.23	peak	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode14 / Polarization: Vertical / CH: H




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5850.000	46.48	4.00	50.48	122.20	-71.72	peak	
2		5855.000	46.40	4.01	50.41	110.80	-60.39	peak	
3		5875.000	47.54	4.11	51.65	105.20	-53.55	peak	
4	*	5920.000	46.50	4.32	50.82	71.90	-21.08	peak	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode15 / Polarization: Horizontal / CH: L

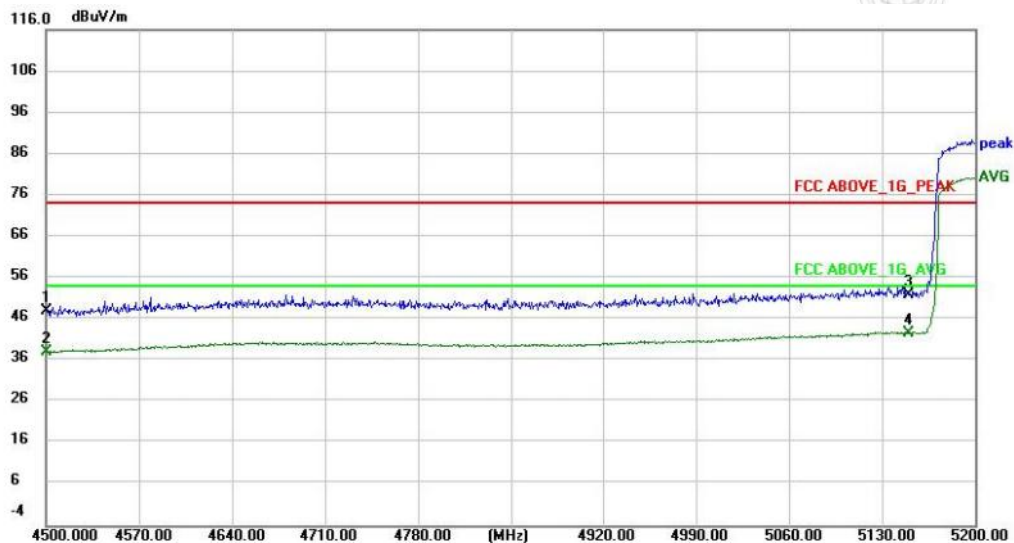


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4500.000	47.03	1.09	48.12	74.00	-25.88	peak	
2		4500.000	37.04	1.09	38.13	54.00	-15.87	AVG	
3		5150.000	49.08	2.77	51.85	74.00	-22.15	peak	
4	*	5150.000	39.85	2.77	42.62	54.00	-11.38	AVG	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode15 / Polarization: Vertical / CH: L

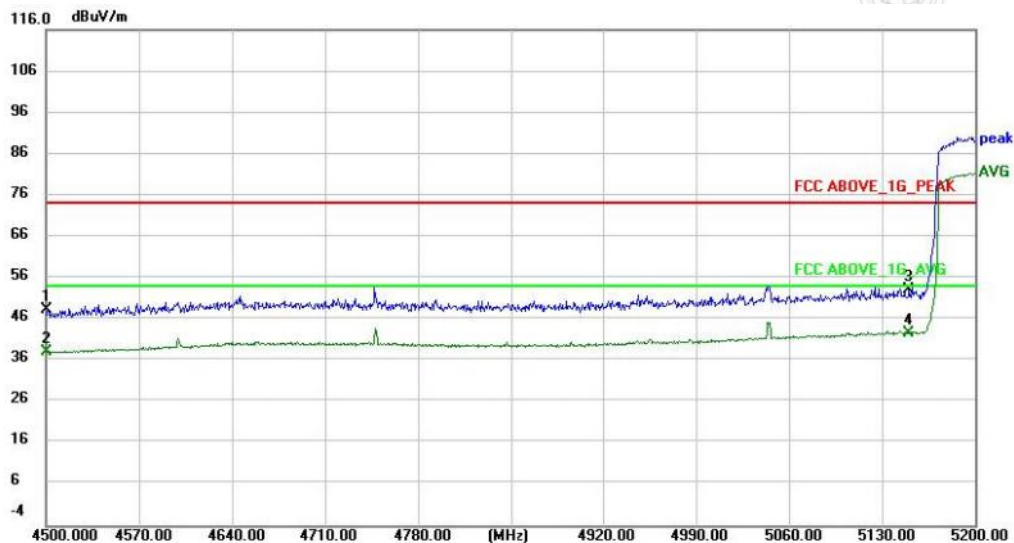


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
		MHz	Level	Factor	ment				
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		4500.000	47.16	1.09	48.25	74.00	-25.75	peak	
2		4500.000	36.96	1.09	38.05	54.00	-15.95	AVG	
3		5150.000	50.43	2.77	53.20	74.00	-20.80	peak	
4	*	5150.000	39.90	2.77	42.67	54.00	-11.33	AVG	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode15 / Polarization: Horizontal / CH: H

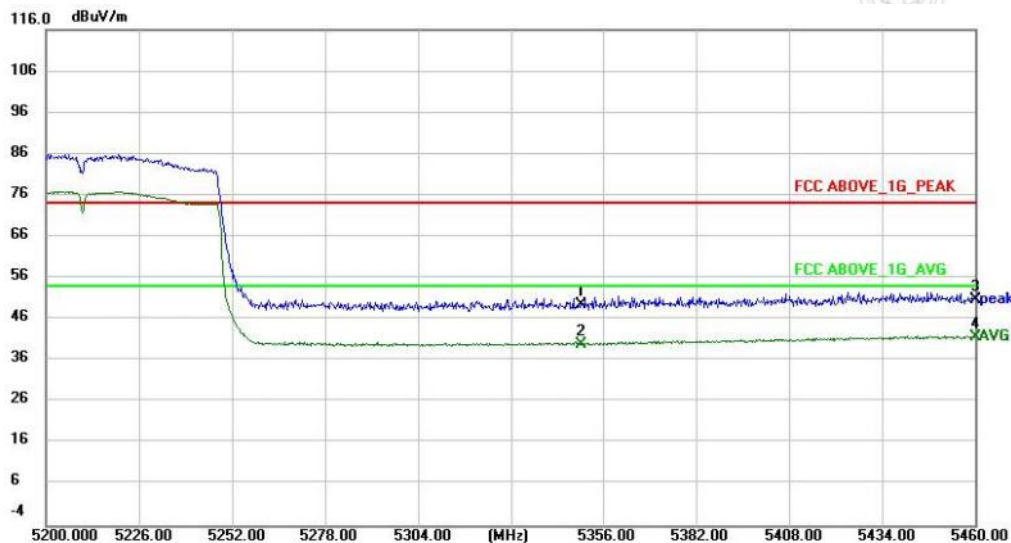


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5350.000	46.89	2.64	49.53	74.00	-24.47	peak	
2		5350.000	37.36	2.64	40.00	54.00	-14.00	AVG	
3		5460.000	47.66	2.98	50.64	74.00	-23.36	peak	
4	*	5460.000	38.78	2.98	41.76	54.00	-12.24	AVG	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode15 / Polarization: Vertical / CH: H

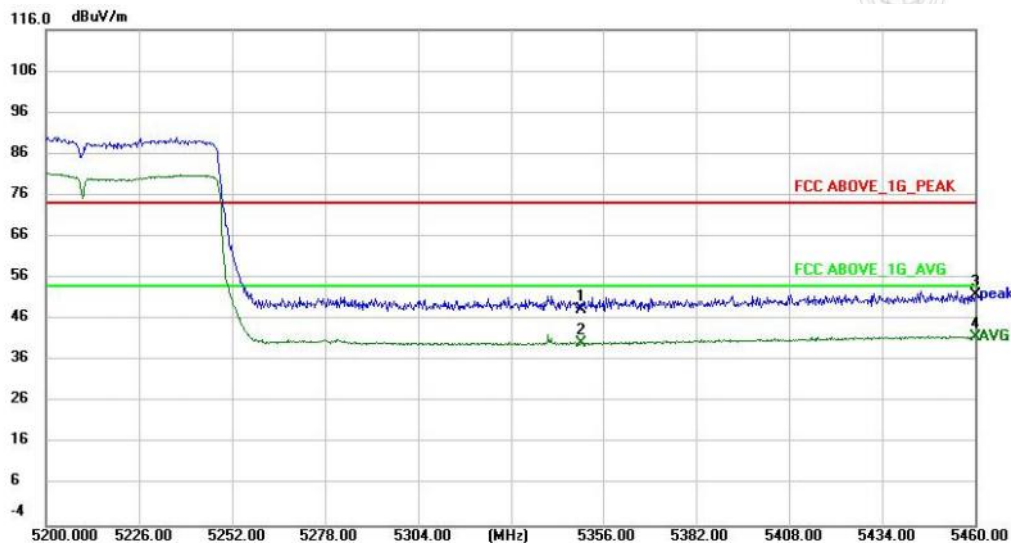


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5350.000	45.60	2.64	48.24	74.00	-25.76	peak	
2		5350.000	37.69	2.64	40.33	54.00	-13.67	AVG	
3		5460.000	48.83	2.98	51.81	74.00	-22.19	peak	
4	*	5460.000	38.66	2.98	41.64	54.00	-12.36	AVG	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode15 / Polarization: Horizontal / CH: L

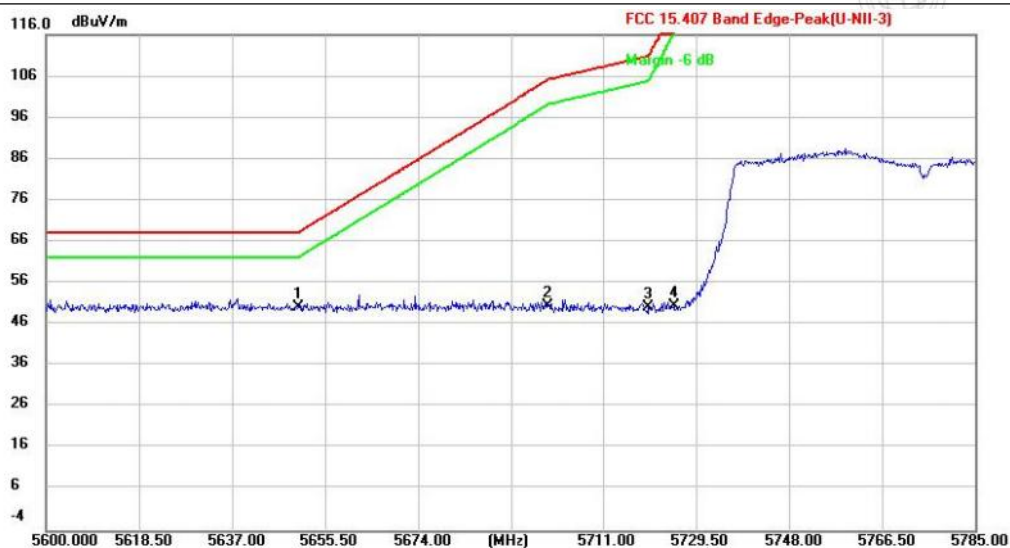


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5650.000	46.76	3.29	50.05	68.20	-18.15	peak	
2		5700.000	46.71	3.61	50.32	105.20	-54.88	peak	
3		5720.000	46.54	3.59	50.13	110.80	-60.67	peak	
4		5725.000	46.88	3.58	50.46	122.20	-71.74	peak	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode15 / Polarization: Vertical / CH: L

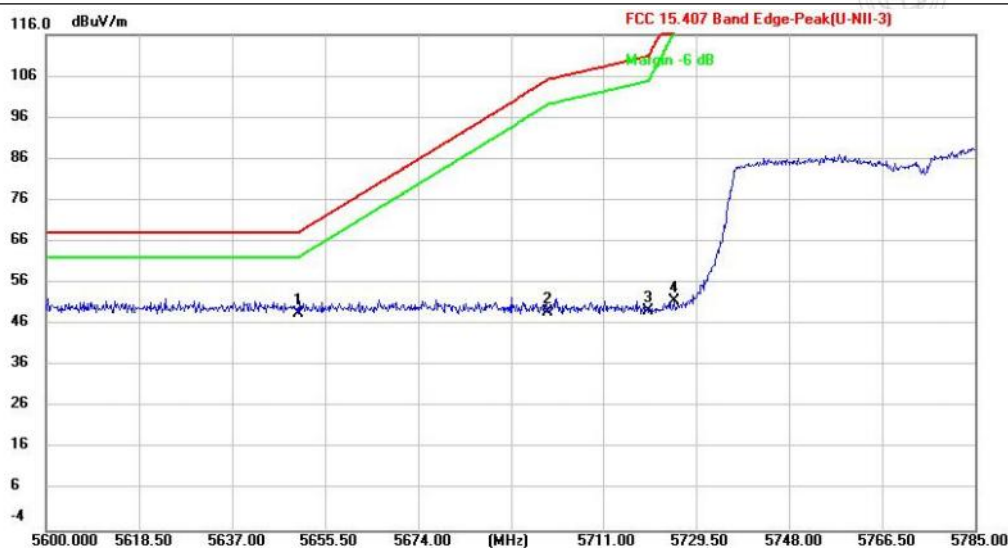

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5650.000	45.44	3.29	48.73	68.20	-19.47	peak	
2		5700.000	45.34	3.61	48.95	105.20	-56.25	peak	
3		5720.000	45.53	3.59	49.12	110.80	-61.68	peak	
4		5725.000	47.99	3.58	51.57	122.20	-70.63	peak	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode15 / Polarization: Horizontal / CH: H



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5850.000	47.11	4.00	51.11	122.20	-71.09	peak	
2		5855.000	46.31	4.01	50.32	110.80	-60.48	peak	
3		5875.000	46.71	4.11	50.82	105.20	-54.38	peak	
4	*	5920.000	46.48	4.32	50.80	71.90	-21.10	peak	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode15 / Polarization: Vertical / CH: H




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5850.000	47.48	4.00	51.48	122.20	-70.72	peak	
2		5855.000	47.19	4.01	51.20	110.80	-59.60	peak	
3		5875.000	45.76	4.11	49.87	105.20	-55.33	peak	
4	*	5920.000	46.76	4.32	51.08	71.90	-20.82	peak	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode16 / Polarization: Horizontal / CH: L

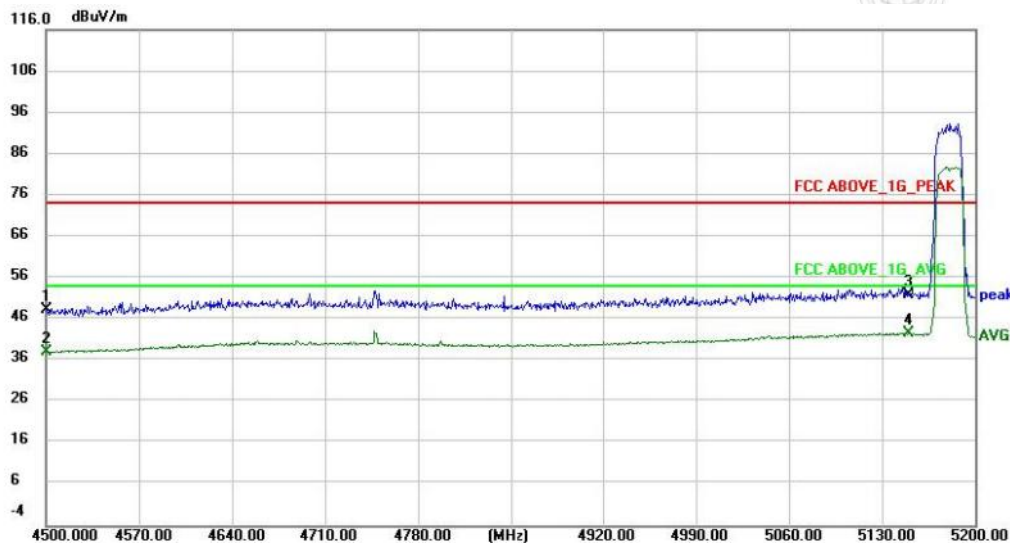


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4500.000	47.38	1.09	48.47	74.00	-25.53	peak	
2		4500.000	37.05	1.09	38.14	54.00	-15.86	AVG	
3		5150.000	49.18	2.77	51.95	74.00	-22.05	peak	
4	*	5150.000	39.78	2.77	42.55	54.00	-11.45	AVG	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode16 / Polarization: Vertical / CH: L

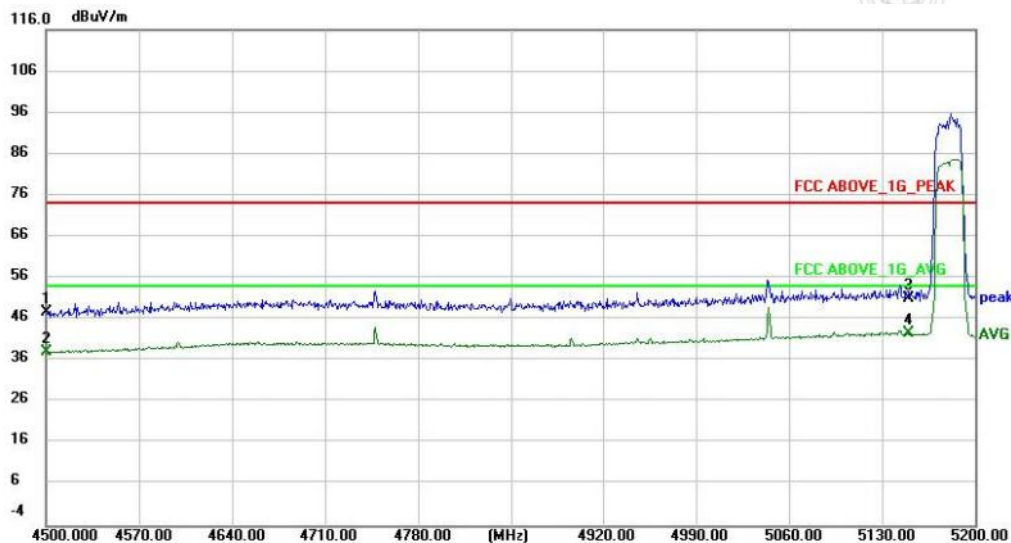


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4500.000	46.75	1.09	47.84	74.00	-26.16	peak	
2		4500.000	36.94	1.09	38.03	54.00	-15.97	AVG	
3		5150.000	48.27	2.77	51.04	74.00	-22.96	peak	
4	*	5150.000	39.79	2.77	42.56	54.00	-11.44	AVG	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode16 / Polarization: Horizontal / CH: H

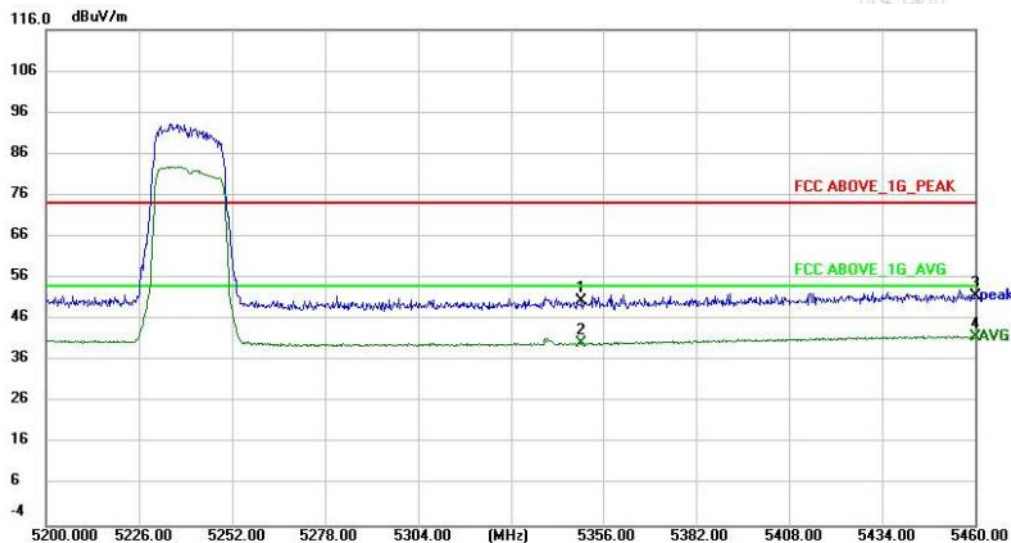


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5350.000	47.85	2.64	50.49	74.00	-23.51	peak	
2		5350.000	37.76	2.64	40.40	54.00	-13.60	AVG	
3		5460.000	48.77	2.98	51.75	74.00	-22.25	peak	
4	*	5460.000	38.77	2.98	41.75	54.00	-12.25	AVG	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode16 / Polarization: Vertical / CH: H

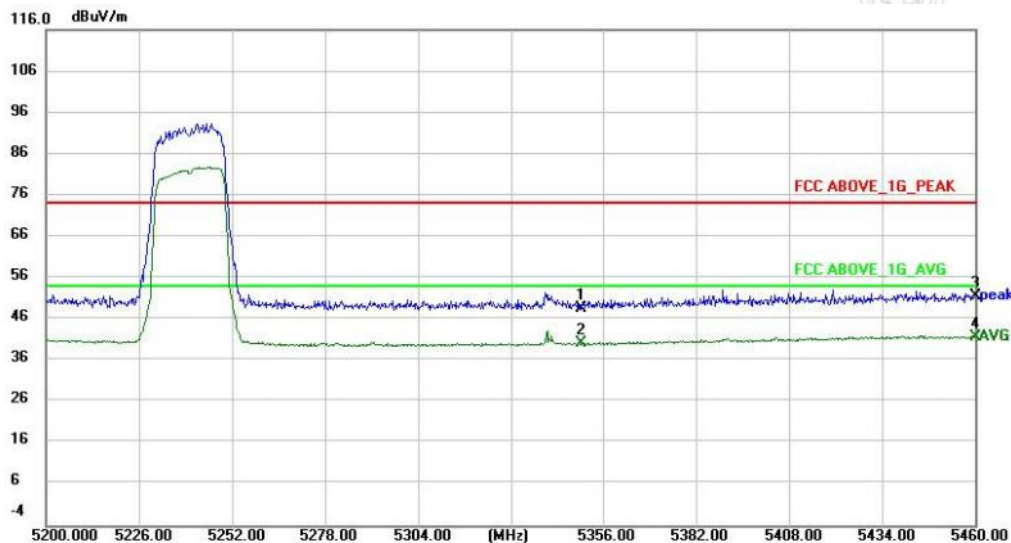


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5350.000	46.09	2.64	48.73	74.00	-25.27	peak	
2		5350.000	37.49	2.64	40.13	54.00	-13.87	AVG	
3		5460.000	48.64	2.98	51.62	74.00	-22.38	peak	
4	*	5460.000	38.72	2.98	41.70	54.00	-12.30	AVG	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode16 / Polarization: Horizontal / CH: L

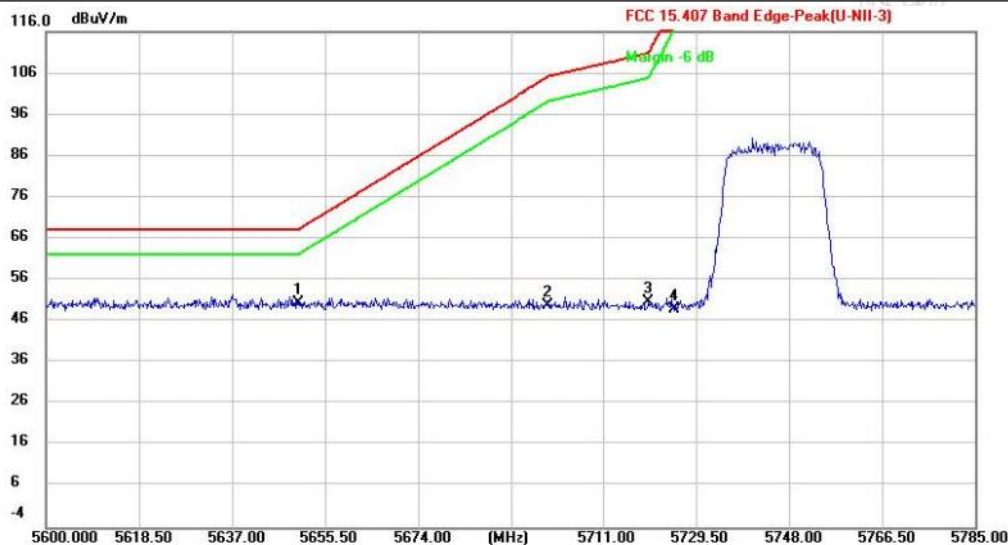


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5650.000	47.02	3.29	50.31	68.20	-17.89	peak	
2		5700.000	46.12	3.61	49.73	105.20	-55.47	peak	
3		5720.000	47.29	3.59	50.88	110.80	-59.92	peak	
4		5725.000	45.38	3.58	48.96	122.20	-73.24	peak	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode16 / Polarization: Vertical / CH: L

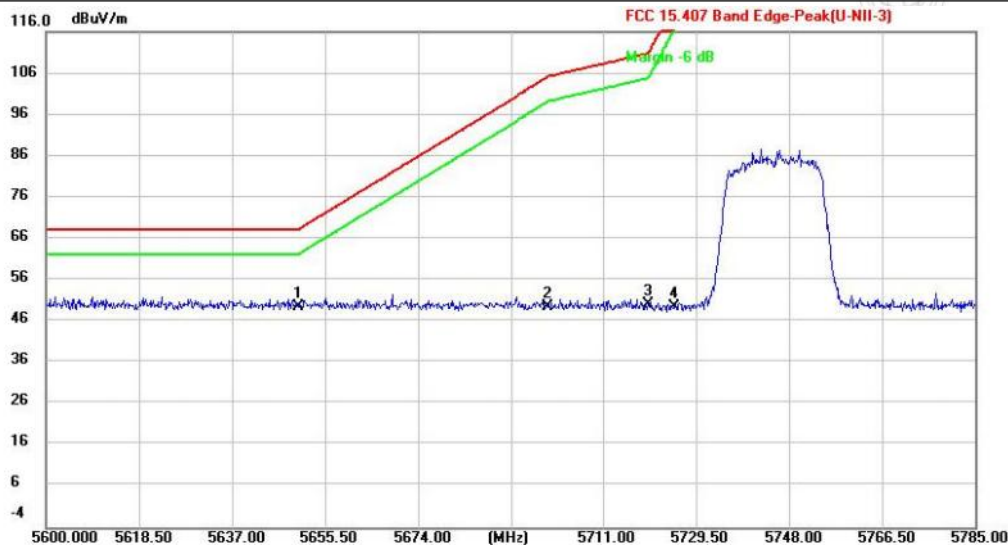


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5650.000	46.31	3.29	49.60	68.20	-18.60	peak	
2		5700.000	46.07	3.61	49.68	105.20	-55.52	peak	
3		5720.000	46.46	3.59	50.05	110.80	-60.75	peak	
4		5725.000	46.07	3.58	49.65	122.20	-72.55	peak	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode16 / Polarization: Horizontal / CH: H

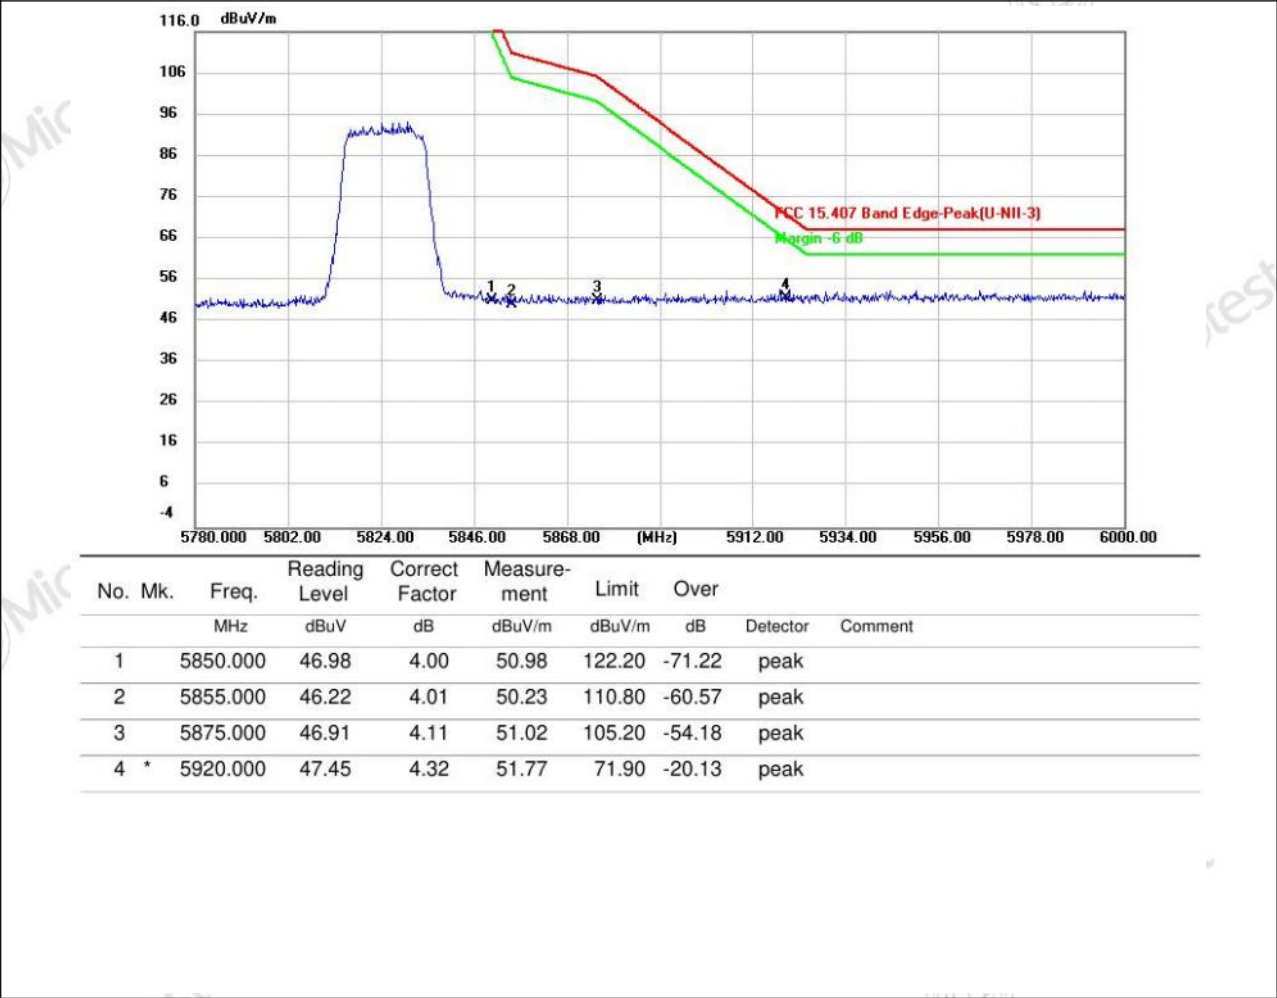

TEST REPORT

Report No.: MTi260320019-0102E4

Mode16 / Polarization: Vertical / CH: H




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5850.000	46.27	4.00	50.27	122.20	-71.93	peak	
2		5855.000	46.56	4.01	50.57	110.80	-60.23	peak	
3		5875.000	46.85	4.11	50.96	105.20	-54.24	peak	
4	*	5920.000	47.19	4.32	51.51	71.90	-20.39	peak	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode17 / Polarization: Horizontal / CH: L

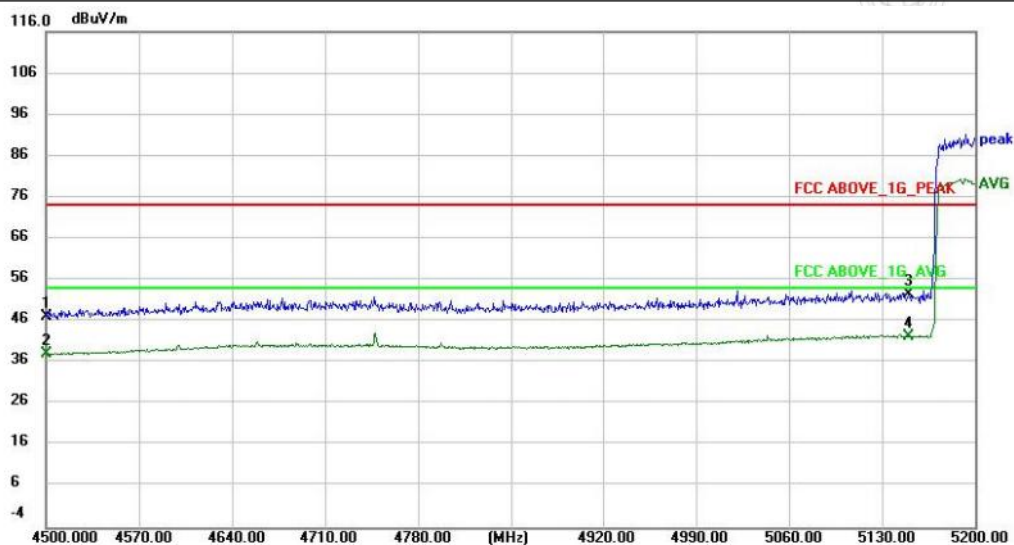


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4500.000	46.16	1.09	47.25	74.00	-26.75	peak	
2		4500.000	37.08	1.09	38.17	54.00	-15.83	AVG	
3		5150.000	49.83	2.77	52.60	74.00	-21.40	peak	
4	*	5150.000	39.48	2.77	42.25	54.00	-11.75	AVG	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode17 / Polarization: Vertical / CH: L

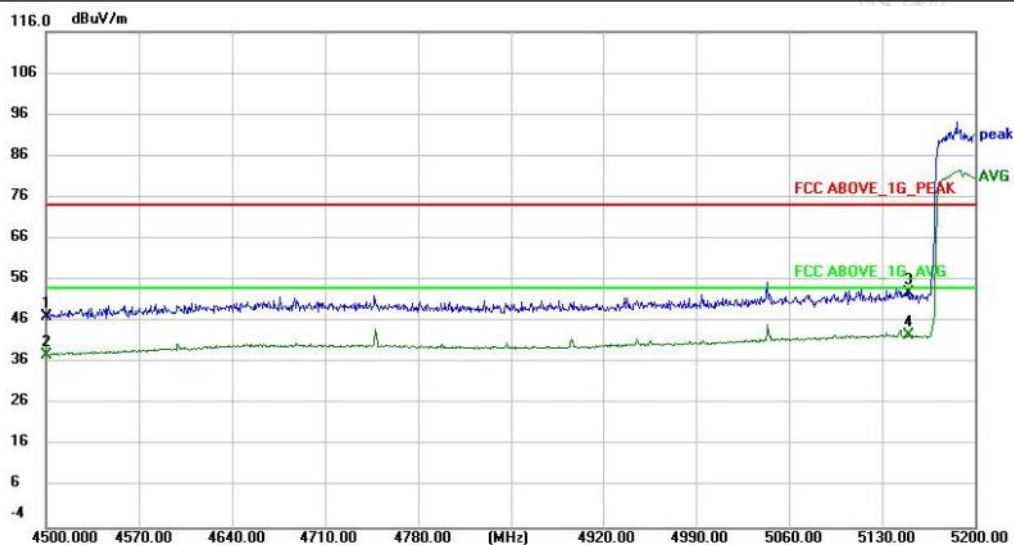


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4500.000	45.95	1.09	47.04	74.00	-26.96	peak	
2		4500.000	36.91	1.09	38.00	54.00	-16.00	AVG	
3		5150.000	50.04	2.77	52.81	74.00	-21.19	peak	
4	*	5150.000	39.80	2.77	42.57	54.00	-11.43	AVG	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode17 / Polarization: Horizontal / CH: H

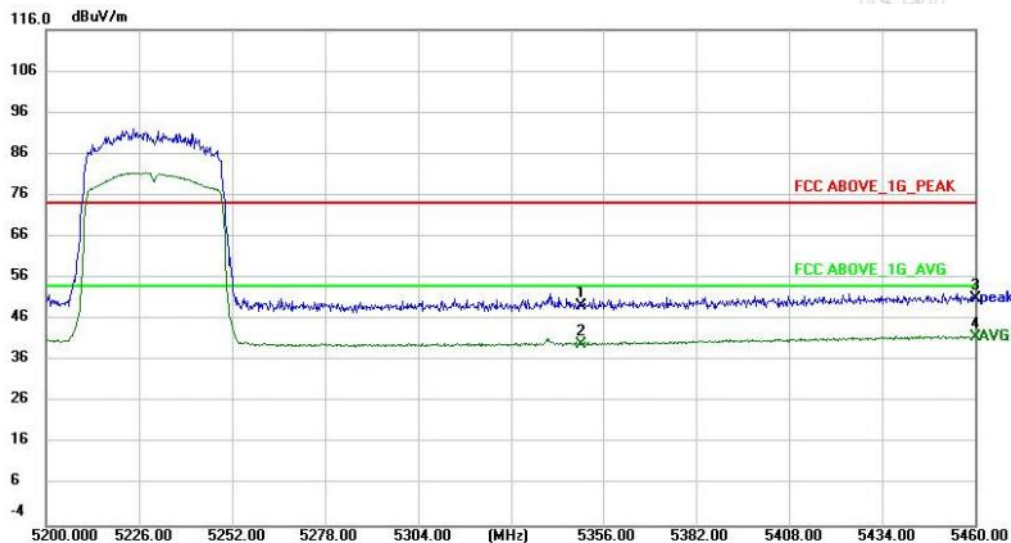


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5350.000	46.58	2.64	49.22	74.00	-24.78	peak	
2		5350.000	37.44	2.64	40.08	54.00	-13.92	AVG	
3		5460.000	48.07	2.98	51.05	74.00	-22.95	peak	
4	*	5460.000	38.75	2.98	41.73	54.00	-12.27	AVG	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode17 / Polarization: Vertical / CH: H

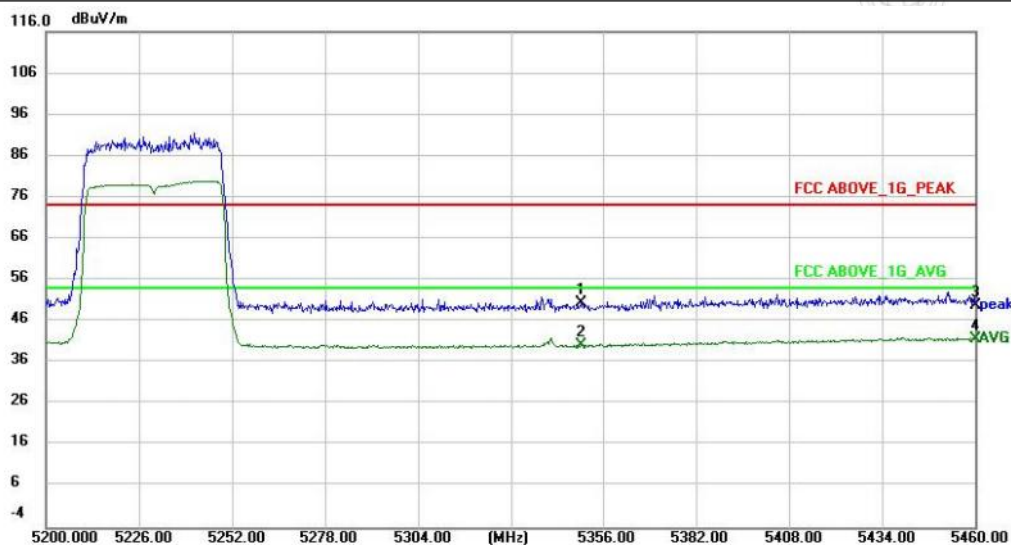

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5350.000	47.74	2.64	50.38	74.00	-23.62	peak	
2		5350.000	37.48	2.64	40.12	54.00	-13.88	AVG	
3		5460.000	46.86	2.98	49.84	74.00	-24.16	peak	
4	*	5460.000	38.71	2.98	41.69	54.00	-12.31	AVG	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode17 / Polarization: Horizontal / CH: L



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5650.000	46.86	3.29	50.15	68.20	-18.05	peak	
2		5700.000	46.24	3.61	49.85	105.20	-55.35	peak	
3		5720.000	46.98	3.59	50.57	110.80	-60.23	peak	
4		5725.000	47.15	3.58	50.73	122.20	-71.47	peak	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode17 / Polarization: Vertical / CH: L



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5650.000	46.67	3.29	49.96	68.20	-18.24	peak	
2		5700.000	47.90	3.61	51.51	105.20	-53.69	peak	
3		5720.000	45.56	3.59	49.15	110.80	-61.65	peak	
4		5725.000	47.02	3.58	50.60	122.20	-71.60	peak	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode17 / Polarization: Horizontal / CH: H



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5850.000	48.39	4.00	52.39	122.20	-69.81	peak	
2		5855.000	46.67	4.01	50.68	110.80	-60.12	peak	
3		5875.000	47.19	4.11	51.30	105.20	-53.90	peak	
4	*	5920.000	46.69	4.32	51.01	71.90	-20.89	peak	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode17 / Polarization: Vertical / CH: H




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5850.000	47.83	4.00	51.83	122.20	-70.37	peak	
2		5855.000	46.66	4.01	50.67	110.80	-60.13	peak	
3		5875.000	47.31	4.11	51.42	105.20	-53.78	peak	
4	*	5920.000	47.36	4.32	51.68	71.90	-20.22	peak	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode18 / Polarization: Horizontal / CH: L

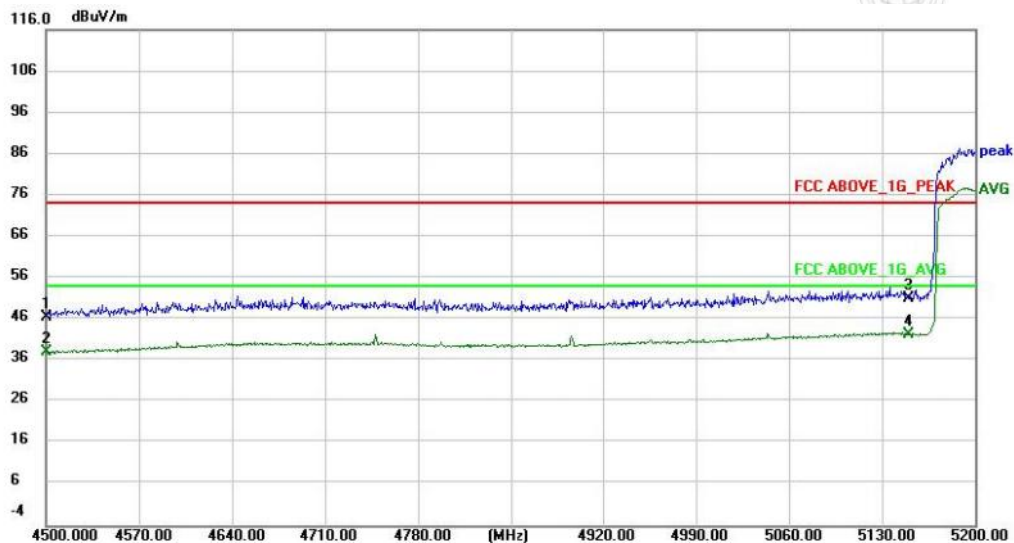


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
		MHz	Level	Factor	ment	dBuV/m	dB		
1		4500.000	45.46	1.09	46.55	74.00	-27.45	peak	
2		4500.000	36.98	1.09	38.07	54.00	-15.93	AVG	
3		5150.000	48.28	2.77	51.05	74.00	-22.95	peak	
4	*	5150.000	39.57	2.77	42.34	54.00	-11.66	AVG	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode18 / Polarization: Vertical / CH: L

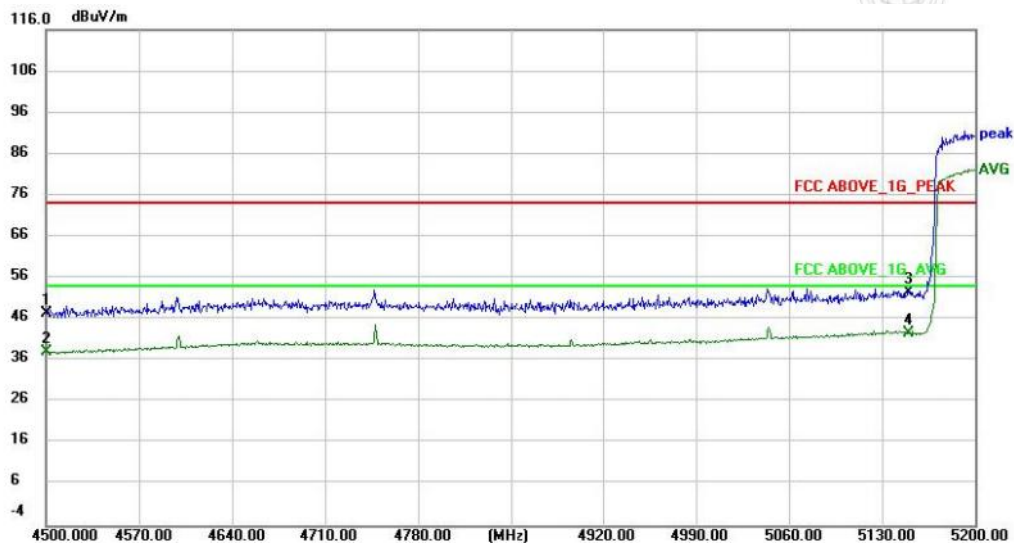


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4500.000	46.33	1.09	47.42	74.00	-26.58	peak	
2		4500.000	36.97	1.09	38.06	54.00	-15.94	AVG	
3		5150.000	49.79	2.77	52.56	74.00	-21.44	peak	
4	*	5150.000	39.92	2.77	42.69	54.00	-11.31	AVG	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode18 / Polarization: Horizontal / CH: H

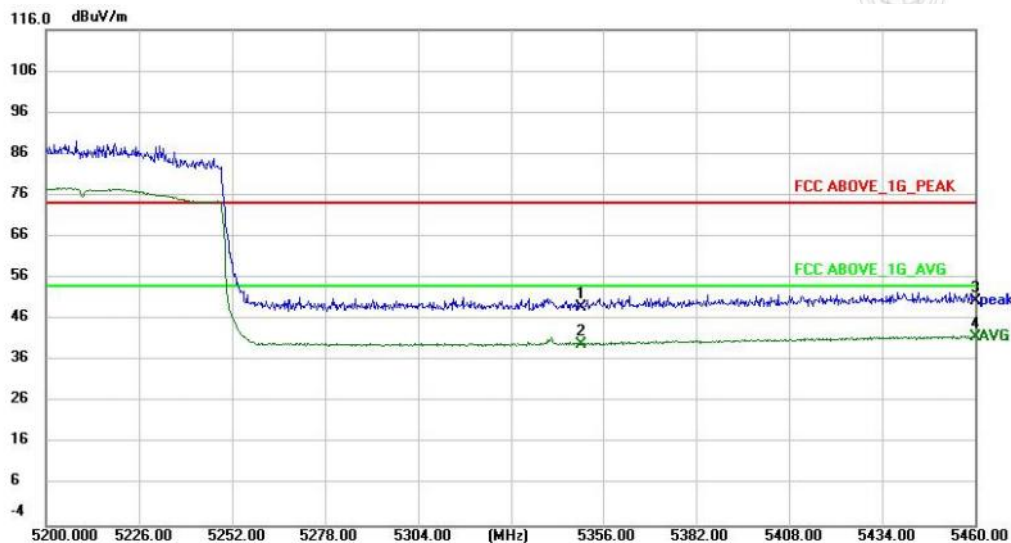


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5350.000	46.38	2.64	49.02	74.00	-24.98	peak	
2		5350.000	37.46	2.64	40.10	54.00	-13.90	AVG	
3		5460.000	47.52	2.98	50.50	74.00	-23.50	peak	
4	*	5460.000	38.81	2.98	41.79	54.00	-12.21	AVG	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode18 / Polarization: Vertical / CH: H

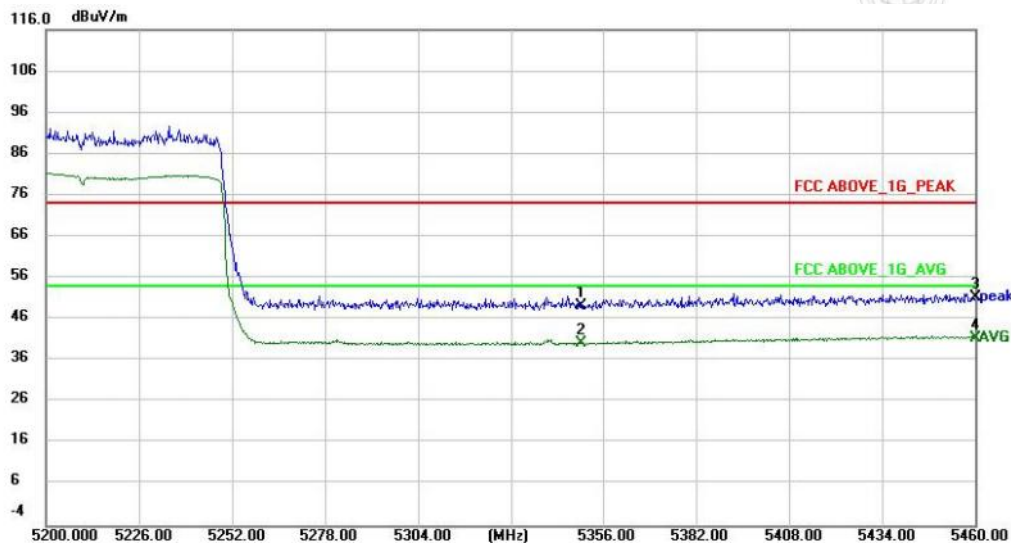


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5350.000	46.55	2.64	49.19	74.00	-24.81	peak	
2		5350.000	37.58	2.64	40.22	54.00	-13.78	AVG	
3		5460.000	48.43	2.98	51.41	74.00	-22.59	peak	
4	*	5460.000	38.56	2.98	41.54	54.00	-12.46	AVG	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode18 / Polarization: Horizontal / CH: L

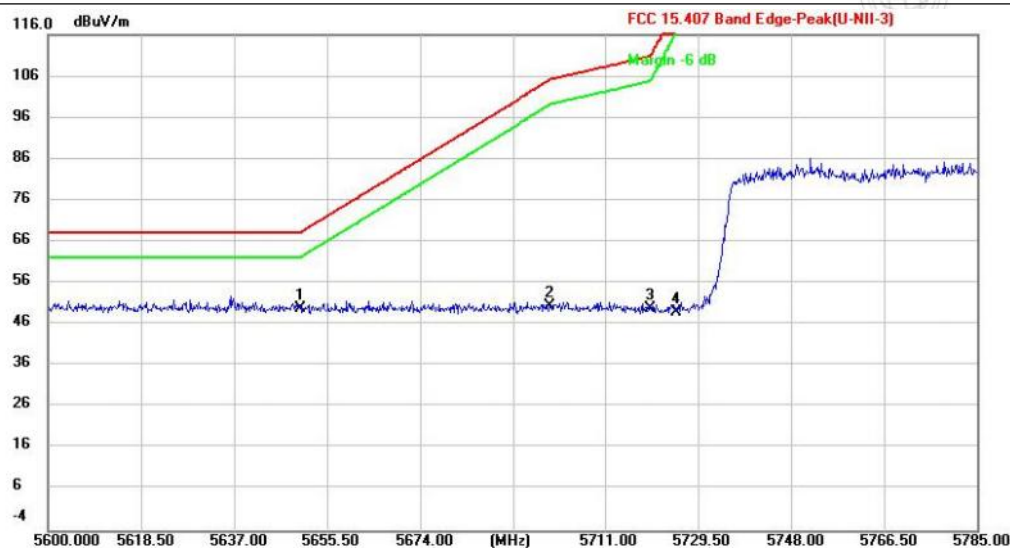


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5650.000	46.66	3.29	49.95	68.20	-18.25	peak	
2		5700.000	46.83	3.61	50.44	105.20	-54.76	peak	
3		5720.000	46.27	3.59	49.86	110.80	-60.94	peak	
4		5725.000	45.52	3.58	49.10	122.20	-73.10	peak	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode18 / Polarization: Vertical / CH: L

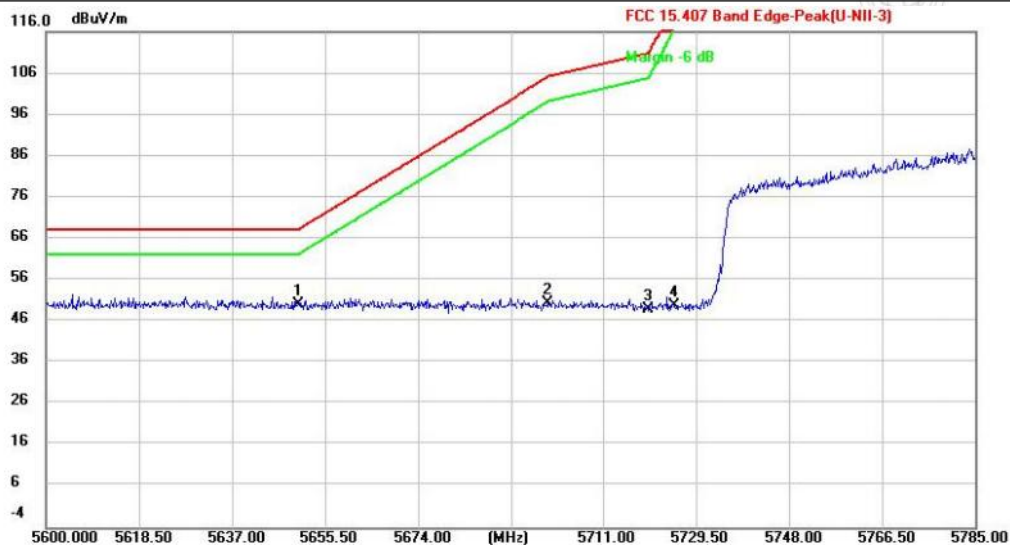

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5650.000	46.99	3.29	50.28	68.20	-17.92	peak	
2		5700.000	46.88	3.61	50.49	105.20	-54.71	peak	
3		5720.000	45.29	3.59	48.88	110.80	-61.92	peak	
4		5725.000	46.33	3.58	49.91	122.20	-72.29	peak	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode18 / Polarization: Horizontal / CH: H



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5850.000	47.39	4.00	51.39	122.20	-70.81	peak	
2		5855.000	47.77	4.01	51.78	110.80	-59.02	peak	
3		5875.000	48.45	4.11	52.56	105.20	-52.64	peak	
4	*	5920.000	47.21	4.32	51.53	71.90	-20.37	peak	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode18 / Polarization: Vertical / CH: H




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5850.000	46.49	4.00	50.49	122.20	-71.71	peak	
2		5855.000	46.11	4.01	50.12	110.80	-60.68	peak	
3		5875.000	48.45	4.11	52.56	105.20	-52.64	peak	
4	*	5920.000	47.21	4.32	51.53	71.90	-20.37	peak	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode19 / Polarization: Horizontal / CH: L

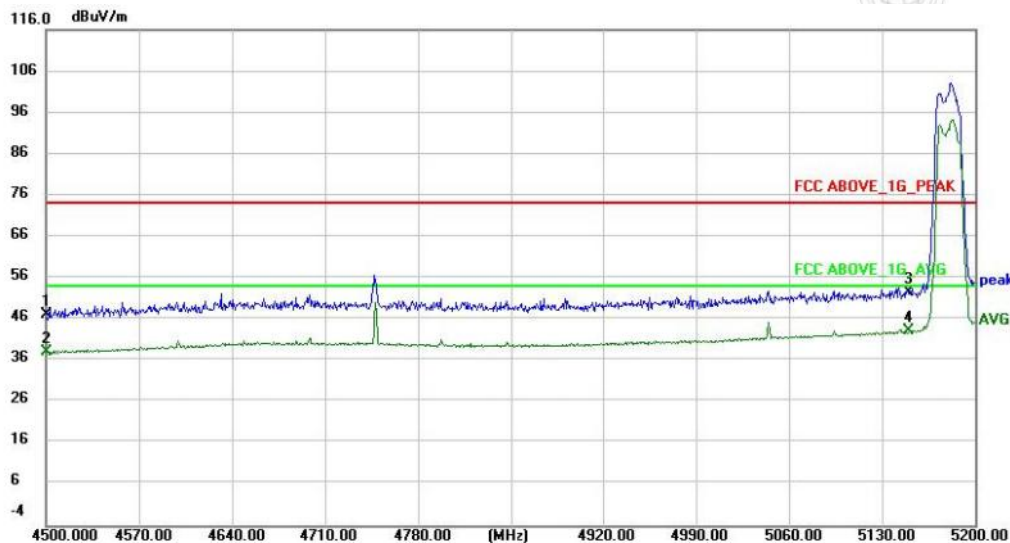


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4500.000	46.01	1.09	47.10	74.00	-26.90	peak	
2		4500.000	37.06	1.09	38.15	54.00	-15.85	AVG	
3		5150.000	49.71	2.77	52.48	74.00	-21.52	peak	
4	*	5150.000	40.35	2.77	43.12	54.00	-10.88	AVG	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode19 / Polarization: Vertical / CH: L

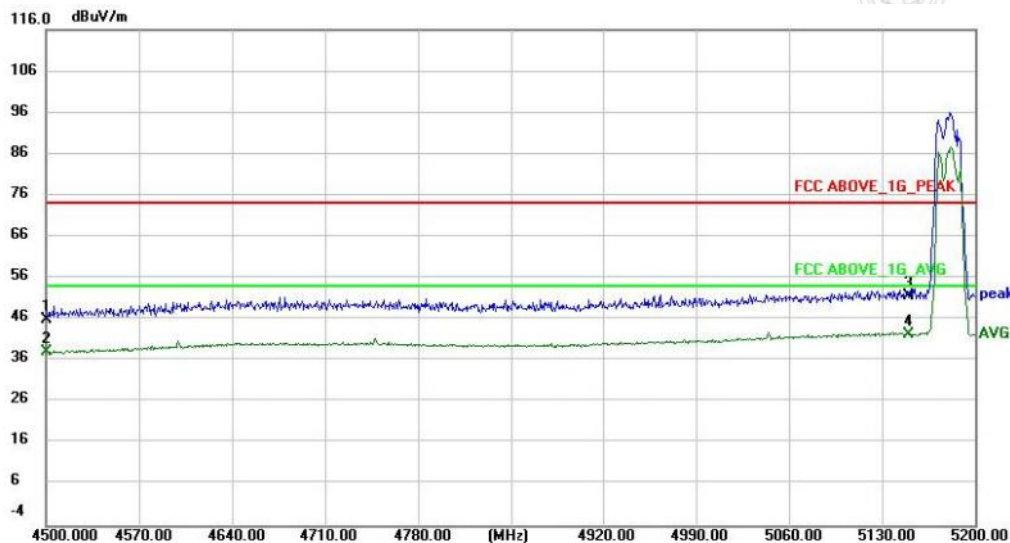


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4500.000	44.94	1.09	46.03	74.00	-27.97	peak	
2		4500.000	36.97	1.09	38.06	54.00	-15.94	AVG	
3		5150.000	48.85	2.77	51.62	74.00	-22.38	peak	
4	*	5150.000	39.70	2.77	42.47	54.00	-11.53	AVG	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode19 / Polarization: Horizontal / CH: H

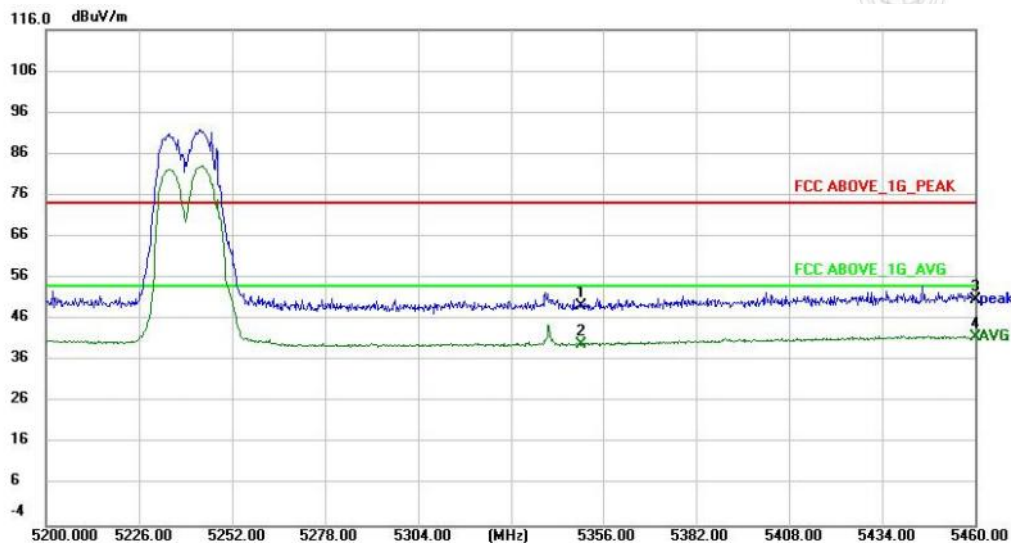


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5350.000	46.54	2.64	49.18	74.00	-24.82	peak	
2		5350.000	37.36	2.64	40.00	54.00	-14.00	AVG	
3		5460.000	47.87	2.98	50.85	74.00	-23.15	peak	
4	*	5460.000	38.75	2.98	41.73	54.00	-12.27	AVG	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode19 / Polarization: Vertical / CH: H

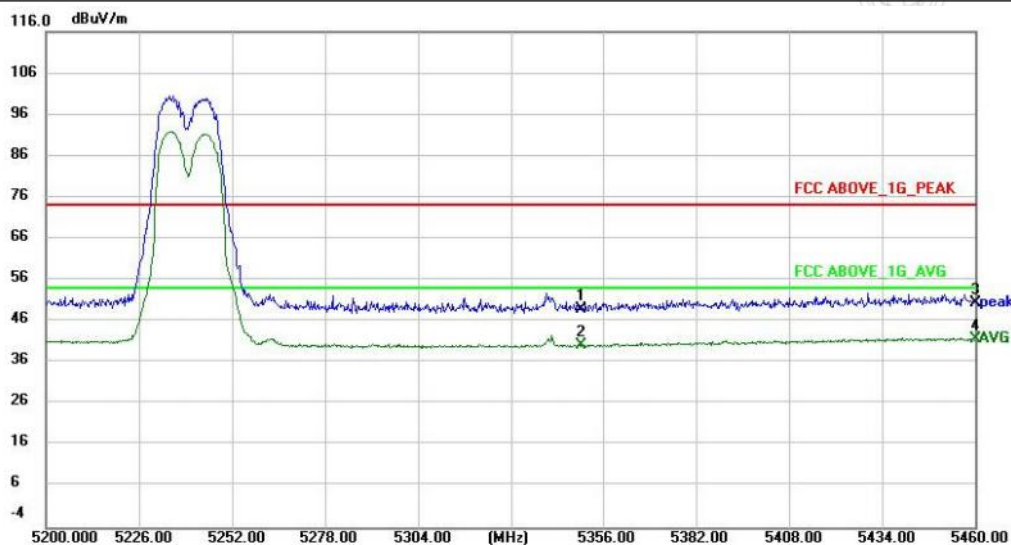


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5350.000	46.27	2.64	48.91	74.00	-25.09	peak	
2		5350.000	37.58	2.64	40.22	54.00	-13.78	AVG	
3		5460.000	47.48	2.98	50.46	74.00	-23.54	peak	
4	*	5460.000	38.90	2.98	41.88	54.00	-12.12	AVG	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode19 / Polarization: Horizontal / CH: L

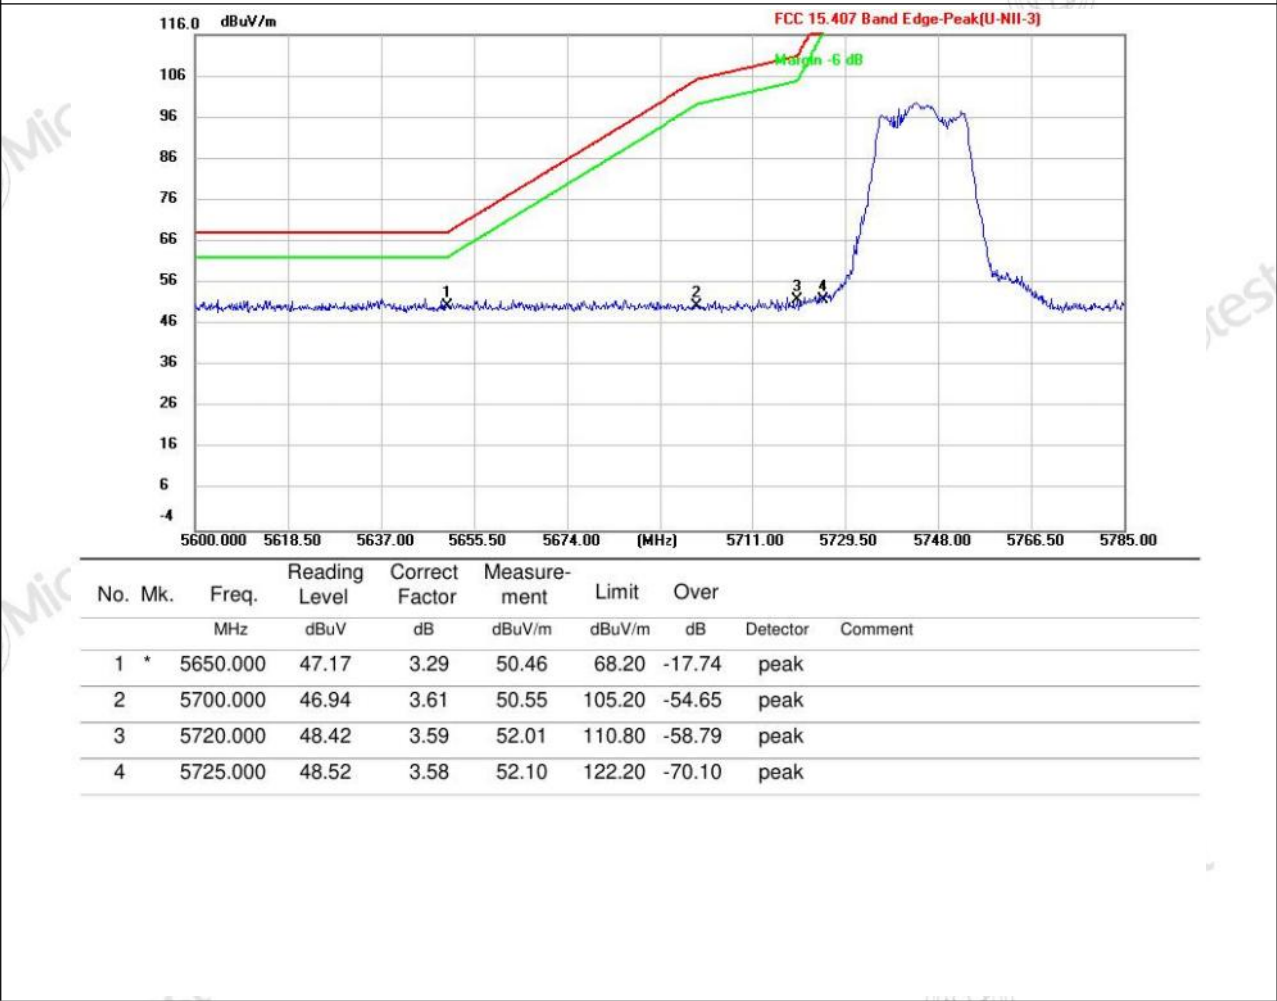

TEST REPORT

Report No.: MTi260320019-0102E4

Mode19 / Polarization: Vertical / CH: L



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5650.000	46.28	3.29	49.57	68.20	-18.63	peak	
2		5700.000	46.07	3.61	49.68	105.20	-55.52	peak	
3		5720.000	45.52	3.59	49.11	110.80	-61.69	peak	
4		5725.000	47.22	3.58	50.80	122.20	-71.40	peak	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode19 / Polarization: Horizontal / CH: H



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5850.000	46.62	4.00	50.62	122.20	-71.58	peak	
2		5855.000	46.32	4.01	50.33	110.80	-60.47	peak	
3		5875.000	46.93	4.11	51.04	105.20	-54.16	peak	
4	*	5920.000	47.67	4.32	51.99	71.90	-19.91	peak	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode19 / Polarization: Vertical / CH: H




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5850.000	46.64	4.00	50.64	122.20	-71.56	peak	
2		5855.000	47.34	4.01	51.35	110.80	-59.45	peak	
3		5875.000	47.69	4.11	51.80	105.20	-53.40	peak	
4	*	5920.000	47.02	4.32	51.34	71.90	-20.56	peak	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode20 / Polarization: Horizontal / CH: L

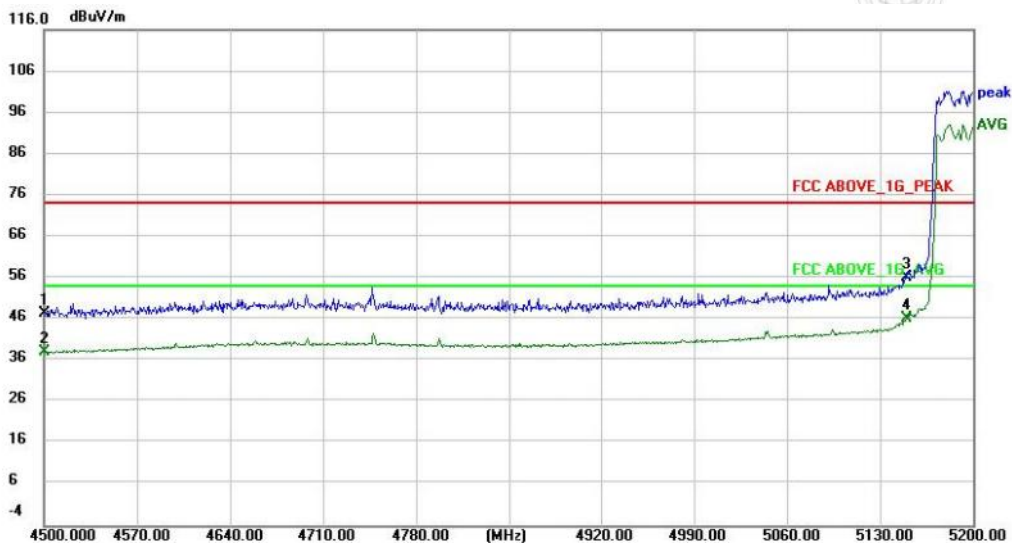


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4500.000	46.33	1.09	47.42	74.00	-26.58	peak	
2		4500.000	37.00	1.09	38.09	54.00	-15.91	AVG	
3		5150.000	53.51	2.77	56.28	74.00	-17.72	peak	
4	*	5150.000	43.57	2.77	46.34	54.00	-7.66	AVG	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode20 / Polarization: Vertical / CH: L

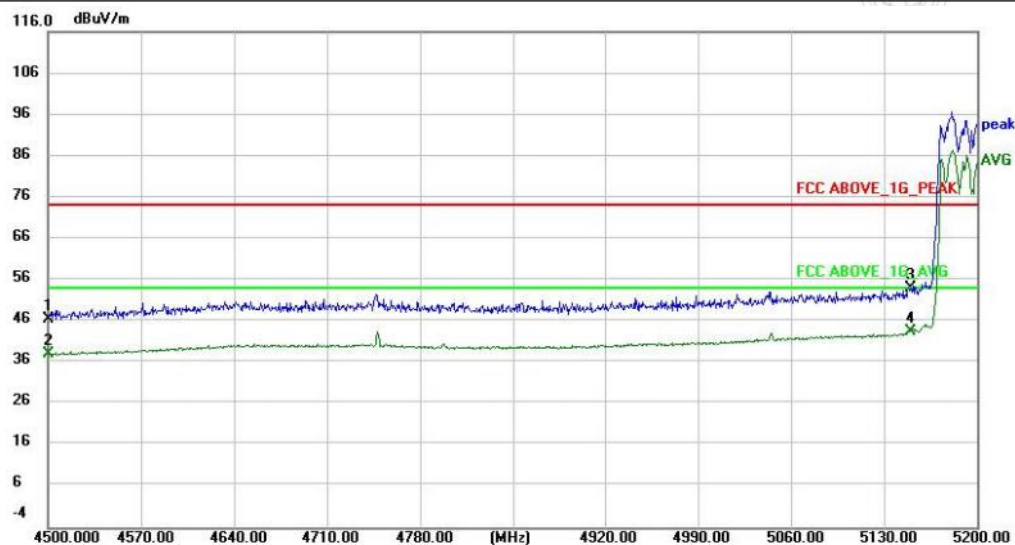


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4500.000	45.43	1.09	46.52	74.00	-27.48	peak	
2		4500.000	37.13	1.09	38.22	54.00	-15.78	AVG	
3		5150.000	51.18	2.77	53.95	74.00	-20.05	peak	
4	*	5150.000	40.81	2.77	43.58	54.00	-10.42	AVG	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode20 / Polarization: Horizontal / CH: H

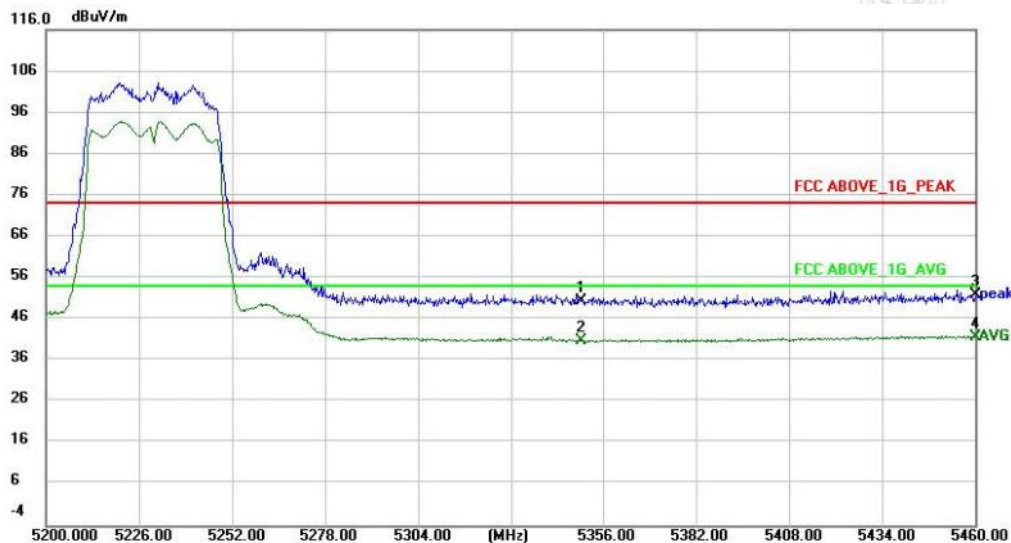


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5350.000	47.84	2.64	50.48	74.00	-23.52	peak	
2		5350.000	38.09	2.64	40.73	54.00	-13.27	AVG	
3		5460.000	48.90	2.98	51.88	74.00	-22.12	peak	
4	*	5460.000	38.71	2.98	41.69	54.00	-12.31	AVG	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode20 / Polarization: Vertical / CH: H

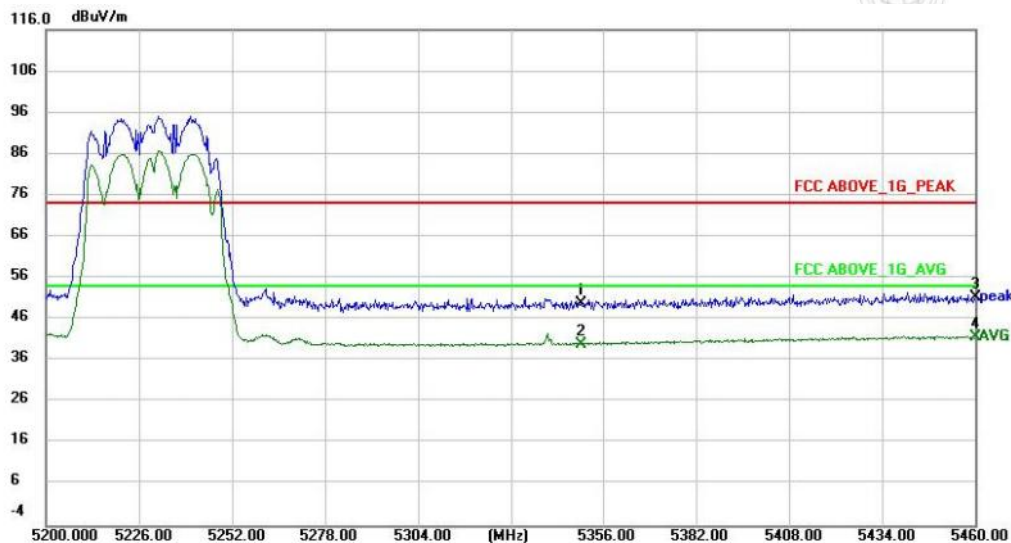

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5350.000	47.26	2.64	49.90	74.00	-24.10	peak	
2		5350.000	37.41	2.64	40.05	54.00	-13.95	AVG	
3		5460.000	48.46	2.98	51.44	74.00	-22.56	peak	
4	*	5460.000	38.82	2.98	41.80	54.00	-12.20	AVG	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode20 / Polarization: Horizontal / CH: L



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5650.000	46.30	3.29	49.59	68.20	-18.61	peak	
2		5700.000	45.97	3.61	49.58	105.20	-55.62	peak	
3		5720.000	45.36	3.59	48.95	110.80	-61.85	peak	
4		5725.000	45.73	3.58	49.31	122.20	-72.89	peak	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode20 / Polarization: Vertical / CH: L



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5650.000	46.70	3.29	49.99	68.20	-18.21	peak	
2		5700.000	46.49	3.61	50.10	105.20	-55.10	peak	
3		5720.000	45.64	3.59	49.23	110.80	-61.57	peak	
4		5725.000	46.24	3.58	49.82	122.20	-72.38	peak	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode20 / Polarization: Horizontal / CH: H



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5850.000	47.12	4.00	51.12	122.20	-71.08	peak	
2		5855.000	47.94	4.01	51.95	110.80	-58.85	peak	
3		5875.000	46.70	4.11	50.81	105.20	-54.39	peak	
4	*	5920.000	47.12	4.32	51.44	71.90	-20.46	peak	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode20 / Polarization: Vertical / CH: H




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5850.000	46.17	4.00	50.17	122.20	-72.03	peak	
2		5855.000	46.21	4.01	50.22	110.80	-60.58	peak	
3		5875.000	47.36	4.11	51.47	105.20	-53.73	peak	
4	*	5920.000	46.68	4.32	51.00	71.90	-20.90	peak	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode21 / Polarization: Horizontal / CH: L

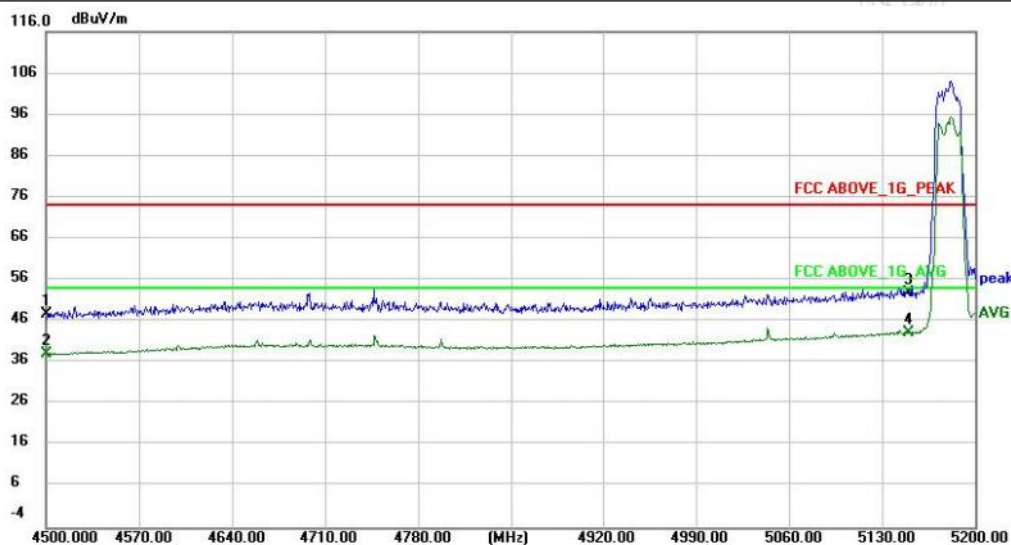


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4500.000	46.63	1.09	47.72	74.00	-26.28	peak	
2		4500.000	36.96	1.09	38.05	54.00	-15.95	AVG	
3		5150.000	49.99	2.77	52.76	74.00	-21.24	peak	
4	*	5150.000	40.57	2.77	43.34	54.00	-10.66	AVG	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode21 / Polarization: Vertical / CH: L

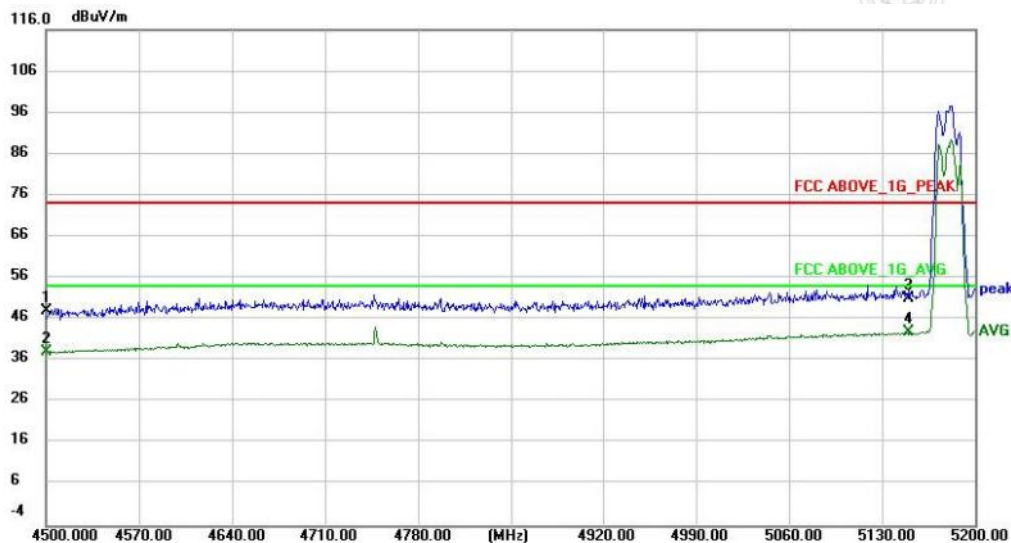


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4500.000	47.07	1.09	48.16	74.00	-25.84	peak	
2		4500.000	36.98	1.09	38.07	54.00	-15.93	AVG	
3		5150.000	48.38	2.77	51.15	74.00	-22.85	peak	
4	*	5150.000	40.10	2.77	42.87	54.00	-11.13	AVG	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode21 / Polarization: Horizontal / CH: H

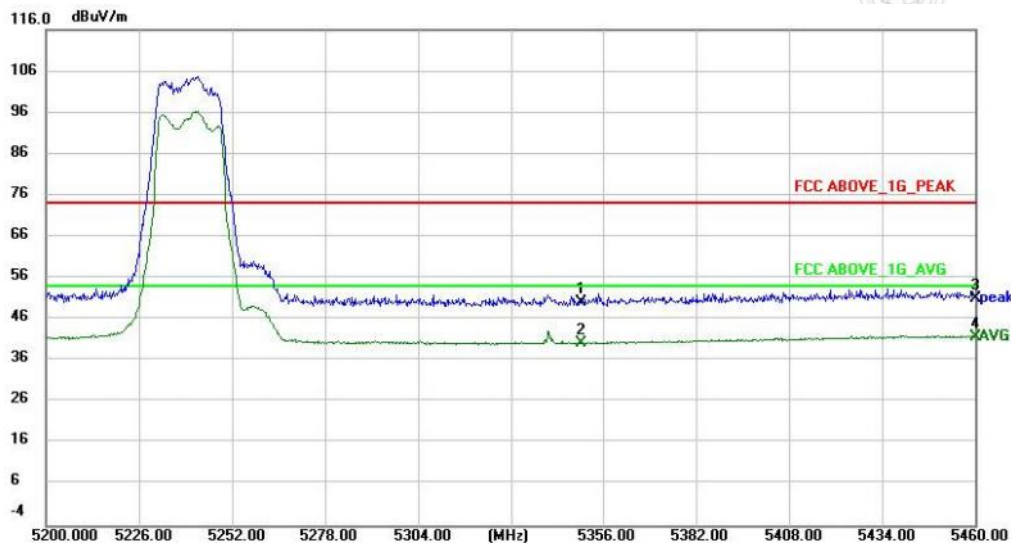


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5350.000	47.64	2.64	50.28	74.00	-23.72	peak	
2		5350.000	37.57	2.64	40.21	54.00	-13.79	AVG	
3		5460.000	48.16	2.98	51.14	74.00	-22.86	peak	
4	*	5460.000	38.72	2.98	41.70	54.00	-12.30	AVG	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode21 / Polarization: Vertical / CH: H

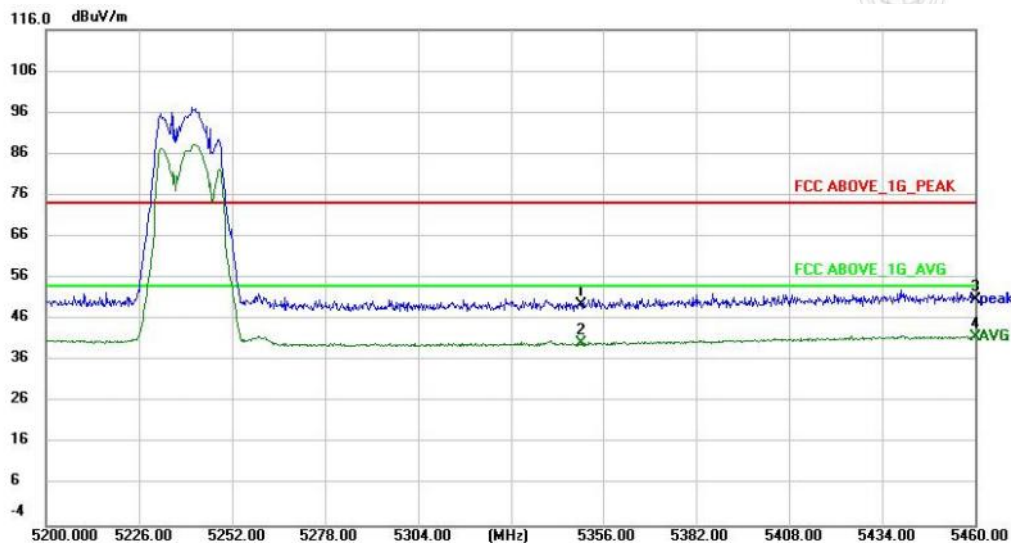


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5350.000	46.91	2.64	49.55	74.00	-24.45	peak	
2		5350.000	37.52	2.64	40.16	54.00	-13.84	AVG	
3		5460.000	47.74	2.98	50.72	74.00	-23.28	peak	
4	*	5460.000	38.68	2.98	41.66	54.00	-12.34	AVG	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode21 / Polarization: Horizontal / CH: L

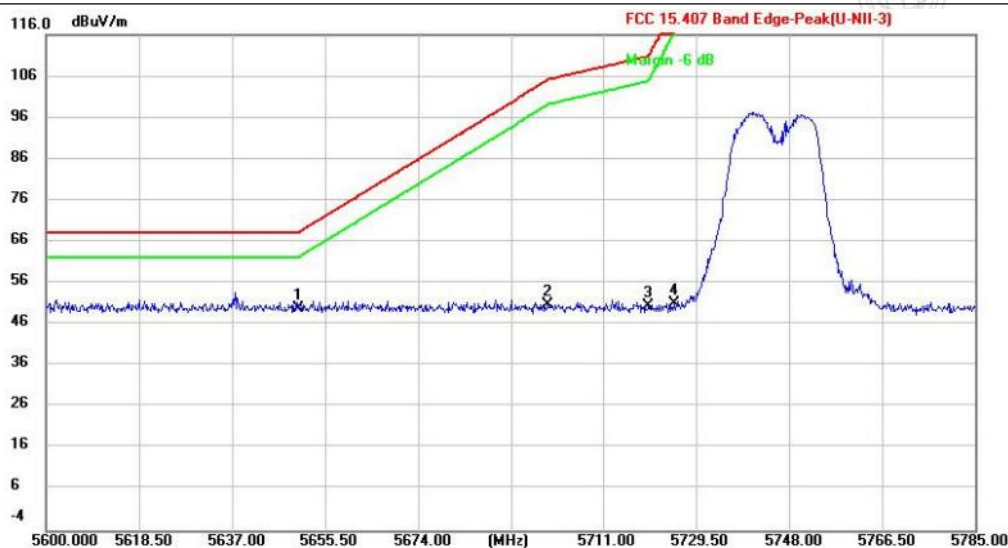


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5650.000	46.57	3.29	49.86	68.20	-18.34	peak	
2		5700.000	47.10	3.61	50.71	105.20	-54.49	peak	
3		5720.000	46.82	3.59	50.41	110.80	-60.39	peak	
4		5725.000	47.52	3.58	51.10	122.20	-71.10	peak	

TEST REPORT

Report No.: MTi260320019-0102E4


Mode21 / Polarization: Vertical / CH: L

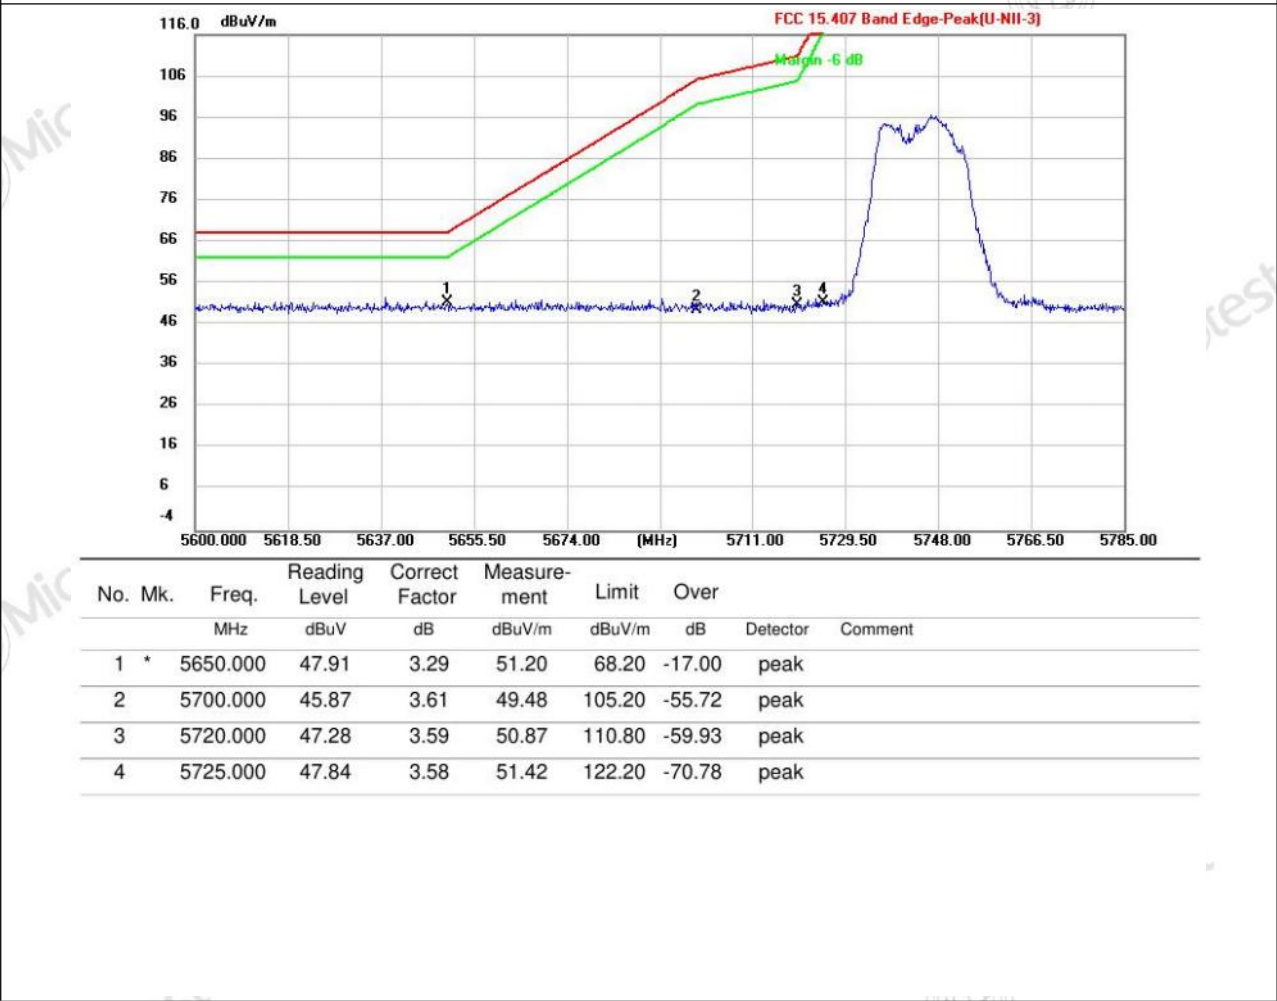

TEST REPORT

Report No.: MTi260320019-0102E4

Mode21 / Polarization: Horizontal / CH: H

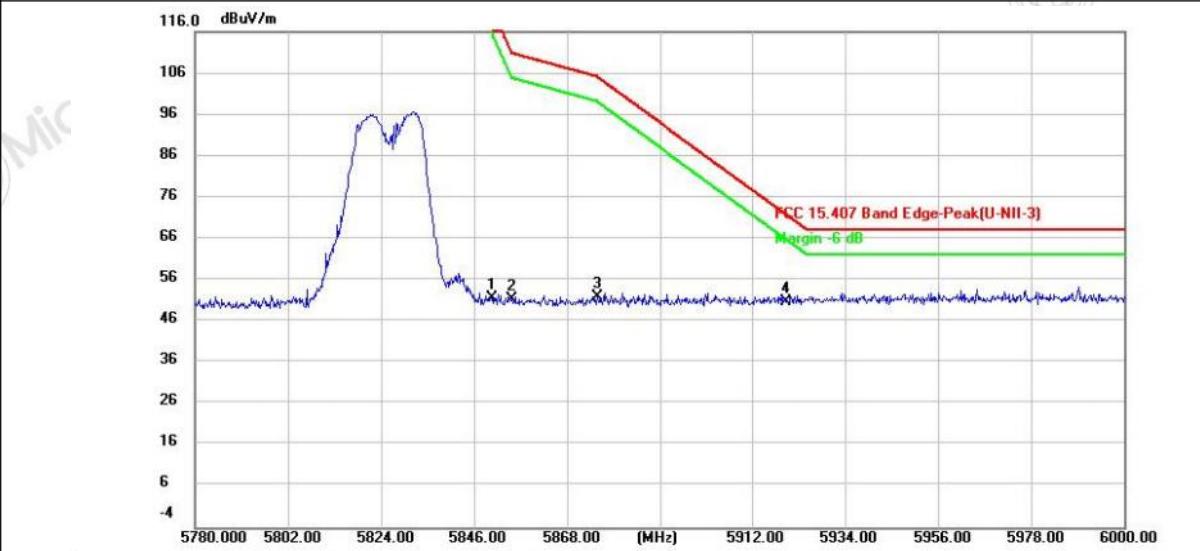


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
		MHz	Level	Factor	ment				
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		5850.000	47.51	4.00	51.51	122.20	-70.69	peak	
2		5855.000	47.27	4.01	51.28	110.80	-59.52	peak	
3		5875.000	47.94	4.11	52.05	105.20	-53.15	peak	
4	*	5920.000	46.30	4.32	50.62	71.90	-21.28	peak	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode21 / Polarization: Vertical / CH: H

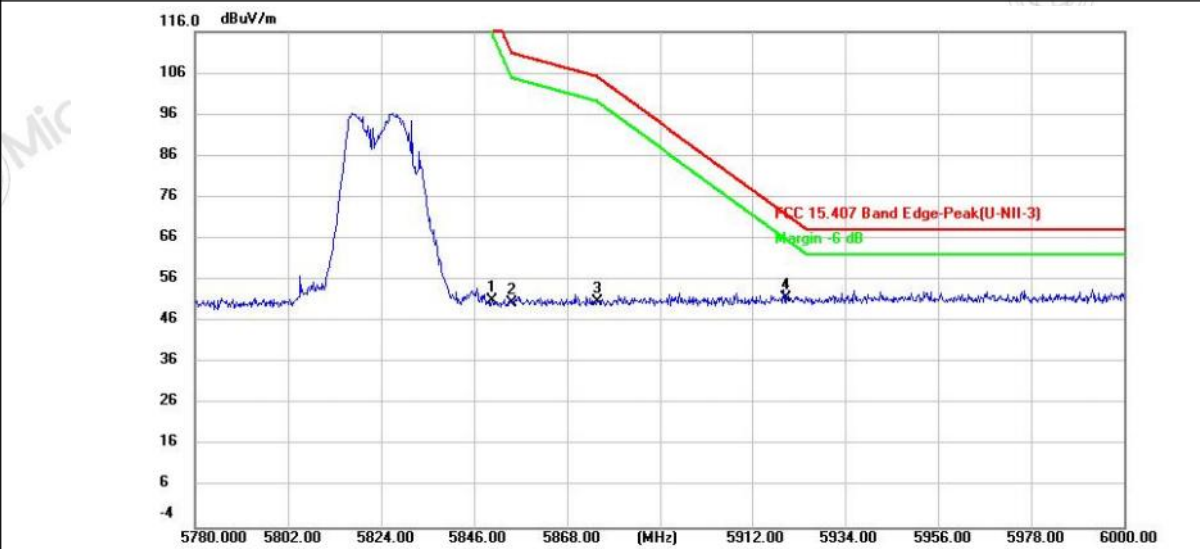


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5850.000	46.94	4.00	50.94	122.20	-71.26	peak	
2		5855.000	46.43	4.01	50.44	110.80	-60.36	peak	
3		5875.000	46.79	4.11	50.90	105.20	-54.30	peak	
4	*	5920.000	47.47	4.32	51.79	71.90	-20.11	peak	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode22 / Polarization: Horizontal / CH: L

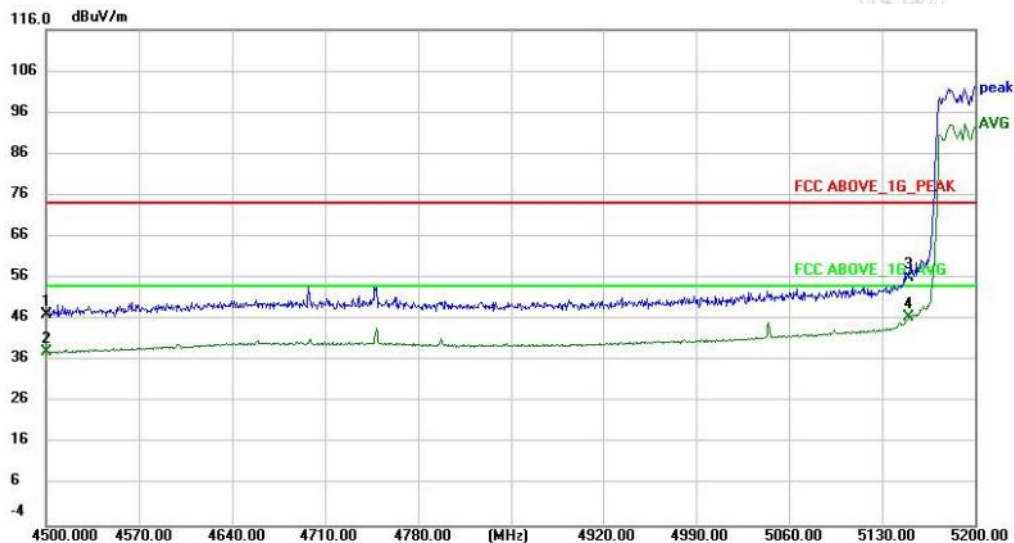


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4500.000	46.01	1.09	47.10	74.00	-26.90	peak	
2		4500.000	37.09	1.09	38.18	54.00	-15.82	AVG	
3		5150.000	53.36	2.77	56.13	74.00	-17.87	peak	
4	*	5150.000	43.79	2.77	46.56	54.00	-7.44	AVG	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode22 / Polarization: Vertical / CH: L

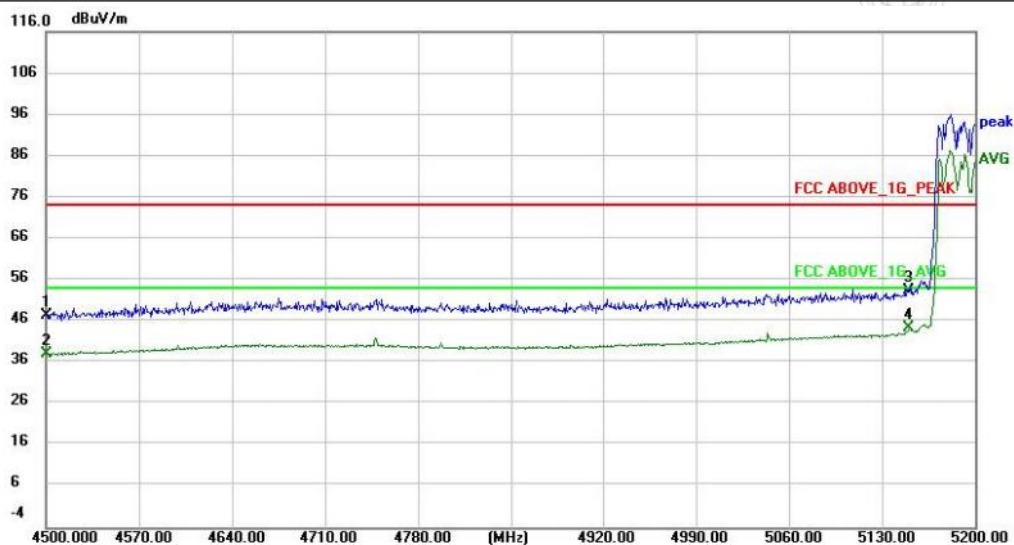


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4500.000	46.50	1.09	47.59	74.00	-26.41	peak	
2		4500.000	37.04	1.09	38.13	54.00	-15.87	AVG	
3		5150.000	50.68	2.77	53.45	74.00	-20.55	peak	
4	*	5150.000	41.56	2.77	44.33	54.00	-9.67	AVG	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode22 / Polarization: Horizontal / CH: H

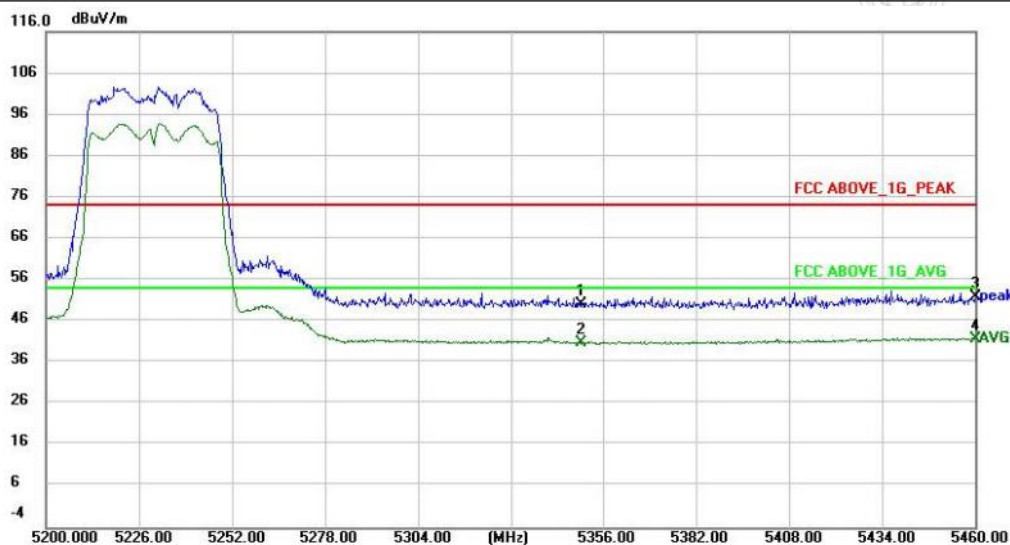


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5350.000	47.58	2.64	50.22	74.00	-23.78	peak	
2		5350.000	38.28	2.64	40.92	54.00	-13.08	AVG	
3		5460.000	48.94	2.98	51.92	74.00	-22.08	peak	
4	*	5460.000	38.73	2.98	41.71	54.00	-12.29	AVG	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode22 / Polarization: Vertical / CH: H

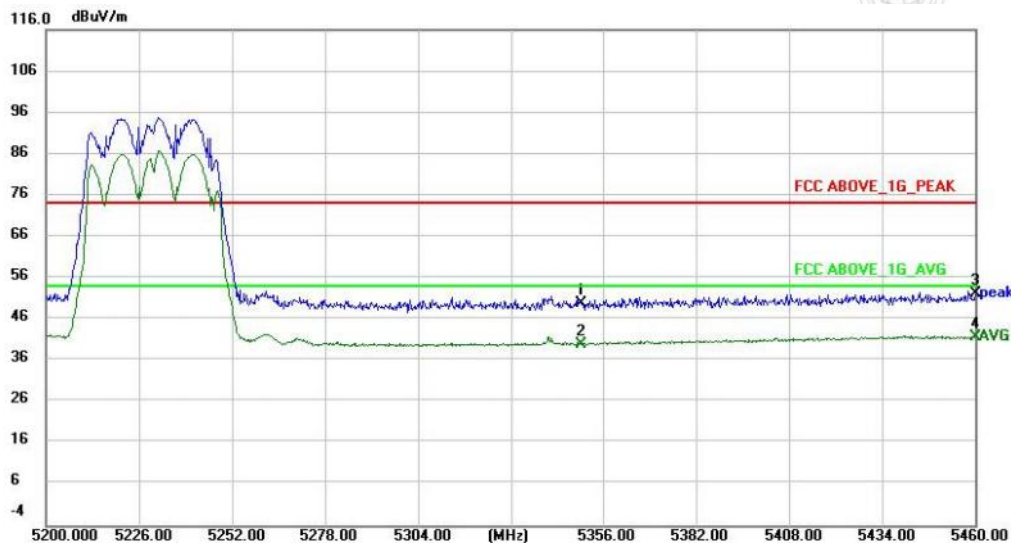


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5350.000	47.28	2.64	49.92	74.00	-24.08	peak	
2		5350.000	37.30	2.64	39.94	54.00	-14.06	AVG	
3		5460.000	49.16	2.98	52.14	74.00	-21.86	peak	
4	*	5460.000	38.67	2.98	41.65	54.00	-12.35	AVG	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode22 / Polarization: Horizontal / CH: L

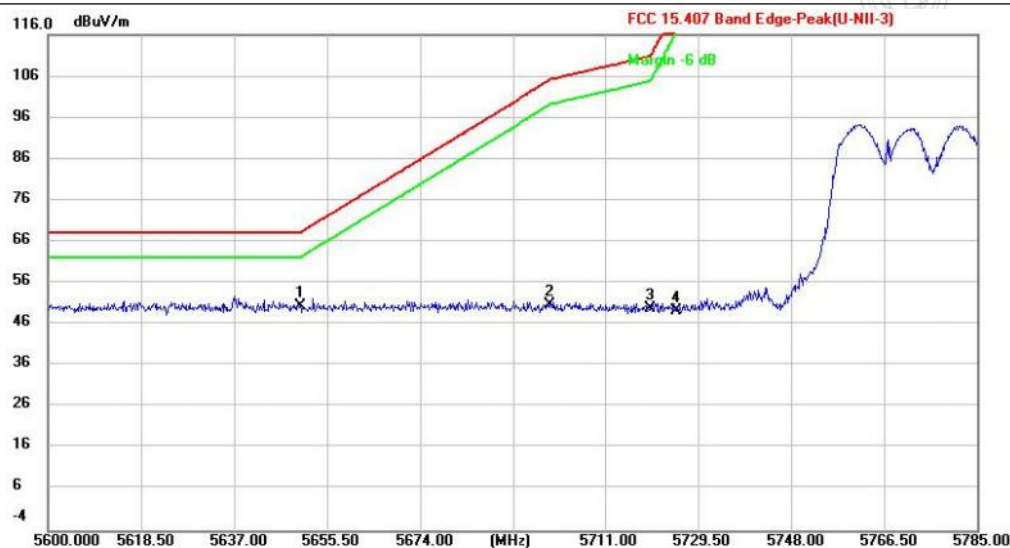

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5650.000	47.24	3.29	50.53	68.20	-17.67	peak	
2		5700.000	47.12	3.61	50.73	105.20	-54.47	peak	
3		5720.000	46.26	3.59	49.85	110.80	-60.95	peak	
4		5725.000	45.78	3.58	49.36	122.20	-72.84	peak	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode22 / Polarization: Vertical / CH: L



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5650.000	46.80	3.29	50.09	68.20	-18.11	peak	
2		5700.000	47.00	3.61	50.61	105.20	-54.59	peak	
3		5720.000	46.69	3.59	50.28	110.80	-60.52	peak	
4		5725.000	46.65	3.58	50.23	122.20	-71.97	peak	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode22 / Polarization: Horizontal / CH: H



TEST REPORT

Report No.: MTi260320019-0102E4

Mode22 / Polarization: Vertical / CH: H




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5850.000	46.90	4.00	50.90	122.20	-71.30	peak	
2		5855.000	46.69	4.01	50.70	110.80	-60.10	peak	
3		5875.000	46.35	4.11	50.46	105.20	-54.74	peak	
4	*	5920.000	46.72	4.32	51.04	71.90	-20.86	peak	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode23 / Polarization: Horizontal / CH: L

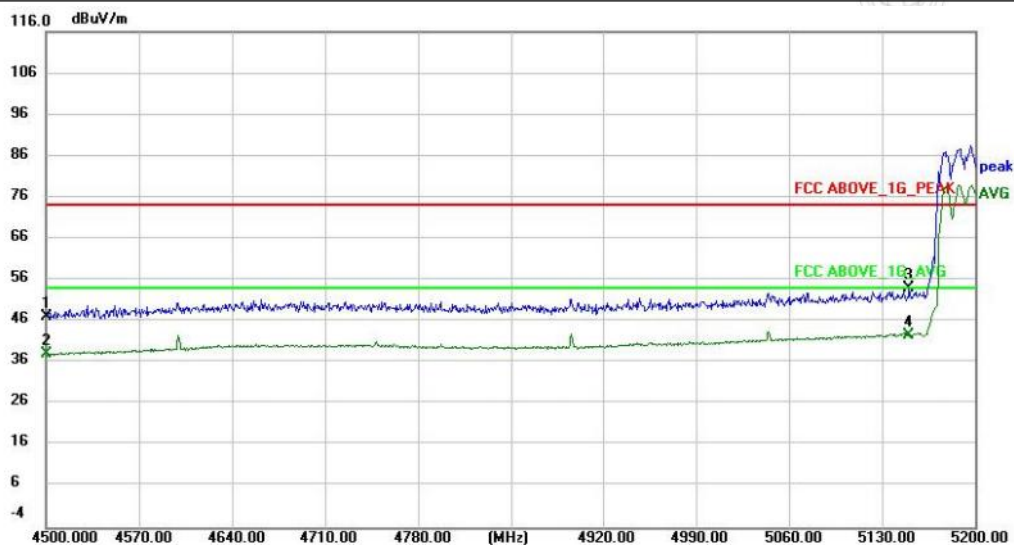


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4500.000	45.92	1.09	47.01	74.00	-26.99	peak	
2		4500.000	36.96	1.09	38.05	54.00	-15.95	AVG	
3		5150.000	51.35	2.77	54.12	74.00	-19.88	peak	
4	*	5150.000	39.79	2.77	42.56	54.00	-11.44	AVG	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode23 / Polarization: Vertical / CH: L

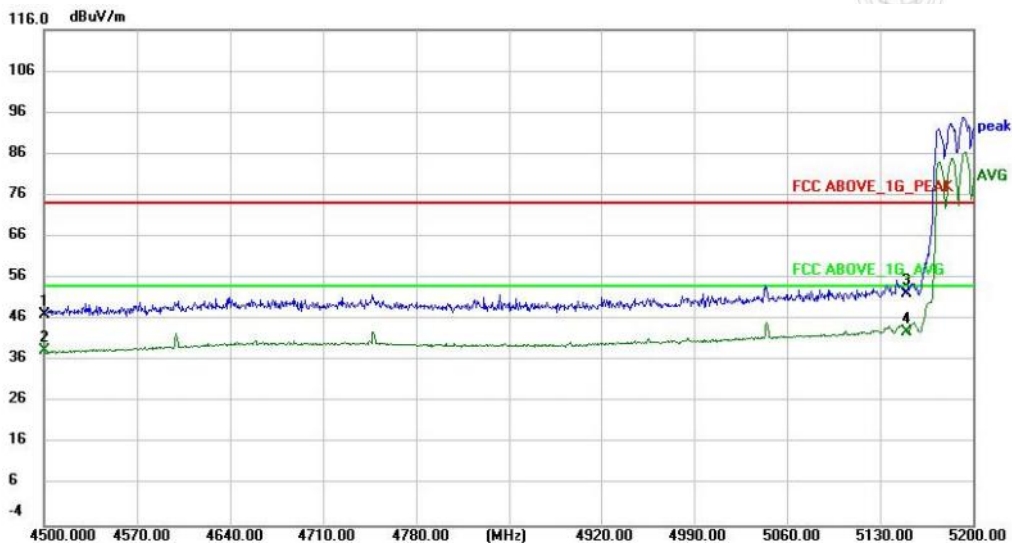


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
		MHz	Level	Factor	ment				
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		4500.000	45.92	1.09	47.01	74.00	-26.99	peak	
2		4500.000	37.27	1.09	38.36	54.00	-15.64	AVG	
3		5150.000	49.61	2.77	52.38	74.00	-21.62	peak	
4	*	5150.000	40.17	2.77	42.94	54.00	-11.06	AVG	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode23 / Polarization: Horizontal / CH: H

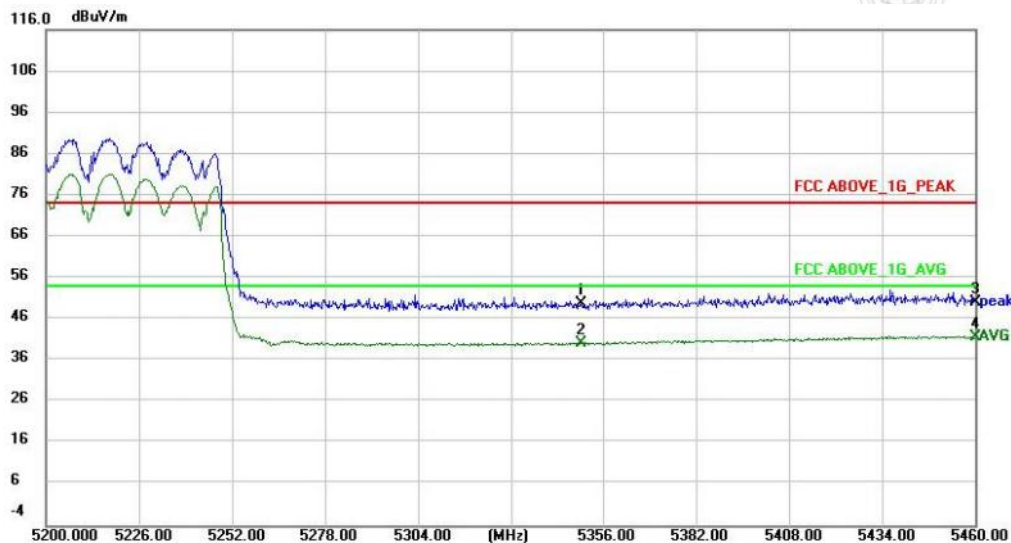


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5350.000	47.15	2.64	49.79	74.00	-24.21	peak	
2		5350.000	37.67	2.64	40.31	54.00	-13.69	AVG	
3		5460.000	47.32	2.98	50.30	74.00	-23.70	peak	
4	*	5460.000	38.67	2.98	41.65	54.00	-12.35	AVG	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode23 / Polarization: Vertical / CH: H

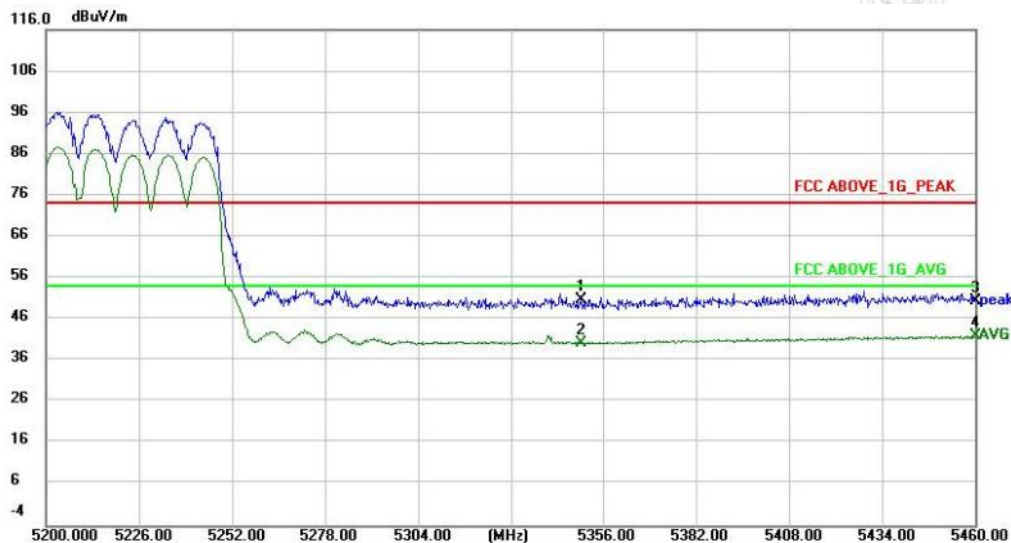


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5350.000	48.11	2.64	50.75	74.00	-23.25	peak	
2		5350.000	37.66	2.64	40.30	54.00	-13.70	AVG	
3		5460.000	47.40	2.98	50.38	74.00	-23.62	peak	
4	*	5460.000	39.02	2.98	42.00	54.00	-12.00	AVG	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode23 / Polarization: Horizontal / CH: L

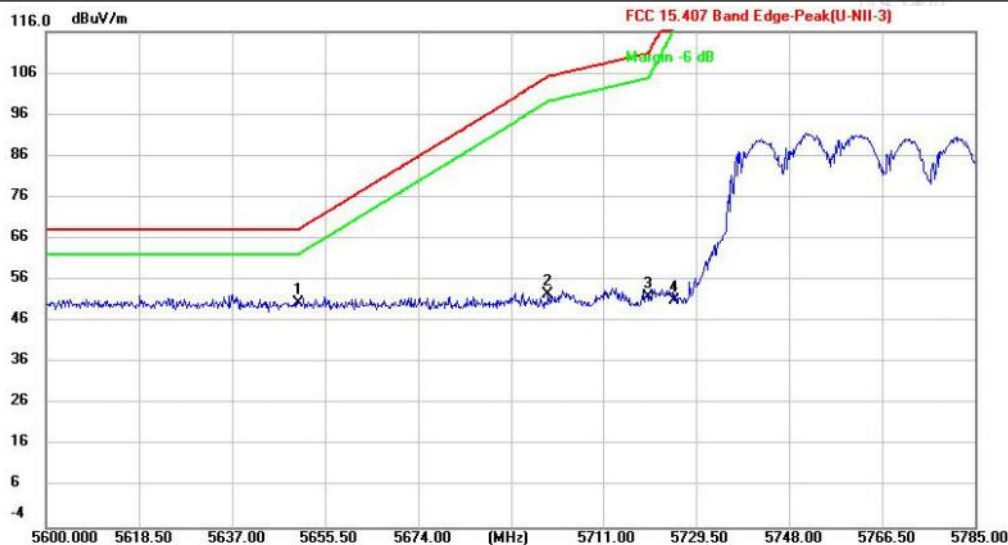


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5650.000	47.12	3.29	50.41	68.20	-17.79	peak	
2		5700.000	49.07	3.61	52.68	105.20	-52.52	peak	
3		5720.000	48.35	3.59	51.94	110.80	-58.86	peak	
4		5725.000	47.53	3.58	51.11	122.20	-71.09	peak	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode23 / Polarization: Vertical / CH: L

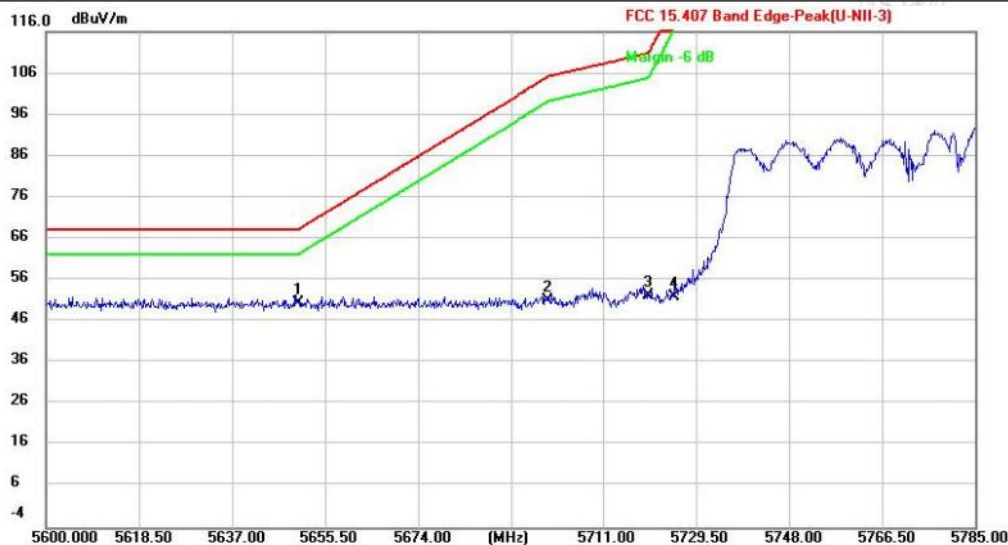

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
		MHz	Level	Factor	ment				
			dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5650.000	47.20	3.29	50.49	68.20	-17.71	peak	
2		5700.000	47.38	3.61	50.99	105.20	-54.21	peak	
3		5720.000	48.62	3.59	52.21	110.80	-58.59	peak	
4		5725.000	48.36	3.58	51.94	122.20	-70.26	peak	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode23 / Polarization: Horizontal / CH: H



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5850.000	50.54	4.00	54.54	122.20	-67.66	peak	
2		5855.000	48.57	4.01	52.58	110.80	-58.22	peak	
3		5875.000	47.63	4.11	51.74	105.20	-53.46	peak	
4	*	5920.000	46.89	4.32	51.21	71.90	-20.69	peak	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode23 / Polarization: Vertical / CH: H




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5850.000	47.08	4.00	51.08	122.20	-71.12	peak	
2		5855.000	47.74	4.01	51.75	110.80	-59.05	peak	
3		5875.000	46.66	4.11	50.77	105.20	-54.43	peak	
4	*	5920.000	46.52	4.32	50.84	71.90	-21.06	peak	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode24 / Polarization: Horizontal / CH: L

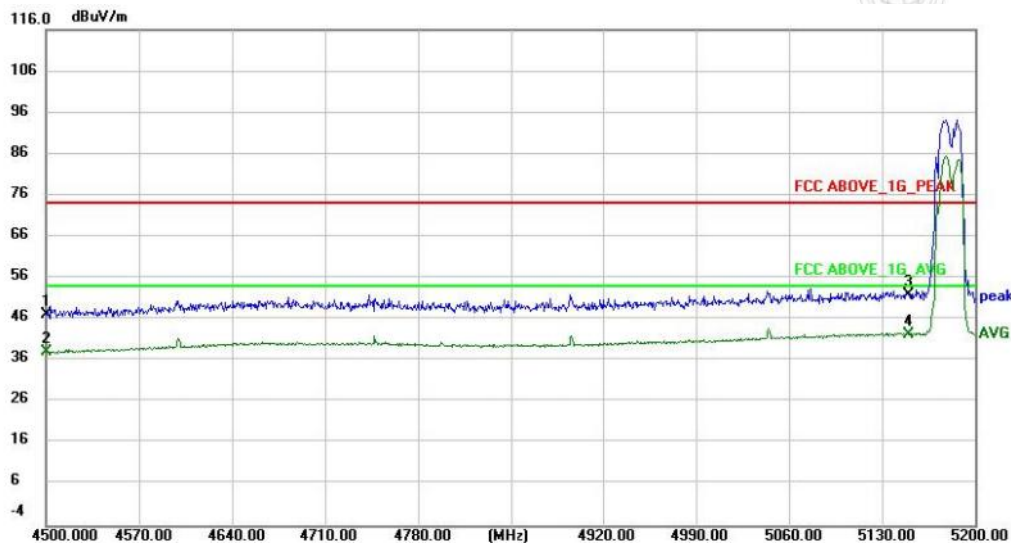


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4500.000	46.00	1.09	47.09	74.00	-26.91	peak	
2		4500.000	37.05	1.09	38.14	54.00	-15.86	AVG	
3		5150.000	49.29	2.77	52.06	74.00	-21.94	peak	
4	*	5150.000	39.58	2.77	42.35	54.00	-11.65	AVG	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode24 / Polarization: Vertical / CH: L

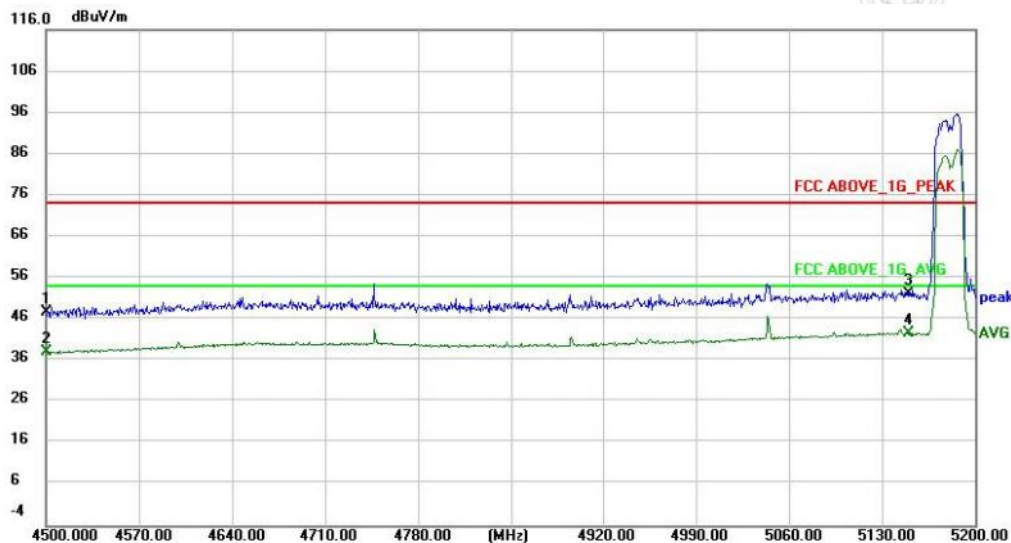


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4500.000	46.63	1.09	47.72	74.00	-26.28	peak	
2		4500.000	37.00	1.09	38.09	54.00	-15.91	AVG	
3		5150.000	49.58	2.77	52.35	74.00	-21.65	peak	
4	*	5150.000	39.91	2.77	42.68	54.00	-11.32	AVG	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode24 / Polarization: Horizontal / CH: H

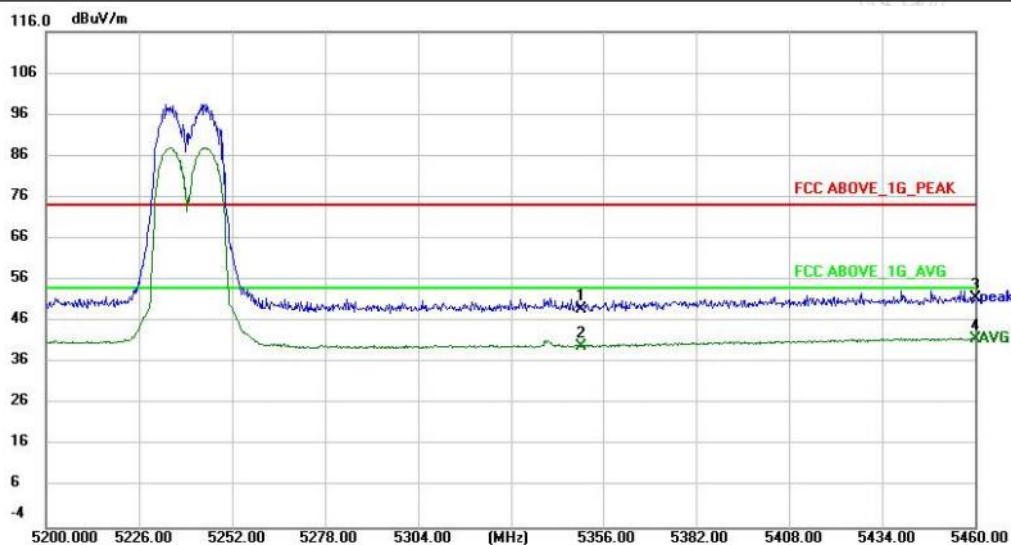


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5350.000	46.35	2.64	48.99	74.00	-25.01	peak	
2		5350.000	37.43	2.64	40.07	54.00	-13.93	AVG	
3		5460.000	48.76	2.98	51.74	74.00	-22.26	peak	
4	*	5460.000	38.84	2.98	41.82	54.00	-12.18	AVG	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode24 / Polarization: Vertical / CH: H

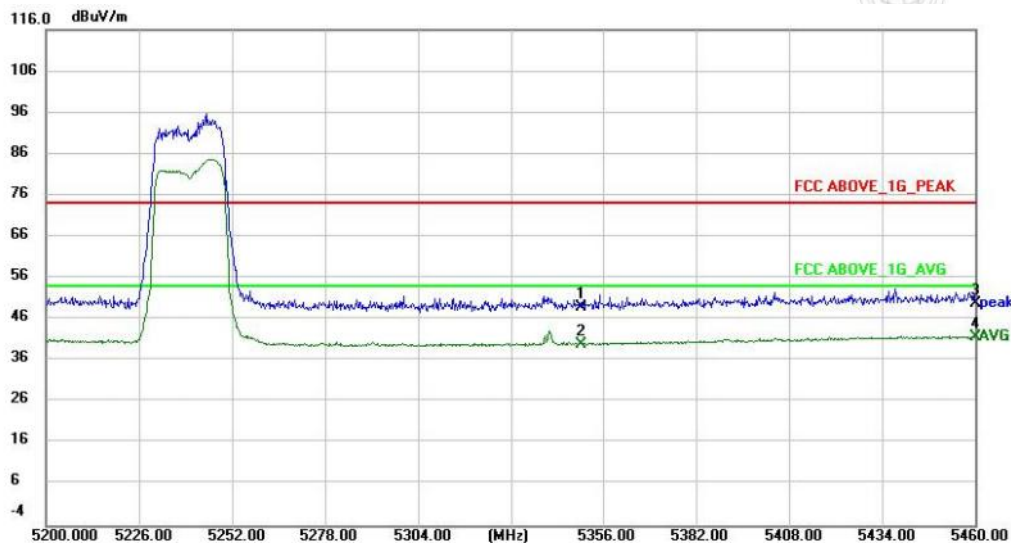


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5350.000	46.30	2.64	48.94	74.00	-25.06	peak	
2		5350.000	37.41	2.64	40.05	54.00	-13.95	AVG	
3		5460.000	46.88	2.98	49.86	74.00	-24.14	peak	
4	*	5460.000	38.73	2.98	41.71	54.00	-12.29	AVG	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode24 / Polarization: Horizontal / CH: L

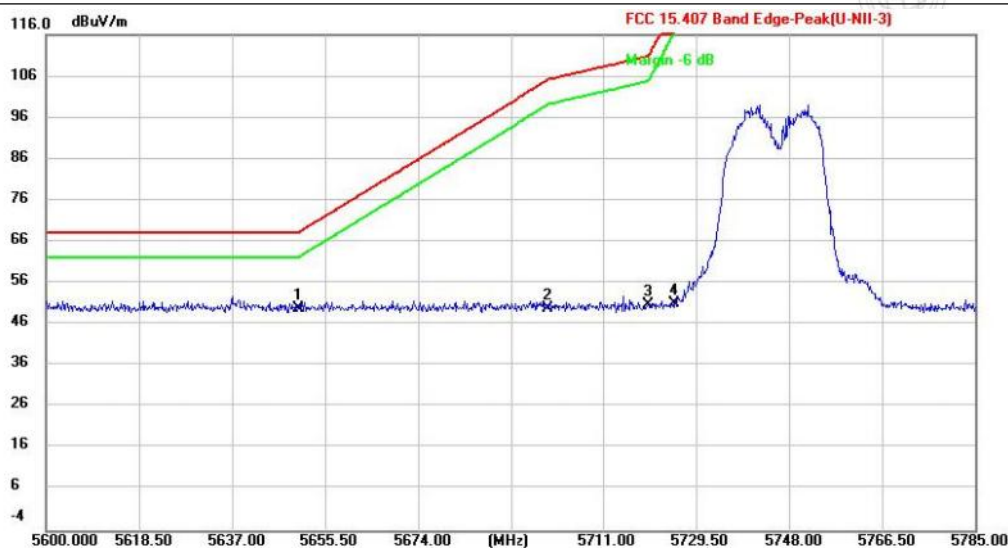


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5650.000	46.42	3.29	49.71	68.20	-18.49	peak	
2		5700.000	46.23	3.61	49.84	105.20	-55.36	peak	
3		5720.000	47.31	3.59	50.90	110.80	-59.90	peak	
4		5725.000	47.55	3.58	51.13	122.20	-71.07	peak	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode24 / Polarization: Vertical / CH: L

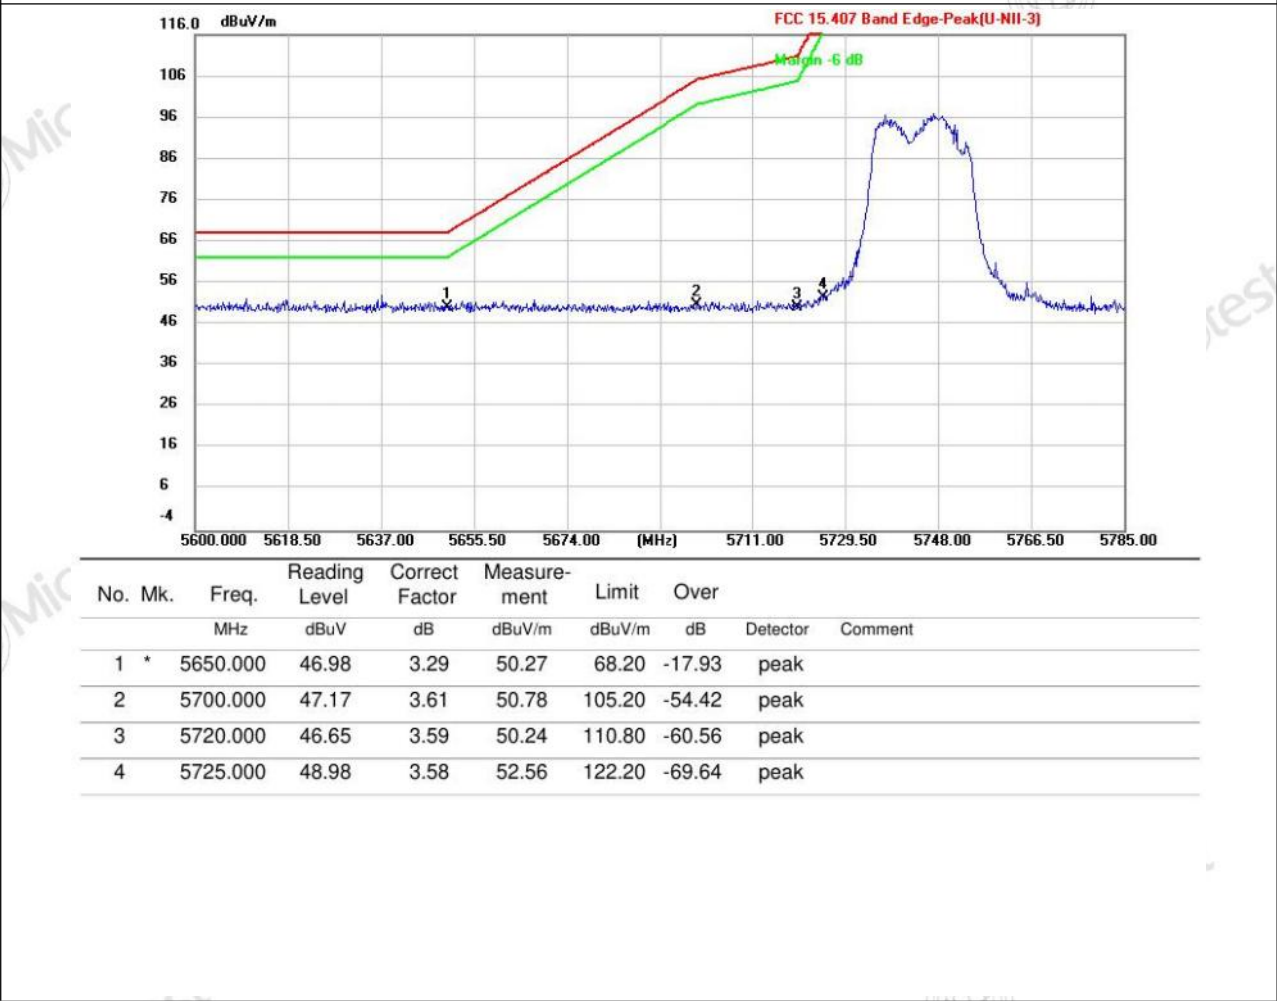

TEST REPORT

Report No.: MTi260320019-0102E4

Mode24 / Polarization: Horizontal / CH: H




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5850.000	48.83	4.00	52.83	122.20	-69.37	peak	
2		5855.000	47.16	4.01	51.17	110.80	-59.63	peak	
3		5875.000	46.34	4.11	50.45	105.20	-54.75	peak	
4	*	5920.000	46.28	4.32	50.60	71.90	-21.30	peak	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode24 / Polarization: Vertical / CH: H

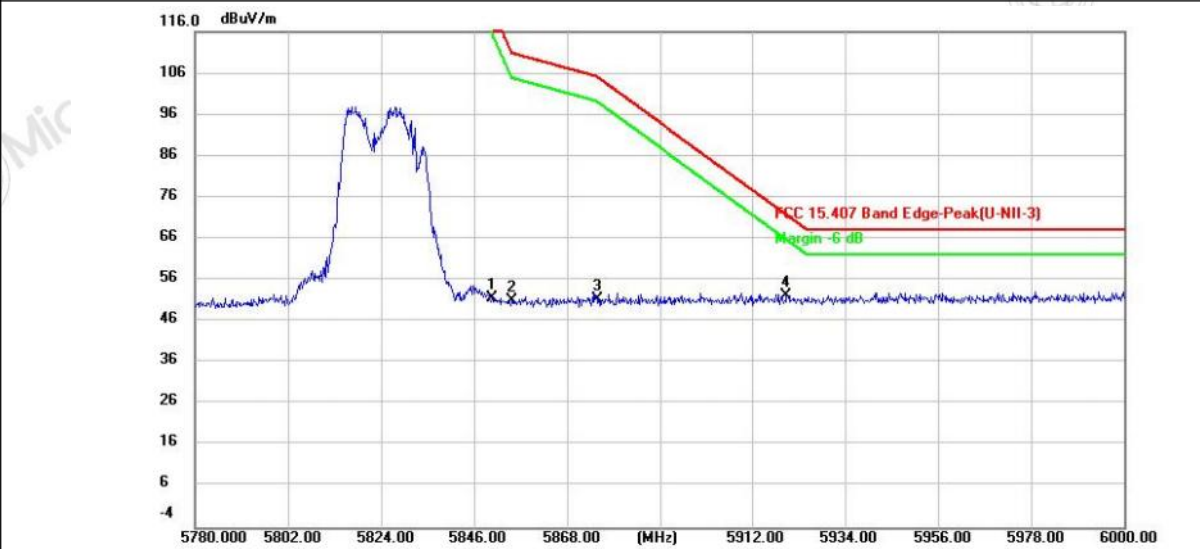


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5850.000	47.63	4.00	51.63	122.20	-70.57	peak	
2		5855.000	46.93	4.01	50.94	110.80	-59.86	peak	
3		5875.000	47.10	4.11	51.21	105.20	-53.99	peak	
4	*	5920.000	47.95	4.32	52.27	71.90	-19.63	peak	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode25 / Polarization: Horizontal / CH: L

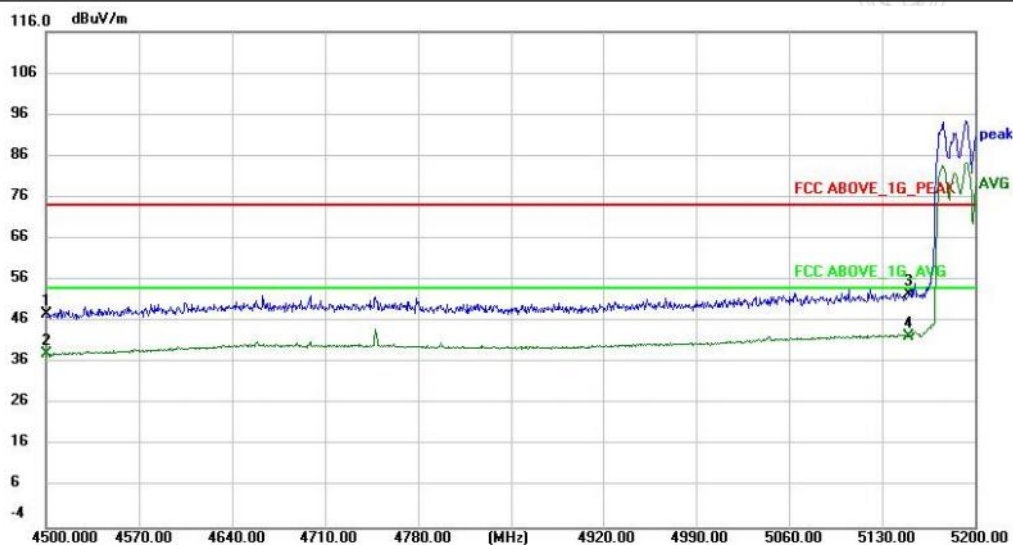


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4500.000	46.78	1.09	47.87	74.00	-26.13	peak	
2		4500.000	36.95	1.09	38.04	54.00	-15.96	AVG	
3		5150.000	49.67	2.77	52.44	74.00	-21.56	peak	
4	*	5150.000	39.73	2.77	42.50	54.00	-11.50	AVG	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode25 / Polarization: Vertical / CH: L

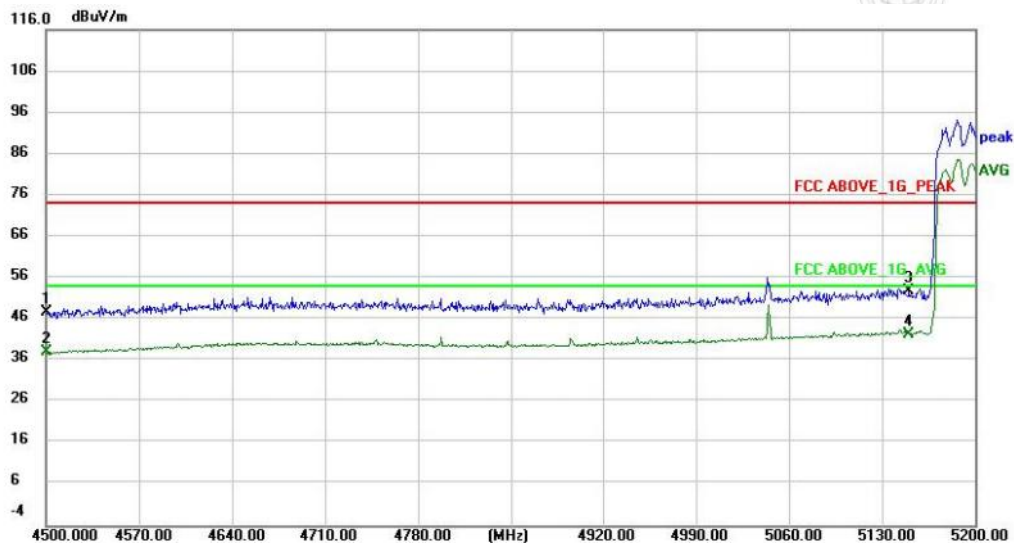


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4500.000	46.52	1.09	47.61	74.00	-26.39	peak	
2		4500.000	37.04	1.09	38.13	54.00	-15.87	AVG	
3		5150.000	50.19	2.77	52.96	74.00	-21.04	peak	
4	*	5150.000	39.68	2.77	42.45	54.00	-11.55	AVG	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode25 / Polarization: Horizontal / CH: H

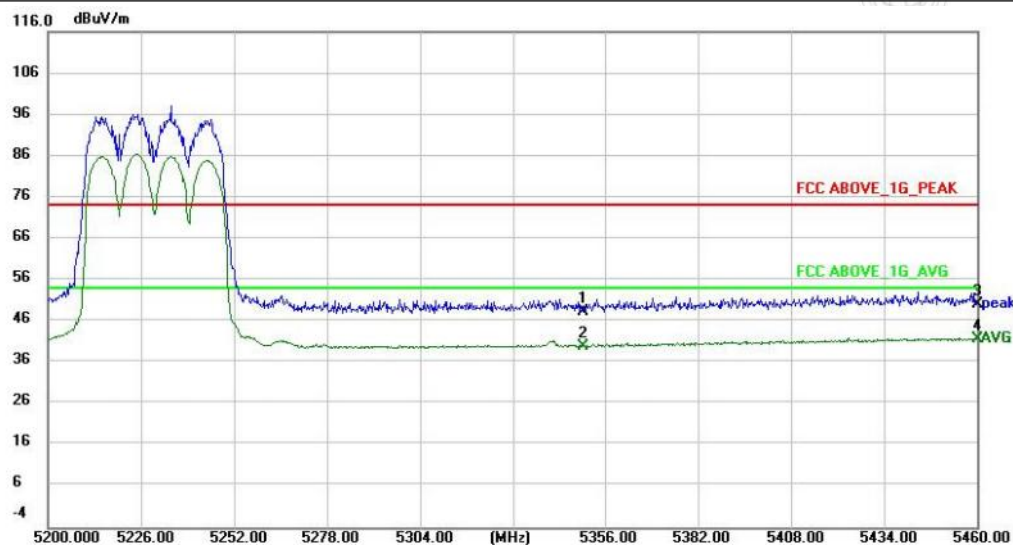


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5350.000	45.74	2.64	48.38	74.00	-25.62	peak	
2		5350.000	37.38	2.64	40.02	54.00	-13.98	AVG	
3		5460.000	47.31	2.98	50.29	74.00	-23.71	peak	
4	*	5460.000	38.64	2.98	41.62	54.00	-12.38	AVG	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode25 / Polarization: Vertical / CH: H

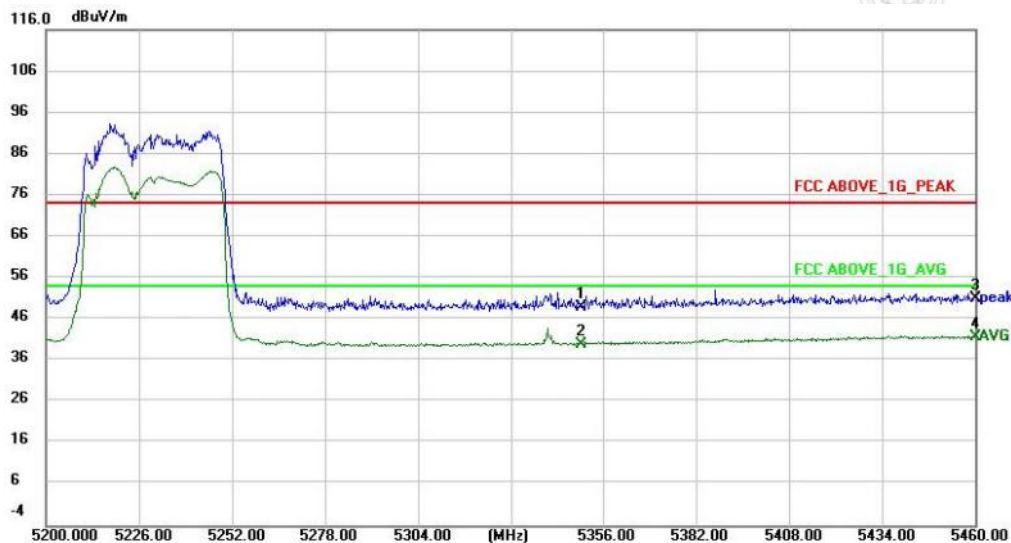

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5350.000	46.45	2.64	49.09	74.00	-24.91	peak	
2		5350.000	37.41	2.64	40.05	54.00	-13.95	AVG	
3		5460.000	48.18	2.98	51.16	74.00	-22.84	peak	
4	*	5460.000	38.76	2.98	41.74	54.00	-12.26	AVG	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode25 / Polarization: Horizontal / CH: L



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5650.000	46.01	3.29	49.30	68.20	-18.90	peak	
2		5700.000	46.10	3.61	49.71	105.20	-55.49	peak	
3		5720.000	48.24	3.59	51.83	110.80	-58.97	peak	
4		5725.000	46.18	3.58	49.76	122.20	-72.44	peak	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode25 / Polarization: Vertical / CH: L



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5650.000	45.92	3.29	49.21	68.20	-18.99	peak	
2		5700.000	45.56	3.61	49.17	105.20	-56.03	peak	
3		5720.000	45.54	3.59	49.13	110.80	-61.67	peak	
4		5725.000	46.61	3.58	50.19	122.20	-72.01	peak	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode25 / Polarization: Horizontal / CH: H



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5850.000	46.47	4.00	50.47	122.20	-71.73	peak	
2		5855.000	46.82	4.01	50.83	110.80	-59.97	peak	
3		5875.000	46.44	4.11	50.55	105.20	-54.65	peak	
4	*	5920.000	45.84	4.32	50.16	71.90	-21.74	peak	

TEST REPORT

Report No.: MTi260320019-0102E4


Mode25 / Polarization: Vertical / CH: H



TEST REPORT

Report No.: MTi260320019-0102E4

Mode26 / Polarization: Horizontal / CH: L

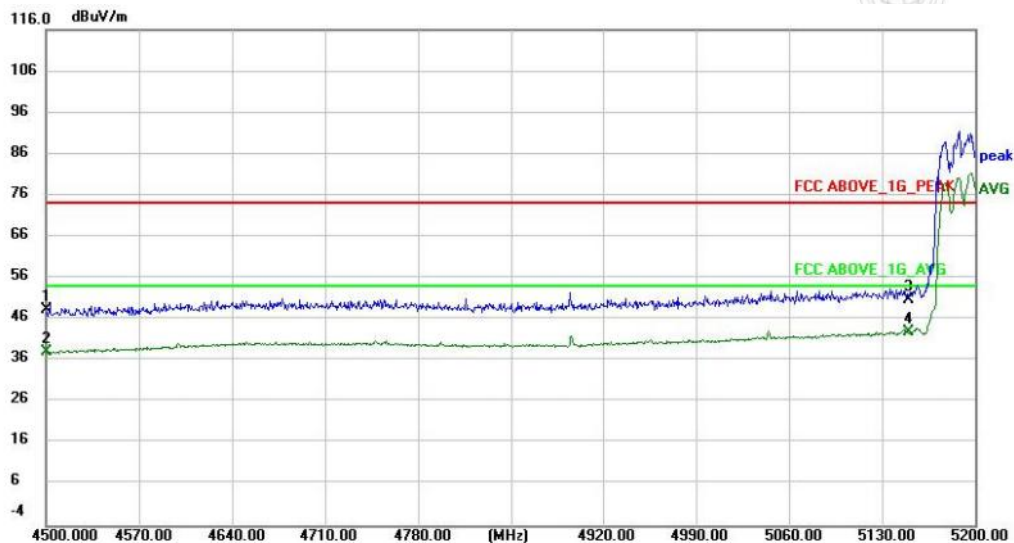


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4500.000	47.35	1.09	48.44	74.00	-25.56	peak	
2		4500.000	37.12	1.09	38.21	54.00	-15.79	AVG	
3		5150.000	48.13	2.77	50.90	74.00	-23.10	peak	
4	*	5150.000	40.07	2.77	42.84	54.00	-11.16	AVG	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode26 / Polarization: Vertical / CH: L

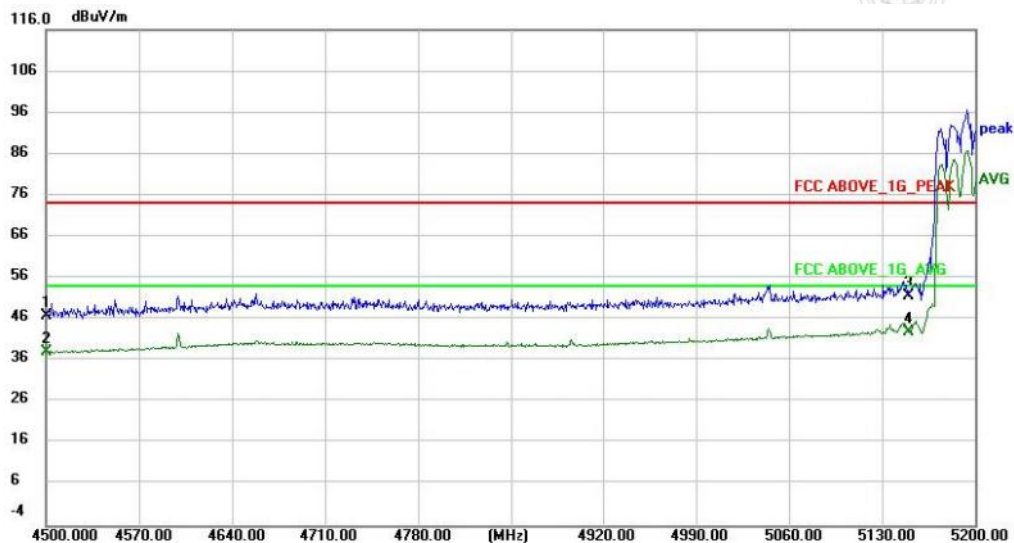


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4500.000	45.85	1.09	46.94	74.00	-27.06	peak	
2		4500.000	36.99	1.09	38.08	54.00	-15.92	AVG	
3		5150.000	48.74	2.77	51.51	74.00	-22.49	peak	
4	*	5150.000	40.21	2.77	42.98	54.00	-11.02	AVG	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode26 / Polarization: Horizontal / CH: H

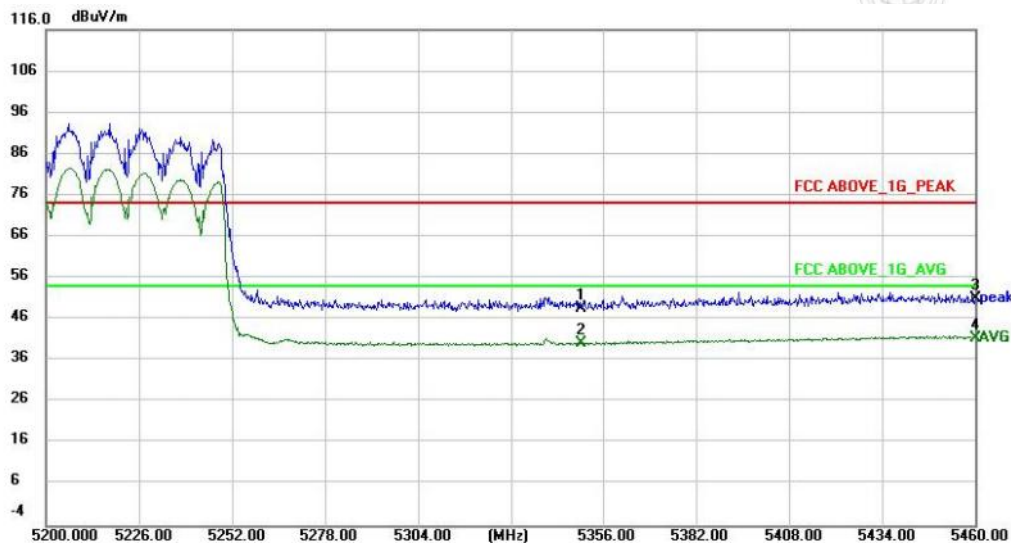


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5350.000	45.93	2.64	48.57	74.00	-25.43	peak	
2		5350.000	37.57	2.64	40.21	54.00	-13.79	AVG	
3		5460.000	47.93	2.98	50.91	74.00	-23.09	peak	
4	*	5460.000	38.50	2.98	41.48	54.00	-12.52	AVG	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode26 / Polarization: Vertical / CH: H

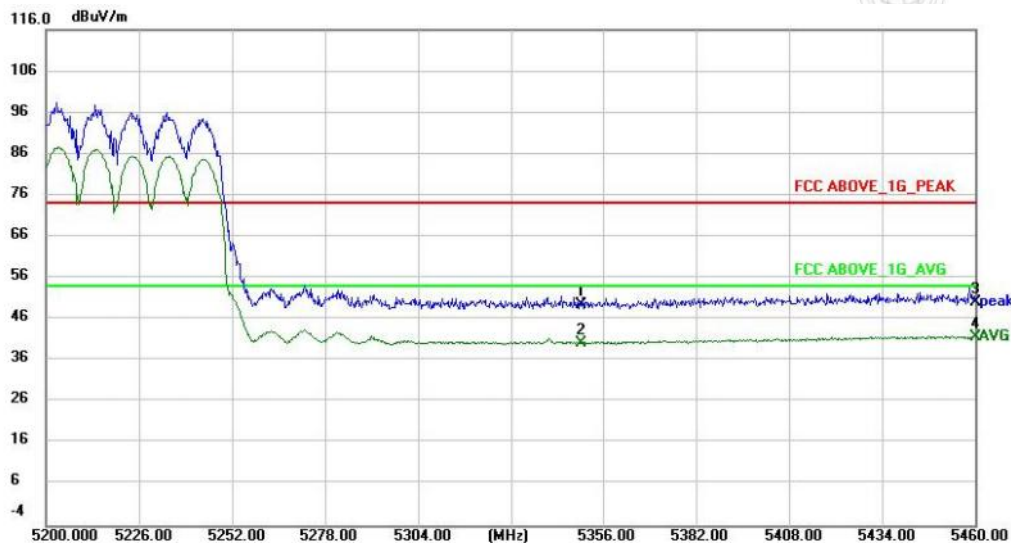


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
		MHz	Level	Factor	ment				
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		5350.000	46.80	2.64	49.44	74.00	-24.56	peak	
2		5350.000	37.58	2.64	40.22	54.00	-13.78	AVG	
3		5460.000	47.30	2.98	50.28	74.00	-23.72	peak	
4	*	5460.000	38.79	2.98	41.77	54.00	-12.23	AVG	

TEST REPORT

Report No.: MTi260320019-0102E4


Mode26 / Polarization: Horizontal / CH: L

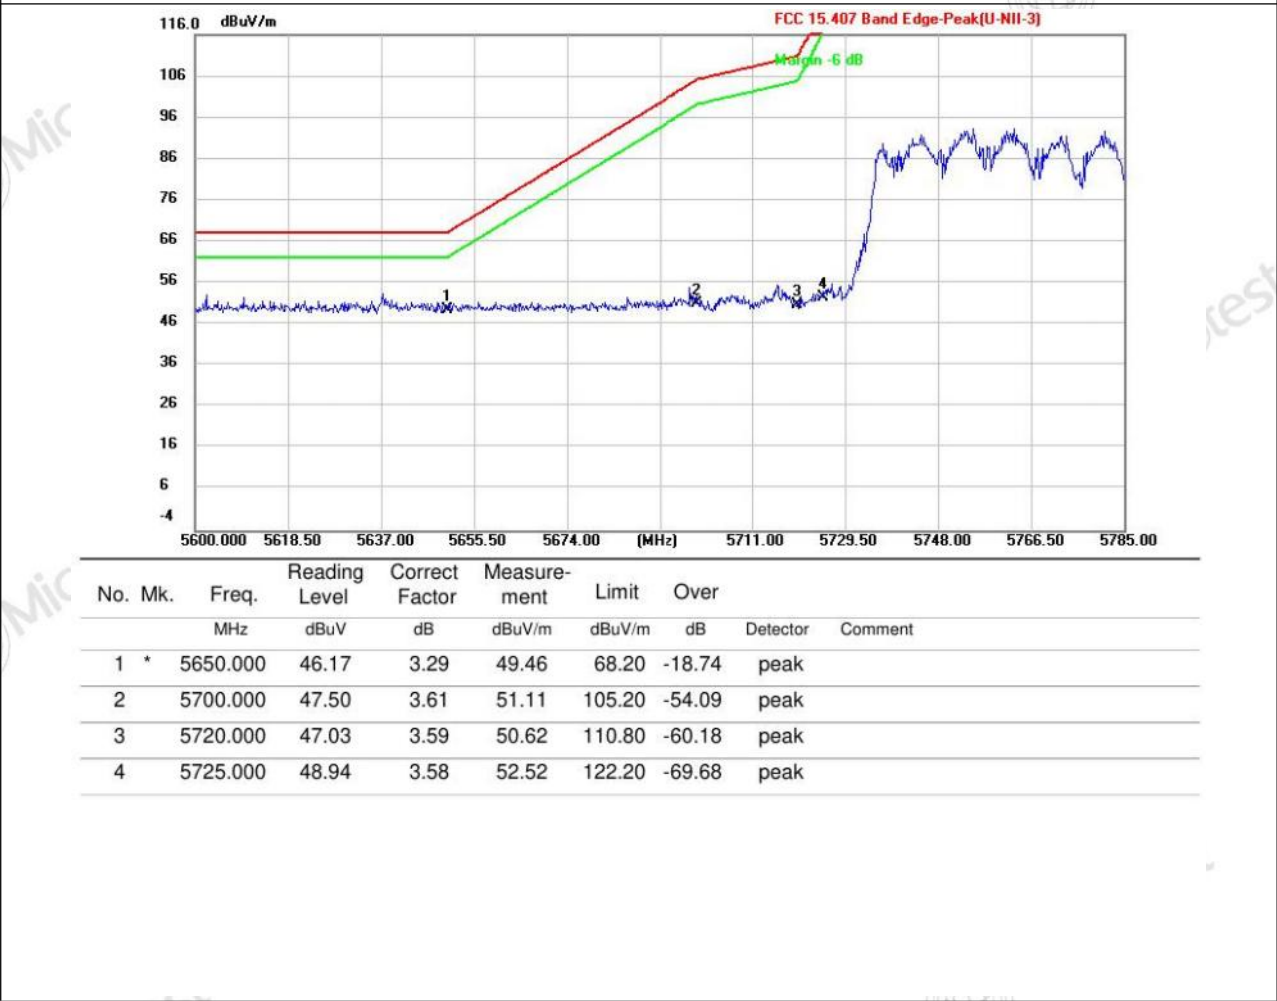

TEST REPORT

Report No.: MTi260320019-0102E4

Mode26 / Polarization: Vertical / CH: L

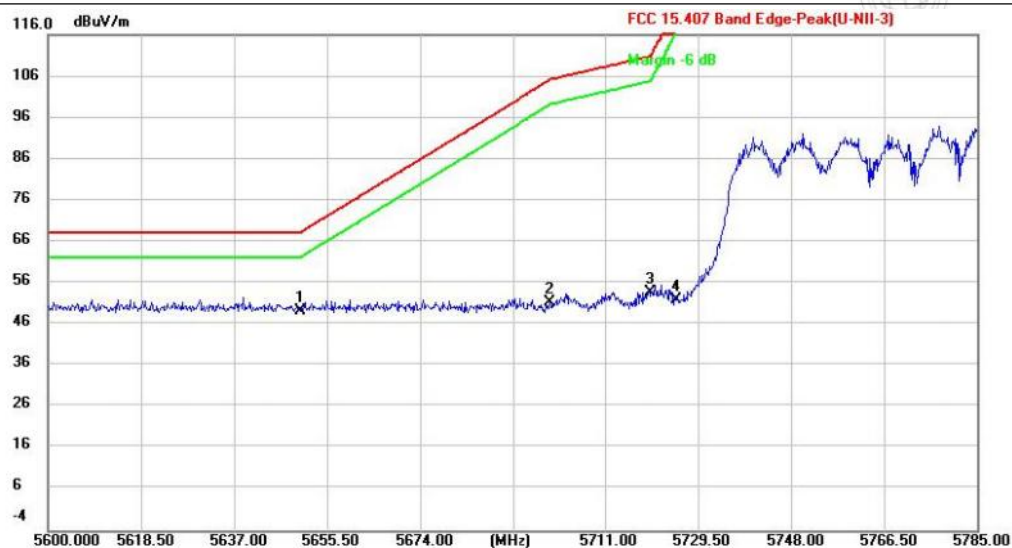

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5650.000	45.96	3.29	49.25	68.20	-18.95	peak	
2		5700.000	47.65	3.61	51.26	105.20	-53.94	peak	
3		5720.000	50.10	3.59	53.69	110.80	-57.11	peak	
4		5725.000	48.51	3.58	52.09	122.20	-70.11	peak	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode26 / Polarization: Horizontal / CH: H



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5850.000	47.39	4.00	51.39	122.20	-70.81	peak	
2		5855.000	50.35	4.01	54.36	110.80	-56.44	peak	
3		5875.000	47.13	4.11	51.24	105.20	-53.96	peak	
4	*	5920.000	47.76	4.32	52.08	71.90	-19.82	peak	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode26 / Polarization: Vertical / CH: H



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5850.000	48.32	4.00	52.32	122.20	-69.88	peak	
2		5855.000	47.46	4.01	51.47	110.80	-59.33	peak	
3		5875.000	47.74	4.11	51.85	105.20	-53.35	peak	
4	*	5920.000	46.13	4.32	50.45	71.90	-21.45	peak	

TEST REPORT

Report No.: MTi260320019-0102E4

6.6 Undesirable emission limits (below 1GHz)

Test Requirement:	47 CFR Part 15.407(b)(9)																									
Test Limit:	Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table: <table border="1"> <thead> <tr> <th>Frequency (MHz)</th><th>Field strength (microvolts/meter)</th><th>Measurement distance (meters)</th></tr> </thead> <tbody> <tr> <td>0.009-0.490</td><td>2400/F(kHz)</td><td>300</td></tr> <tr> <td>0.490-1.705</td><td>24000/F(kHz)</td><td>30</td></tr> <tr> <td>1.705-30.0</td><td>30</td><td>30</td></tr> <tr> <td>30-88</td><td>100 **</td><td>3</td></tr> <tr> <td>88-216</td><td>150 **</td><td>3</td></tr> <tr> <td>216-960</td><td>200 **</td><td>3</td></tr> <tr> <td>Above 960</td><td>500</td><td>3</td></tr> </tbody> </table> ** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.		Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)	0.009-0.490	2400/F(kHz)	300	0.490-1.705	24000/F(kHz)	30	1.705-30.0	30	30	30-88	100 **	3	88-216	150 **	3	216-960	200 **	3	Above 960	500	3
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)																								
0.009-0.490	2400/F(kHz)	300																								
0.490-1.705	24000/F(kHz)	30																								
1.705-30.0	30	30																								
30-88	100 **	3																								
88-216	150 **	3																								
216-960	200 **	3																								
Above 960	500	3																								
Test Method:	ANSI C63.10-2020 + Cor.1-2023+C63.10a-2024 + Errata to C63.10a-2024, section 12.7.4, 12.7.5																									
Procedure:	Below 1GHz: - For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. - The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. - The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. - For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. - The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. - If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet. - Test the EUT in the lowest channel, the middle channel, the Highest channel.																									

TEST REPORT

Report No.: MTi260320019-0102E4

h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
3. The disturbance below 1GHz was very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.

Above 1GHz:

- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. Scan from 18GHz to 40GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.
4. The disturbance above 18GHz were very low and the harmonics were the

TEST REPORT

Report No.: MTi260320019-0102E4

	highest point could be found when testing, so only the above harmonics had been displayed.
--	--

6.6.1 E.U.T. Operation:


Operating Environment:					
Temperature:	23 °C	Humidity:	45 %	Atmospheric Pressure:	101 kPa
Pre test mode:	Mode1, Mode2, Mode3, Mode4, Mode5, Mode6, Mode7, Mode8, Mode9, Mode10, Mode11, Mode12, Mode13, Mode14, Mode15, Mode16, Mode17, Mode18, Mode19, Mode20, Mode21, Mode22, Mode23, Mode24, Mode25, Mode26				
Final test mode:	All of the listed pre-test mode were tested, only the data of the worst mode (Mode1) is recorded in the report				

Calculation formula:

$$\text{Measurement (dB}\mu\text{V/m)} = \text{Reading Level (dB}\mu\text{V)} + \text{Correct Factor (dB)}$$

$$\text{Over (dB)} = \text{Measurement (dB}\mu\text{V/m)} - \text{Limit (dB}\mu\text{V/m)}$$

6.6.2 Test Setup Diagram:

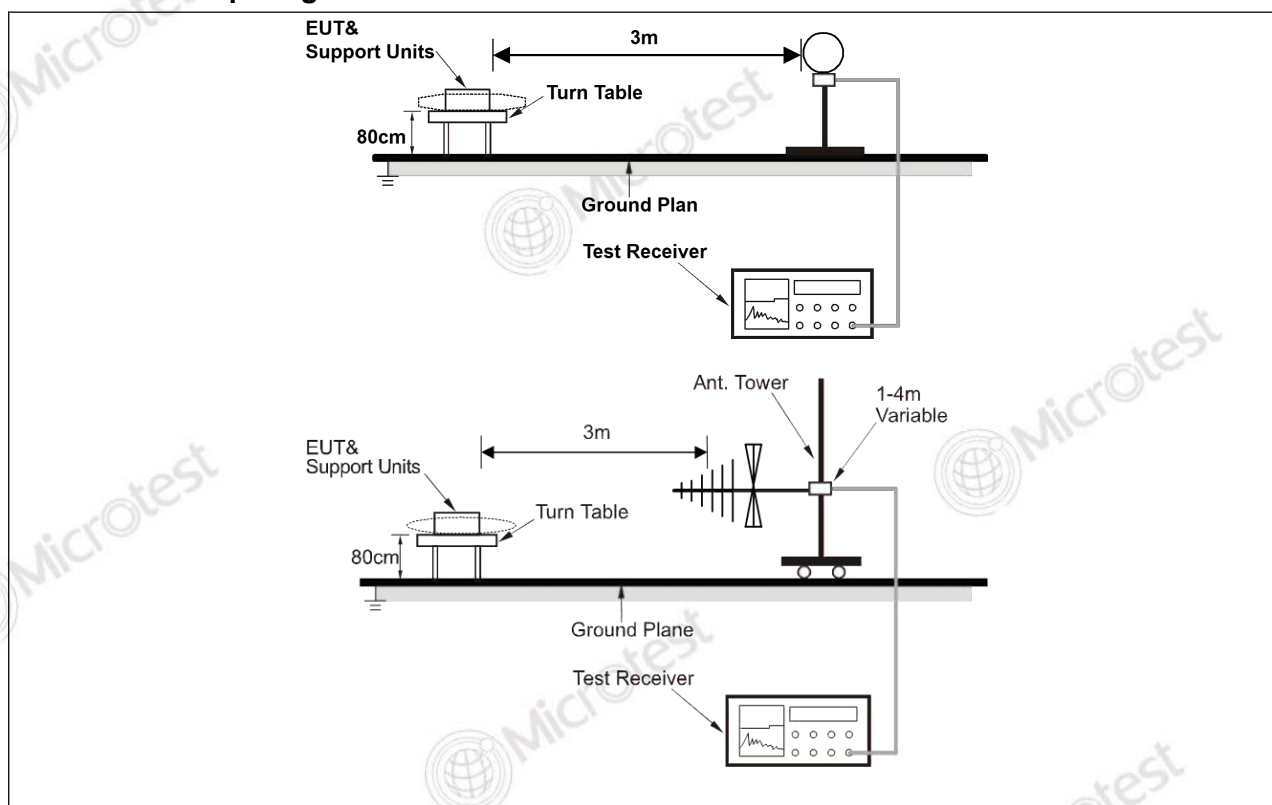


TEST REPORT

Report No.: MTi260320019-0102E4

6.6.3 Test Data:

Band1:


Mode1 / Polarization: Horizontal / CH: L

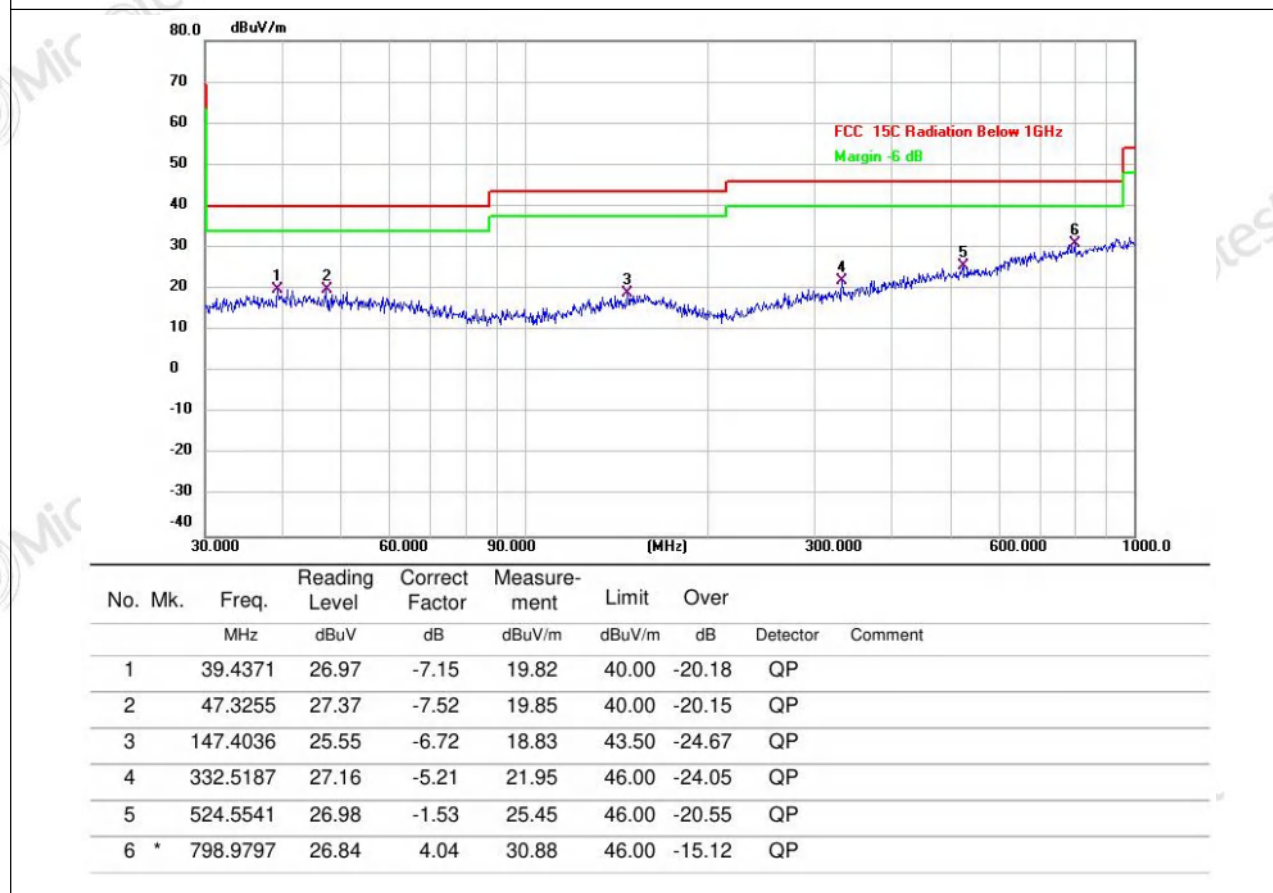

TEST REPORT

Report No.: MTi260320019-0102E4

Mode1 / Polarization: Vertical / CH: L

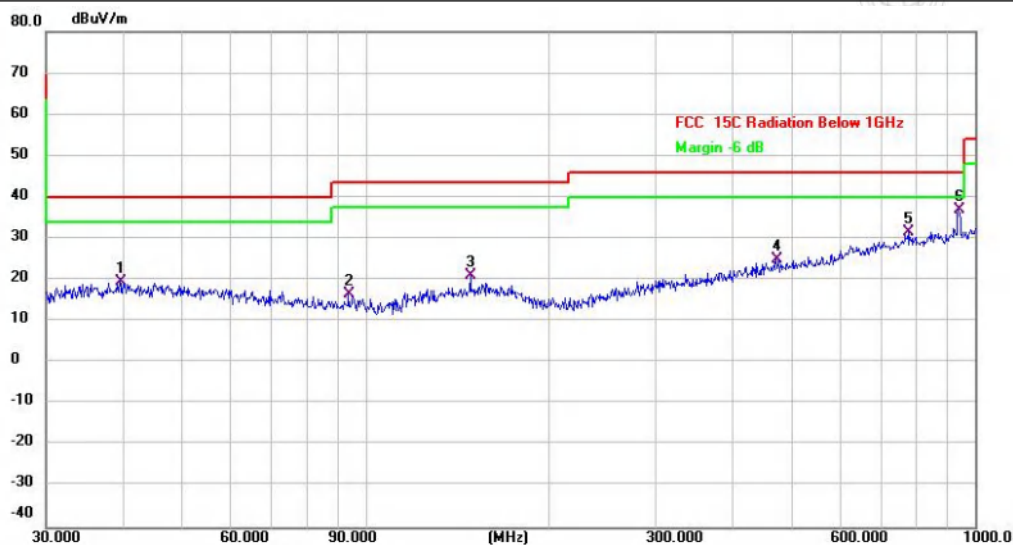


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	39.5757	26.54	-7.13	19.41	40.00	-20.59	QP	
2	93.7685	27.86	-11.33	16.53	43.50	-26.97	QP	
3	148.4410	27.69	-6.62	21.07	43.50	-22.43	QP	
4	472.1760	27.26	-2.39	24.87	46.00	-21.13	QP	
5	776.8778	27.97	3.71	31.68	46.00	-14.32	QP	
6 *	938.8326	31.18	5.63	36.81	46.00	-9.19	QP	

TEST REPORT

Report No.: MTi260320019-0102E4

Band3:

Mode1 / Polarization: Horizontal / CH: L

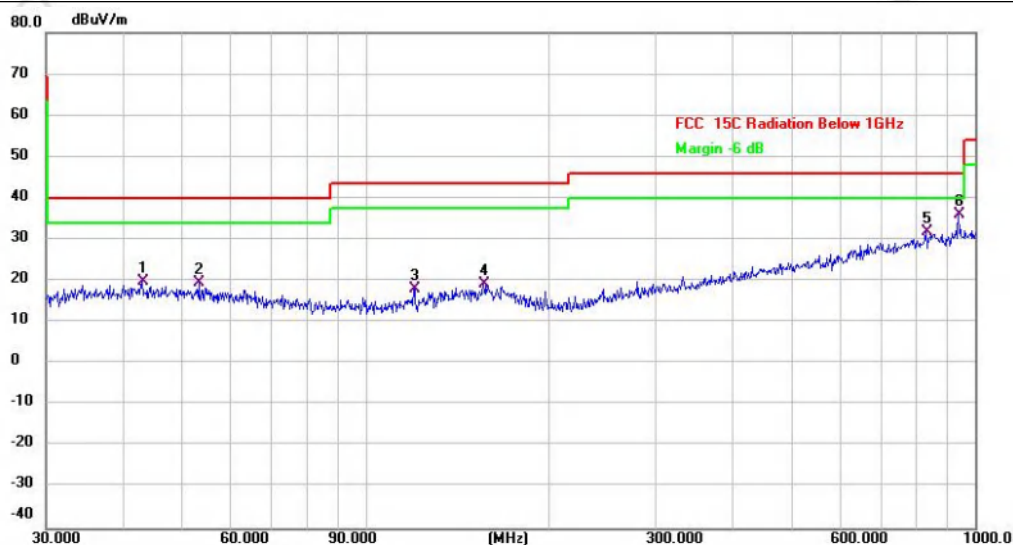

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		43.0505	27.14	-7.29	19.85	40.00	-20.15	QP	
2		53.3179	27.36	-7.78	19.58	40.00	-20.42	QP	
3		119.8556	27.06	-8.92	18.14	43.50	-25.36	QP	
4		155.9101	25.65	-6.27	19.38	43.50	-24.12	QP	
5		830.4002	27.64	4.31	31.95	46.00	-14.05	QP	
6	*	938.8326	30.34	5.63	35.97	46.00	-10.03	QP	

TEST REPORT

Report No.: MTi260320019-0102E4

Mode1 / Polarization: Vertical / CH: L




No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	39.9942	26.98	-7.09	19.89	40.00	-20.11	QP	
2	64.6594	27.04	-8.85	18.19	40.00	-21.81	QP	
3	144.3348	26.81	-6.92	19.89	43.50	-23.61	QP	
4	420.5803	27.76	-3.24	24.52	46.00	-21.48	QP	
5	711.6734	28.38	2.54	30.92	46.00	-15.08	QP	
6 *	854.0247	27.02	4.80	31.82	46.00	-14.18	QP	

TEST REPORT

Report No.: MTi260320019-0102E4

MIMO:

Mode1 / Polarization: Horizontal / CH: L

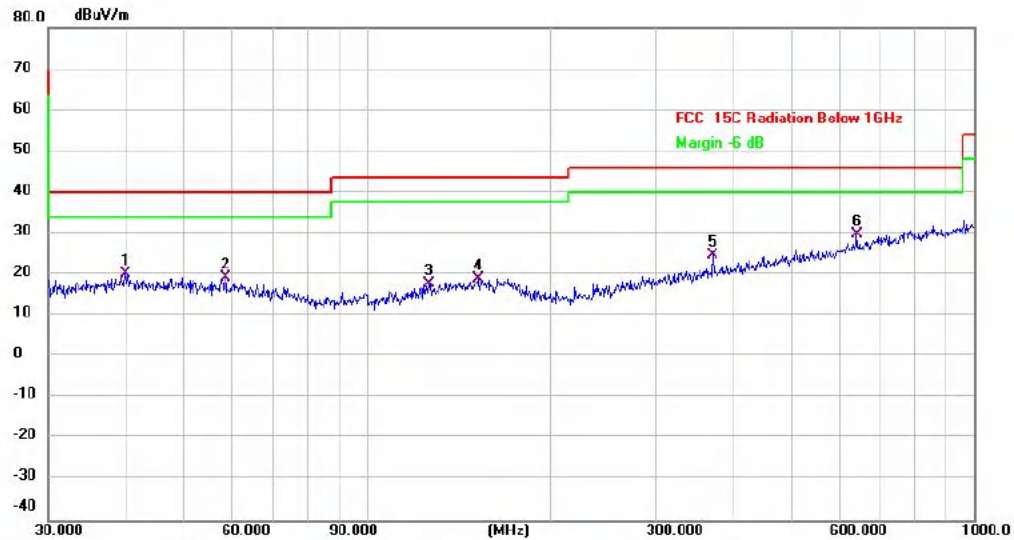

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		39.9942	27.25	-7.09	20.16	40.00	-19.84	QP	
2		58.6126	27.38	-8.24	19.14	40.00	-20.86	QP	
3		126.7723	25.87	-8.16	17.71	43.50	-25.79	QP	
4		152.6641	25.35	-6.42	18.93	43.50	-24.57	QP	
5		372.0045	28.93	-4.37	24.56	46.00	-21.44	QP	
6	*	640.6110	28.30	1.32	29.62	46.00	-16.38	QP	