

FCC TEST REPORT

FCC ID: 2BVEY-G4

Report No. : SSP25120720-1E

Applicant : GuangDong BaoHuaXin Technology Co. Ltd.

Product Name : 3-in-1 Wireless Charging Stand

Model Name : G4

Test Standard : FCC Part 15 Subpart C

Date of Issue : 2026-03-26

Shenzhen CCUT Quality Technology Co., Ltd.

1F, Building 35, Changxing Technology Industrial Park, Yutang Street, Guangming District, Shenzhen,
Guangdong, China; (Tel.:+86-755-23406590 website: www.ccuttest.com)

This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen CCUT Quality Technology Co., Ltd.

Test Report Basic Information

Applicant:	GuangDong BaoHuaXin Technology Co. Ltd.	
Address of Applicant:	No. 401, Building 29, No. 179 Fenggang Section of Dongshen Road, Fenggang Town, Dongguan City, Guangdong Province, China	
Manufacturer:	GuangDong BaoHuaXin Technology Co. Ltd.	
Address of Manufacturer:	No. 401, Building 29, No. 179 Fenggang Section of Dongshen Road, Fenggang Town, Dongguan City, Guangdong Province, China	
Product Name:	3-in-1 Wireless Charging Stand	
Brand Name:	easism	
Main Model:	G4	
Series Models:	-	
Test Standard:	FCC Part 15 Subpart C ANSI C63.4-2014 ANSI C63.10-2020	
Date of Test	2026-01-04 to 2026-01-30	
Test Result:	PASS	
Tested By	 _____	(Coke Huang)
Reviewed By:	 _____	(Lorzix Luo)
Authorized Signatory:	 _____	(Lahm Peng)
		
Note : This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen CCUT Quality Technology Co., Ltd.. All test data presented in this test report is only applicable to presented test sample.		

CONTENTS

1. General Information.....	5
1.1 Product Information	5
1.2 Test Setup Information.....	6
1.3 Compliance Standards.....	7
1.4 Test Facilities.....	7
1.5 List of Measurement Instruments	8
1.6 Measurement Uncertainty.....	8
2. Summary of Test Results.....	9
3. Antenna Requirement.....	10
3.1 Standard and Limit.....	10
3.2 Test Result.....	10
4. Conducted Emissions	11
4.1 Standard and Limit.....	11
4.2 Test Procedure.....	11
4.3 Test Data and Results	12
5. Radiated Emissions	17
5.1 Standard and Limit.....	17
5.2 Test Procedure.....	17
5.3 Test Data and Results	19
6. Occupied Bandwidth	28
6.1 Standard and Limit.....	28
6.2 Test Procedure.....	28
6.3 Test Data and Results	28

Revision History

Revision	Issue Date	Description	Revised By
V1.0	2026-03-26	Initial Release	Lahm Peng

1. General Information

1.1 Product Information

Product Name:	3-in-1 Wireless Charging Stand
Trade Name:	easism
Test Model:	G4
Series Models:	-
Rated Voltage:	Input: 5V=3A, 9V=3A, 12V=3A Output: 2.5W/5W/7.5W/10W/15W (Wireless output)
Power Adapter:	-
Battery:	-
Test Sample No:	SSP25120720-1
Hardware Version:	V1.0
Software Version:	V1.0
Note 1: The test data is gathered from a production sample, provided by the manufacturer.	

Wireless Specification	
Wireless Standard:	WPC (Qi)
Operating Frequency:	Wireless charging Output (Phone):110.5kHz-205kHz, 360kHz Wireless charging Output (Earphone):110.5kHz-205kHz Wireless charging Output (Watch):310kHz-340kHz
Max. Field Strength:	69.27dBuV/m
Modulation:	FSK
Antenna Gain:	0dBi
Type of Antenna:	Coil Antenna
Type of Device:	☐ Portable Device ☒ Mobile Device ☐ Modular Device

1.2 Test Setup Information

List of Test Modes				
Test Mode	Description		Remark	
TM1	Wireless charging 15W (Phone)+adapter charging		-	
TM2	Wireless charging 10W (Phone)+adapter charging		-	
TM3	Wireless charging 7.5W (Phone)+adapter charging		-	
TM4	Wireless charging 5W (Phone)+adapter charging		-	
TM5	Wireless charging 5W (Earphone)+adapter charging		-	
TM6	Wireless charging 2.5W (Watch)+adapter charging		-	
TM7	Wireless charging 15W (Phone) + Wireless charging 5W (Earphone) + Wireless charging 2.5W (Watch) +adapter charging		-	
TM8	Wireless charging 10W (Phone) + Wireless charging 5W (Earphone) + Wireless charging 2.5W (Watch) +adapter charging		-	
TM9	Wireless charging 7.5W (Phone) + Wireless charging 5W (Earphone) + Wireless charging 2.5W (Watch) +adapter charging		-	
TM10	Wireless charging 5W (Phone) + Wireless charging 5W (Earphone) + Wireless charging 2.5W (Watch) +adapter charging		-	
Note1: All modes including full load, halfload and no-load have been tested, The report reflects data for the worst full load TM7 and TM8 mode only.				
List and Details of Auxiliary Cable				
Description		Length (cm)	Shielded/Unshielded	With/Without Ferrite
USB cable		100	Unshielded	Without Ferrite
-		-	-	-
List and Details of Auxiliary Equipment				
Description		Manufacturer	Model	Serial Number
Dummy load (15W)		YBZ	YBZ-001	N/A
Dummy load (5W)		YBZ	YBZ-002	N/A
Dummy load (2.5W)		YBZ	YBZ-003	N/A
Adapter		xiaomi	MDY-14-EU	45461/A62505U102607S

1.3 Compliance Standards

Compliance Standards	
FCC Part 15 Subpart C	FEDERAL COMMUNICATIONS COMMISSION, RADIO FREQUENCY DEVICES, Intentional Radiators
All measurements contained in this report were conducted with all above standards	
According to standards for test methodology	
FCC Part 15 Subpart C	FEDERAL COMMUNICATIONS COMMISSION, RADIO FREQUENCY DEVICES, Intentional Radiators
ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.
ANSI C63.10-2020	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
Maintenance of compliance is the responsibility of the manufacturer or applicant. Any modification of the product, which result is lowering the emission, should be checked to ensure compliance has been maintained.	

1.4 Test Facilities

Laboratory Name:	Shenzhen CCUT Quality Technology Co., Ltd. 1F, Building 35, Changxing Technology Industrial Park, Yutang Street, Guangming District, Shenzhen, Guangdong, China
CNAS Laboratory No.:	L18863
A2LA Certificate No.:	6983.01
FCC Registration No:	583813
FCC Designation No.:	CN1373
ISED Registration No.:	CN0164

1.5 List of Measurement Instruments

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Conducted Emissions					
AMN	ROHDE&SCHWARZ	ENV216	101097	2025-07-15	2026-07-14
EMI Test Receiver	ROHDE&SCHWARZ	ESPI	100242	2025-07-15	2026-07-14
Test Cable	N/A	Cable 5	N/A	2025-07-15	2026-07-14
EMI Test Software	FARA	EZ-EMC	EMEC-3A1+	N/A	N/A
Radiated Emissions					
EMI Test Receiver	ROHDE&SCHWARZ	ESPI	100154	2025-07-15	2026-07-14
Spectrum Analyzer	KEYSIGHT	N9020A	MY48030972	2025-07-15	2026-07-14
Amplifier	SCHWARZBECK	BBV 9743B	00251	2025-07-15	2026-07-14
Amplifier	HUABO	YXL0518-2.5-45	--	2025-07-15	2026-07-14
Loop Antenna	DAZE	ZN30900C	21104	2025-07-12	2026-07-11
Broadband Antenna	SCHWARZBECK	VULB 9168	01320	2025-07-12	2026-07-11
Horn Antenna	SCHWARZBECK	BBHA 9120D	02553	2025-07-12	2026-07-11
Attenuator	QUANJUDA	6dB	220731	2025-07-15	2026-07-14
Test Cable	N/A	Cable 1	N/A	2025-07-15	2026-07-14
Test Cable	N/A	Cable 2	N/A	2025-07-15	2026-07-14
Test Cable	N/A	Cable 3	N/A	2025-07-15	2026-07-14
Test Cable	N/A	Cable 4	N/A	2025-07-15	2026-07-14
EMI Test Software	FARA	EZ-EMC	FA-03A2 RE+	N/A	N/A
Conducted RF Testing					
RF Test System	MWRFTTest	MW100-RFCB	220418SQS-37	2025-07-16	2026-07-15
Spectrum Analyzer	KEYSIGHT	N9020A	ATO-90521	2025-07-16	2026-07-15

1.6 Measurement Uncertainty

Test Item	Conditions	Uncertainty
Conducted Emissions	9kHz ~ 30MHz	±1.64 dB
Radiated Emissions	9kHz ~ 30MHz	±2.88 dB
	30MHz ~ 1GHz	±3.32 dB
	1GHz ~ 18GHz	±3.50 dB
Occupied Bandwidth	9kHz ~ 26GHz	±4.0 %

2. Summary of Test Results

FCC Rule	Description of Test Item	Result
FCC Part 15.203	Antenna Requirement	Passed
FCC Part 15.207	Conducted Emissions	Passed
FCC Part 15.209	Radiated Emissions	Passed
FCC Part 15.215(c)	Occupied Bandwidth	Passed
Passed: The EUT complies with the essential requirements in the standard Failed: The EUT does not comply with the essential requirements in the standard N/A: Not applicable		

3. Antenna Requirement

3.1 Standard and Limit

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Test Result

This product has an Coil antenna, fulfill the requirement of this section.

4. Conducted Emissions

4.1 Standard and Limit


According to the rule FCC Part 15.207, Conducted emissions limit, the limit for a wireless device as below:

Frequency of Emission (MHz)	Conducted emissions (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Note 1: Decreases with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz
Note 2: The lower limit applies at the band edges

4.2 Test Procedure

Test is conducting under the description of ANSI C63.10-2020 section 6.2.

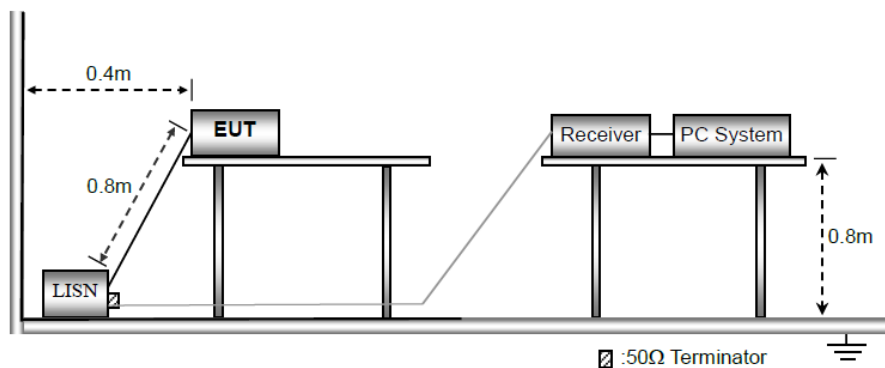

Test Setup Block Diagram

a) The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

b) The following is the setting of the receiver

Attenuation: 10dB

Start Frequency: 0.15MHz

Stop Frequency: 30MHz

IF Bandwidth: 9kHz

c) The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.

- d) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- e) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- f) LISN is at least 80 cm from nearest part of EUT chassis.
- g) For the actual test configuration, please refer to the related Item - photographs of the test setup.


4.3 Test Data and Results

Based on all tested data, the EUT complied with the FCC Part 15.207 standard limit for a wireless device, and with the worst case as below:

Remark: Level = Reading + Factor, Margin = Level - Limit

Test Plots and Data of Conducted Emissions


Tested Mode:	TM7
Test Voltage:	AC 120V/60Hz
Test Power Line:	Neutral
Remark:	

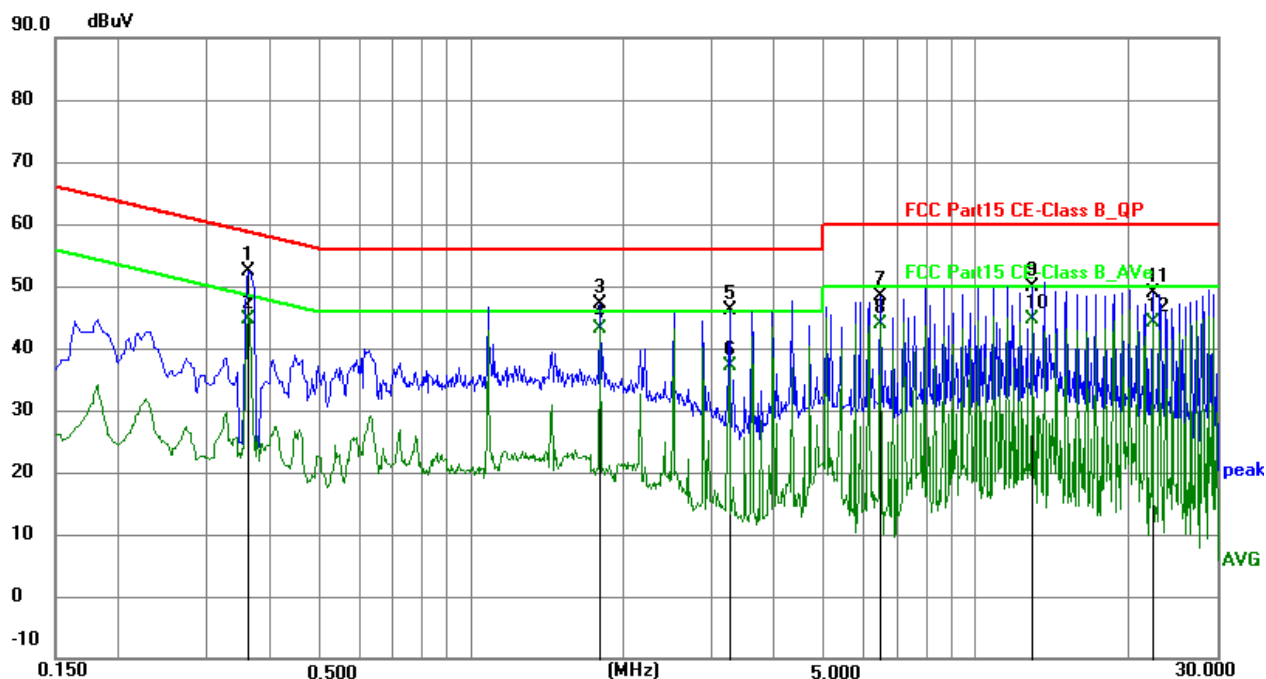

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.3613	42.97	9.39	52.36	58.70	-6.34	peak	P	
2	0.3613	35.27	9.39	44.66	48.70	-4.04	AVG	P	
3	1.8015	37.57	9.46	47.03	56.00	-8.97	peak	P	
4 *	1.8015	33.78	9.46	43.24	46.00	-2.76	AVG	P	
5	3.2414	36.61	9.51	46.12	56.00	-9.88	peak	P	
6	3.2414	27.53	9.51	37.04	46.00	-8.96	AVG	P	
7	6.4813	38.70	9.57	48.27	60.00	-11.73	peak	P	
8	6.4813	34.23	9.57	43.80	50.00	-6.20	AVG	P	
9	12.9611	40.44	9.54	49.98	60.00	-10.02	peak	P	
10	12.9611	35.10	9.54	44.64	50.00	-5.36	AVG	P	
11	22.3215	38.89	10.01	48.90	60.00	-11.10	peak	P	
12	22.3215	34.02	10.01	44.03	50.00	-5.97	AVG	P	

Test Plots and Data of Conducted Emissions

Tested Mode:	TM7
Test Voltage:	AC 120V/60Hz
Test Power Line:	Live
Remark:	

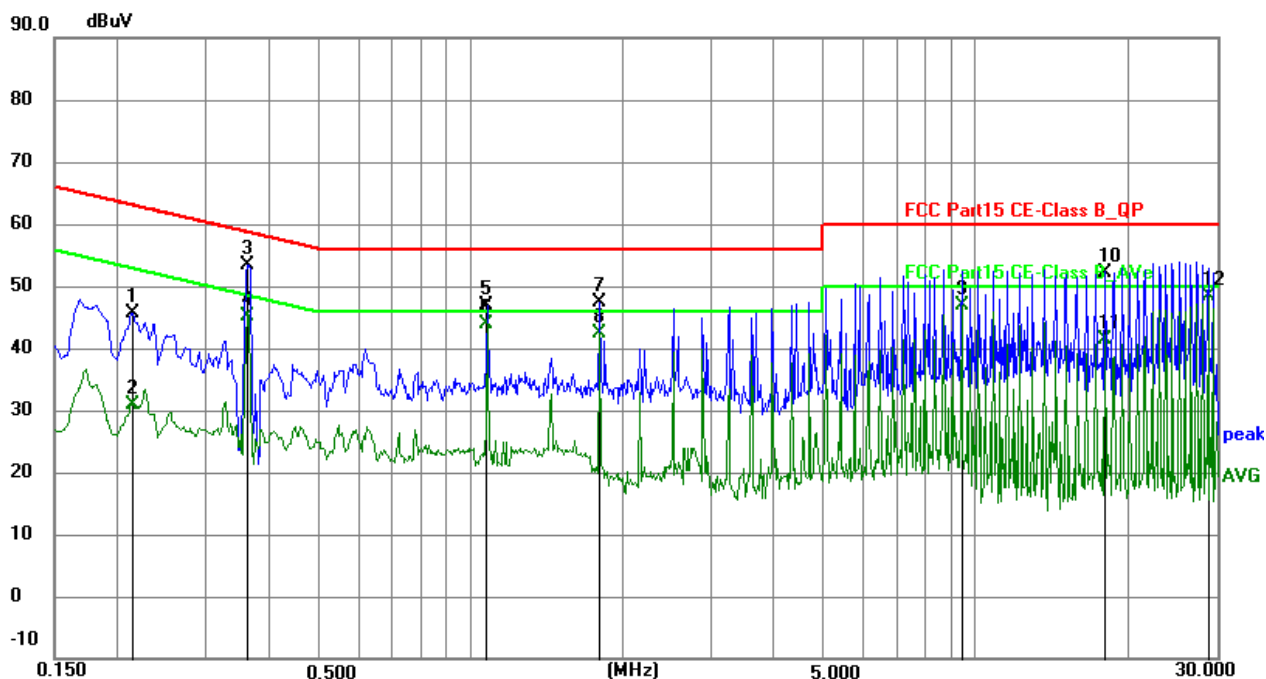

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.2130	36.24	9.42	45.66	63.09	-17.43	peak	P	
2	0.2130	21.55	9.42	30.97	53.09	-22.12	AVG	P	
3	0.3613	43.71	9.58	53.29	58.70	-5.41	peak	P	
4	0.3613	35.55	9.58	45.13	48.70	-3.57	AVG	P	
5	1.0809	37.25	9.62	46.87	56.00	-9.13	peak	P	
6	1.0809	34.31	9.62	43.93	46.00	-2.07	AVG	P	
7	1.8015	37.72	9.65	47.37	56.00	-8.63	peak	P	
8	1.8015	32.79	9.65	42.44	46.00	-3.56	AVG	P	
9	9.3612	37.06	9.76	46.82	50.00	-3.18	AVG	P	
10	18.0015	42.33	9.92	52.25	60.00	-7.75	peak	P	
11	18.0015	31.57	9.92	41.49	50.00	-8.51	AVG	P	
12 *	28.8015	38.02	10.31	48.33	50.00	-1.67	AVG	P	


Test Plots and Data of Conducted Emissions

Tested Mode: TM8


Test Voltage: AC 120V/60Hz

Test Power Line: Neutral

Remark:

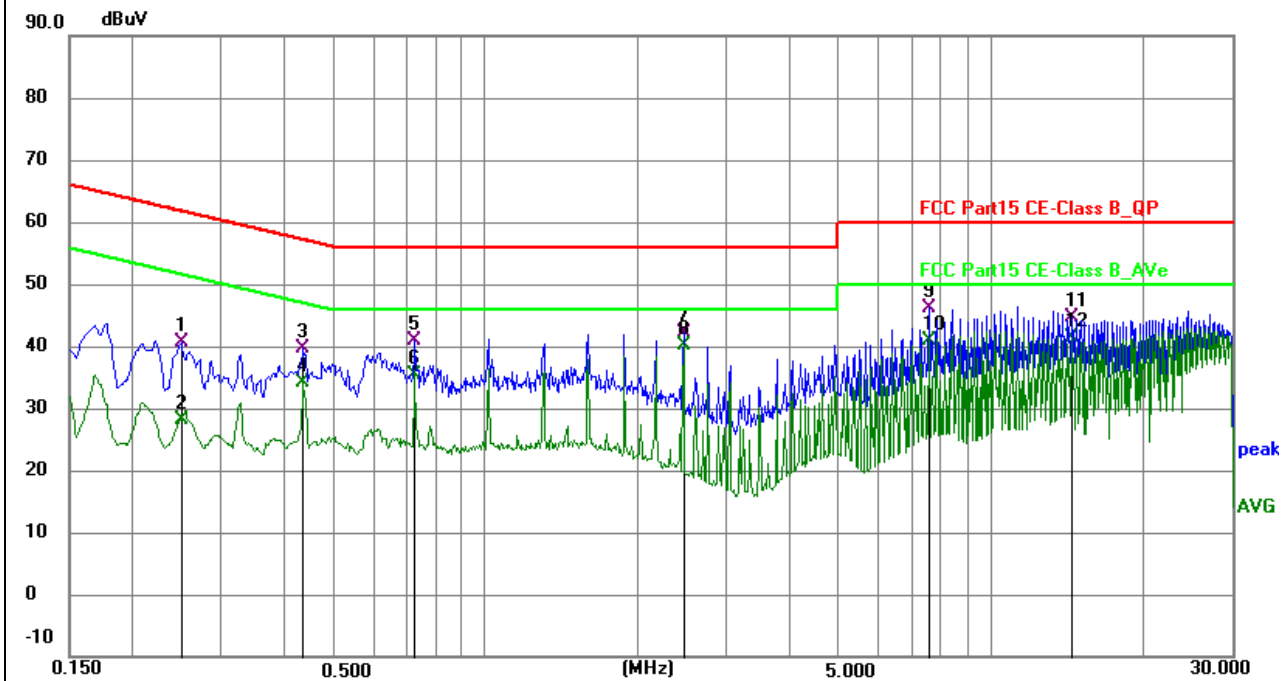

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.2490	31.34	9.30	40.64	61.79	-21.15	QP	P	
2	0.2490	18.93	9.30	28.23	51.79	-23.56	AVG	P	
3	0.4335	30.37	9.38	39.75	57.19	-17.44	QP	P	
4	0.4335	24.85	9.38	34.23	47.19	-12.96	AVG	P	
5	0.7260	31.59	9.38	40.97	56.00	-15.03	QP	P	
6	0.7260	26.01	9.38	35.39	46.00	-10.61	AVG	P	
7	2.4630	32.61	9.48	42.09	56.00	-13.91	QP	P	
8 *	2.4630	30.57	9.48	40.05	46.00	-5.95	AVG	P	
9	7.5345	36.57	9.57	46.14	60.00	-13.86	QP	P	
10	7.5345	31.43	9.57	41.00	50.00	-9.00	AVG	P	
11	14.4870	35.22	9.53	44.75	60.00	-15.25	QP	P	
12	14.4870	31.73	9.53	41.26	50.00	-8.74	AVG	P	

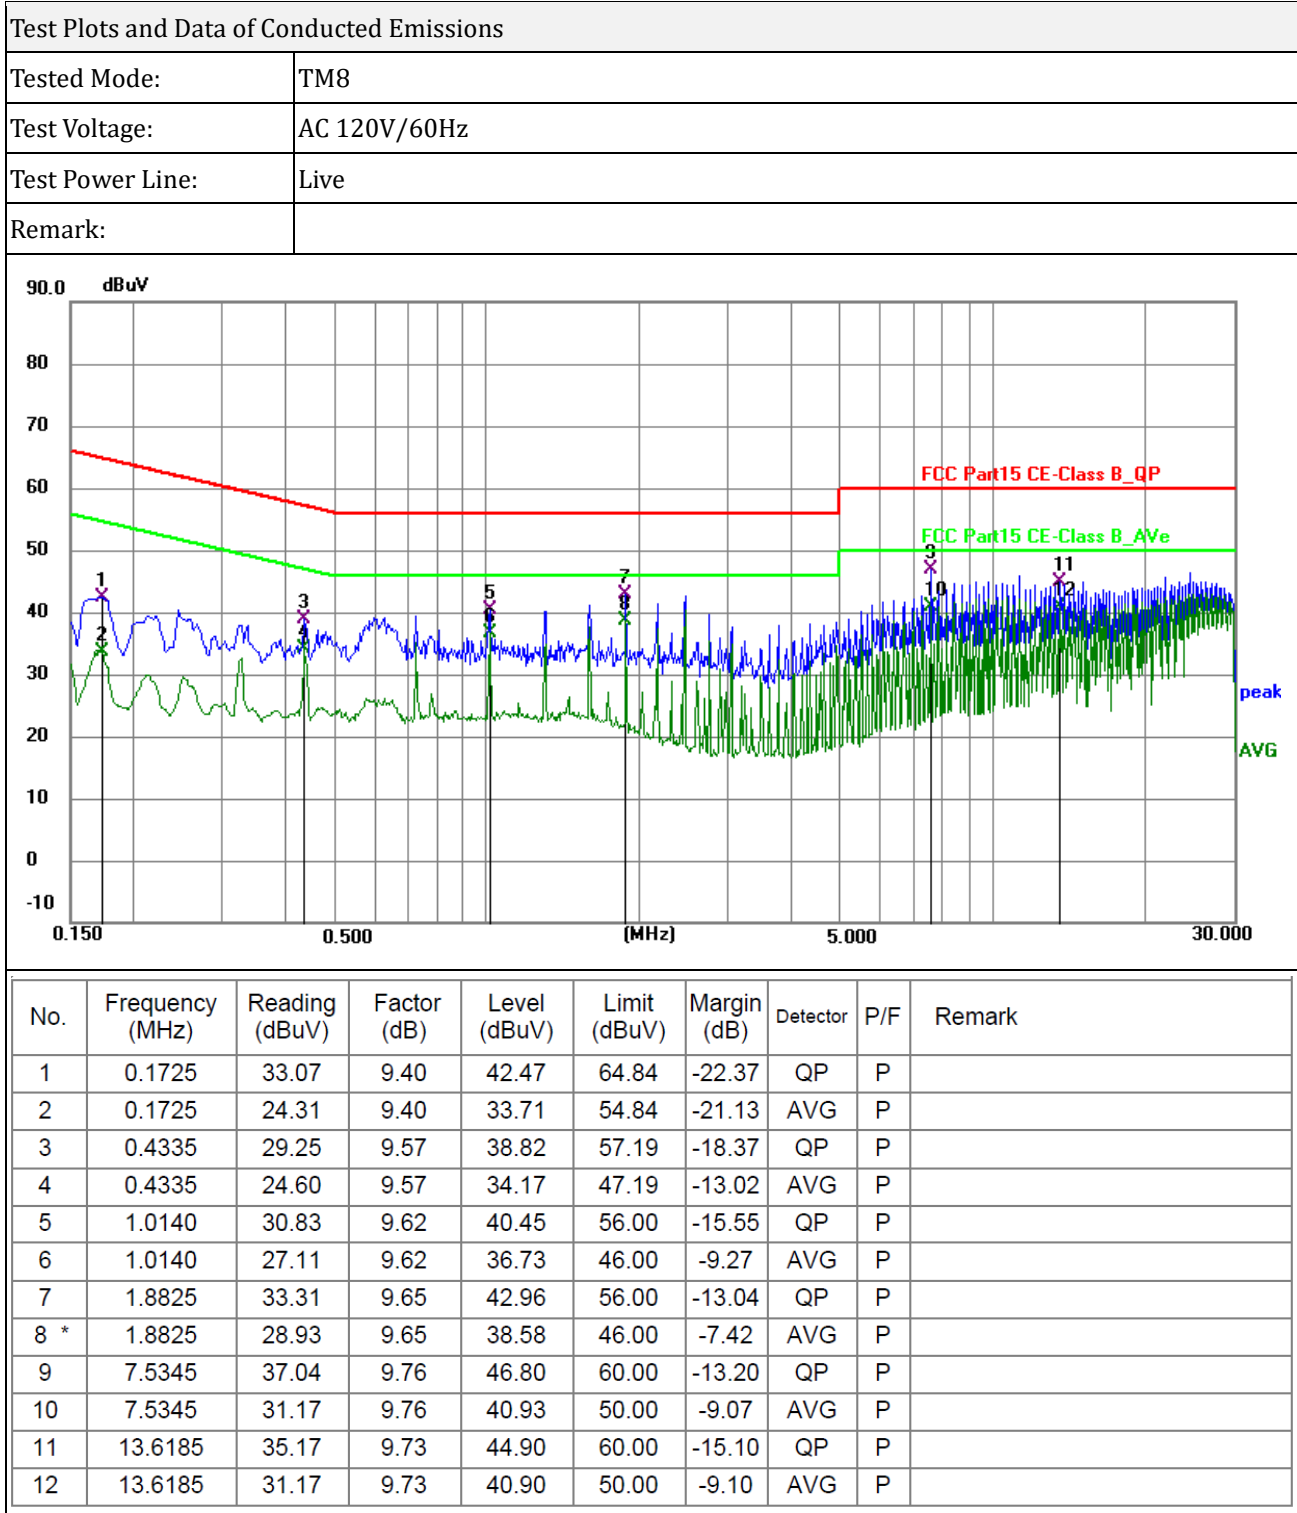

5. Radiated Emissions

5.1 Standard and Limit


According to the rule FCC Part 15.209, Radiated emission limit for a wireless device as below:

Frequency of Emission (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3
Note: The more stringent limit applies at transition frequencies.		


Note: Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

5.2 Test Procedure


Test is conducting under the description of ANSI C63.10-2020 section 6.3 to 6.6.

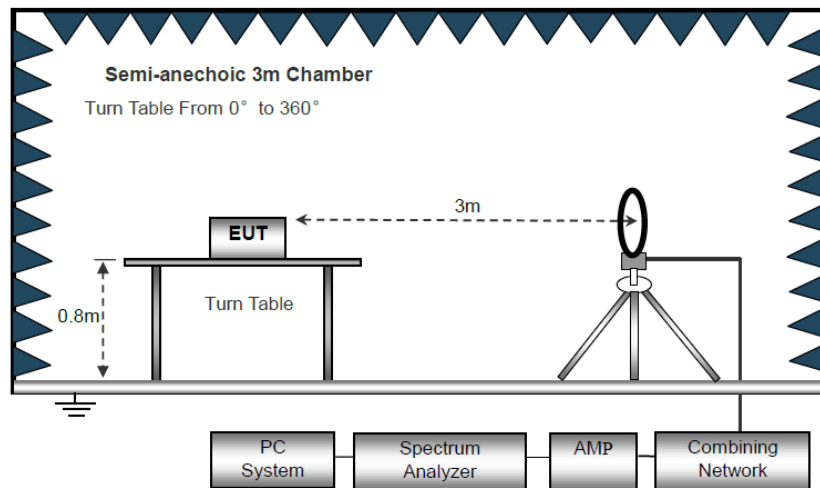

Block Diagram of Radiated Emission Below 30MHz

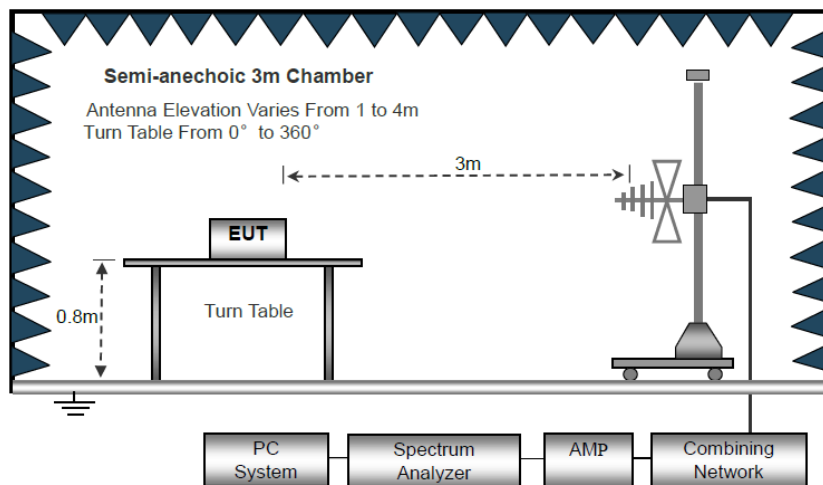

Block Diagram of Radiated Emission From 30MHz to 1GHz

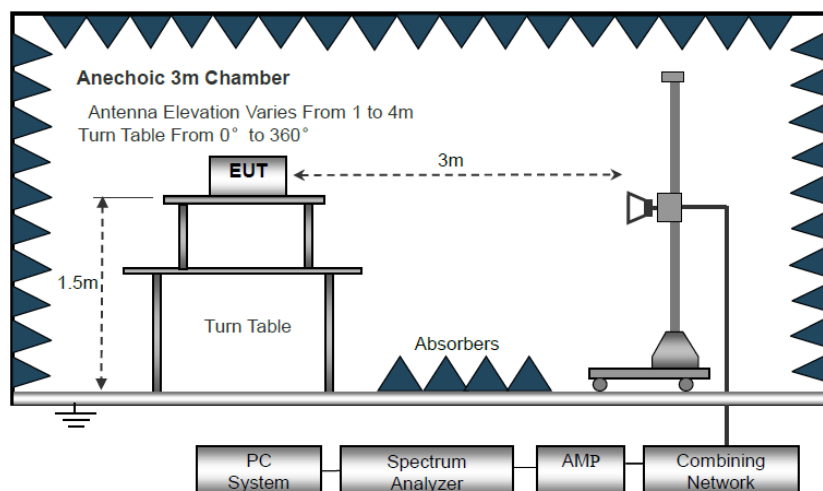

Block Diagram of Radiated Emission Above 1GHz

- a) The EUT is placed on a turntable, which is 0.8m above ground plane for test frequency range below 1GHz, and 1.5m above ground plane for test frequency range above 1GHz.
- b) EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
- c) Use the following spectrum analyzer settings:
Span = wide enough to fully capture the emission being measured
RBW = 1 MHz for $f \geq 1\text{GHz}$, 100 kHz for $f < 1\text{GHz}$, 10kHz for $f < 30\text{MHz}$
VBW $\geq$ RBW, Sweep = auto
Detector function = peak
Trace = max hold
- d) Follow the guidelines in ANSI C63.4-2014 with respect to maximizing the emission by rotating the EUT, adjusting the measurement antenna height and polarization, etc. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, submit this data. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- e) The peak level, once corrected, must comply with the limit specified in Section 15.209. Set the RBW = 1MHz, VBW = 10Hz, Detector = PK for AV value, while maintaining all of the other instrument settings.
- f) For the actual test configuration, please refer to the related item - EUT test photos.

5.3 Test Data and Results

Based on all tested data, the EUT complied with the FCC Part 15.209 standard limit for a wireless device, and with the worst case as below:

Test Data of Radiated Emissions from 9kHz to 30MHz


Test Mode:

TM7


Phase:


Coplaner


Remark:

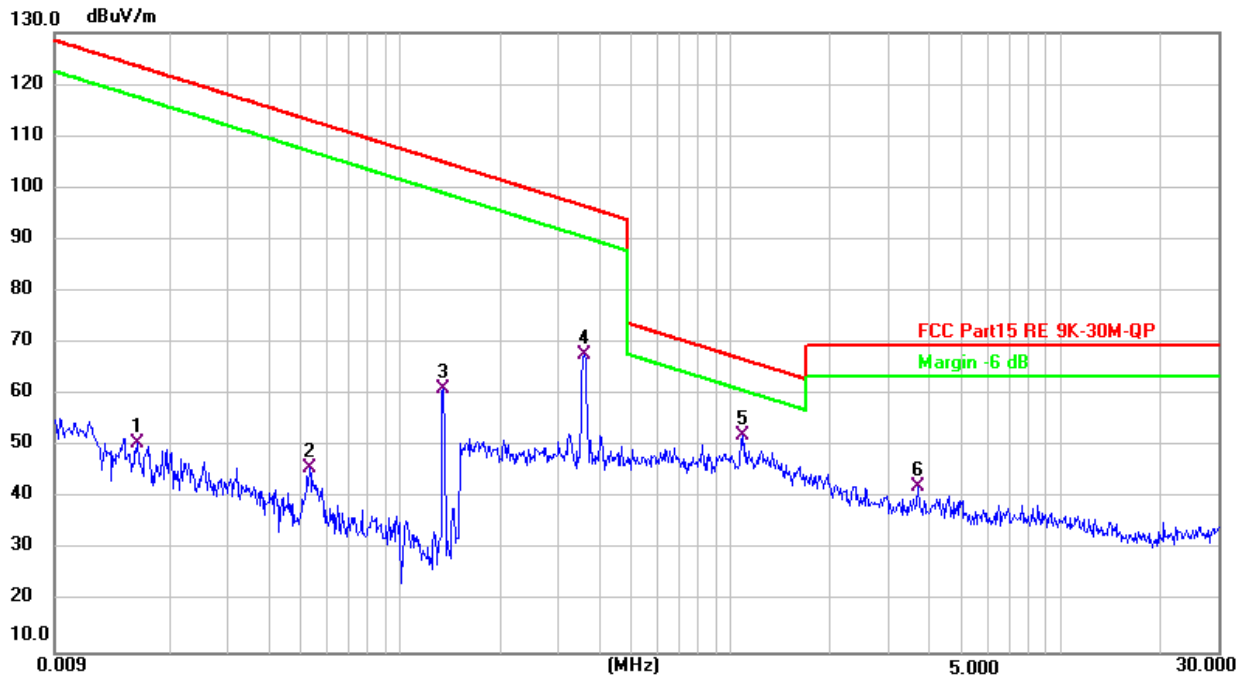

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	0.0160	15.44	35.33	50.77	123.51	-72.74	QP	100	0	P	
2	0.0530	18.01	27.88	45.89	113.11	-67.22	QP	100	0	P	
3	0.1345	35.58	25.43	61.01	105.02	-44.01	QP	100	0	P	
4	0.3593	41.95	25.78	67.73	96.49	-28.76	QP	100	0	P	
5 *	1.0823	26.23	25.93	52.16	66.91	-14.75	QP	100	0	P	
6	3.6804	15.71	26.39	42.10	69.50	-27.40	QP	100	0	P	

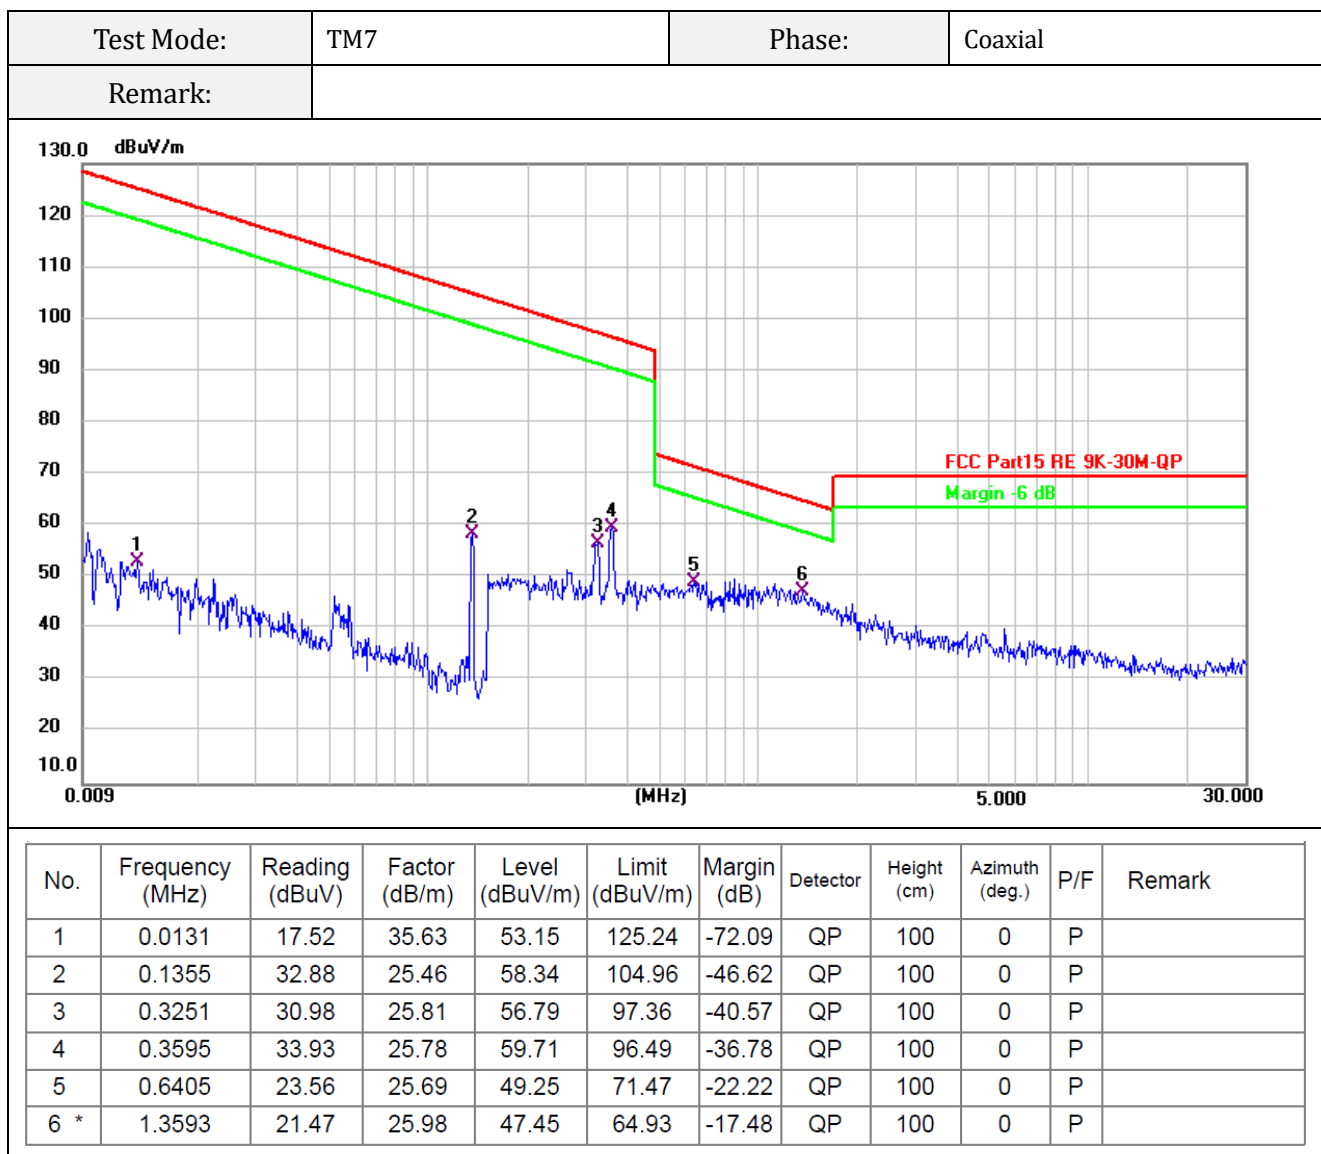

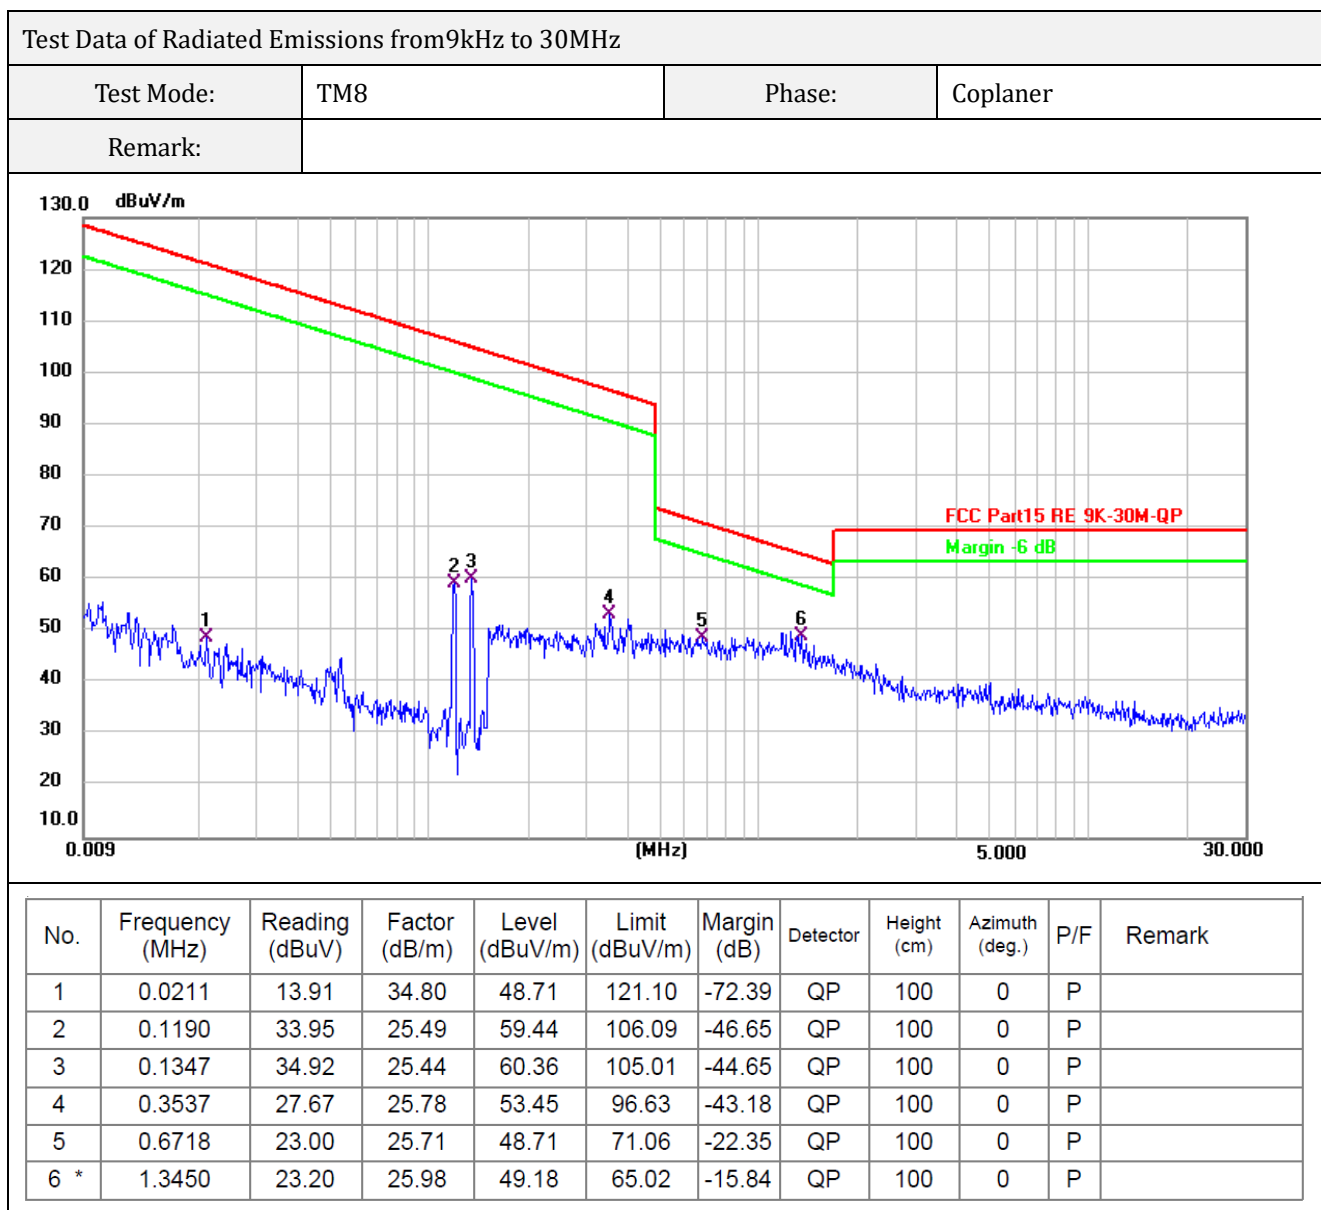

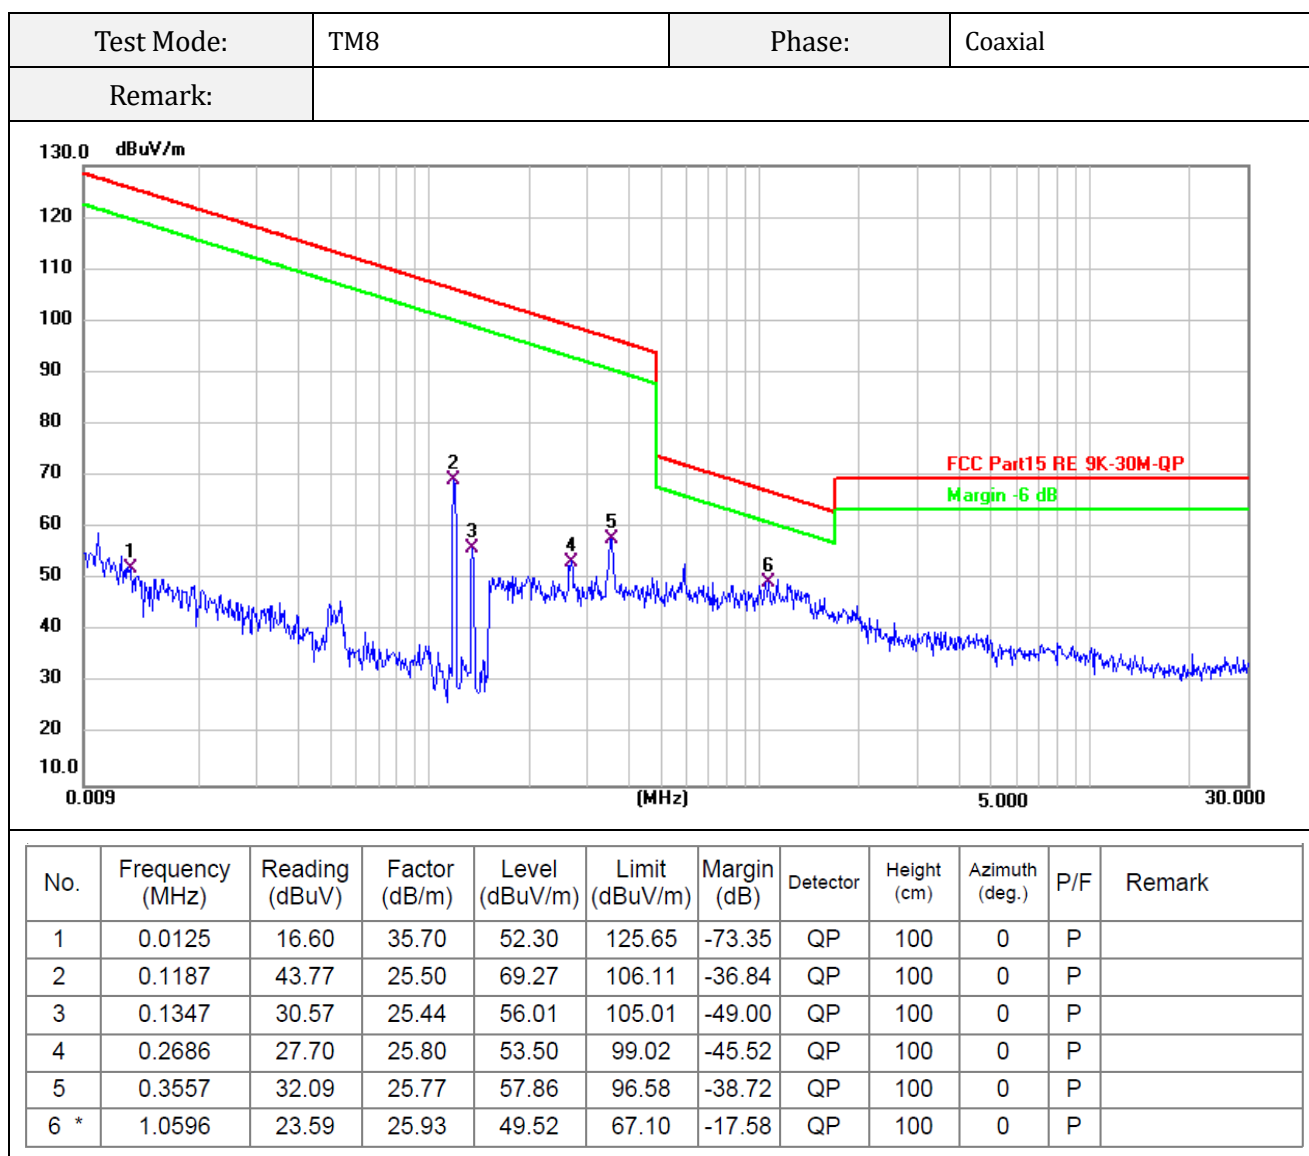

Note:

Pre-scan in the all of mode, the worst case in of was recorded.

Limit dBuV/m @3m = Limit dBuV/m @300m+ 80

Limit dBuV/m @3m = Limit dBuV/m @30m + 40


Margin = Reading - Limit.

Test Plots and Data of Radiated Emissions from 30MHz to 1GHz

Tested Mode: TM7

Test Antenna Polarization: Horizontal

Remark:

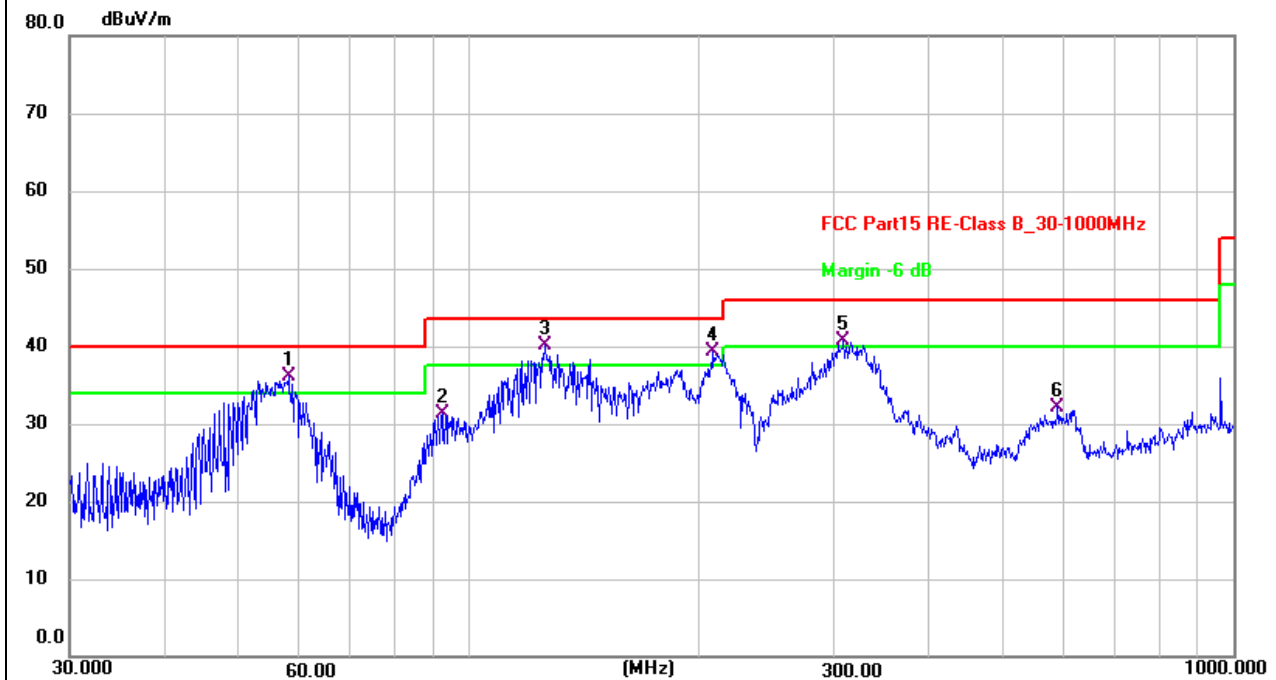


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 !	57.9992	45.66	-9.65	36.01	40.00	-3.99	QP	100	2	P	
2	92.4624	44.14	-12.86	31.28	43.50	-12.22	QP	200	349	P	
3 *	125.4457	49.44	-9.25	40.19	43.50	-3.31	QP	100	45	P	
4 !	208.5800	51.30	-11.95	39.35	43.50	-4.15	QP	200	341	P	
5 !	308.9126	48.35	-7.70	40.65	46.00	-5.35	QP	100	321	P	
6	588.9051	34.05	-1.85	32.20	46.00	-13.80	QP	200	89	P	

Test Plots and Data of Radiated Emissions from 30MHz to 1GHz

Tested Mode: TM7

Test Antenna Polarization: Vertical

Remark:

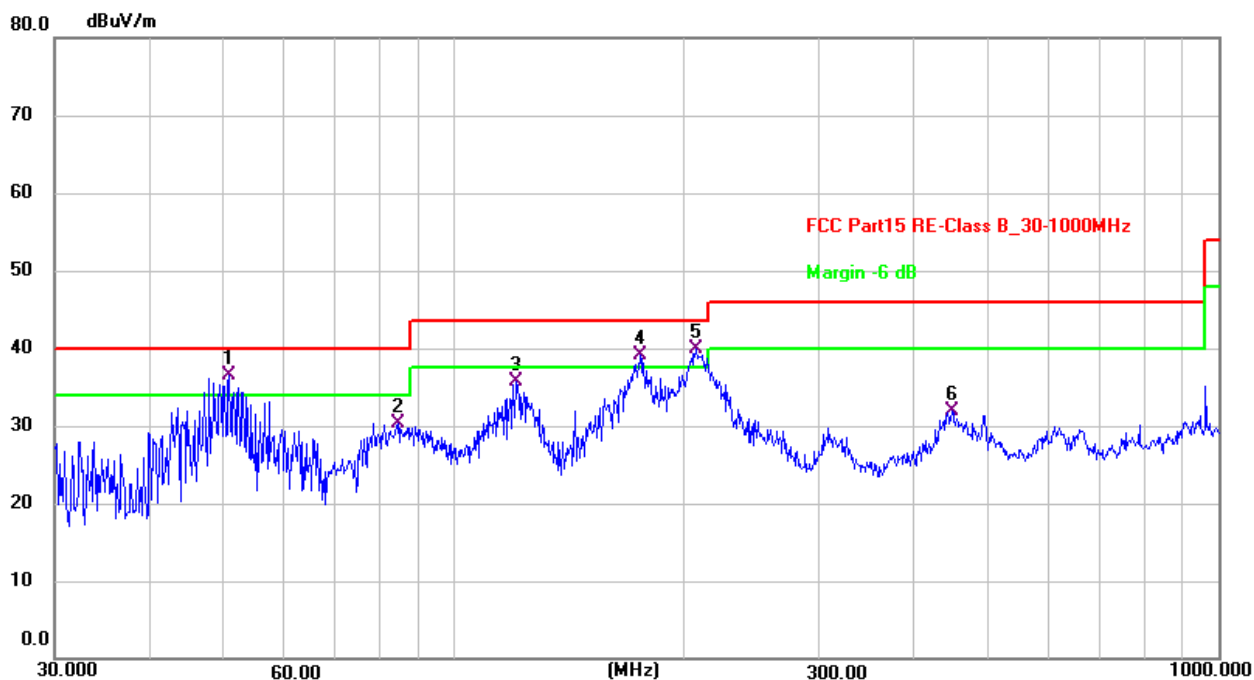


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	50.7635	45.04	-8.51	36.53	40.00	-3.47	QP	100	1	P	
2	84.4054	43.30	-12.95	30.35	40.00	-9.65	QP	100	11	P	
3	120.2766	45.35	-9.71	35.64	43.50	-7.86	QP	100	11	P	
4 !	175.0368	48.80	-9.67	39.13	43.50	-4.37	QP	100	135	P	
5 !	207.1226	51.81	-11.97	39.84	43.50	-3.66	QP	100	63	P	
6	447.9822	36.43	-4.57	31.86	46.00	-14.14	QP	200	348	P	

Test Plots and Data of Radiated Emissions from 30MHz to 1GHz


Tested Mode: TM8

Test Antenna Polarization: Horizontal

Remark:

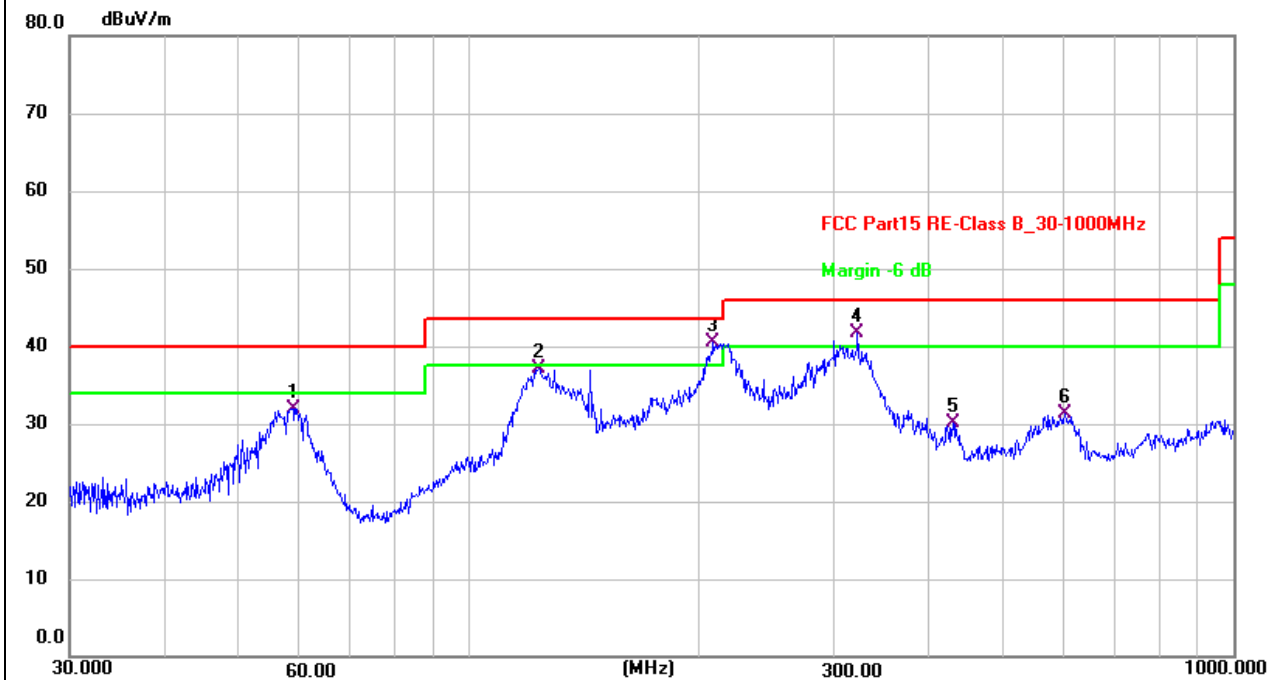

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	58.8185	41.64	-9.77	31.87	40.00	-8.13	QP	200	215	P	
2	123.2655	46.60	-9.45	37.15	43.50	-6.35	QP	200	350	P	
3 *	208.5803	52.40	-11.95	40.45	43.50	-3.05	QP	200	152	P	
4 !	322.1886	48.79	-7.18	41.61	46.00	-4.39	QP	200	350	P	
5	429.5228	35.04	-4.95	30.09	46.00	-15.91	QP	100	136	P	
6	601.4265	32.94	-1.59	31.35	46.00	-14.65	QP	200	100	P	

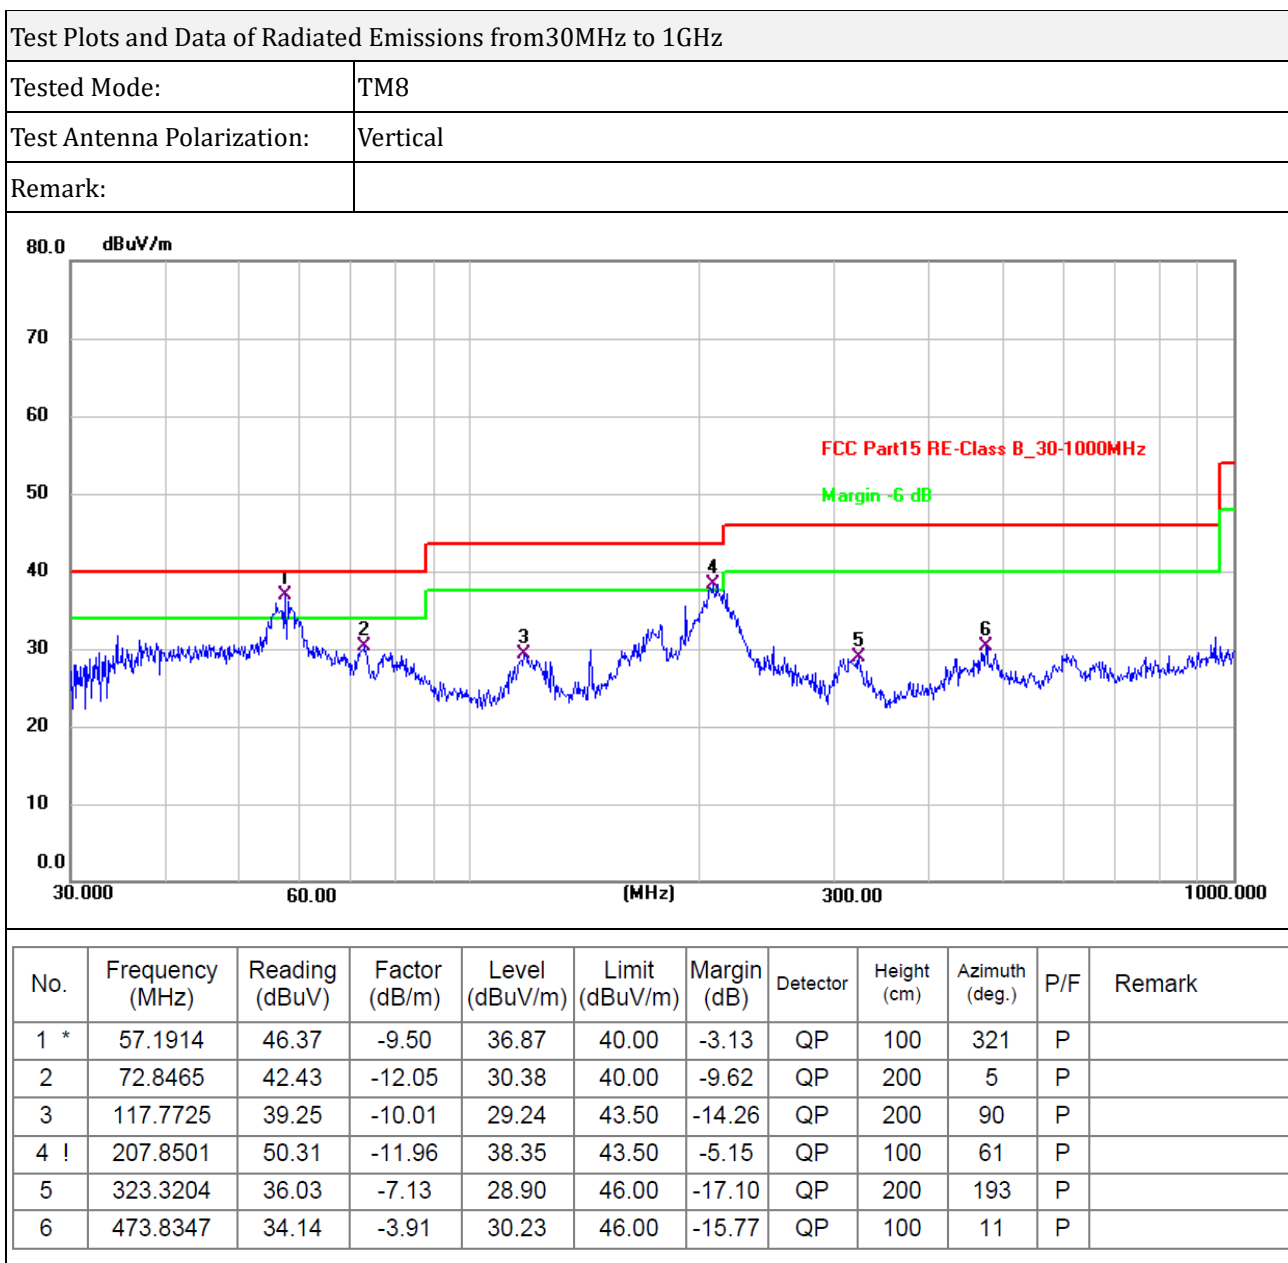

Note 1: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

Note 2: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The measurements greater than 20dB below the limit from 9kHz to 30MHz.

Note 3: For 9kHz-30MHz, Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})(\text{dB})$;

Limit line = specific limits (dBuV) + distance extrapolation factor.

Note 4: Level = Reading + Factor, Margin = Level – Limit.

6. Occupied Bandwidth

6.1 Standard and Limit

According to 15.215 (c), intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

6.2 Test Procedure

According to the ANSI C63.10-2020, section 6.9, the emission bandwidth test method as follows.

- 1) Remove the antenna from the EUT and connect to the spectrum analyzer via a low loss RF cable.
- 2) Set the spectrum analyzer to any one measured frequency within its operating range.
- 3) Set RBW = 1% ~5% of the 20 dB bandwidth, VBW = RBW.
- 4) Set Sweep = Auto, Detector function = peak, Trace = max hold.
- 5) Set a reference level on the measuring instrument equal to the highest peak value.
- 6) Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level.

Record the frequency difference as the emission bandwidth.

All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, use the marker-delta function to measure and record the 20dB down and 99% bandwidth of the emission.




Test Setup Block Diagram

6.3 Test Data and Results

Phone:

Test Frequency	20dB Bandwidth	99% Bandwidth
360kHz	38Hz	106Hz


Test Plots of Occupied Bandwidth

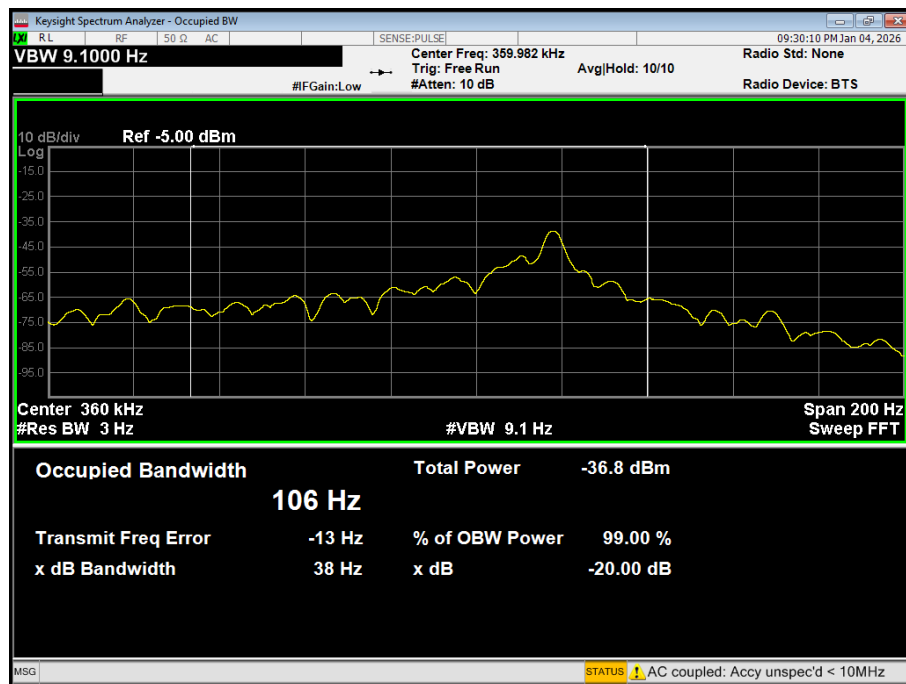

Phone:

Test Frequency	20dB Bandwidth	99% Bandwidth
127.9kHz	3Hz	3Hz

Test Plots of Occupied Bandwidth

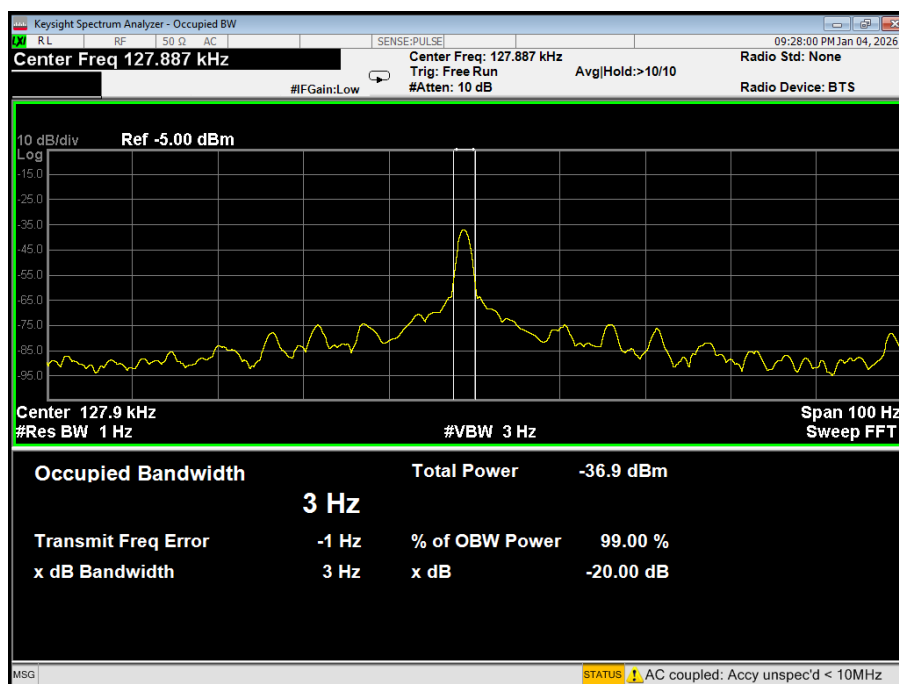


Note: Because the measured signal is CW-like, adjusting the RBW per C63.10 would not be practical since measurement bandwidth will always follow the RBW. The RBW is set to 1 Hz to perform the occupied bandwidth test.

Earphone:

Test Frequency	20dB Bandwidth	99% Bandwidth
120.6kHz	2Hz	2Hz

Test Plots of Occupied Bandwidth

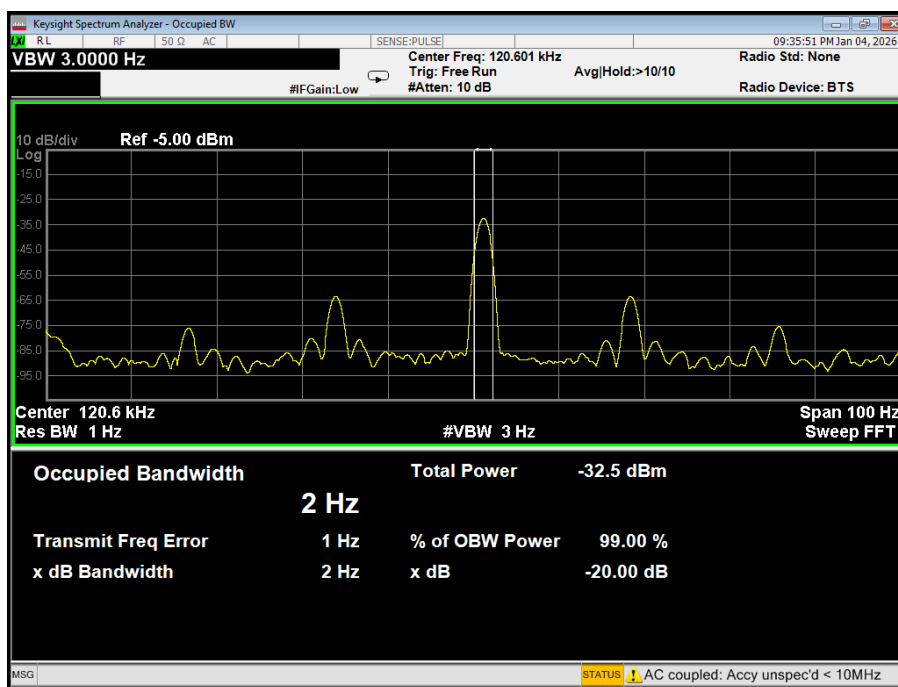


Note: Because the measured signal is CW-like, adjusting the RBW per C63.10 would not be practical since measurement bandwidth will always follow the RBW. The RBW is set to 1 Hz to perform the occupied bandwidth test.

Watch:

Test Frequency	20dB Bandwidth	99% Bandwidth
325.2kHz	808Hz	828Hz

Test Plots of Occupied Bandwidth

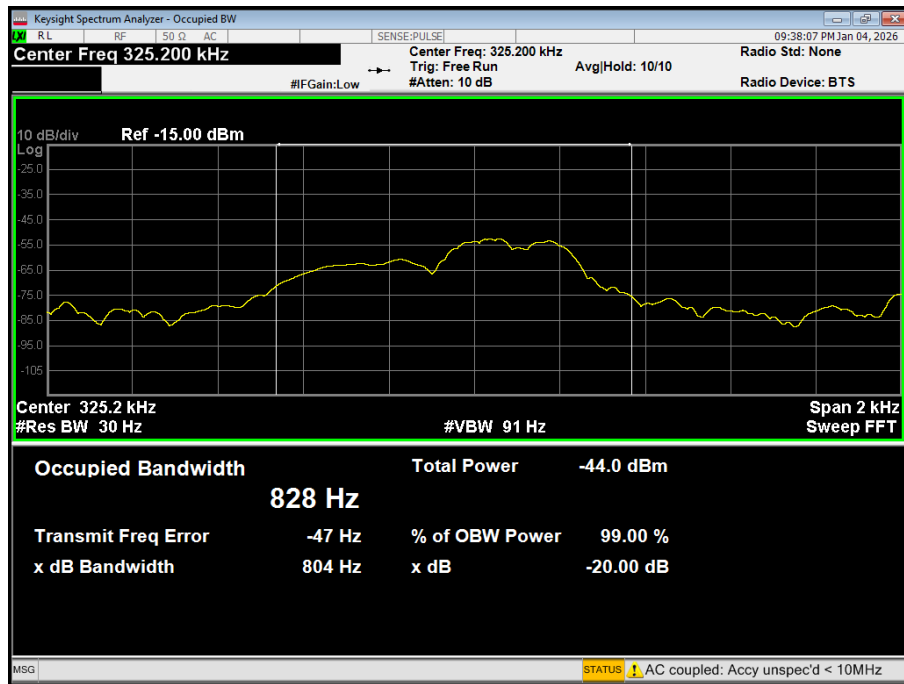

***** END OF REPORT *****