

Appendix B

LTE Band 2
LTE Band 5
LTE Band 12
LTE Band 30
LTE Band 66
LTE Band 71
WIFI 2.4G
WIFI 5G
BT

Measurement Report for BC1, FRONT, Band 2, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO, Channel 19100 (1900.000 MHz)

Device Under Test Properties

Model	Dimensions [mm]
BC1	80.0 x 20.0 x 15.0

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	FRONT, 5.00	Band 2	LTE-FDD, 10169-CAF	1900.000, 19100	7.52	1.38	40.2

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) – 2168	HSL1900	EX3DV4 – SN7858, 2026-02-20	DAE4ip Sn1846, 2026-01-07

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	70.0 x 140.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-07-10, 10:51	2026-07-10, 10:54
psSAR1g [W/Kg]	0.681	0.722
psSAR10g [W/Kg]	0.351	0.379
Power Drift [dB]	0.06	-0.00
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		52.6
Dist 3dB Peak [mm]		10.3

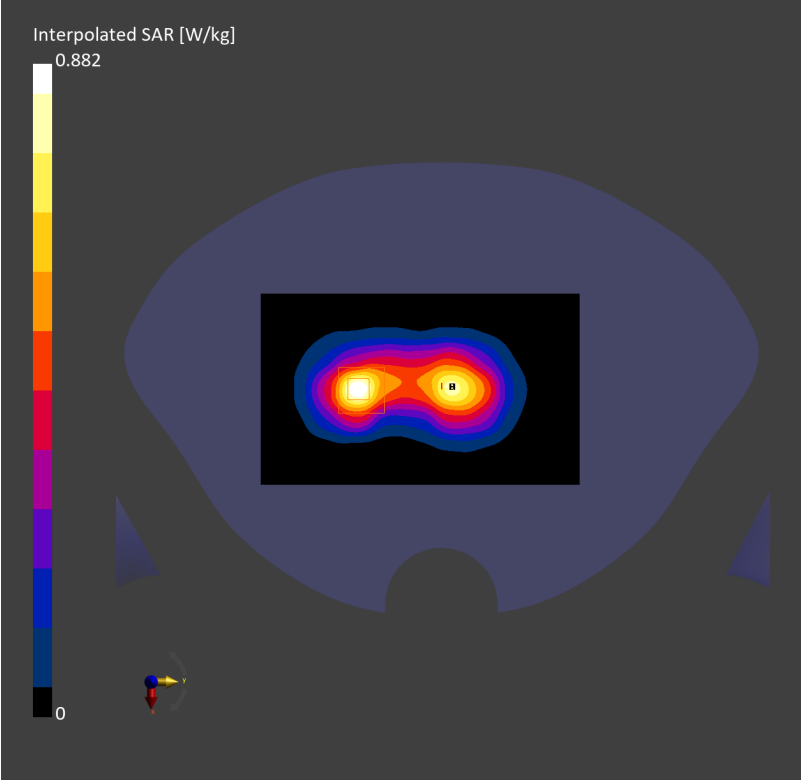

Device Under Test Properties

Model	Dimensions [mm]
BC1	80.0 x 20.0 x 15.0

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	FRONT, 5.00	Band 5	LTE-FDD, 10175-CAH	844.000, 20600	9.37	0.895	41.7

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) – 2168	HSL835	EX3DV4 – SN7858, 2026-02-20	DAE4ip Sn1846, 2026-01-07

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	70.0 x 140.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-07-10, 13:22	2026-07-10, 13:25
psSAR1g [W/Kg]	0.635	0.651
psSAR10g [W/Kg]	0.423	0.436
Power Drift [dB]	-0.11	-0.06
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		64.6
Dist 3dB Peak [mm]		> 16.0

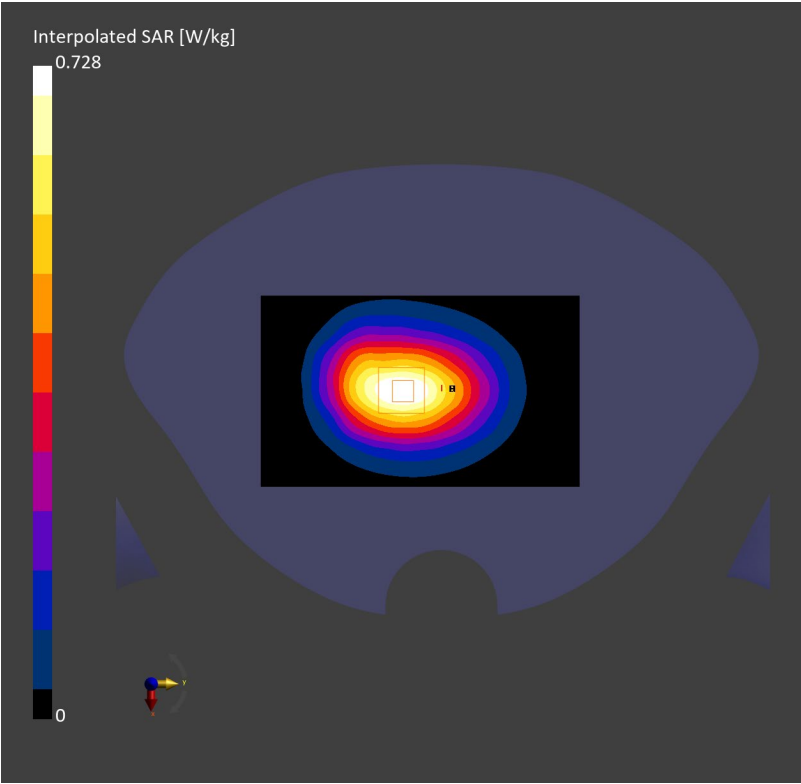

Measurement Report for BC1, FRONT, Band 12, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO, Channel 23130 (711.000 MHz)

Device Under Test Properties

Model	Dimensions [mm]
BC1	80.0 x 20.0 x 15.0

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	FRONT, 5.00	Band 12	LTE-FDD, 10175-CAH	711.000, 23130	9.72	0.880	42.9

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) – 2173	HSL750	EX3DV4 – SN7812, 2026-01-19	DAE4ip Sn1847, 2026-03-17

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	70.0 x 120.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-07-25, 10:42	2026-07-25, 10:46
psSAR1g [W/Kg]	0.215	0.223
psSAR10g [W/Kg]	0.147	0.151
Power Drift [dB]	0.02	-0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		65.3
Dist 3dB Peak [mm]		> 16.0

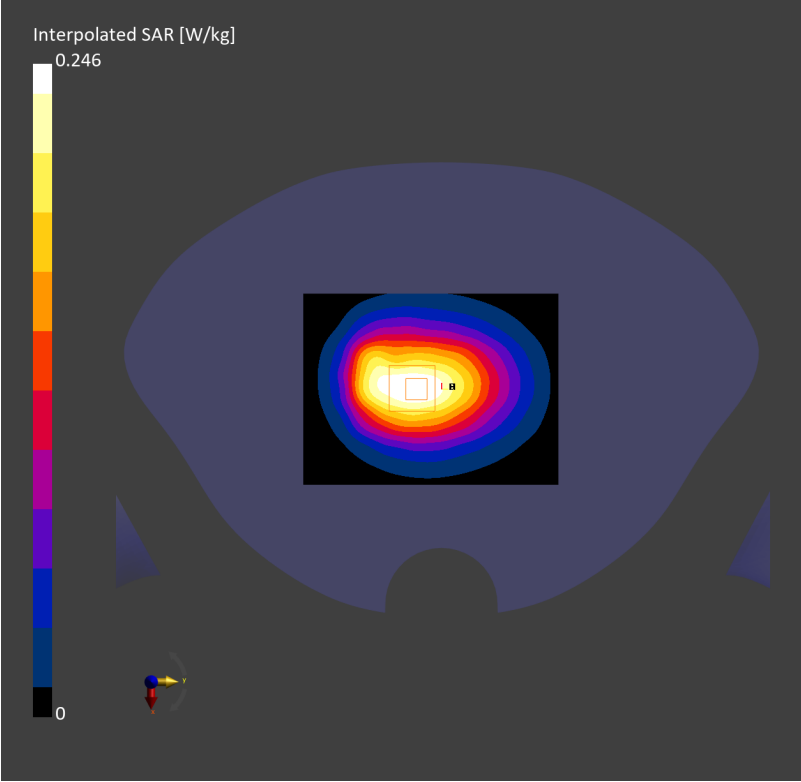

Measurement Report for BC1, EDGE TOP, Band 30, LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO, Channel 27710 (2310.000 MHz)

Device Under Test Properties

Model	Dimensions [mm]
BC1	36.0 x 20.0 x 20.0

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	EDGE TOP, 5.00	Band 30	LTE-FDD, 10154-CAH	2310.000, 27710	7.5	1.69	40.5

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) – 2173	HSL2300	EX3DV4 – SN7812, 2026-01-19	DAE4ip Sn1847, 2026-03-17

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 90.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-07-25, 15:51	2026-07-25, 15:56
psSAR1g [W/Kg]	0.702	0.736
psSAR10g [W/Kg]	0.300	0.289
Power Drift [dB]	-0.00	-0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		46.4
Dist 3dB Peak [mm]		6.4

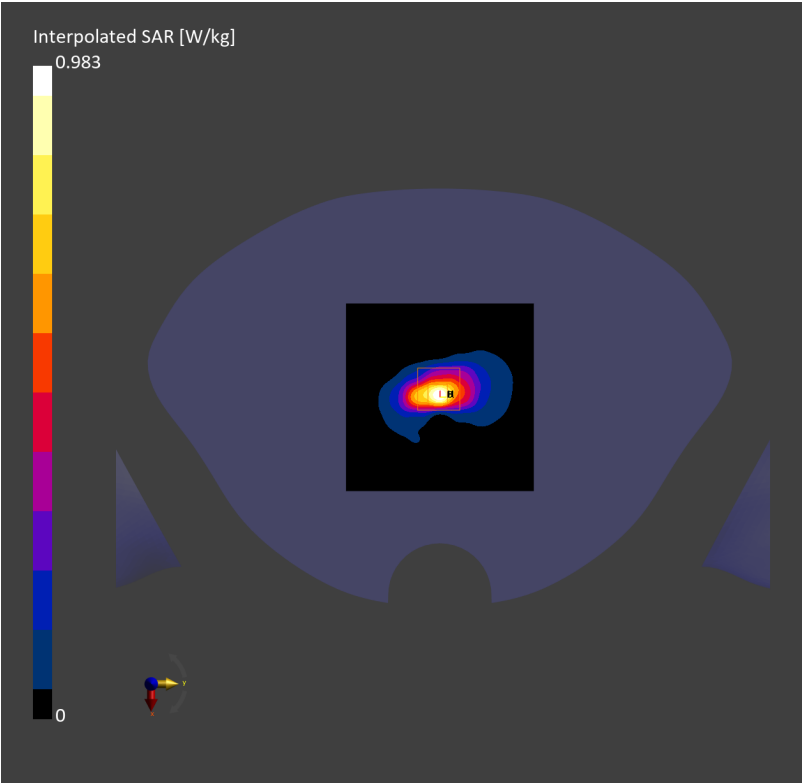

Measurement Report for BC1 , FRONT, Band 66, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO, Channel 132072 (1720.000 MHz)

Device Under Test Properties

Model	Dimensions [mm]
BC1	80.0 x 20.0 x 15.0

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	FRONT, 5.00	Band 66	LTE-FDD, 10169-CAF	1720.000, 132072	7.76	1.36	40.7

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) – 2168	HSL1750	EX3DV4 – SN7858, 2026-02-20	DAE4ip Sn1846, 2026-01-07

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	70.0 x 120.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-07-10, 18:09	2026-07-10, 18:13
psSAR1g [W/Kg]	0.542	0.588
psSAR10g [W/Kg]	0.320	0.370
Power Drift [dB]	-0.01	0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		67.1
Dist 3dB Peak [mm]		16.4

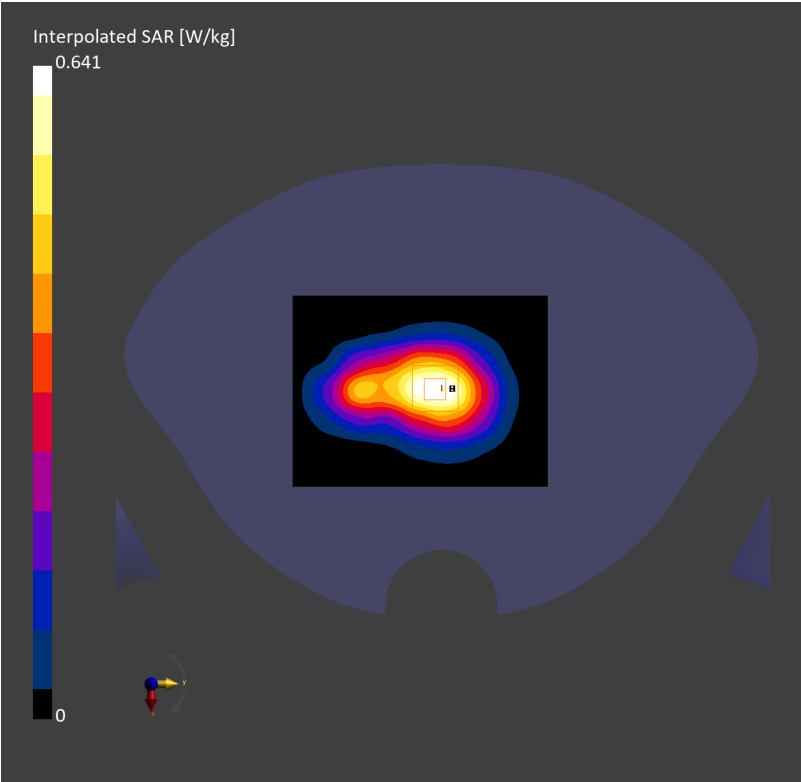

Measurement Report for BC1, FRONT, Band 71, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO, Channel 133372 (688.000 MHz)

Device Under Test Properties

Model	Dimensions [mm]
BC1	80.0 x 20.0 x 15.0

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	FRONT, 5.00	Band 71	LTE-FDD, 10169-CAF	688.000, 133372	9.72	0.873	43.0

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) – 2173	HSL750	EX3DV4 – SN7812, 2026-01-19	DAE4ip Sn1847, 2026-03-17

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	70.0 x 120.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-07-25, 17:51	2026-07-25, 17:54
psSAR1g [W/Kg]	0.128	0.129
psSAR10g [W/Kg]	0.089	0.087
Power Drift [dB]	-0.11	-0.18
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		64.9
Dist 3dB Peak [mm]		27.6

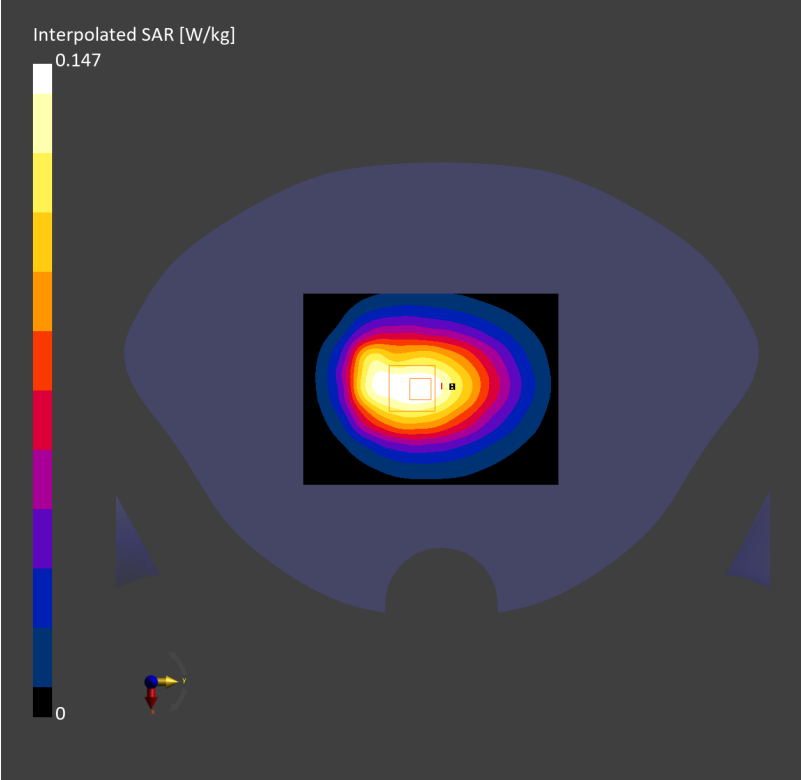

Device Under Test Properties

Model	Dimensions [mm]
BC1	80.0 x 20.0 x 15.0

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	FRONT, 5.00	WLAN 2.4GHz	WLAN, 10012-CAB	2412.000, 1	6.97	1.77	39.9

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) – 2173	HBBL-600-10000 Liquid	EX3DV4 – SN7858, 2026-02-20	DAE4ip Sn1847, 2026-03-17

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 140.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-07-26, 01:17	2026-07-26, 01:21
psSAR1g [W/Kg]	0.398	0.447
psSAR10g [W/Kg]	0.202	0.213
Power Drift [dB]	-0.01	-0.05
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		42.7
Dist 3dB Peak [mm]		9.4

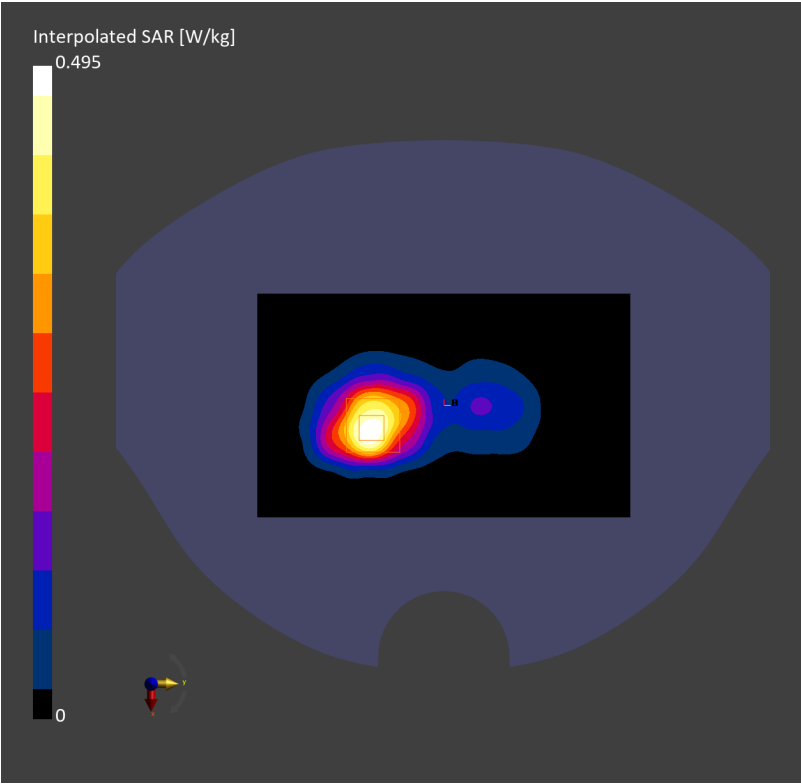

Device Under Test Properties

Model	Dimensions [mm]
BC1	36.0 x 20.0 x 20.0

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	EDGE RIGHT, 5.00	WLAN 5GHz	WLAN, 10062-CAE	5240.000, 48	5.05	4.84	36.8

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) – 2173	HSL5GHz	EX3DV4 – SN7812, 2026-01-19	DAE4ip Sn1847, 2026-03-17

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 90.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-07-25, 21:11	2026-07-25, 21:18
psSAR1g [W/Kg]	0.094	0.088
psSAR10g [W/Kg]	0.026	0.017
Power Drift [dB]	0.05	0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		54.5
Dist 3dB Peak [mm]		5.6

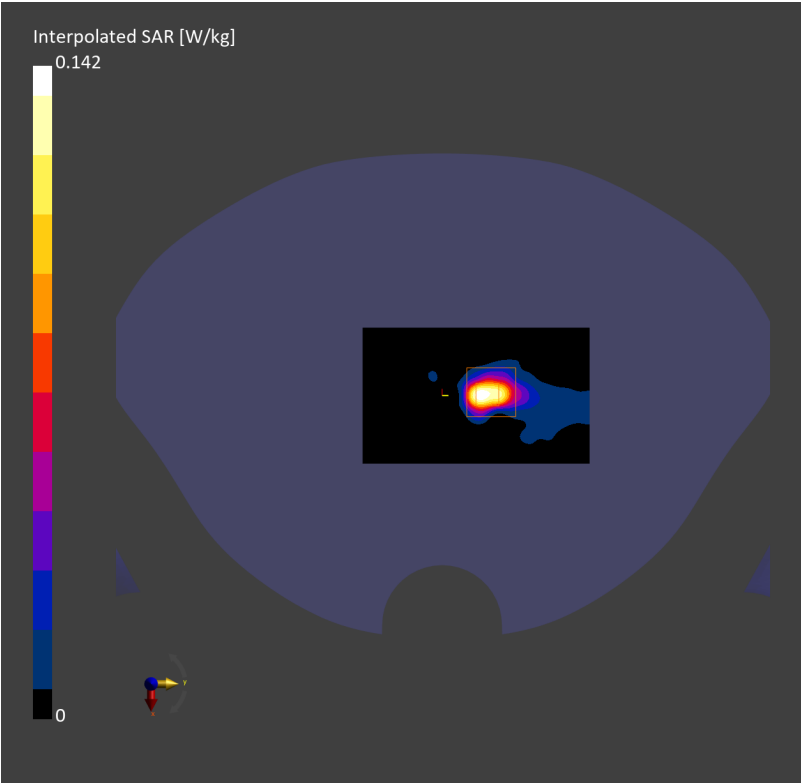

Device Under Test Properties

Model	Dimensions [mm]
BC1	36.0 x 20.0 x 20.0

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	EDGE BOTTOM, 5.00	WLAN 5GHz	WLAN, 10062-CAE	5825.000, 165	4.52	5.48	35.4

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) – 2173	HSL5GHz	EX3DV4 – SN7812, 2026-01-19	DAE4ip Sn1847, 2026-03-17

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 90.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-07-26, 00:14	2026-07-26, 00:21
psSAR1g [W/Kg]	0.141	0.130
psSAR10g [W/Kg]	0.053	0.044
Power Drift [dB]	0.02	0.12
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		51.9
Dist 3dB Peak [mm]		11.2

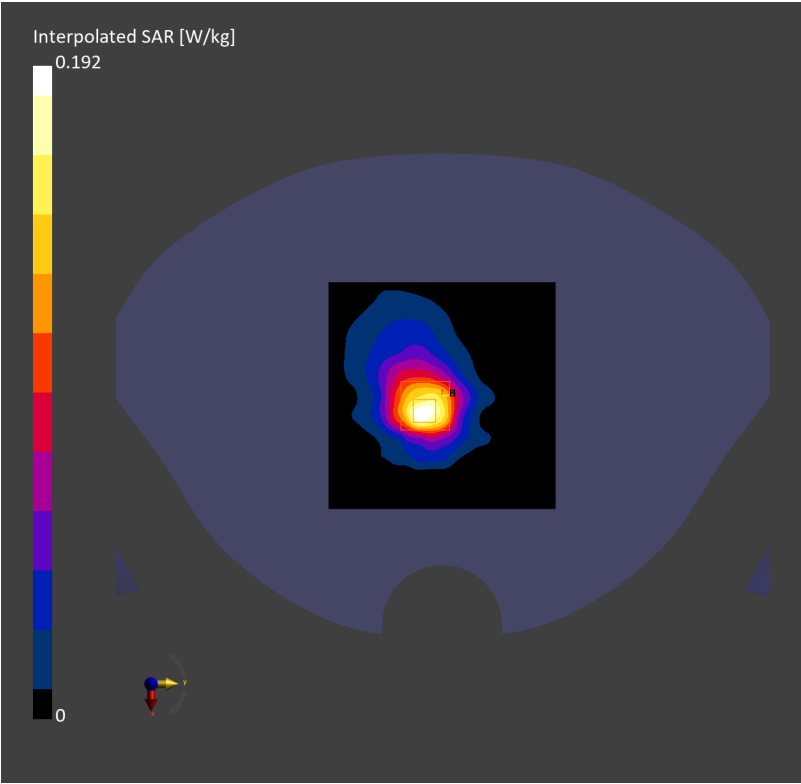

Device Under Test Properties

Model	Dimensions [mm]
BC1	36.0 x 20.0 x 20.0

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	FRONT, 5.00	ISM 2.4 GHz Band	Bluetooth, 10032-CAA	2480.000, 78	6.97	1.85	39.7

Hardware Setup

Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) – 2173	HSL2450	EX3DV4 – SN7858, 2026-02-20	DAE4ip Sn1847, 2026-03-17

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	70.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-07-26, 05:29	2026-07-26, 05:38
psSAR1g [W/Kg]	0.073	0.075
psSAR10g [W/Kg]	0.036	0.035
Power Drift [dB]	-0.03	-0.08
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		47.9
Dist 3dB Peak [mm]		8.1

