

RADIO TEST REPORT

FCC ID: 2BVG8-SPPLUS

Product: Tablet PC

Trade Mark: SugarPixel

Model No.: SPPLUS

Family Model: N/A

Report No.: N26012902613E

Issue Date: Apr. 08, 2026

Prepared for

CustomTypeOne LLC

4381 Hudson Drive #185 Stow, Ohio 44224 USA

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

No. 24 Xinfu East Road Xiangshan Community, Xinqiao Street, Baoan
District, Shenzhen, Guangdong, China

Tel. 0755-23200050 Website: <http://www.ntek.org.cn>

TABLE OF CONTENTS

1	TEST RESULT CERTIFICATION	3
2	SUMMARY OF TEST RESULTS.....	4
3	FACILITIES AND ACCREDITATIONS	5
3.1	FACILITIES.....	5
3.2	LABORATORY ACCREDITATIONS AND LISTINGS	5
3.3	MEASUREMENT UNCERTAINTY	5
4	GENERAL DESCRIPTION OF EUT	6
5	DESCRIPTION OF TEST MODES	8
6	SETUP OF EQUIPMENT UNDER TEST	9
6.1	BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM.....	9
6.2	SUPPORT EQUIPMENT.....	10
6.3	EQUIPMENTS LIST FOR ALL TEST ITEMS.....	11
7	TEST REQUIREMENTS	13
7.1	CONDUCTED EMISSIONS TEST	13
7.2	RADIATED SPURIOUS EMISSION	16
7.3	NUMBER OF HOPPING CHANNEL	34
7.4	HOPPING CHANNEL SEPARATION MEASUREMENT	35
7.5	AVERAGE TIME OF OCCUPANCY (DWEIL TIME)	36
7.6	20DB BANDWIDTH TEST	38
7.7	PEAK OUTPUT POWER.....	39
7.8	CONDUCTED BAND EDGE MEASUREMENT.....	40
7.9	SPURIOUS RF CONDUCTED EMISSION.....	41
7.10	ANTENNA APPLICATION	42
7.11	FREQUENCY HOPPING SYSTEM (FHSS) EQUIPMENT REQUIREMENTS	43
8	TEST RESULTS	44
8.1	DWEIL TIME	44
8.2	MAXIMUM CONDUCTED OUTPUT POWER	54
8.3	-20DB BANDWIDTH	60
8.4	OCCUPIED CHANNEL BANDWIDTH.....	66
8.5	CARRIER FREQUENCIES SEPARATION	72
8.6	NUMBER OF HOPPING CHANNEL.....	78
8.7	BAND EDGE	81
8.8	BAND EDGE(HOPPING)	88
8.9	CONDUCTED RF SPURIOUS EMISSION.....	95

1 TEST RESULT CERTIFICATION

Applicant's name	CustomTypeOne LLC
Address.....	4381 Hudson Drive #185 Stow, Ohio 44224 USA
Manufacturer's Name	Epudo (DongGuan) Digital Technology Co., Ltd.
Address.....	No.5 Plant, Huanan Science Park 5th Road, Tianxin Village, Tangxia Town, 523710 Dongguan, PEOPLE'S REPUBLIC OF CHINA
Product description	
Product name	Tablet PC
Trade Mark.....	SugarPixel
Model and/or type reference	SPPLUS
Family Model	N/A
Test Sample number.....	S2601300159-1#
Date (s) of performance of tests	Jan. 29, 2026 ~ Apr. 08, 2026

Measurement Procedure Used:

APPLICABLE STANDARDS	
STANDARD/ TEST PROCEDURE	TEST RESULT
FCC 47 CFR Part 2, Subpart J FCC 47 CFR Part 15, Subpart C ANSI C63.10-2020+COR 1-2023 KDB 558074 D01 15.247 Meas Guidance v05r02	Complied

This device described above has been tested by Shenzhen NTEK Testing Technology Co., Ltd., and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of Shenzhen NTEK Testing Technology Co., Ltd., this document may be altered or revised by Shenzhen NTEK Testing Technology Co., Ltd., personnel only, and shall be noted in the revision of the document. The test results of this report relate only to the tested sample identified in this report.

Prepared By: Kieron Luo
Kieron Luo
(Project Engineer)

Reviewed By: Aaron Cheng
Aaron Cheng
(Supervisor)

Approved By: Alex Li
Alex Li
(Manager)

2 SUMMARY OF TEST RESULTS**FCC Part15 (15.247), Subpart C**

Standard Section	Test Item	Verdict	Remark
15.207	Conducted Emission	PASS	
15.209 (a) 15.205 (a)	Radiated Spurious Emission	PASS	
15.247(a)(1)	Hopping Channel Separation	PASS	
15.247(b)(1)	Peak Output Power	PASS	
15.247(a)(iii)	Number of Hopping Frequency	PASS	
15.247(a)(iii)	Dwell Time	PASS	
15.247(a)(1)	Bandwidth	PASS	
15.247 (d)	Band Edge Emission	PASS	
15.247 (d)	Spurious RF Conducted Emission	PASS	
15.203	Antenna Requirement	PASS	

Remark:

1. "N/A" denotes test is not applicable in this Test Report.
2. All test items were verified and recorded according to the standards and without any deviation during the test.

3 FACILITIES AND ACCREDITATIONS

3.1 FACILITIES

All measurement facilities used to collect the measurement data are located at No. 24 Xinfu East Road Xiangshan Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong, China.

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

3.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

CNAS-Lab.

IC-Registration

FCC- Accredited

A2LA-Lab.

Name of Firm

Site Location

: The Certificate Registration Number is L5516.

The Certificate Registration Number is 9270A.

CAB identifier:CN0074

Test Firm Registration Number: 463705.

Designation Number: CN1184

The Certificate Registration Number is 4298.01

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories.

This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).

: Shenzhen NTEK Testing Technology Co., Ltd.

: No. 24 Xinfu East Road Xiangshan Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong, China.

3.3 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 2.80\text{dB}$
2	RF power, conducted	$\pm 0.16\text{dB}$
3	Spurious emissions, conducted	$\pm 0.21\text{dB}$
4	All emissions, radiated(30MHz~1GHz)	$\pm 2.64\text{dB}$
5	All emissions, radiated(1GHz~6GHz)	$\pm 2.40\text{dB}$
6	All emissions, radiated(> 6GHz)	$\pm 2.52\text{dB}$
7	Temperature	$\pm 0.5^{\circ}\text{C}$
8	Humidity	$\pm 2\%$
9	All emissions, radiated(9KHz~30MHz)	$\pm 6\text{dB}$
10	Occupied bandwidth	$\pm 4.7\%$
11	Dwell time	$\pm 5.4\%$

4 GENERAL DESCRIPTION OF EUT

Product Feature and Specification	
Equipment	Tablet PC
Trade Mark	SugarPixel
FCC ID	2BVG8-SPPLUS
Model No.	SPPLUS
Family Model	N/A
Model Difference	N/A
Operating Frequency	2402MHz~2480MHz
Modulation	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Number of Channels	79 Channels
Antenna Type	PCB Antenna
Antenna Gain	0.19 dBi
Adapter	N/A
Battery	DC 3.8V, 5000mA, 19Wh
Power supply	DC 3.8V from battery or DC 5V from USB Port
HW Version	T30-T616-V2.0
SW Version	EC873B_T1_20260407

Note 1: Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.

Note 2: The engineering test program was provided and the EUT was programmed to be in continuously transmitting mode.

Revision History

Report No.	Version	Description	Issued Date
N26012902613E	Rev.01	Initial issue of report	Apr. 08, 2026

5 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (1Mbps for GFSK modulation; 2Mbps for $\pi/4$ -DQPSK modulation; 3Mbps for 8-DPSK modulation) were used for all test.

The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y and Z-plane. The X-plane results were found as the worst case and were shown in this report.

Carrier Frequency and Channel list:

Channel	Frequency(MHz)
0	2402
1	2403
...	...
39	2441
40	2442
...	...
77	2479
78	2480

Note: $f_c = 2402\text{MHz} + k \times 1\text{MHz}$ $k=0$ to 78

The following summary table is showing all test modes to demonstrate in compliance with the standard.

For AC Conducted Emission	
Final Test Mode	Description
Mode 1	normal link mode

Note: AC power line Conducted Emission was tested under maximum output power.

For Radiated Test Cases	
Final Test Mode	Description
Mode 1	normal link mode
Mode 2	CH00(2402MHz)
Mode 3	CH39(2441MHz)
Mode 4	CH78(2480MHz)

Note: For radiated test cases, the worst mode data rate 3Mbps was reported only, because this data rate has the highest RF output power at preliminary tests, and no other significantly frequencies found in conducted spurious emission.


For Conducted Test Cases	
Final Test Mode	Description
Mode 2	CH00(2402MHz)
Mode 3	CH39(2441MHz)
Mode 4	CH78(2480MHz)
Mode 5	Hopping mode

Note: The engineering test program was provided and the EUT was programmed to be in continuously transmitting mode.


6 SETUP OF EQUIPMENT UNDER TEST

6.1 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM


For AC Conducted Emission Mode

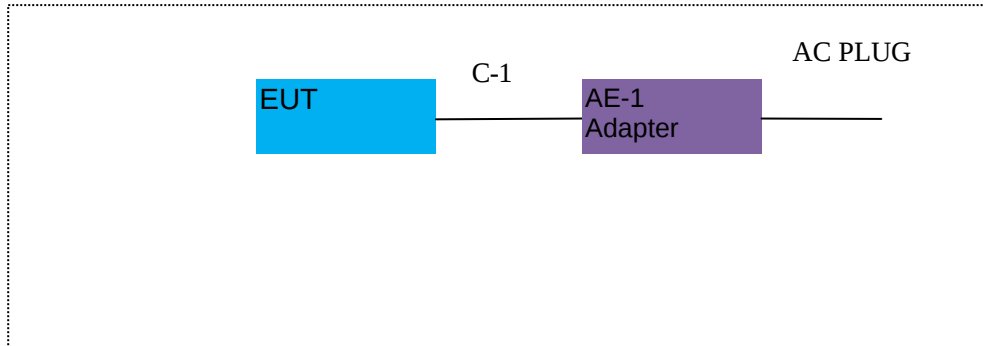

For Radiated Test Cases

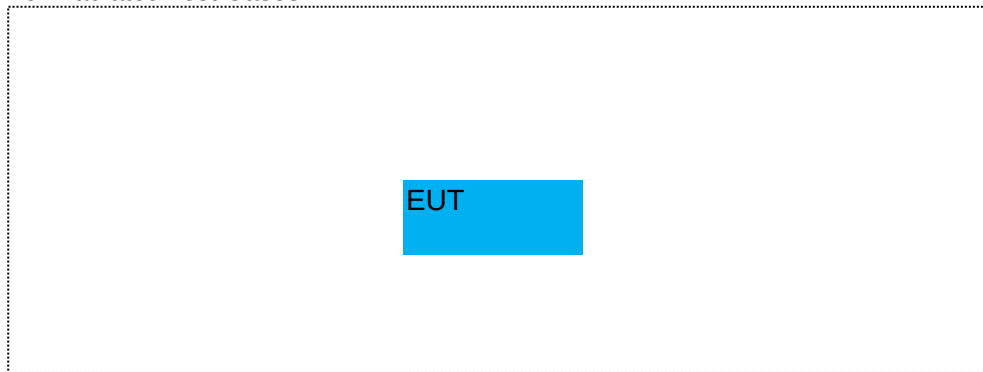

For Conducted Test Cases

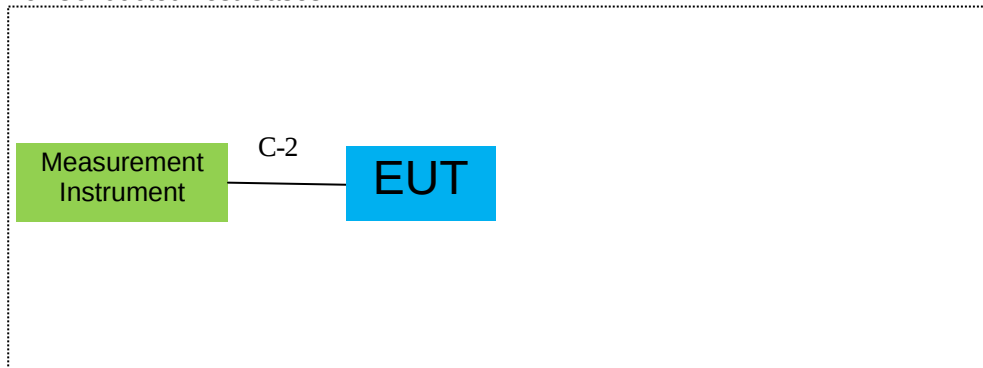

Note: 1. The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.
 2. EUT built-in battery-powered, the battery is fully-charged.

6.2 SUPPORT EQUIPMENT

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model/Type No.	Series No.	Note
AE-1	Adapter	N/A	N/A	Peripherals

Item	Cable Type	Shielded Type	Ferrite Core	Length
C-1	DC Cable	NO	NO	1.0m
C-2	RF Cable	YES	NO	0.1m

Notes:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

6.3 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation& Conducted Test equipment

EQUIPMENT TYPE	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
EMI Test Receiver	R&S	ESPI7	101318	2025.04.17	2026.04.16	1 year
Bilog Antenna	TESEQ	CBL6111D	31216	2025.04.17	2026.04.16	1 year
Turn Table	EM	SC100_1	60531	N/A	N/A	N/A
Antnna Mast	EM	SC100	N/A	N/A	N/A	N/A
Horn Antenna	EM	EM-AH-10180	2011071402	2024.05.12	2027.05.11	3 year
Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2024.05.12	2027.05.11	3 year
Test Cable (30MHz-1GHz)	N/A	R-01	N/A	2023.06.17	2026.06.16	3 year
Test Cable (1-18GHz)	N/A	R-02	N/A	2023.06.17	2026.06.16	3 year
50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2024.04.26	2027.04.25	3 year
Pre-Amplifier	EMC	EMC051835SE	980246	2025.04.17	2026.04.16	1 year
Spectrum Analyzer	Agilent	E4440A	MY41000130	2025.04.17	2026.04.16	1 year
Filter	TRILTHIC	2400MHz	29	2024.04.26	2027.04.25	3 year
Attenuator	Weinschel	33-10-33	AR4010	2024.04.25	2027.04.24	3 year
Attenuator	Weinschel	24-20-34	BP4485	2024.04.25	2027.04.24	3 year
MXA Signal Analyzer	Agilent	N9020A	MY49100060	2025.04.17	2026.04.16	1 year
ESG VETCTOR SIGNAL GENERAROR	Agilent	E4438C	MY45093347	2025.04.17	2026.04.16	1 year
Power Splitter	Mini-Circuits/ USA	ZN2PD-63-S+	SF025101428	2024.04.26	2027.04.25	3 year
Coupler	Mini-Circuits	ZADC-10-63-S +	SF794101410	2024.04.26	2027.04.25	3 year
Directional Coupler	MCLI/USA	CB11-20	0D2L51502	2024.04.26	2027.04.25	3 year
Attenuator	Agilent	8495B	MY42147029	2024.04.26	2027.04.25	3 year
Power Meter	DARE	RPR3006W	15I00041SNO 84	2025.04.17	2026.04.16	1 year
MXG Vector Signal Generator	Agilent	N5182A	MY47070317	2025.04.17	2026.04.16	1 year
Wideband Radio Communication Tester Specifications	R&S	CMW500	148500	2025.05.06	2026.05.05	1 year
temporary antenna connector (Note)	NTS	R001	N/A	N/A	N/A	N/A

Note:

We will use the temporary antenna connector (soldered on the PCB board) When conducted test
And this temporary antenna connector is listed within the instrument list

AC Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2025.04.17	2026.04.16	1 year
2	LISN	R&S	ENV216	101313	2025.04.16	2026.04.15	1 year
3	LISN	SCHWARZBECK	NNLK 8129	8129245	2025.04.16	2026.04.15	1 year
4	50Ω Coaxial Switch	ANRITSU CORP	MP59B	6200983704	2024.04.26	2027.04.25	3 year
5	Test Cable (9KHz-30MHz)	N/A	C01	N/A	2023.05.06	2026.05.05	3 year
6	Test Cable (9KHz-30MHz)	N/A	C02	N/A	2023.05.06	2026.05.05	3 year
7	Test Cable (9KHz-30MHz)	N/A	C03	N/A	2023.05.06	2026.05.05	3 year

Note: Each piece of equipment is scheduled for calibration once a year except the Aux Equipment & Test Cable which is scheduled for calibration every 2 or 3 years.

Measurement Software

Item	Manufacturer	Software Name	Software Version	Description
1	MWRFtest	MTS 8310 2.4GHz/5GHz	2.0	RF Conducted Test
2	Farad	EZ-EMC_RE	AIT-03A	RadiatedTest
3	raditeq	RadiMation	2023.1.3	RadiatedTest

7 TEST REQUIREMENTS

7.1 CONDUCTED EMISSIONS TEST

7.1.1 Applicable Standard


According to FCC Part 15.207(a)

7.1.2 Conformance Limit

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56*	56-46*
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. *Decreases with the logarithm of the frequency
2. The lower limit shall apply at the transition frequencies
3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

7.1.3 Test Configuration

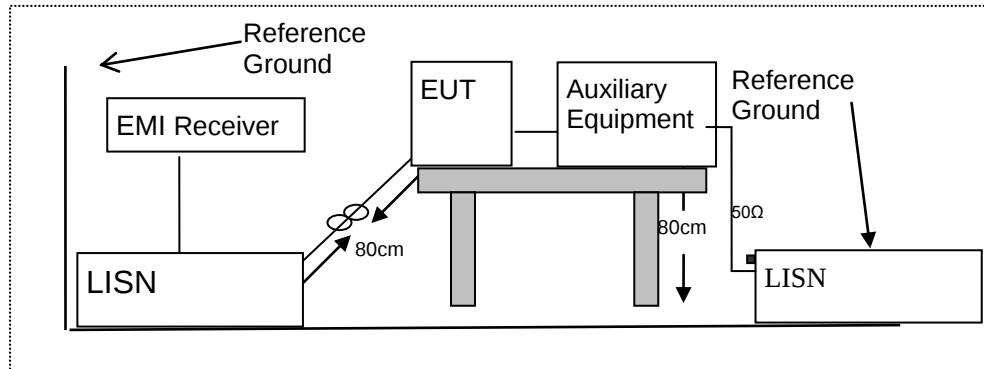

7.1.4 Test Procedure

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2020+COR 1-2023 Conducted emissions the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room.
2. The EUT was placed on a table which is 0.8m above ground plane.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40cm long.
5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
6. LISN at least 80 cm from nearest part of EUT chassis.
7. The frequency range from 150KHz to 30MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth(IF bandwidth=9KHz) with Maximum Hold Mode
9. For the actual test configuration, please refer to the related Item –EUT Test Photos.

7.1.5 Test Results

Pass


7.1.6 Test Results

EUT:	Tablet PC	Model Name :	SPPLUS
Temperature:	25.1℃	Relative Humidity:	47.9%
Pressure:	1010hPa	Phase :	L
Test Voltage :	DC 5V from Adapter AC 120V/60Hz	Test Mode:	Mode 1

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remar k
0.1540	23.08	20.30	43.38	65.78	-22.40	QP
0.1540	11.32	20.30	31.62	55.78	-24.16	AVG
0.5321	14.34	20.43	34.77	56.00	-21.23	QP
0.5321	6.60	20.43	27.03	46.00	-18.97	AVG
0.8980	15.38	20.39	35.77	56.00	-20.23	QP
0.9020	2.04	20.38	22.42	46.00	-23.58	AVG
3.0260	15.33	20.44	35.77	56.00	-20.23	QP
3.0220	4.10	20.44	24.54	46.00	-21.46	AVG
3.5260	13.85	20.47	34.32	56.00	-21.68	QP
3.5260	5.42	20.47	25.89	46.00	-20.11	AVG
12.4420	30.76	9.29	40.05	60.00	-19.95	QP
12.4420	21.58	9.29	30.87	50.00	-19.13	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

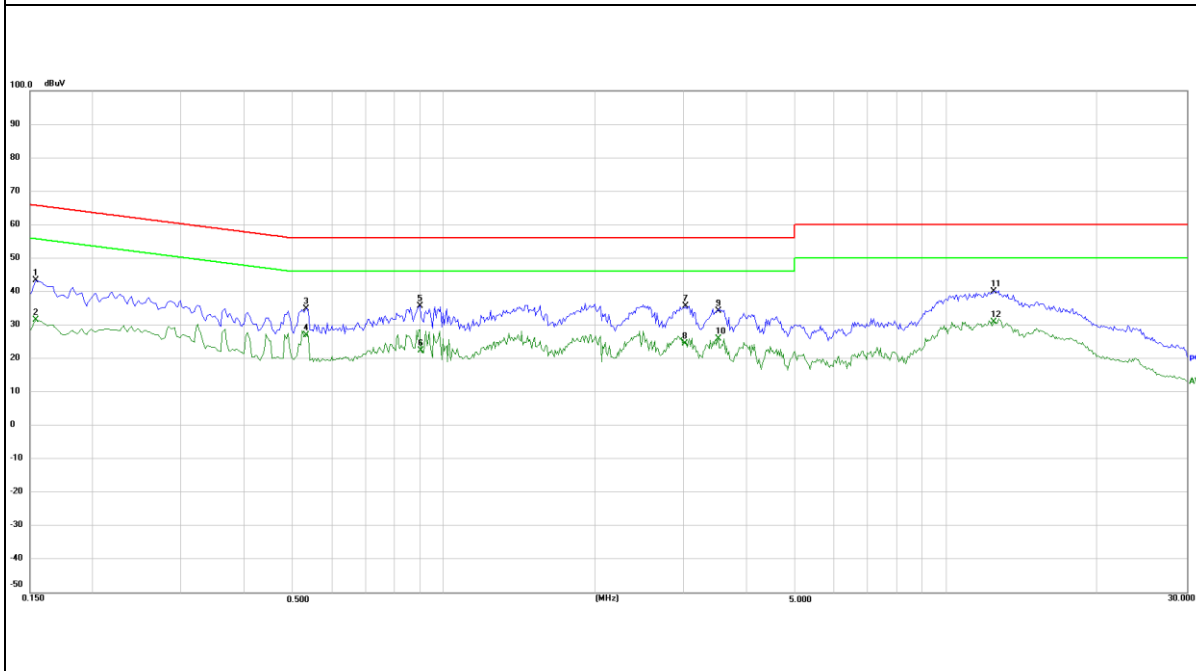


EUT:	Tablet PC	Model Name :	SPPLUS
Temperature:	25.1℃	Relative Humidity:	47.9%
Pressure:	1010hPa	Phase :	N
Test Voltage :	DC 5V from Adapter AC 120V/60Hz	Test Mode:	Mode 1

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.4820	14.48	20.43	34.91	56.30	-21.39	QP
0.4820	6.51	20.43	26.94	46.30	-19.36	AVG
1.1700	13.74	20.34	34.08	56.00	-21.92	QP
1.1620	1.71	20.34	22.05	46.00	-23.95	AVG
5.6220	12.48	20.67	33.15	60.00	-26.85	QP
5.6500	1.14	20.67	21.81	50.00	-28.19	AVG
6.0660	12.65	20.72	33.37	60.00	-26.63	QP
6.0300	1.58	20.71	22.29	50.00	-27.71	AVG
9.7220	25.91	10.52	36.43	60.00	-23.57	QP
9.7220	17.13	10.52	27.65	50.00	-22.35	AVG
12.4900	27.57	8.86	36.43	60.00	-23.57	QP
12.5740	17.26	8.82	26.08	50.00	-23.92	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

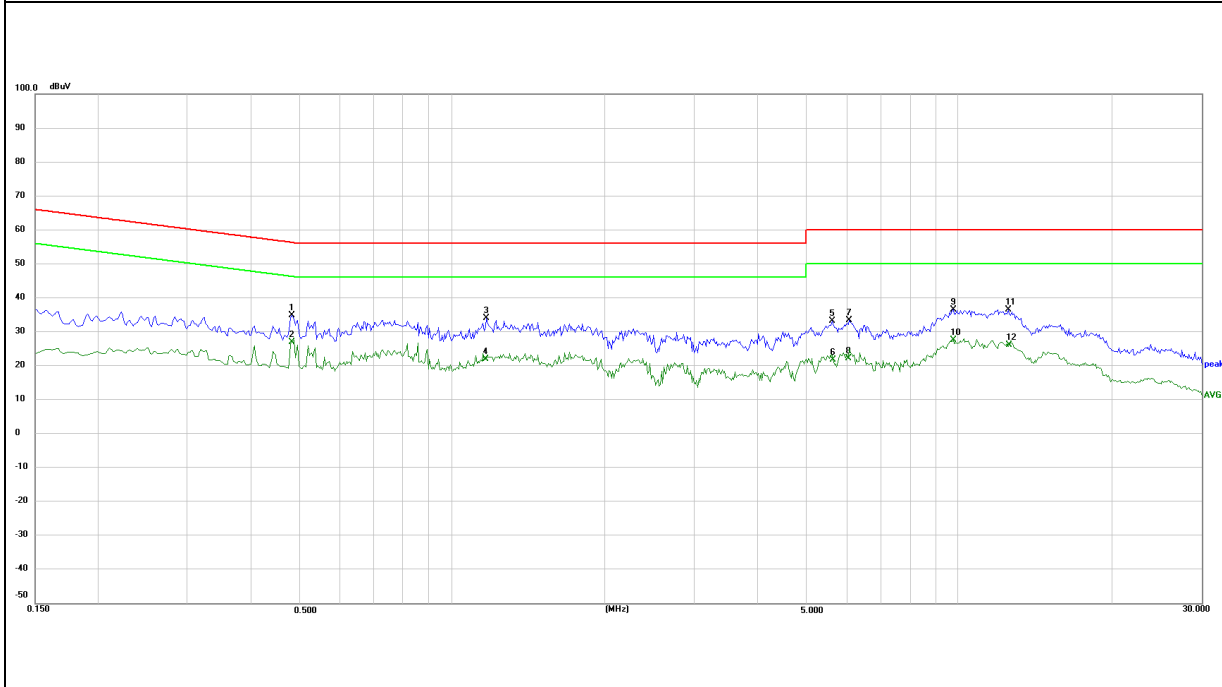

7.2 RADIATED SPURIOUS EMISSION

7.2.1 Applicable Standard

According to FCC Part 15.247(d) & 15.209 & 15.205 and ANSI C63.10-2020+COR 1-2023

7.2.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance
0.009~0.490	2400/F(KHz)	20 log (uV/m)	300
0.490~1.705	24000/F(KHz)	20 log (uV/m)	30
1.705~30.0	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Limits of Radiated Emission Measurement(Above 1000MHz)

Frequency(MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54


Remark : 1. Emission level in dBuV/m=20 log (uV/m)
 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
 3. For Frequency 9kHz~30MHz:
 Distance extrapolation factor =40log(Specific distance/ test distance)(dB);
 Limit line=Specific limits(dBuV) + distance extrapolation factor.
 For Frequency above 30MHz:
 Distance extrapolation factor =20log(Specific distance/ test distance)(dB);
 Limit line=Specific limits(dBuV) + distance extrapolation factor.

7.2.3 Measuring Instruments


The Measuring equipment is listed in the section 6.3 of this test report.

7.2.4 Test Configuration


(a) For radiated emissions below 30MHz

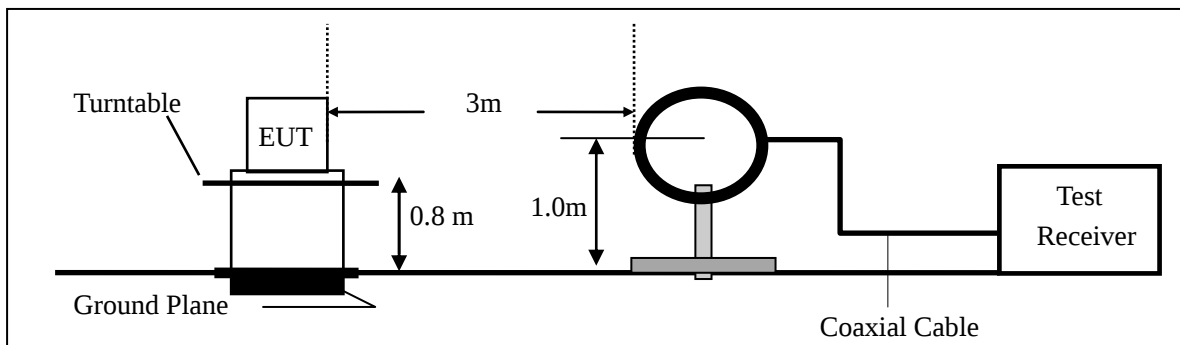

(b) For radiated emissions from 30MHz to 1000MHz

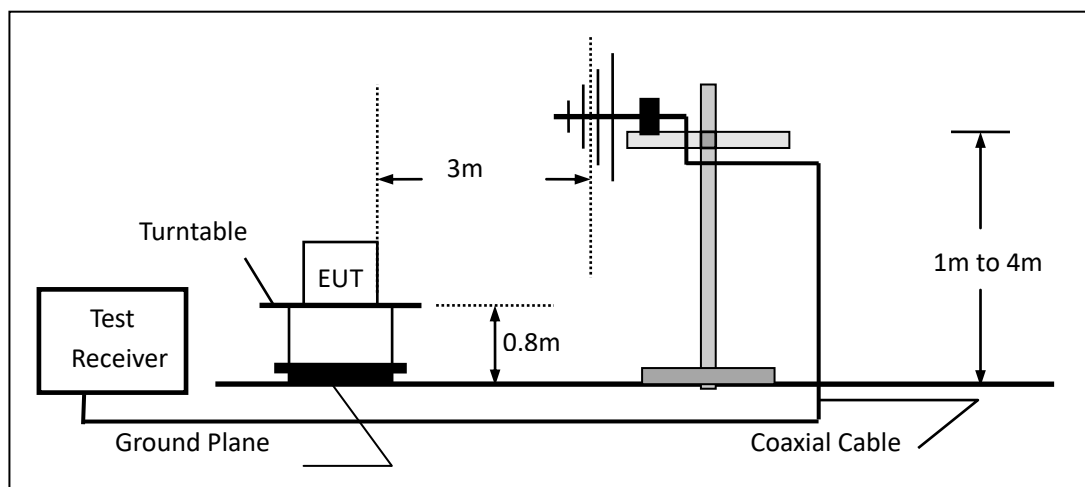

(c) For radiated emissions above 1000MHz

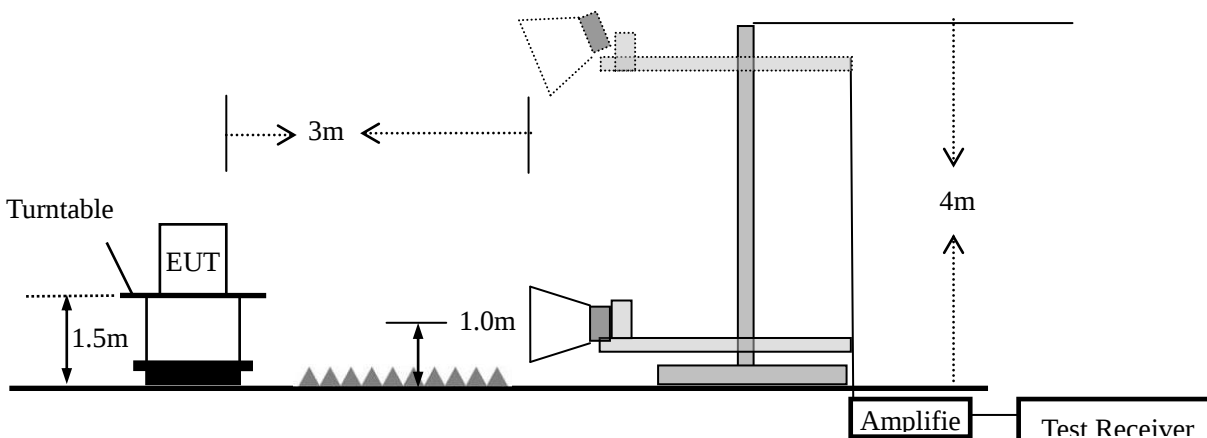

7.2.5 Test Procedure

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2020+COR 1-2023. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2020+COR 1-2023 and CAN/CSA-CEI/IEC CISPR 22. This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 1 MHz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For the radiated emission test above 1GHz:
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	1 MHz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \cdot \lg(100 [kHz] / \text{narrower RBW [kHz]})$. , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

7.2.6 Test Results

■ Spurious Emission below 30MHz (9KHz to 30MHz)


EUT:	Tablet PC	Model Name :	SPPLUS
Temperature:	24.4℃	Relative Humidity:	50.9%
Pressure:	1010hPa	Test Mode:	Mode 3(GFSK)
Test Voltage:	DC 5V from Adapter AC 120V/60Hz		

All the modulation modes have been tested, and the worst result was report as below:

Polar	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
PARALLEL	0.0190	36.30	19.82	56.12	122.03	-65.91	peak
PARALLEL	0.0343	29.68	19.90	49.58	116.90	-67.32	peak
PARALLEL	0.0769	23.03	20.28	43.31	109.89	-66.58	peak
PARALLEL	0.2649	38.37	21.00	59.37	99.14	-39.77	peak
PARALLEL	1.3380	26.56	23.13	49.69	65.08	-15.39	peak
PARALLEL	22.9740	24.67	20.85	45.52	69.54	-24.02	peak

Remark:

Emission Level= Meter Reading+ Factor, Margin= Emission Level - Limit

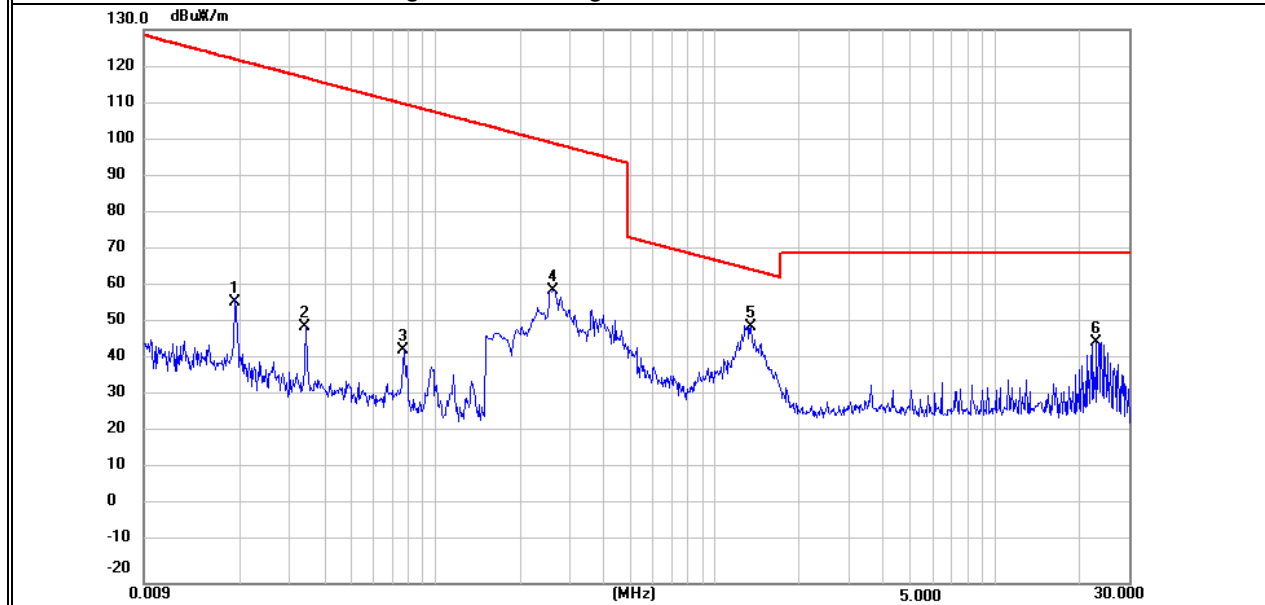

Note: RBW Setting 9kHz.

■ Spurious Emission below 1GHz (30MHz to 1GHz)


All the modulation modes have been tested, and the worst result was report as below:

EUT:	Tablet PC	Model Name :	SPPLUS
Temperature:	24.4℃	Relative Humidity:	50.9%
Pressure:	1010hPa	Test Mode:	Mode 3(GFSK)
Test Voltage:	DC 5V from Adapter AC 120V/60Hz		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	46.8300	11.57	19.72	31.29	40.00	-8.71	peak
V	93.4400	10.19	16.29	26.48	43.50	-17.02	peak
V	167.8240	6.75	15.10	21.85	43.50	-21.65	peak
V	216.0240	11.72	17.64	29.36	46.00	-16.64	peak
V	263.8190	7.27	19.44	26.71	46.00	-19.29	peak
V	373.3110	5.96	21.81	27.77	46.00	-18.23	peak

Remark:


Emission Level= Meter Reading+ Factor, Margin= Emission Level - Limit

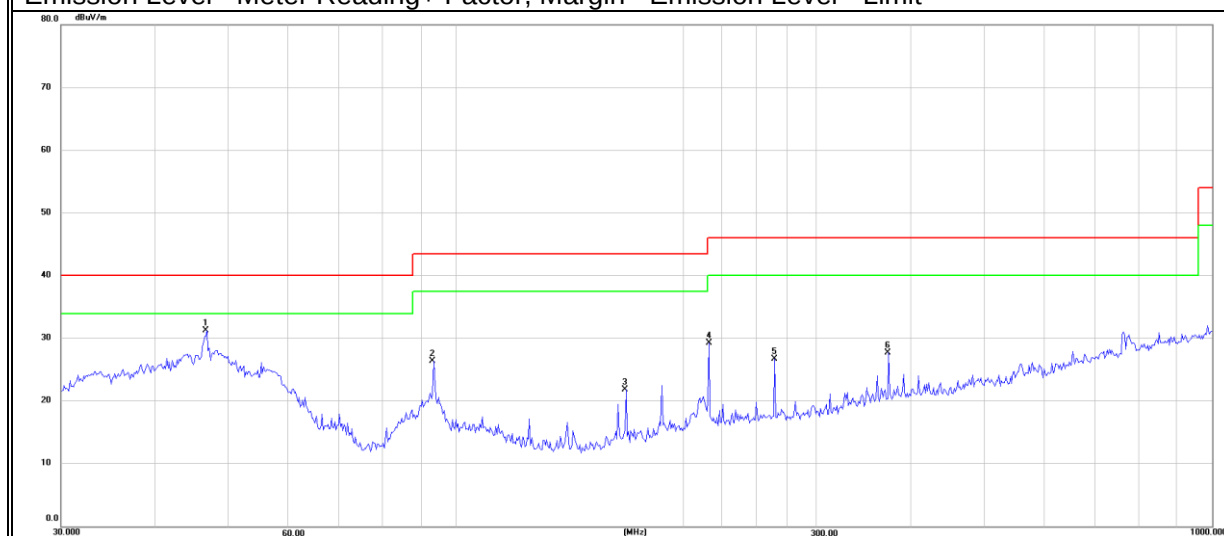

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	93.4400	15.57	16.29	31.86	43.50	-11.64	peak
H	210.7860	10.15	17.54	27.69	43.50	-15.81	peak
H	216.0240	18.06	17.64	35.70	46.00	-10.30	peak
H	263.8190	13.64	19.44	33.08	46.00	-12.92	peak
H	373.3110	9.16	21.81	30.97	46.00	-15.03	peak
H	576.6440	0.79	25.25	26.04	46.00	-19.96	peak

Remark:

Emission Level= Meter Reading+ Factor, Margin= Emission Level - Limit

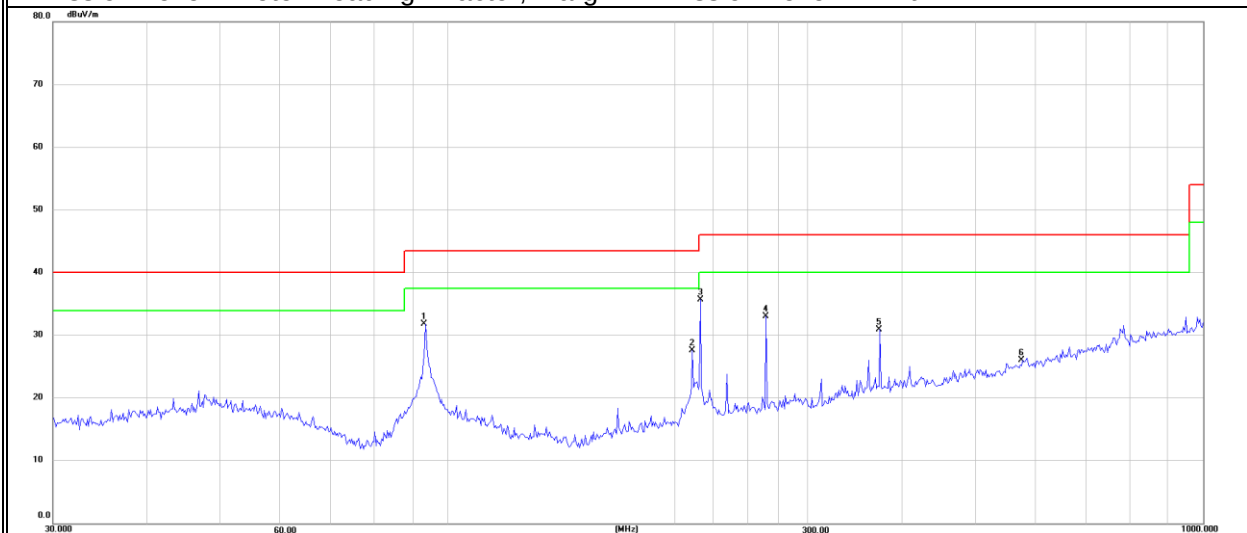

■ Spurious Emission Above 1GHz (1GHz to 25GHz)

EUT:	Tablet PC	Model No.:	SPPLUS
Temperature:	25 °C	Relative Humidity:	56%
Test Mode:	Mode2/Mode3/Mode4	Test By:	Kieron Luo

Low Channel (2402 MHz)(GFSK)--Above 1G

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	1237.150	51.34	-18.01	33.33	54.00	-20.67	AVG
V	1241.400	59.41	-17.96	41.45	74.00	-32.55	peak
V	2129.650	54.87	-12.65	42.22	74.00	-31.78	peak
V	2132.625	46.93	-12.67	34.26	54.00	-19.74	AVG
V	3353.650	45.15	-9.37	35.78	54.00	-18.22	AVG
V	3398.275	54.37	-9.68	44.69	74.00	-29.31	peak
V	5930.000	49.33	-4.57	44.76	74.00	-29.24	peak
V	6300.600	42.03	-4.21	37.82	54.00	-16.18	AVG
V	8718.000	47.80	-0.67	47.13	74.00	-26.87	peak
V	9394.600	39.34	0.23	39.57	54.00	-14.43	AVG
V	17936.675	41.29	13.31	54.60	74.00	-19.40	peak
V	17936.675	33.22	13.31	46.53	54.00	-7.47	AVG


Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

All the modulation modes have been tested, and the worst-case result was GFSK. Only the worst-case mode reported.

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

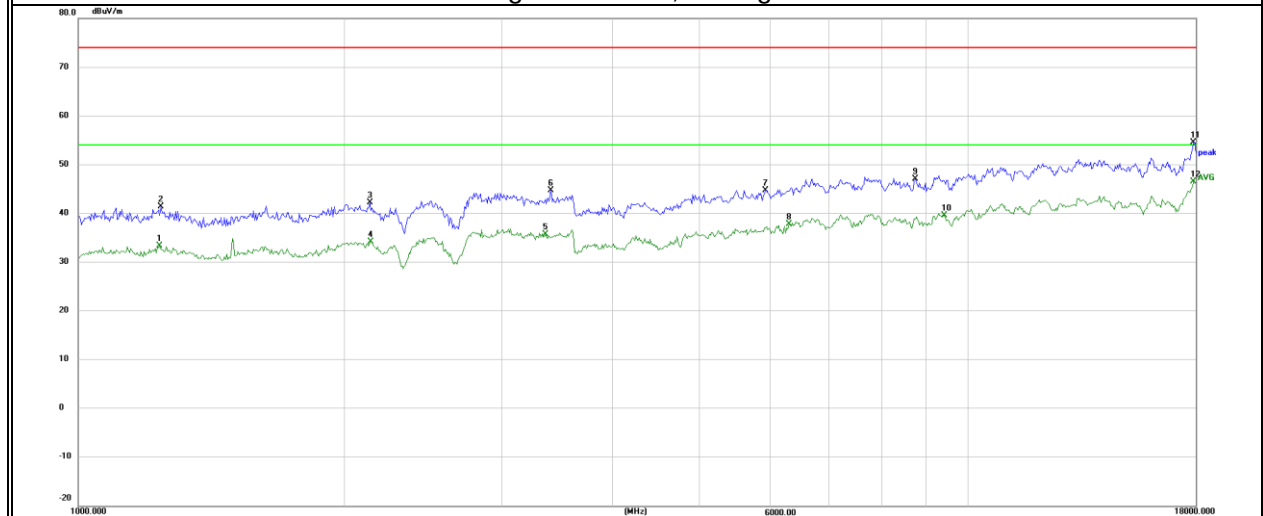

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	1432.225	56.39	-17.73	38.66	74.00	-35.34	peak
H	1494.275	53.81	-17.11	36.70	54.00	-17.30	AVG
H	2073.550	55.20	-12.69	42.51	74.00	-31.49	peak
H	2073.550	47.67	-12.69	34.98	54.00	-19.02	AVG
H	2840.675	45.91	-10.25	35.66	54.00	-18.34	AVG
H	3250.375	52.53	-8.97	43.56	74.00	-30.44	peak
H	4995.850	42.56	-6.38	36.18	54.00	-17.82	AVG
H	5183.275	49.82	-6.23	43.59	74.00	-30.41	peak
H	7184.175	49.68	-2.35	47.33	74.00	-26.67	peak
H	7263.225	42.55	-2.71	39.84	54.00	-14.16	AVG
H	17966.425	42.21	13.45	55.66	74.00	-18.34	peak
H	17940.925	33.68	13.33	47.01	54.00	-6.99	AVG


Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

All the modulation modes have been tested, and the worst-case result was GFSK . Only the worst-case mode reported.

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

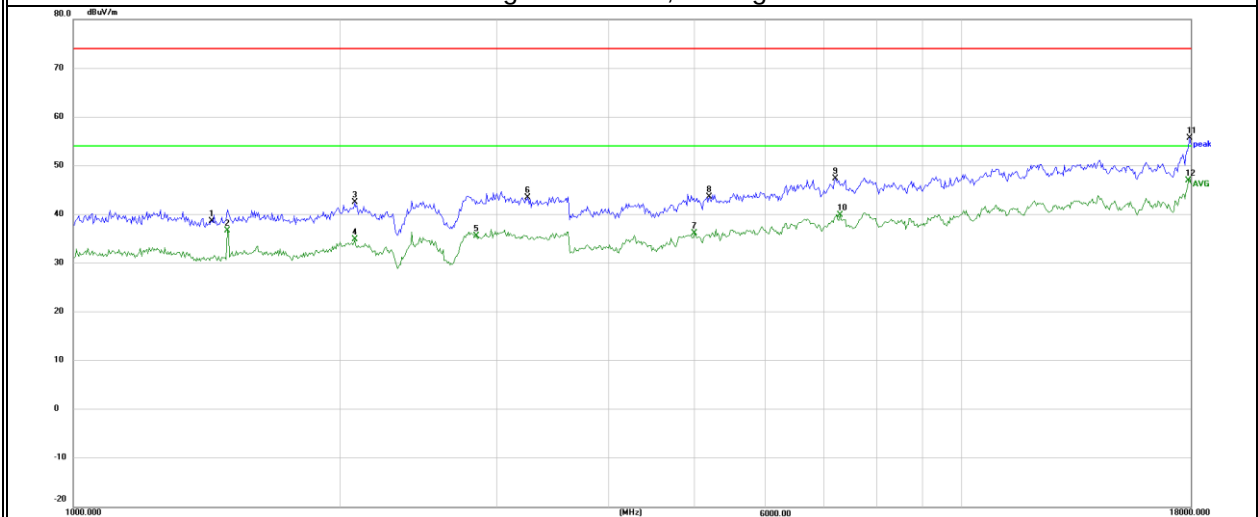

Mid Channel (2441 MHz)(GFSK)--Above 1G

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	1239.275	51.87	-17.99	33.88	54.00	-20.12	AVG
V	1278.800	59.26	-17.86	41.40	74.00	-32.60	peak
V	2048.900	55.02	-12.90	42.12	74.00	-31.88	peak
V	2112.650	47.18	-12.55	34.63	54.00	-19.37	AVG
V	3307.325	53.76	-9.40	44.36	74.00	-29.64	peak
V	3350.250	45.21	-9.35	35.86	54.00	-18.14	AVG
V	5151.400	49.18	-5.92	43.26	74.00	-30.74	peak
V	5451.450	42.18	-6.08	36.10	54.00	-17.90	AVG
V	8308.300	40.74	-1.52	39.22	54.00	-14.78	AVG
V	8599.425	47.11	-0.48	46.63	74.00	-27.37	peak
V	17979.175	40.91	13.51	54.42	74.00	-19.58	peak
V	17979.175	34.01	13.51	47.52	54.00	-6.48	AVG


Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

All the modulation modes have been tested, and the worst-case result was GFSK. Only the worst-case mode reported.

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

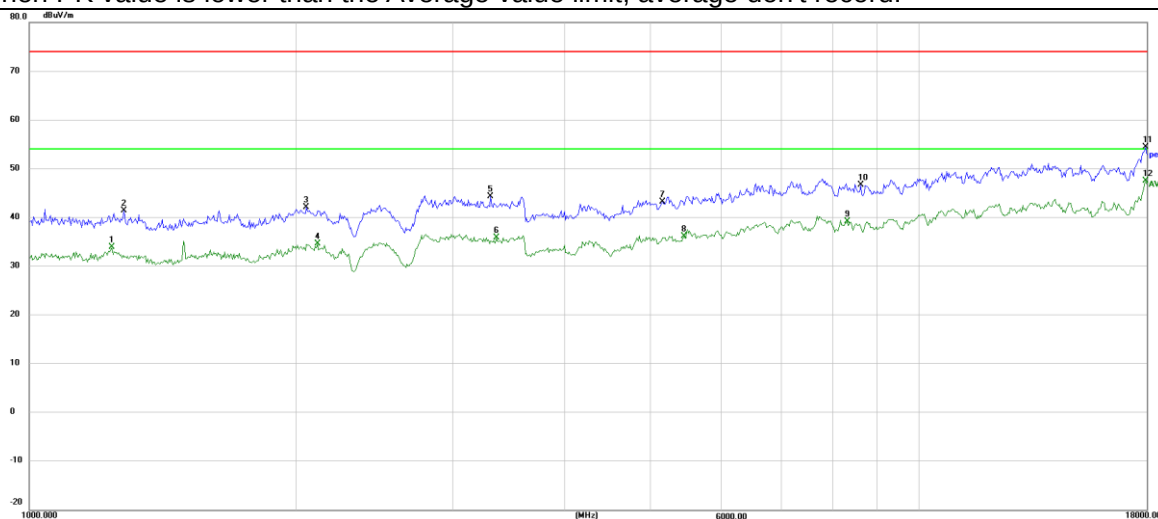

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	1235.450	51.24	-18.04	33.20	54.00	-20.80	AVG
H	1258.825	58.74	-17.88	40.86	74.00	-33.14	peak
H	1980.900	48.60	-14.03	34.57	54.00	-19.43	AVG
H	1999.175	55.56	-13.62	41.94	74.00	-32.06	peak
H	3351.525	44.40	-9.36	35.04	54.00	-18.96	AVG
H	3465.425	53.56	-9.54	44.02	74.00	-29.98	peak
H	5027.725	42.37	-6.08	36.29	54.00	-17.71	AVG
H	5279.325	51.62	-6.49	45.13	74.00	-28.87	peak
H	7704.375	41.30	-1.71	39.59	54.00	-14.41	AVG
H	7786.400	49.08	-1.54	47.54	74.00	-26.46	peak
H	17978.325	41.39	13.50	54.89	74.00	-19.11	peak
H	17978.325	34.08	13.50	47.58	54.00	-6.42	AVG


Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

All the modulation modes have been tested, and the worst-case result was GFSK. Only the worst-case mode reported.

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

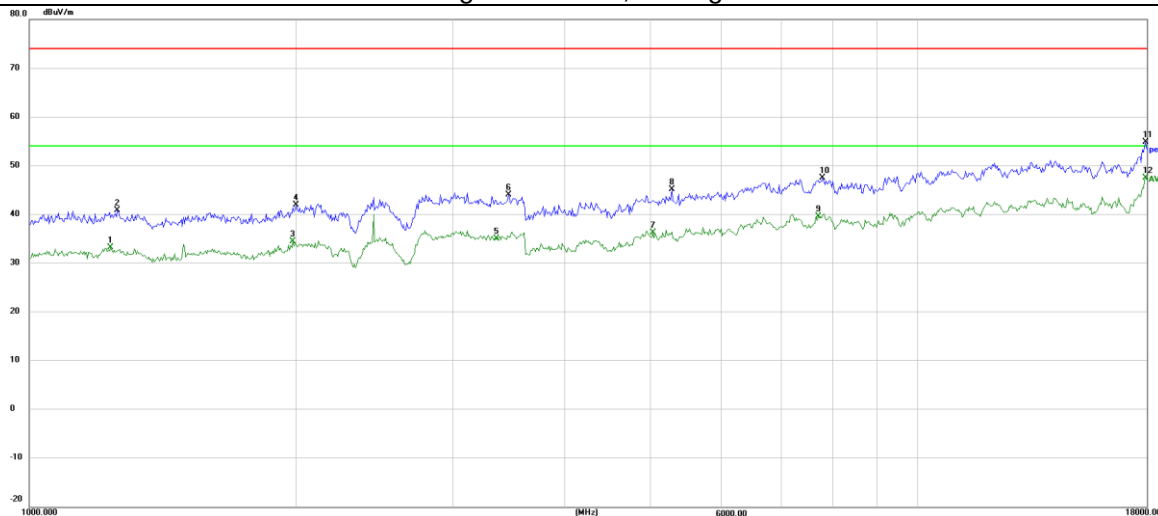

High Channel (2480 MHz)(GFSK)-- Above 1G

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	1229.925	51.41	-18.09	33.32	54.00	-20.68	AVG
V	1243.100	58.20	-17.95	40.25	74.00	-33.75	peak
V	1981.325	48.61	-14.02	34.59	54.00	-19.41	AVG
V	2037.850	55.36	-13.06	42.30	74.00	-31.70	peak
V	2892.100	45.39	-10.03	35.36	54.00	-18.64	AVG
V	3082.500	54.54	-9.57	44.97	74.00	-29.03	peak
V	4250.825	42.76	-7.75	35.01	54.00	-18.99	AVG
V	4405.525	49.00	-7.78	41.22	74.00	-32.78	peak
V	7734.125	41.96	-1.76	40.20	54.00	-13.80	AVG
V	7796.175	49.57	-1.48	48.09	74.00	-25.91	peak
V	17991.925	41.66	13.58	55.24	74.00	-18.76	peak
V	17991.925	34.26	13.58	47.84	54.00	-6.16	AVG


Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

All the modulation modes have been tested, and the worst-case result was GFSK. Only the worst-case mode reported.

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

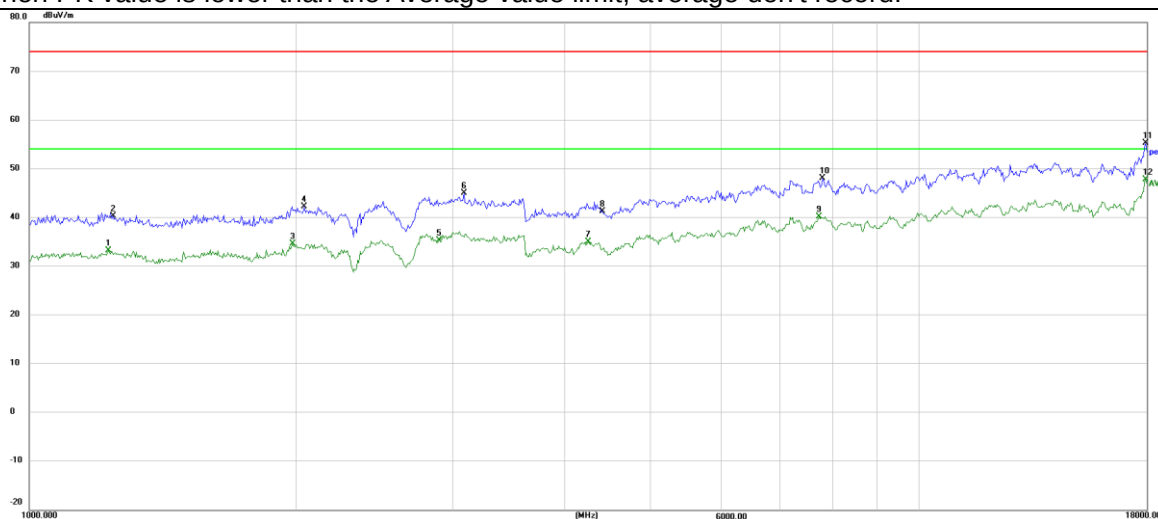

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	1239.275	51.44	-17.99	33.45	54.00	-20.55	AVG
H	1245.650	59.18	-17.91	41.27	74.00	-32.73	peak
H	1988.975	56.95	-13.84	43.11	74.00	-30.89	peak
H	1999.175	48.16	-13.62	34.54	54.00	-19.46	AVG
H	2857.250	46.00	-10.18	35.82	54.00	-18.18	AVG
H	3048.075	54.51	-9.61	44.90	74.00	-29.10	peak
H	4318.400	42.58	-7.65	34.93	54.00	-19.07	AVG
H	4480.325	47.84	-7.69	40.15	74.00	-33.85	peak
H	6654.625	50.44	-3.57	46.87	74.00	-27.13	peak
H	6669.925	42.45	-3.32	39.13	54.00	-14.87	AVG
H	17992.350	41.33	13.58	54.91	74.00	-19.09	peak
H	17992.350	33.85	13.58	47.43	54.00	-6.57	AVG


Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor



All the modulation modes have been tested, and the worst-case result was GFSK. Only the worst-case mode reported.

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

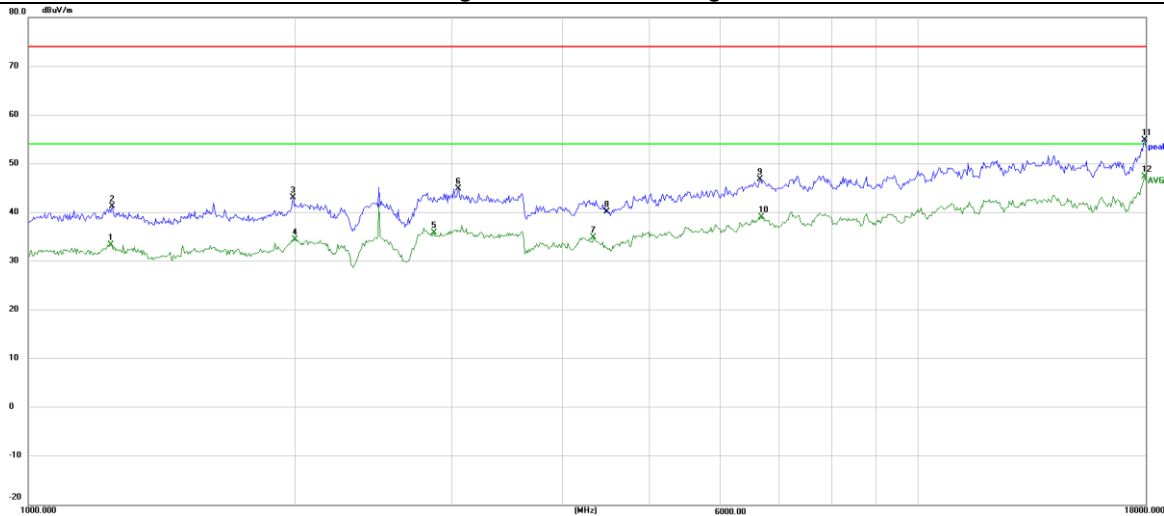

18-25G:

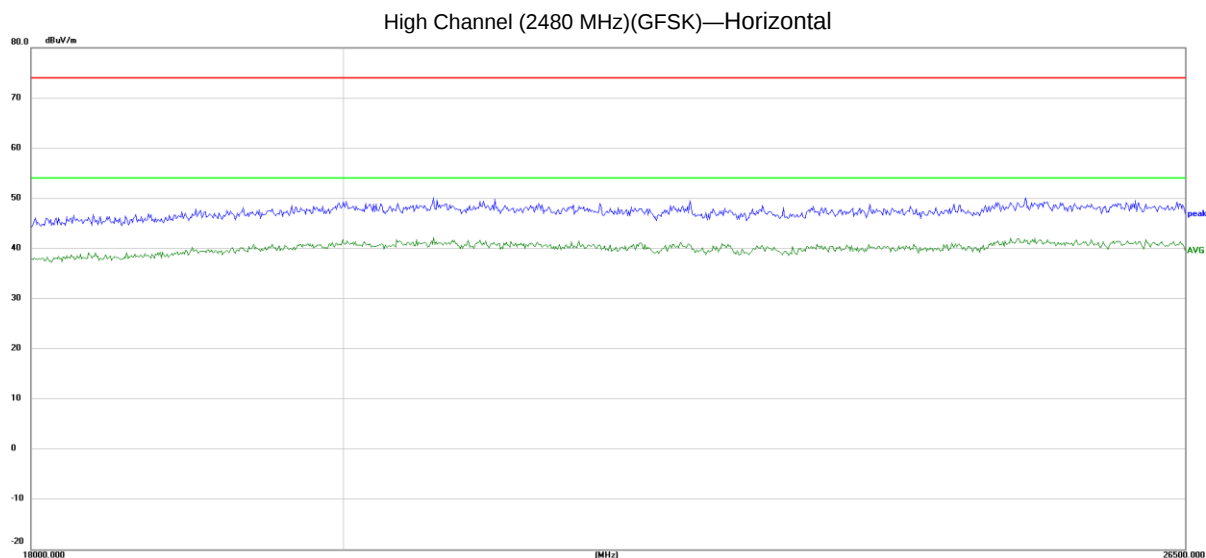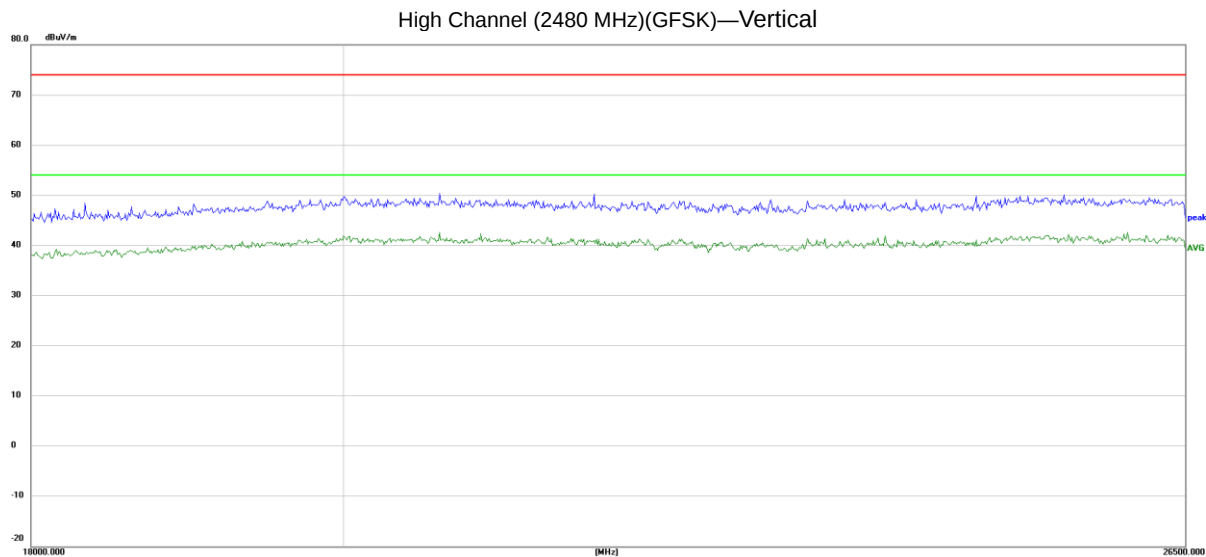

Note:

- (1) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor
- (2) All other emissions more than 20dB below the limit.
- (3) Only the worst data is recorded in the report, the data rates test result is the worst

■ Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

EUT:	Tablet PC	Model No.:	SPPLUS
Temperature:	25 °C	Relative Humidity:	56%
Test Mode:	Mode5	Test By:	Kieron Luo

All the modulation modes have been tested, and the worst result was report as below:

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	2390.000	55.42	-7.31	48.11	74.00	-25.89	peak
V	2390.000	43.92	-7.31	36.61	54.00	-17.39	AVG


Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

All the modulation modes have been tested, and the worst-case result was 8-DPSK. Only the worst-case mode reported.

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

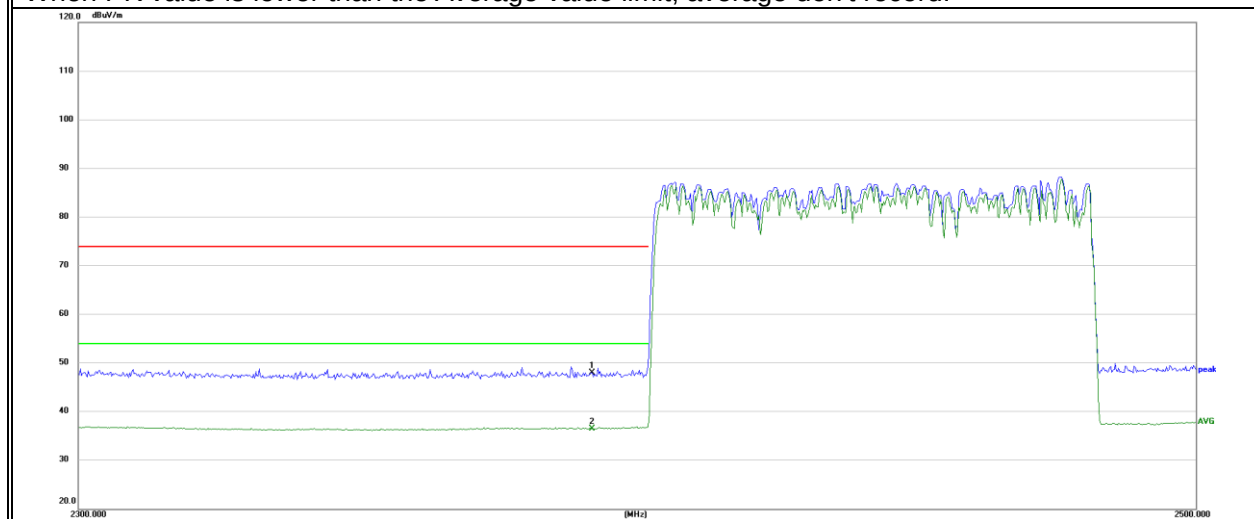

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	2390.000	54.62	-7.31	47.31	74.00	-26.69	peak
H	2390.000	43.90	-7.31	36.59	54.00	-17.41	AVG


Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

All the modulation modes have been tested, and the worst-case result was 8-DPSK. Only the worst-case mode reported.

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

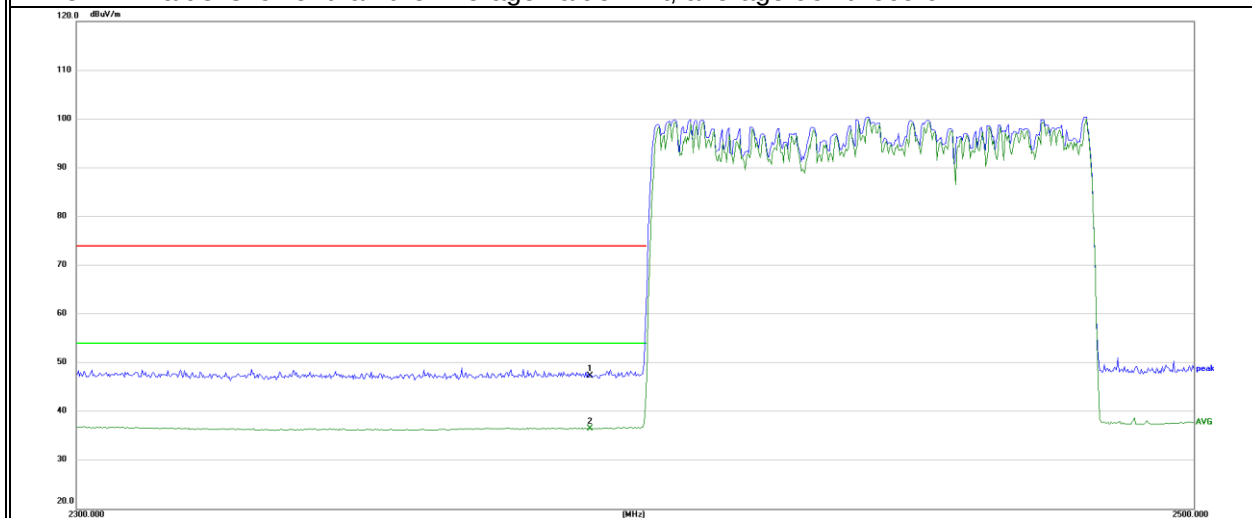

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	2483.500	55.43	-6.38	49.05	74.00	-24.95	peak
V	2483.500	43.84	-6.38	37.46	54.00	-16.54	AVG

Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

All the modulation modes have been tested, and the worst-case result was 8-DPSK. Only the worst-case mode reported.

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.



Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	2483.500	55.22	-6.38	48.84	74.00	-25.16	peak
H	2483.500	45.20	-6.38	38.82	54.00	-15.18	AVG


Remark:

Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor

All the modulation modes have been tested, and the worst-case result was 8-DPSK. Only the worst-case mode reported.

Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

When PK value is lower than the Average value limit, average don't record.

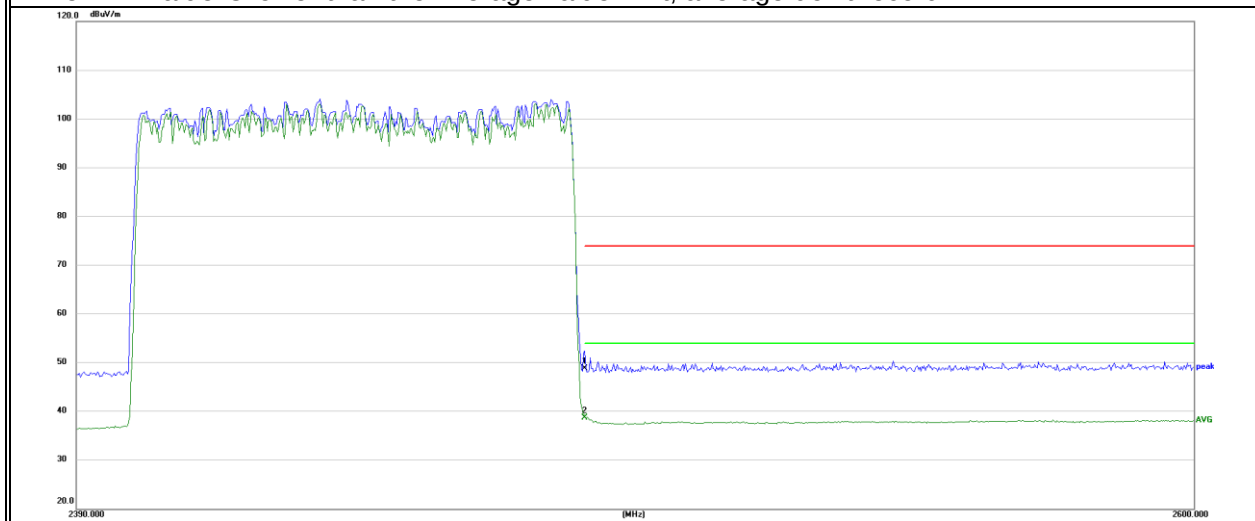

7.3 NUMBER OF HOPPING CHANNEL

7.3.1 Applicable Standard

According to FCC Part 15.247(a)(1) (iii) and ANSI C63.10-2020+COR 1-2023

7.3.2 Conformance Limit

Frequency hopping systems in the 2400-2483.5MHz band shall use at least 15 channels.

7.3.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.3.4 Test Setup

Please refer to Section 6.1 of this test report.

7.3.5 Test Procedure

The testing follows ANSI C63.10-2020+COR 1-2023 clause 7.8.3

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT must have its hopping function enabled.

Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW : To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

7.3.6 Test Results

EUT:	Tablet PC	Model No.:	SPPLUS
Temperature:	25 °C	Relative Humidity:	56%
Test Mode:	Mode 5(1Mbps)	Test By:	Kieron Luo

Test data reference attachment.

7.4 HOPPING CHANNEL SEPARATION MEASUREMENT

7.4.1 Applicable Standard

According to FCC Part 15.247(a)(1) and ANSI C63.10-2020+COR 1-2023

7.4.2 Conformance Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band shall have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

7.4.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.4.4 Test Setup

Please refer to Section 6.1 of this test report.

7.4.5 Test Procedure

The testing follows ANSI C63.10-2020+COR 1-2023 clause 7.8.2

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Use the following spectrum analyzer settings:

Span = Measurement Bandwidth or Channel Separation

RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

7.4.6 Test Results

EUT:	Tablet PC	Model No.:	SPPLUS
Temperature:	25 °C	Relative Humidity:	56%
Test Mode:	Mode2/Mode3/Mode4	Test By:	Kieron Luo

Test data reference attachment.

7.5 AVERAGE TIME OF OCCUPANCY (DWELL TIME)

7.5.1 Applicable Standard

According to FCC Part 15.247(a)(1)(iii) and ANSI C63.10-2020+COR 1-2023

7.5.2 Conformance Limit

The average time of occupancy on any channel shall not be greater than 0.4s within a period of 0.4s multiplied by the number of hopping channels employed.

7.5.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.5.4 Test Setup

Please refer to Section 6.1 of this test report.

7.5.5 Test Procedure

The testing follows ANSI C63.10-2020+COR 1-2023 clause 7.8.4

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT must have its hopping function enabled.

Use the following spectrum analyzer settings:

Span = zero span, centered on a hopping channel

RBW $\geq$ 1MHz

VBW $\geq$ RBW

Sweep = as necessary to capture the entire dwell time per hopping channel

Detector function = peak

Trace = max hold

Measure the maximum time duration of one single pulse.

Set the EUT for DH5, DH3 and DH1 packet transmitting.

Measure the maximum time duration of one single pulse.

7.5.6 Test Results

EUT:	Tablet PC	Model No.:	SPPLUS
Temperature:	25 °C	Relative Humidity:	56%
Test Mode:	Mode2/Mode3/Mode4	Test By:	Kieron Luo

Test data reference attachment.

Note:

Period Time = (channel number)*0.4

DH1 Dwell time: Pulse time* Burst Count (Number of hops in the period specified in the requirements)

DH3 Dwell time: Pulse time* Burst Count (Number of hops in the period specified in the requirements)

DH5 Dwell time: Pulse time* Burst Count (Number of hops in the period specified in the requirements)

7.6 20DB BANDWIDTH TEST

7.6.1 Applicable Standard

According to FCC Part 15.247(a)(1) and ANSI C63.10-2020+COR 1-2023

7.6.2 Conformance Limit

No limit requirement.

7.6.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.6.4 Test Setup

Please refer to Section 6.1 of this test report.

7.6.5 Test Procedure

The testing follows ANSI C63.10-2020+COR 1-2023 clause 6.9.2
 The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
 The path loss was compensated to the results for each measurement.
 Set to the maximum power setting and enable the EUT transmit continuously.
 The EUT was operating in controlled its channel.
 Use the following spectrum analyzer settings:
 Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
 RBW shall be in the range of 1% to 5% of the OBW
 VBW = 3*RBW
 Sweep = auto
 Detector function = peak
 Trace = max hold

7.6.6 Test Results

EUT:	Tablet PC	Model No.:	SPPLUS
Temperature:	25 °C	Relative Humidity:	56%
Test Mode:	Mode2/Mode3/Mode4	Test By:	Kieron Luo

Test data reference attachment.

7.7 PEAK OUTPUT POWER

7.7.1 Applicable Standard

According to FCC Part 15.247(b)(1) and ANSI C63.10-2020+COR 1-2023

7.7.2 Conformance Limit

The maximum peak conducted output power of the intentional radiator shall not exceed the following: (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts.

7.7.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.7.4 Test Setup

Please refer to Section 6.1 of this test report.

7.7.5 Test Procedure

The testing follows ANSI C63.10-2020+COR 1-2023 clause 7.8.5.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW $\geq$ the 20 dB bandwidth of the emission being measured

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

7.7.6 Test Results

EUT:	Tablet PC	Model No.:	SPPLUS
Temperature:	25 °C	Relative Humidity:	56%
Test Mode:	Mode2/Mode3/Mode4	Test By:	Kieron Luo

Test data reference attachment.

7.8 CONDUCTED BAND EDGE MEASUREMENT

7.8.1 Applicable Standard

According to FCC Part 15.247(d) and ANSI C63.10-2020+COR 1-2023

7.8.2 Conformance Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.8.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.8.4 Test Setup

Please refer to Section 6.1 of this test report.

7.8.5 Test Procedure

The testing follows ANSI C63.10-2020+COR 1-2023 clause 7.8.6.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT must have its hopping function enabled.

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW = 100KHz

VBW = 300KHz

Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.

Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.

Repeat above procedures until all measured frequencies were complete.

7.8.6 Test Results

EUT:	Tablet PC	Model No.:	SPPLUS
Temperature:	25 °C	Relative Humidity:	56%
Test Mode:	Mode2 /Mode4/ Mode 5	Test By:	Kieron Luo

Test data reference attachment.

7.9 SPURIOUS RF CONDUCTED EMISSION

7.9.1 Applicable Standard

According to FCC Part 15.247(d) and ANSI C63.10-2020+COR 1-2023.

7.9.2 Conformance Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.9.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.9.4 Test Setup

Please refer to Section 6.1 of this test report.

7.9.5 Test Procedure

Establish an emission level by using the following procedure:

- a) Set the center frequency and span to encompass frequency range to be measured.
 - b) Set the RBW = 100 kHz.
 - c) Set the VBW $\geq [3 \times \text{RBW}]$.
 - d) Detector = peak.
 - e) Sweep time = auto couple.
 - f) Trace mode = max hold.
 - g) Allow trace to fully stabilize.
 - h) Use the peak marker function to determine the maximum amplitude level.
- Then the limit shall be attenuated by at least 20 dB relative to the maximum amplitude level in 100 kHz.

7.9.6 Test Results

Remark: The measurement frequency range is from 30MHzHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and bandege measurement data.

Test data reference attachment.

7.10 ANTENNA APPLICATION

7.10.1 Antenna Requirement

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

7.10.2 Result

The EUT antenna is permanent attached PCB Antenna (Gain: 0.19). It comply with the standard requirement.

7.11 FREQUENCY HOPPING SYSTEM (FHSS) EQUIPMENT REQUIREMENTS

7.11.1 Standard Applicable

According to FCC Part 15.247(a)(1), The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals. (g) Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section. (h) The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

7.11.2 Frequency Hopping System

This transmitter device is frequency hopping device, and complies with FCC part 15.247 rule. This device uses Bluetooth radio which operates in 2400-2483.5 MHz band. Bluetooth uses a radio technology called frequency-hopping spread spectrum, which chops up the data being sent and transmits chunks of it on up to 79 bands (1 MHz each; centred from 2402 to 2480 MHz) in the range 2,400-2,483.5 MHz. The transmitter switches hop frequencies 1,600 times per second to assure a high degree of data security. All Bluetooth devices participating in a given piconet are synchronized to the frequency-hopping channel for the piconet. The frequency hopping sequence is determined by the master's device address and the phase of the hopping sequence (the frequency to hop at a specific time) is determined by the master's internal clock. Therefore, all slaves in a piconet must know the master's device address and must synchronize their clocks with the master's clock. Adaptive Frequency Hopping (AFH) was introduced in the Bluetooth specification to provide an effective way for a Bluetooth radio to counteract normal interference. AFH identifies "bad" channels, where either other wireless devices are interfering with the Bluetooth signal or the Bluetooth signal is interfering with another device. The AFH-enabled Bluetooth device will then communicate with other devices within its piconet to share details of any identified bad channels. The devices will then switch to alternative available "good" channels, away from the areas of interference, thus having no impact on the bandwidth used.

This device was tested with an bluetooth system receiver to check that the device maintained hopping synchronization, and the device complied with these requirements for FCC Part 15.247 rule.

7.11.3 EUT Pseudorandom Frequency Hopping Sequence


Pseudorandom Frequency Hopping Sequence Table as below: Channel: 08, 24, 40, 56, 40, 56, 72, 09, 01, 09, 33, 41, 33, 41, 65, 73, 53, 69, 06, 22, 04, 20, 36, 52, 38, 46, 70, 78, 68, 76, 21, 29, 10, 26, 42, 58, 44, 60, 76, 13, 03, 11, 35, 43, 37, 45, 69, 77, 55, 71, 08, 24, 08, 24, 40, 56, 40, 48, 72, 01, 72, 01, 25, 33, 12, 28, 44, 60, 42, 58, 74, 11, 05, 13, 37, 45 etc.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.


8 TEST RESULTS

8.1 DWELL TIME


Condition	Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
NVNT	1-DH1	2441	Ant1	0.408	80.784	198	31600	400	Pass
NVNT	1-DH3	2441	Ant1	1.665	214.785	129	31600	400	Pass
NVNT	1-DH5	2441	Ant1	2.912	224.224	77	31600	400	Pass
NVNT	2-DH1	2441	Ant1	0.399	73.017	183	31600	400	Pass
NVNT	2-DH3	2441	Ant1	1.65	204.6	124	31600	400	Pass
NVNT	2-DH5	2441	Ant1	2.896	269.328	93	31600	400	Pass
NVNT	3-DH1	2441	Ant1	0.396	76.032	192	31600	400	Pass
NVNT	3-DH3	2441	Ant1	1.645	192.465	117	31600	400	Pass
NVNT	3-DH5	2441	Ant1	2.896	260.64	90	31600	400	Pass

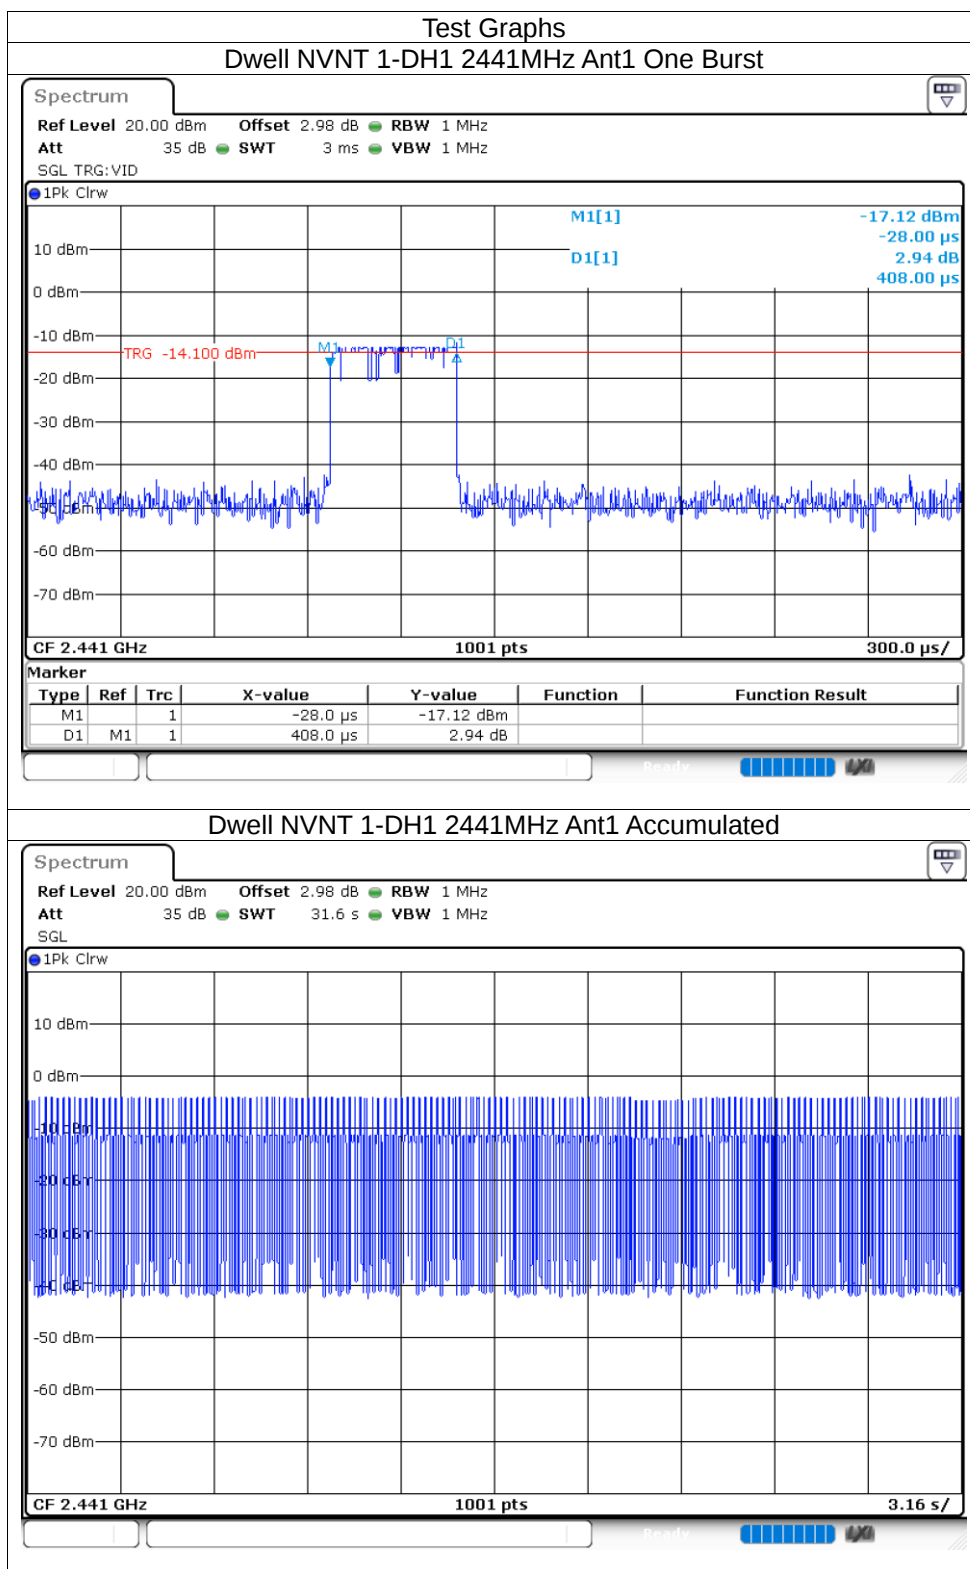


Dwell NVNT 1-DH3 2441MHz Ant1 One Burst

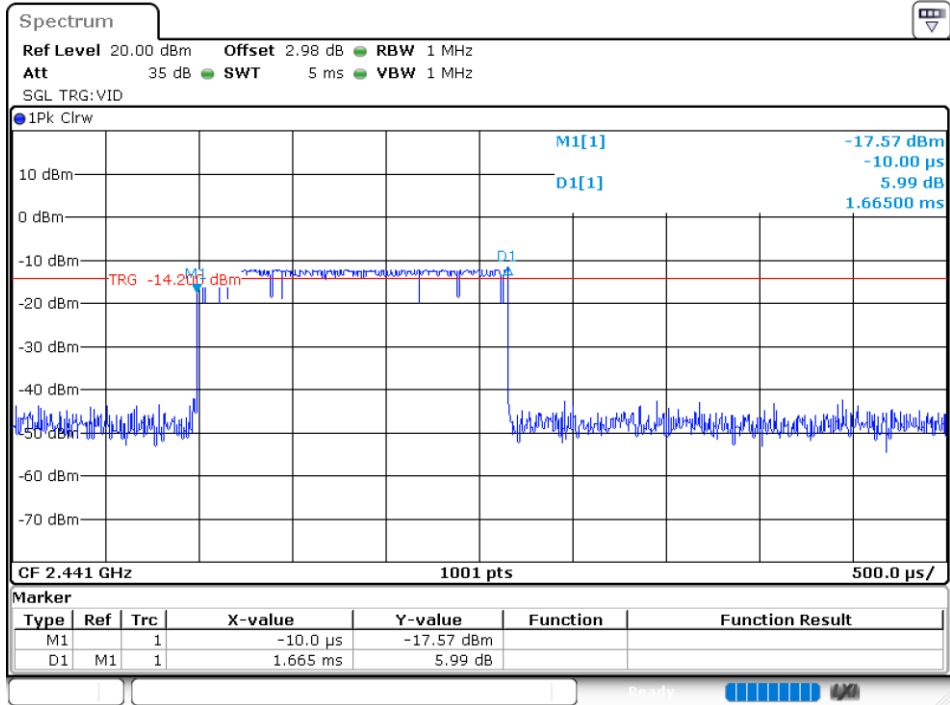


Dwell NVNT 1-DH3 2441MHz Ant1 Accumulated

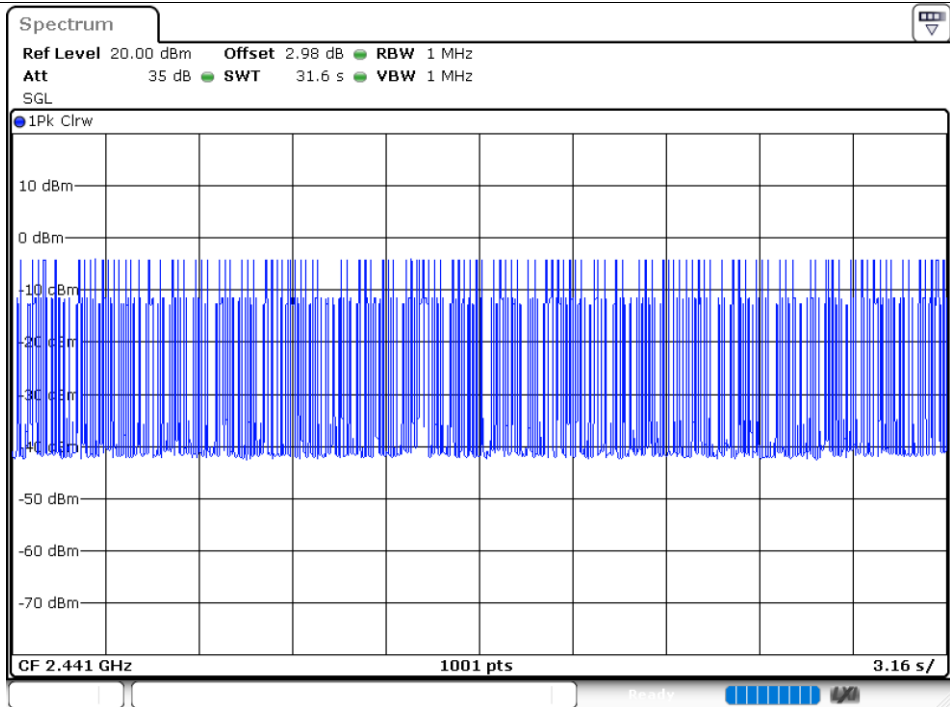


Dwell NVNT 1-DH5 2441MHz Ant1 One Burst

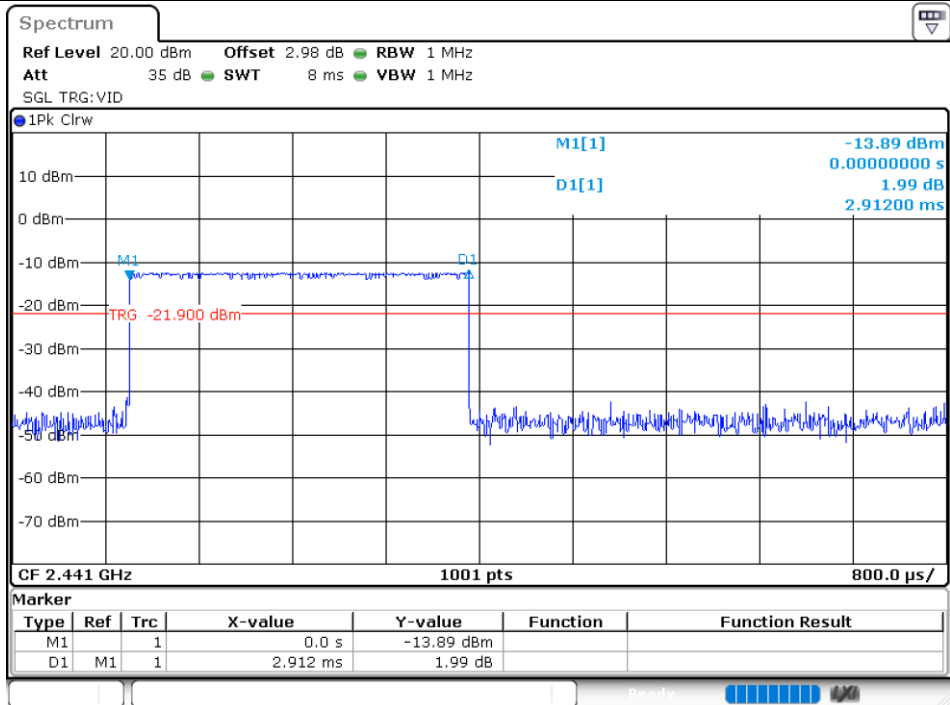


Dwell NVNT 1-DH5 2441MHz Ant1 Accumulated

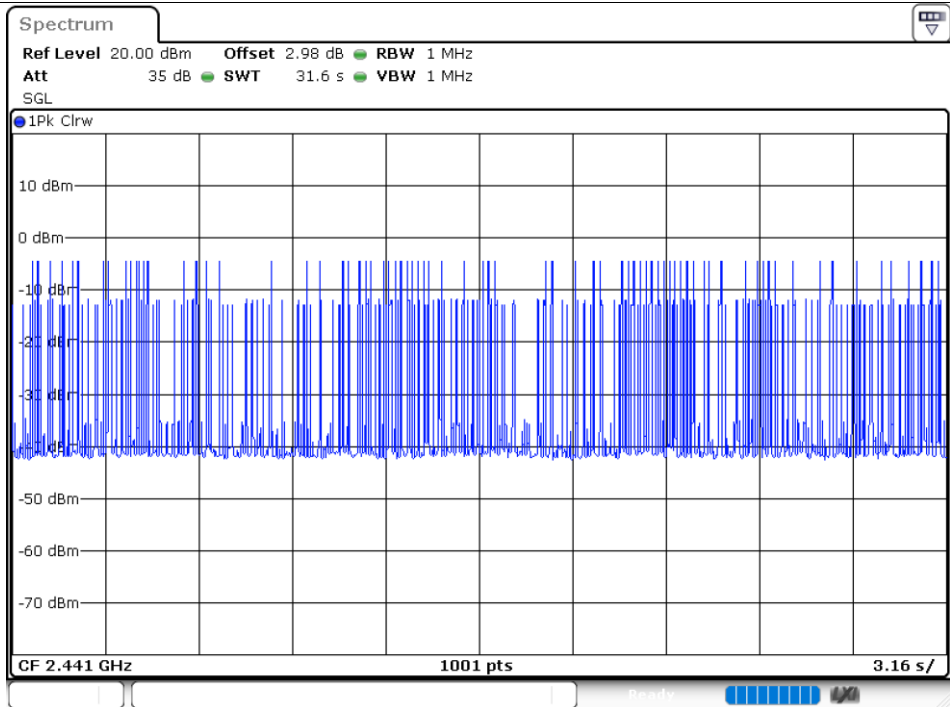


Dwell NVNT 2-DH1 2441MHz Ant1 One Burst

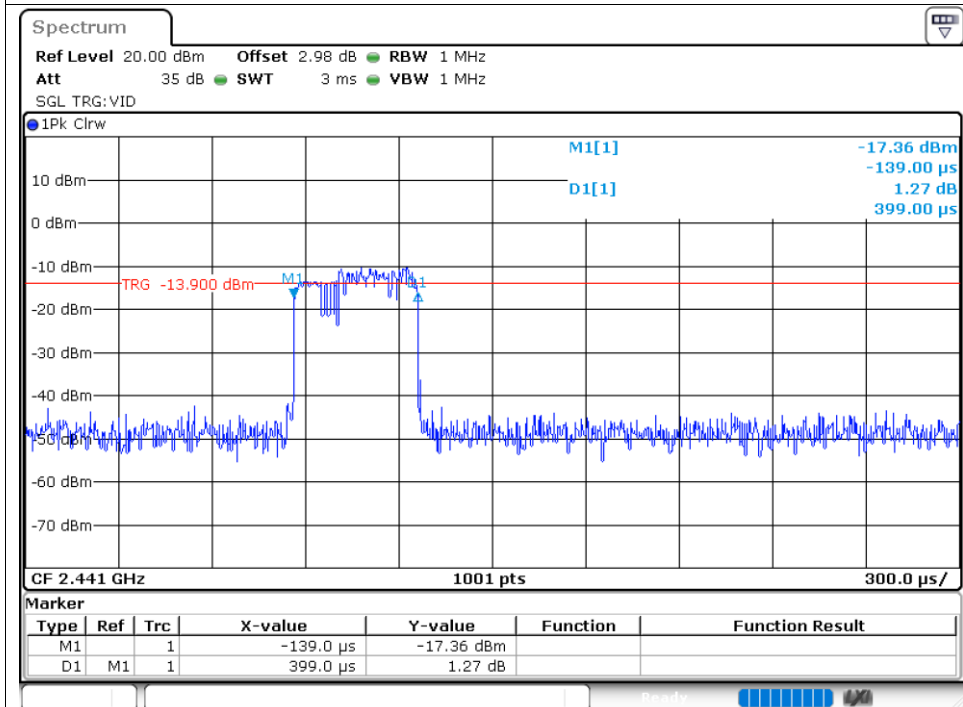


Dwell NVNT 2-DH1 2441MHz Ant1 Accumulated

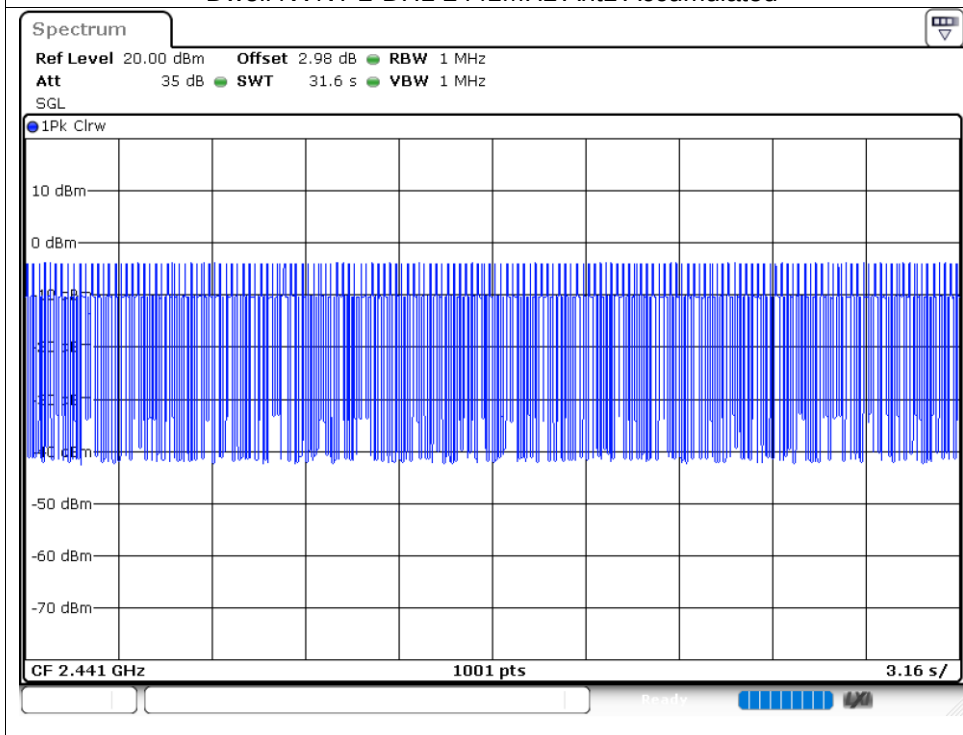


Dwell NVNT 2-DH3 2441MHz Ant1 One Burst

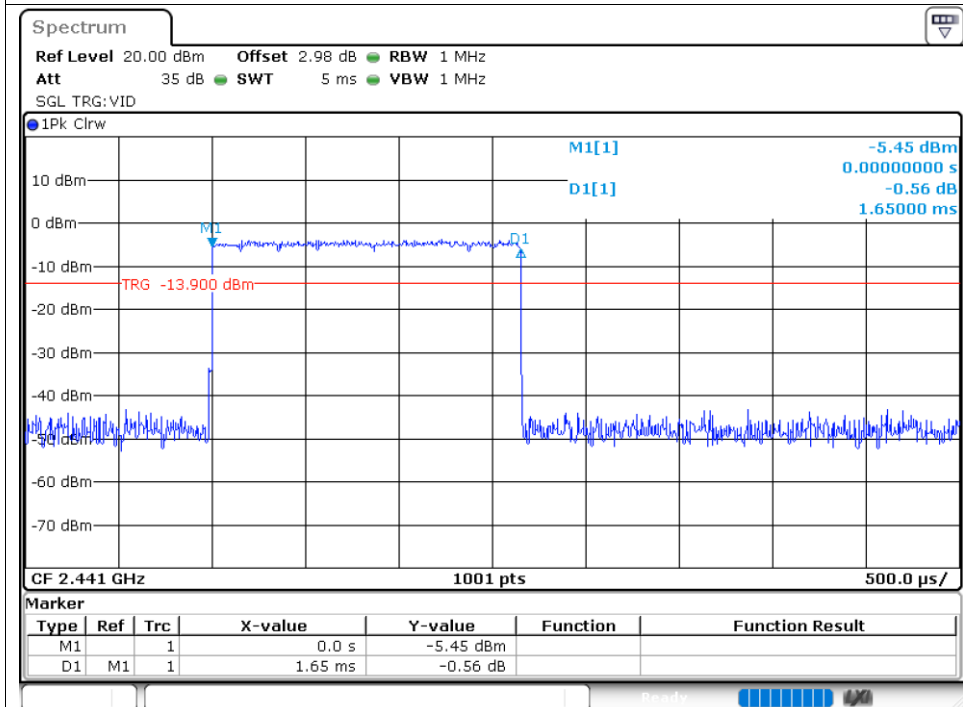


Dwell NVNT 2-DH3 2441MHz Ant1 Accumulated

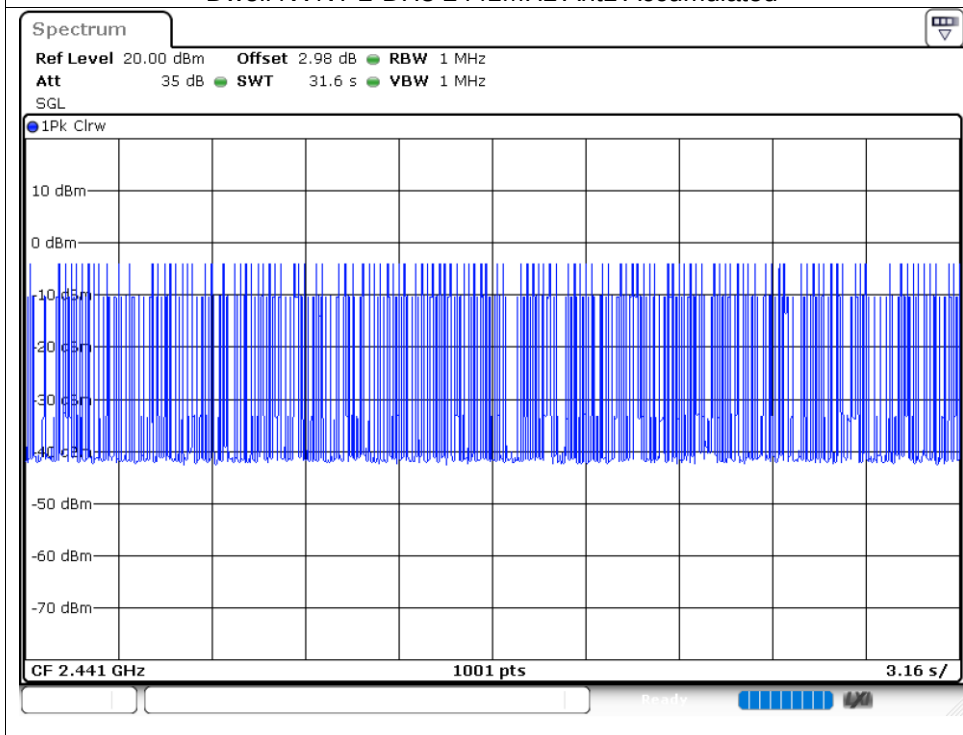


Dwell NVNT 2-DH5 2441MHz Ant1 One Burst

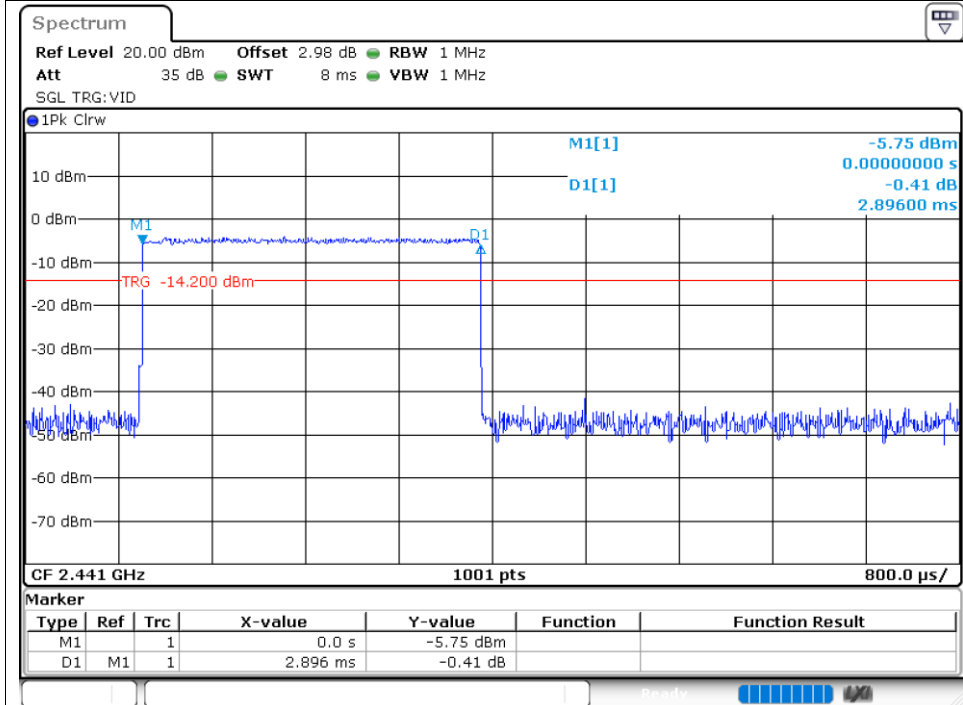


Dwell NVNT 2-DH5 2441MHz Ant1 Accumulated

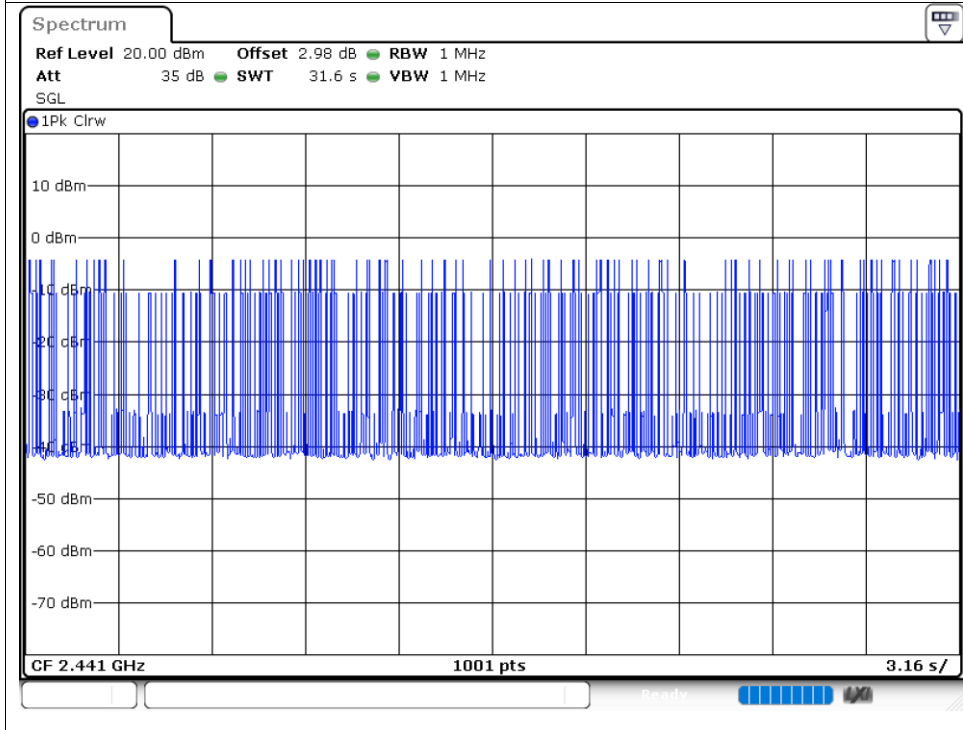


Dwell NVNT 3-DH1 2441MHz Ant1 One Burst

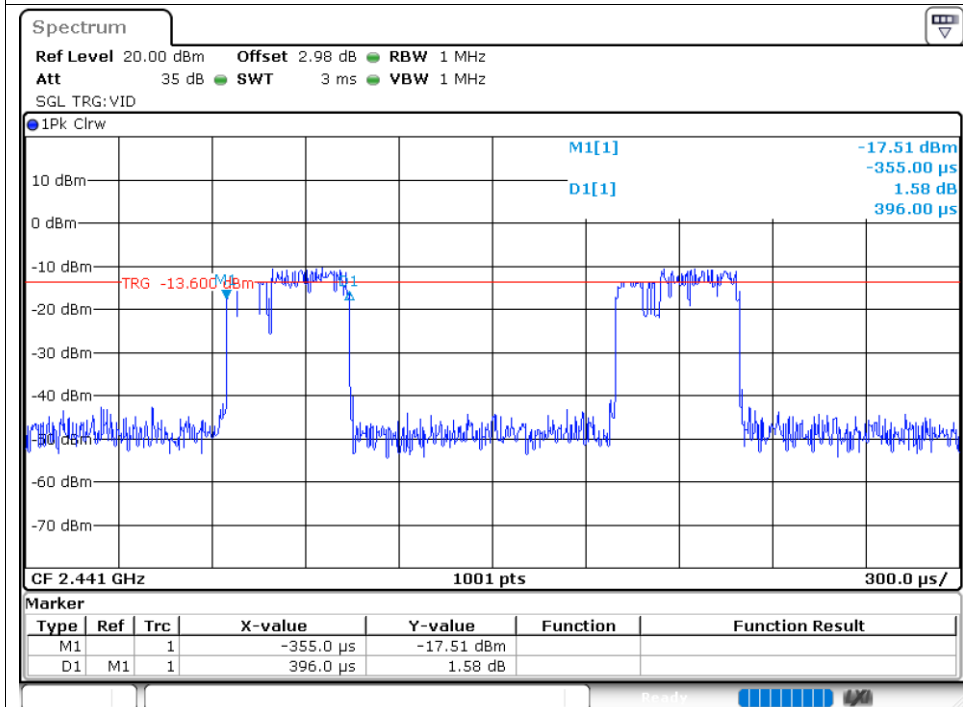


Dwell NVNT 3-DH1 2441MHz Ant1 Accumulated

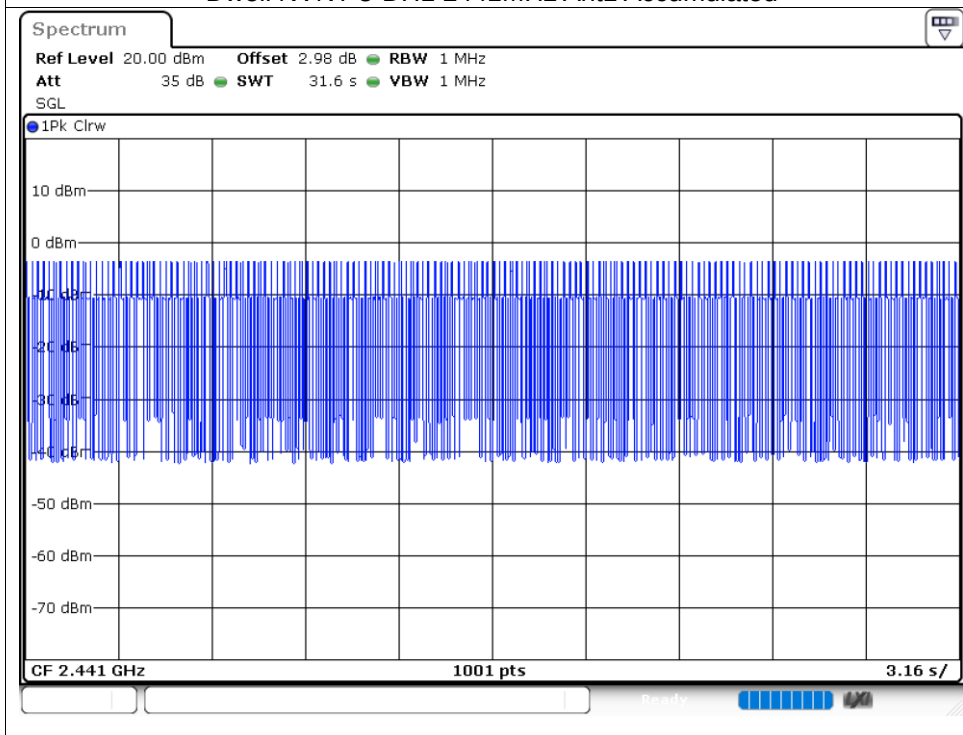


Dwell NVNT 3-DH3 2441MHz Ant1 One Burst

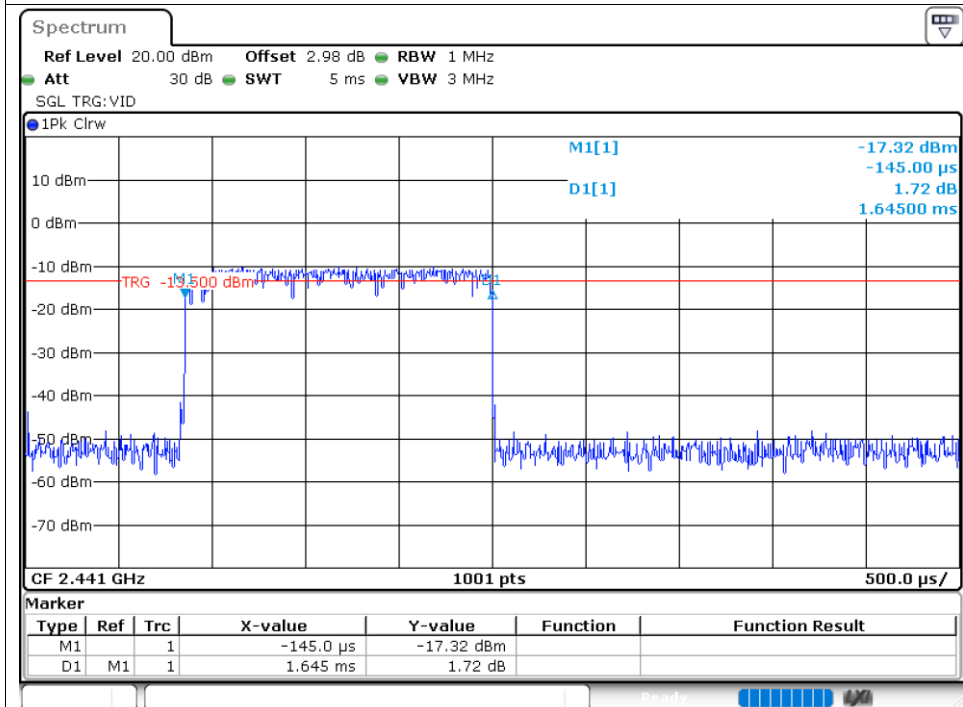


Dwell NVNT 3-DH3 2441MHz Ant1 Accumulated

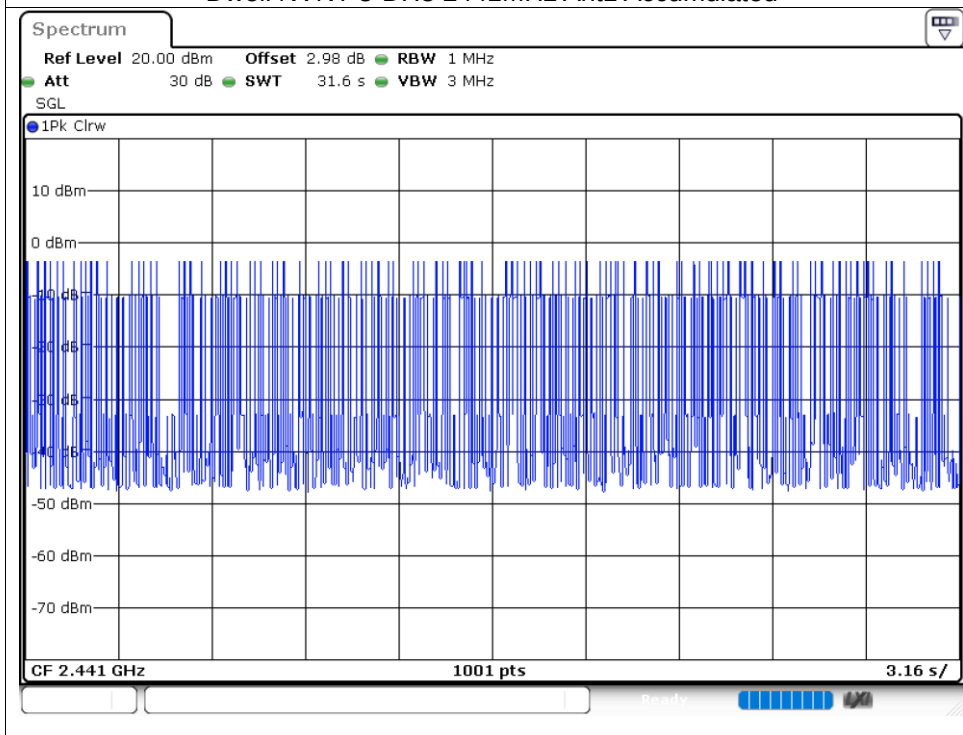

Dwell NVNT 3-DH5 2441MHz Ant1 One Burst

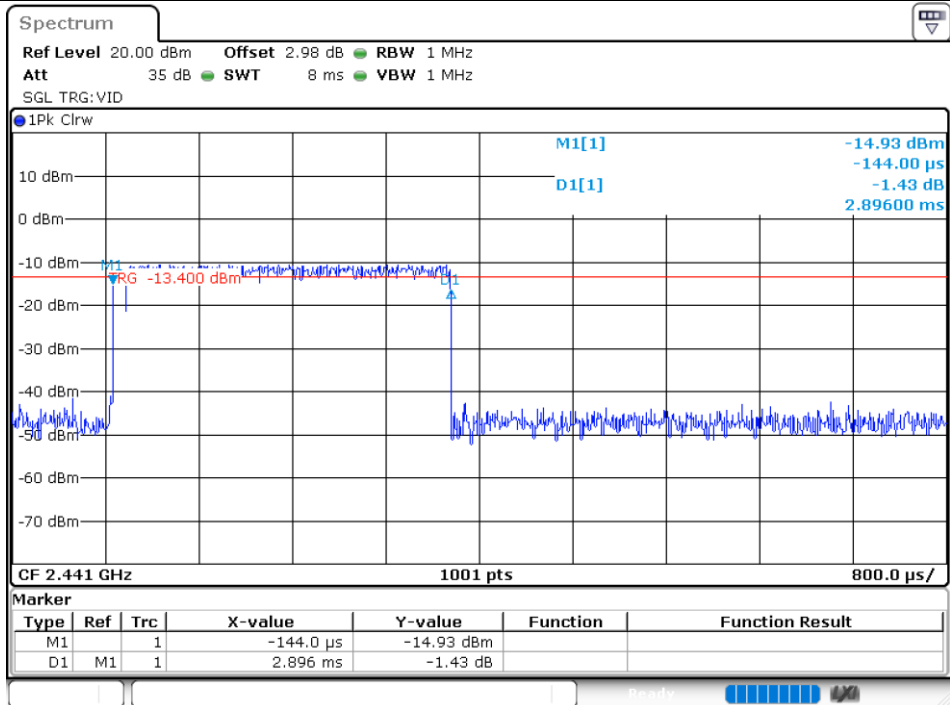


Dwell NVNT 3-DH5 2441MHz Ant1 Accumulated

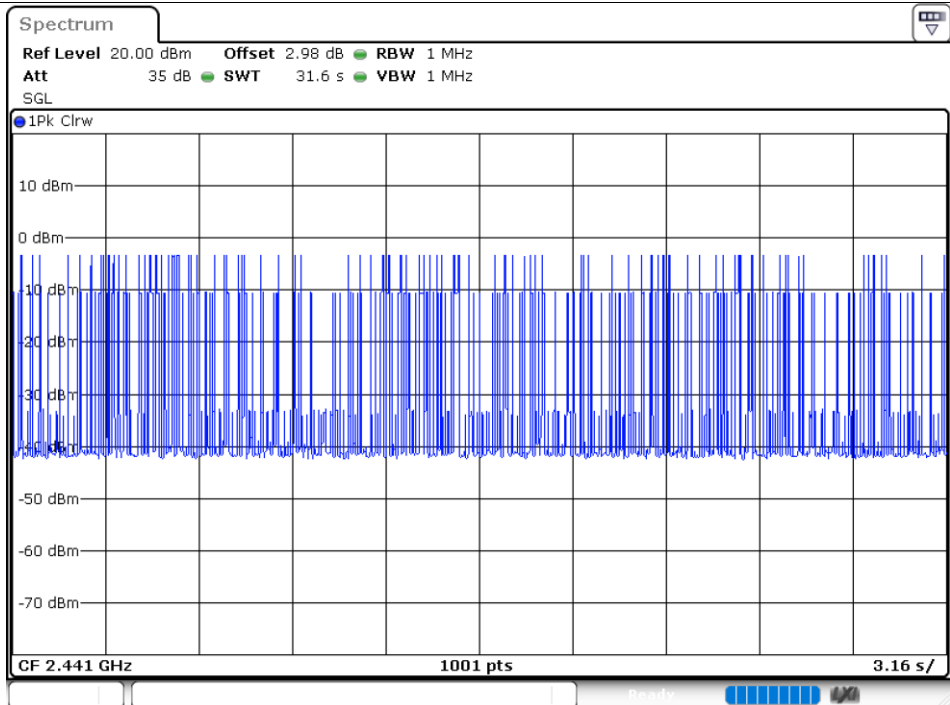


8.2 MAXIMUM CONDUCTED OUTPUT POWER


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH5	2402	Ant1	-5.66	21	Pass
NVNT	1-DH5	2441	Ant1	-4.13	21	Pass
NVNT	1-DH5	2480	Ant1	-4.02	21	Pass
NVNT	2-DH5	2402	Ant1	-4.41	21	Pass
NVNT	2-DH5	2441	Ant1	-3.37	21	Pass
NVNT	2-DH5	2480	Ant1	-3.88	21	Pass
NVNT	3-DH5	2402	Ant1	-3.7	21	Pass
NVNT	3-DH5	2441	Ant1	-2.7	21	Pass
NVNT	3-DH5	2480	Ant1	-3.11	21	Pass

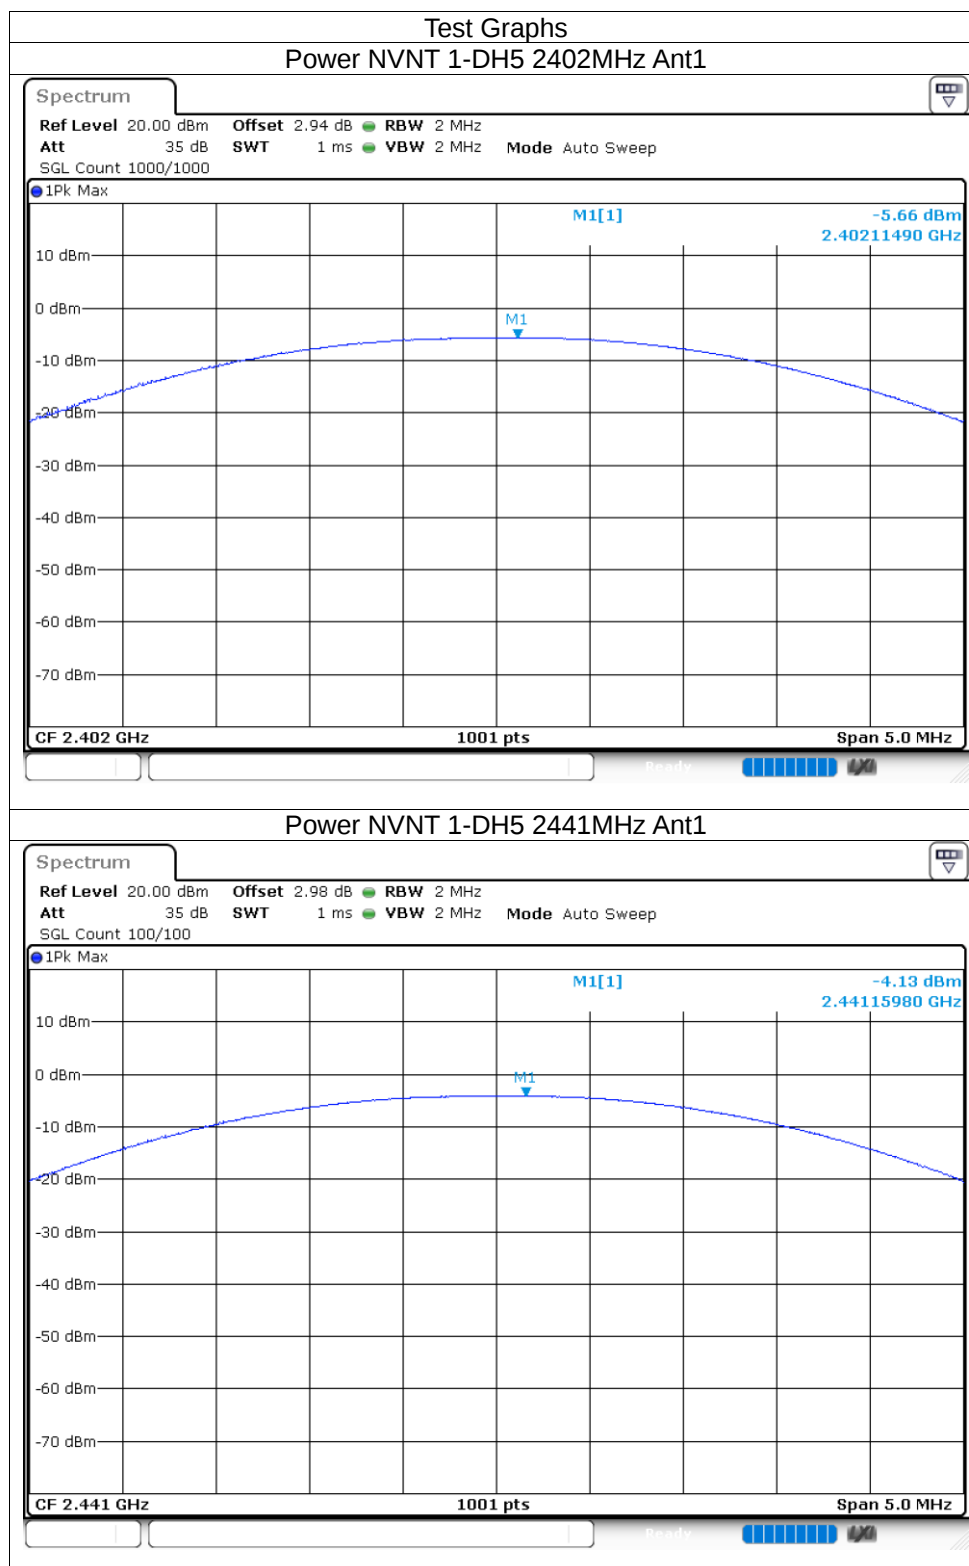


Power NVNT 1-DH5 2480MHz Ant1

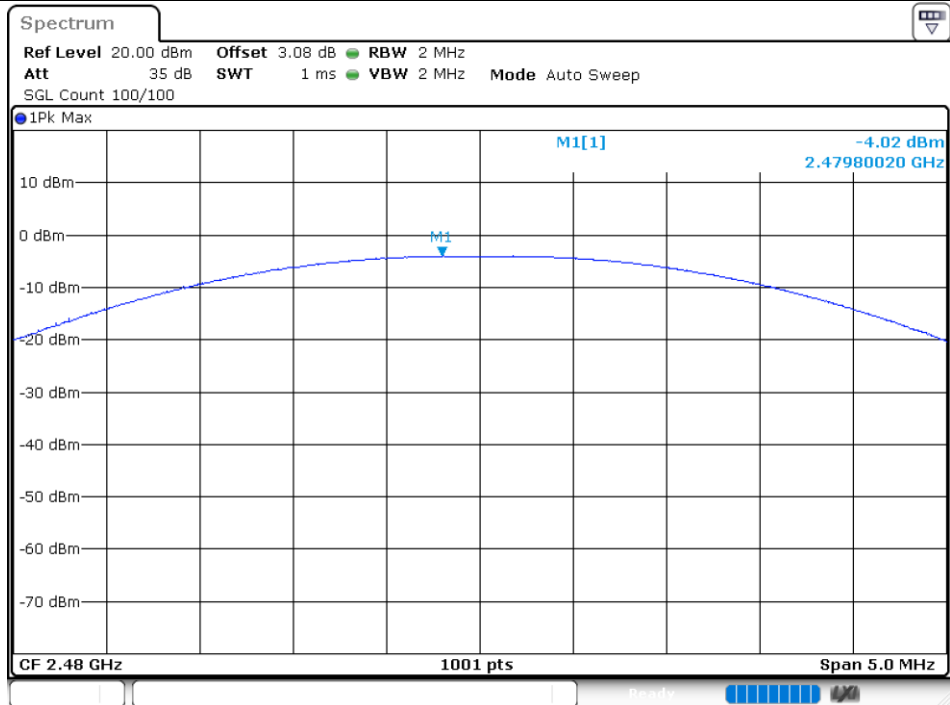


Power NVNT 2-DH5 2402MHz Ant1

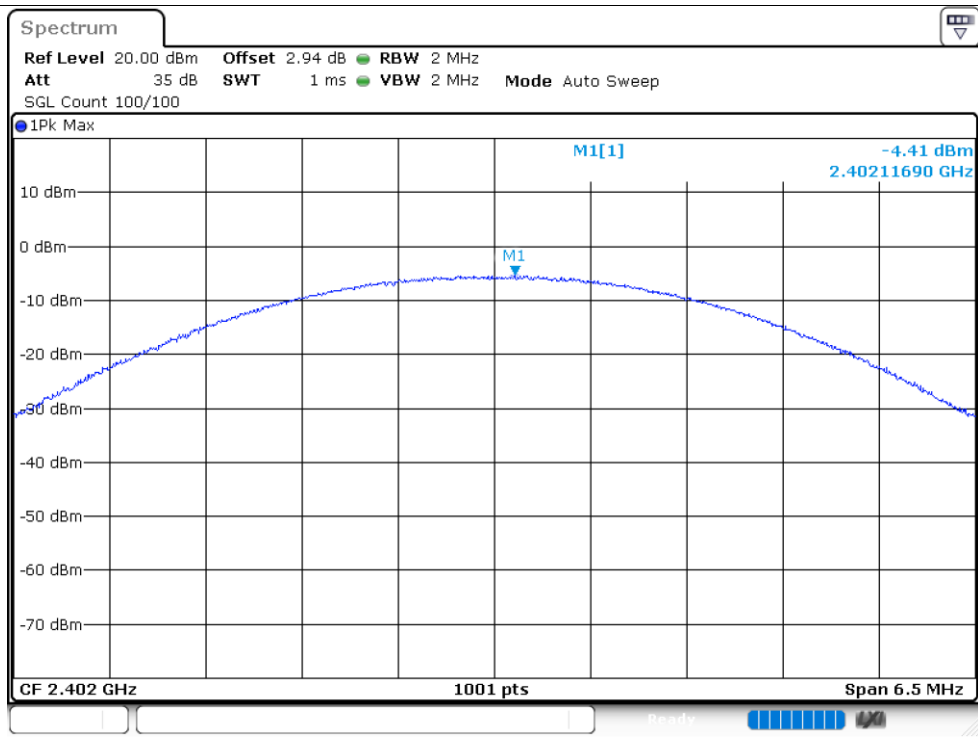


Power NVNT 2-DH5 2441MHz Ant1

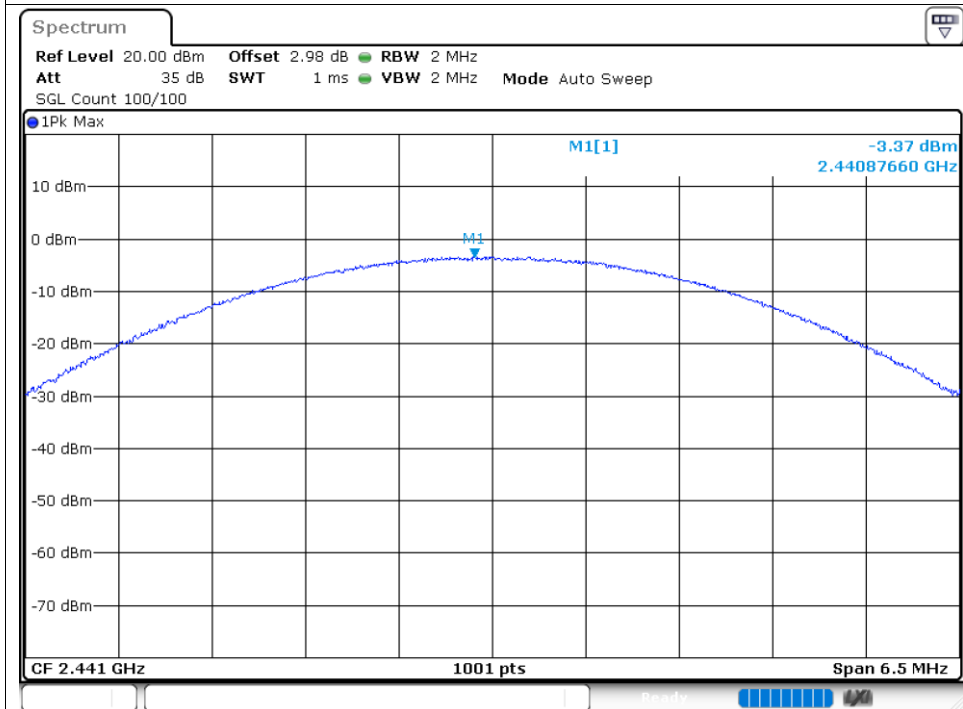


Power NVNT 2-DH5 2480MHz Ant1

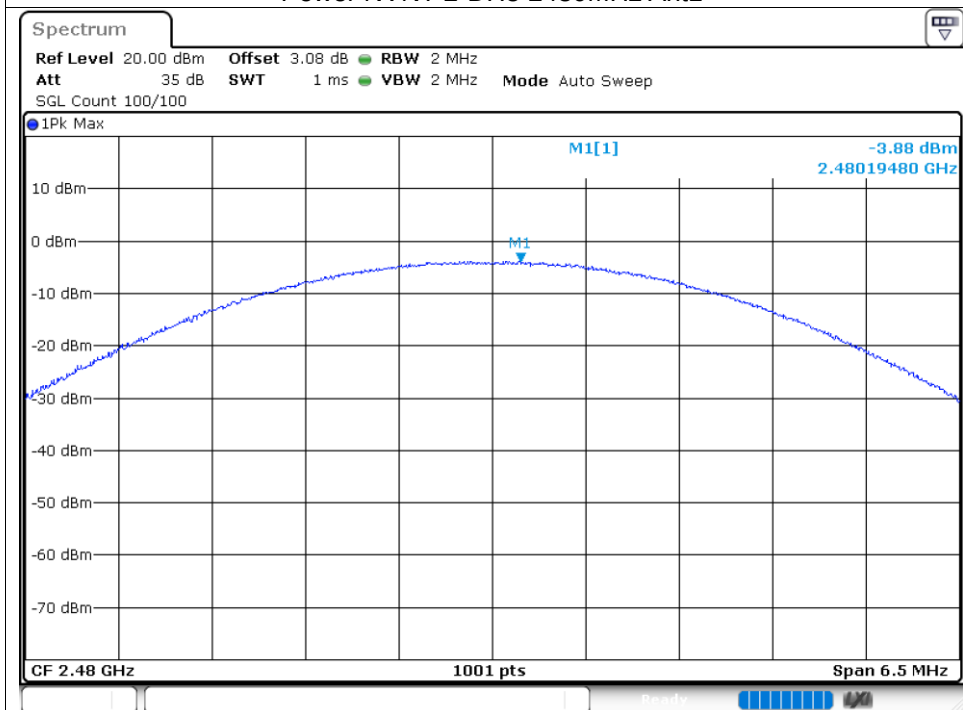


Power NVNT 3-DH5 2402MHz Ant1

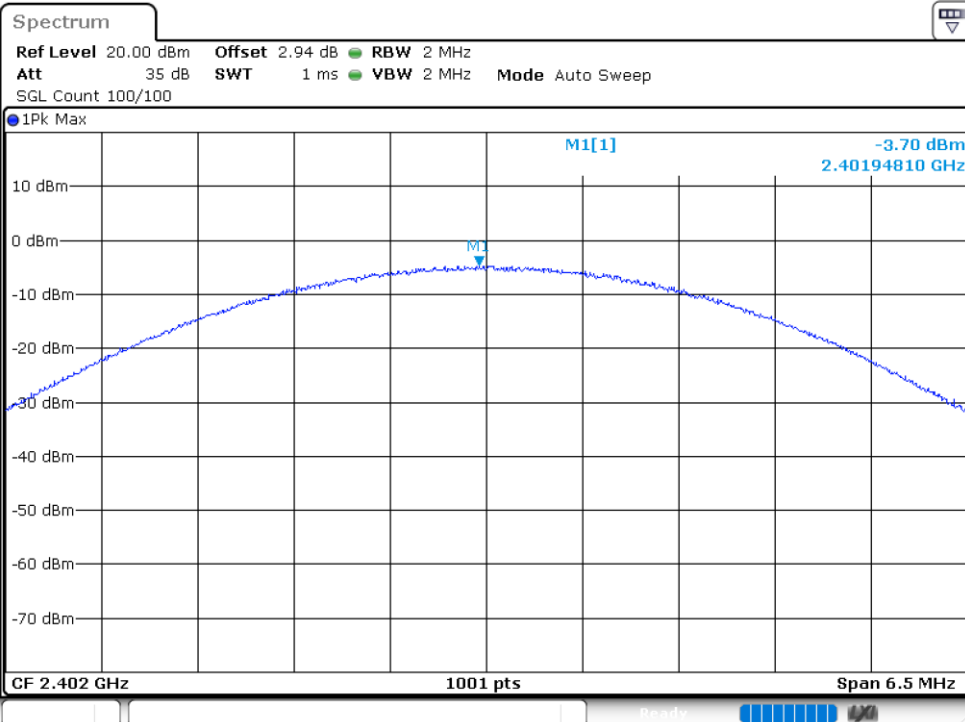

Power NVNT 3-DH5 2441MHz Ant1

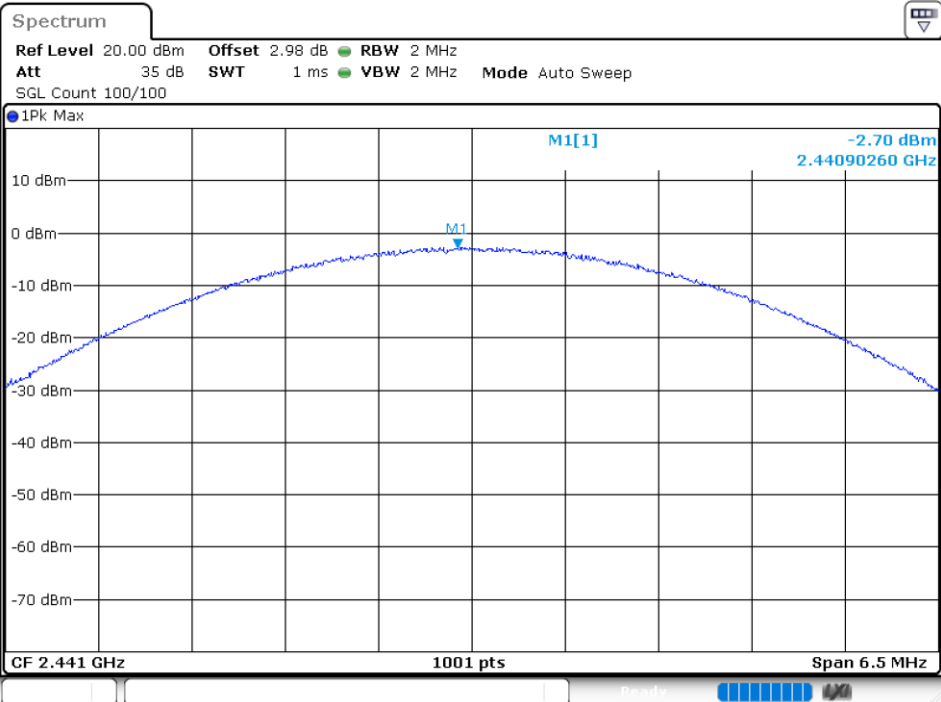

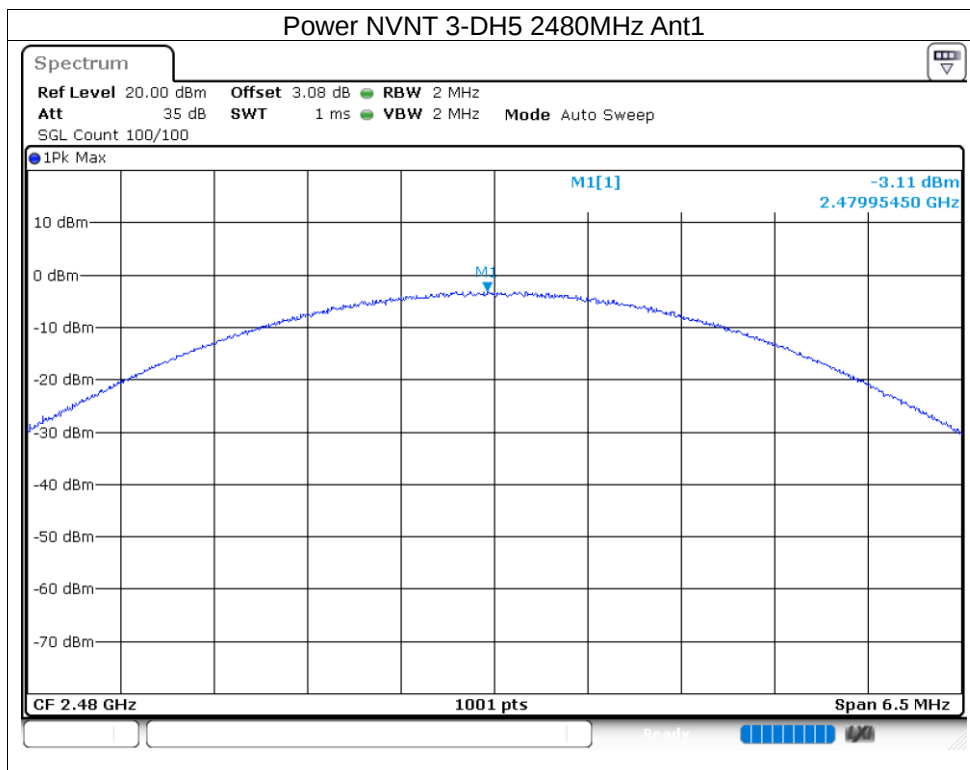

8.3 -20dB BANDWIDTH

Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH5	2402	Ant1	0.962	Pass
NVNT	1-DH5	2441	Ant1	0.932	Pass
NVNT	1-DH5	2480	Ant1	0.936	Pass
NVNT	2-DH5	2402	Ant1	1.326	Pass
NVNT	2-DH5	2441	Ant1	1.31	Pass
NVNT	2-DH5	2480	Ant1	1.302	Pass
NVNT	3-DH5	2402	Ant1	1.304	Pass
NVNT	3-DH5	2441	Ant1	1.288	Pass
NVNT	3-DH5	2480	Ant1	1.286	Pass


Test Graphs

-20dB Bandwidth NVNT 1-DH5 2402MHz Ant1

Spectrum

Ref Level 20.00 dBm Offset 2.94 dB RBW 30 kHz
Att 35 dB SWT 63.3 μ s VBW 100 kHz Mode Auto FFT
SGL Count 1000/1000

1Pk Max

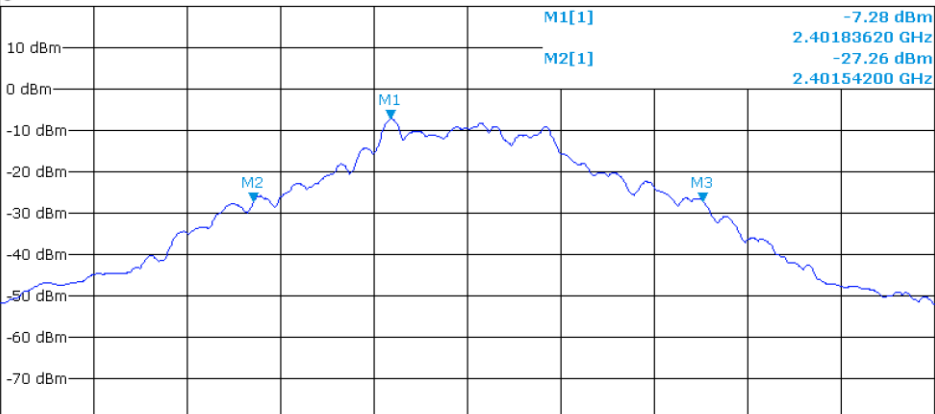

CF 2.402 GHz 1001 pts Span 2.0 MHz

Marker


Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1	1	1	2.4018362 GHz	-7.28 dBm		
M2	1	1	2.401542 GHz	-27.26 dBm		
M3	1	1	2.402504 GHz	-27.15 dBm		

-20dB Bandwidth NVNT 1-DH5 2441MHz Ant1

Spectrum

Ref Level 20.00 dBm Offset 2.98 dB RBW 30 kHz
Att 35 dB SWT 63.3 μ s VBW 100 kHz Mode Auto FFT
SGL Count 100/100

1Pk Max

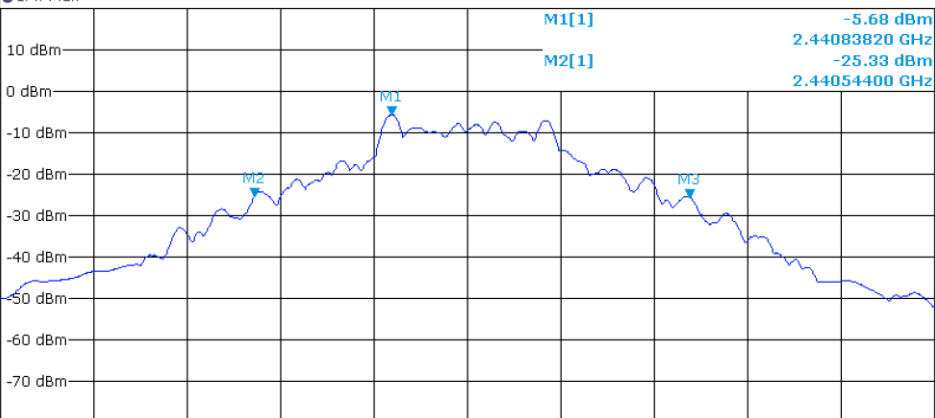


CF 2.441 GHz 1001 pts Span 2.0 MHz


Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1	1	1	2.4408382 GHz	-5.68 dBm		
M2	1	1	2.440544 GHz	-25.33 dBm		
M3	1	1	2.441476 GHz	-25.61 dBm		


-20dB Bandwidth NVNT 1-DH5 2480MHz Ant1

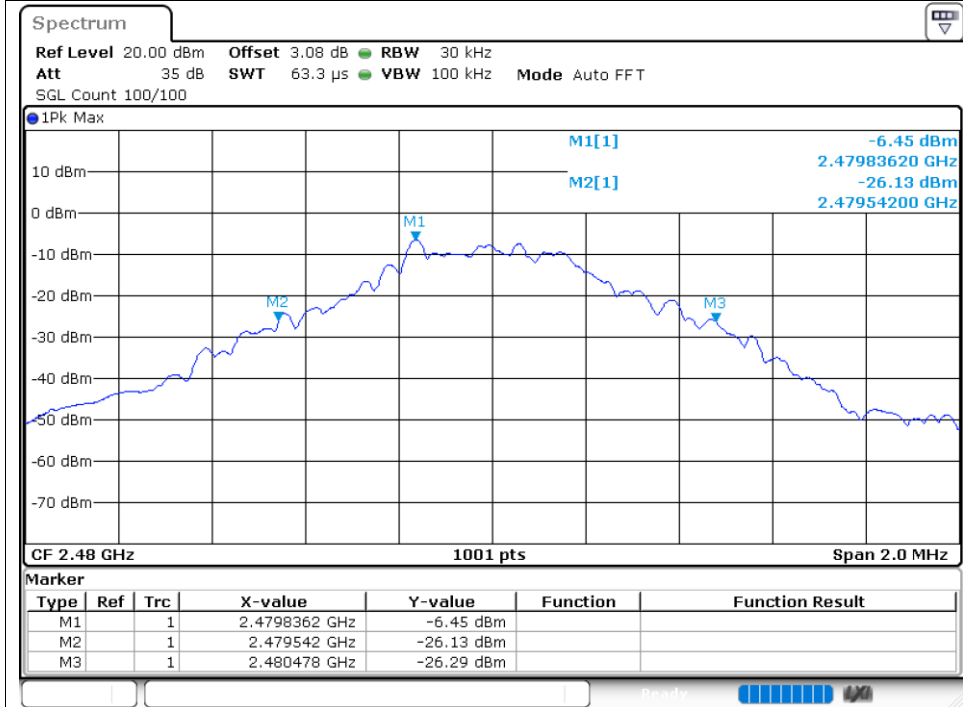


-20dB Bandwidth NVNT 2-DH5 2402MHz Ant1

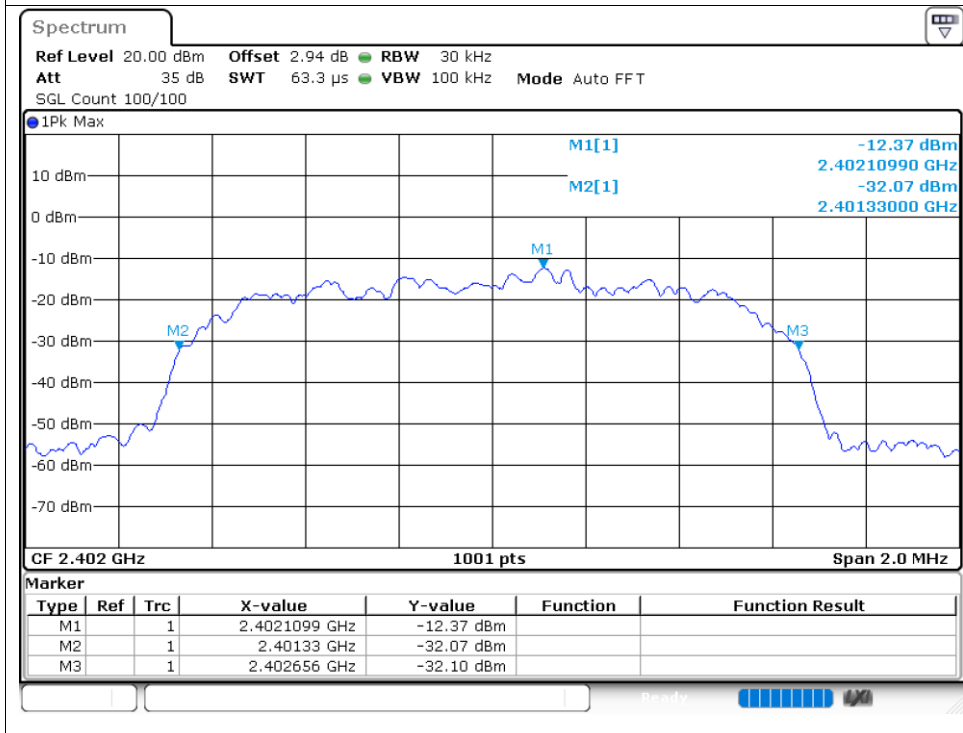


-20dB Bandwidth NVNT 2-DH5 2441MHz Ant1

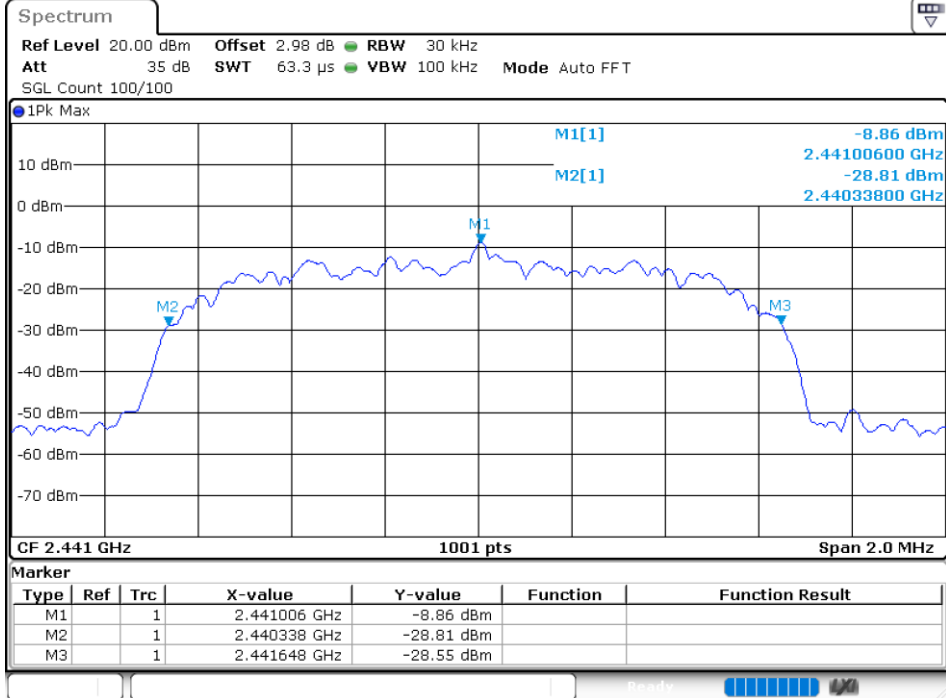


-20dB Bandwidth NVNT 2-DH5 2480MHz Ant1

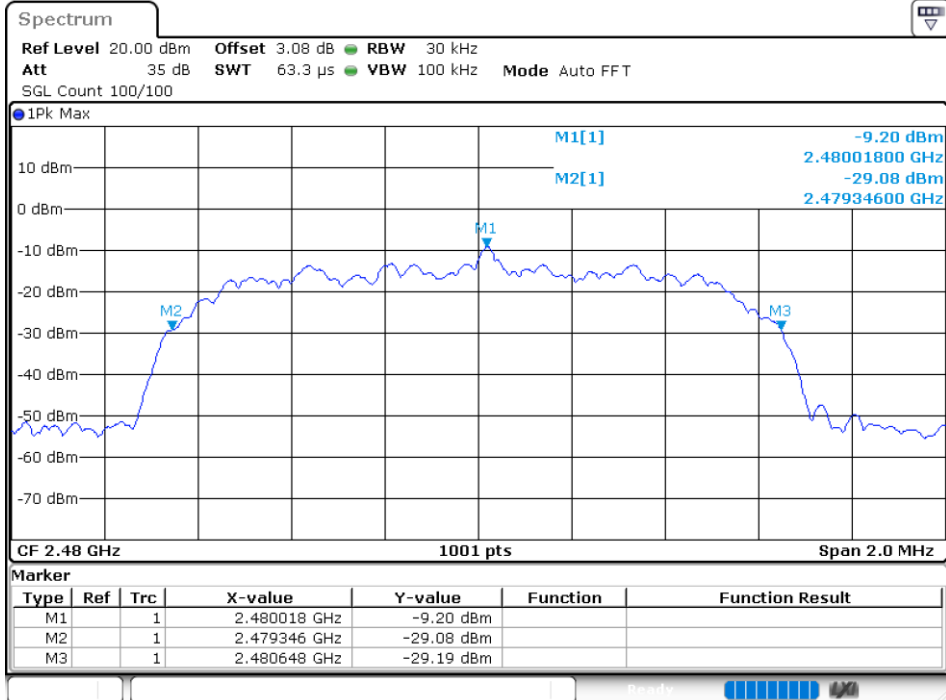


-20dB Bandwidth NVNT 3-DH5 2402MHz Ant1

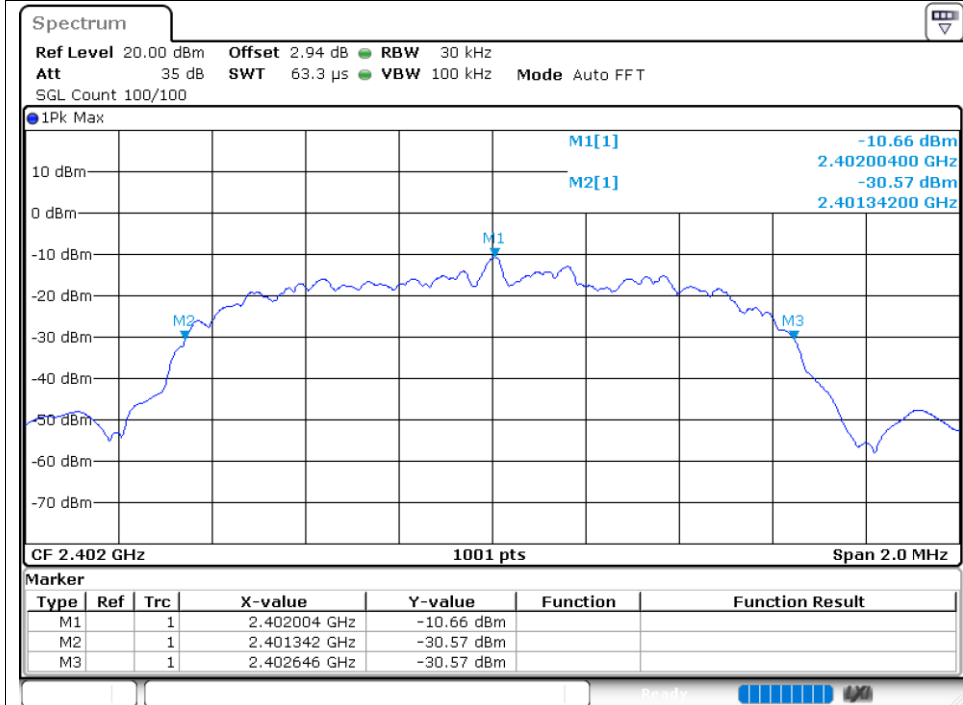

-20dB Bandwidth NVNT 3-DH5 2441MHz Ant1

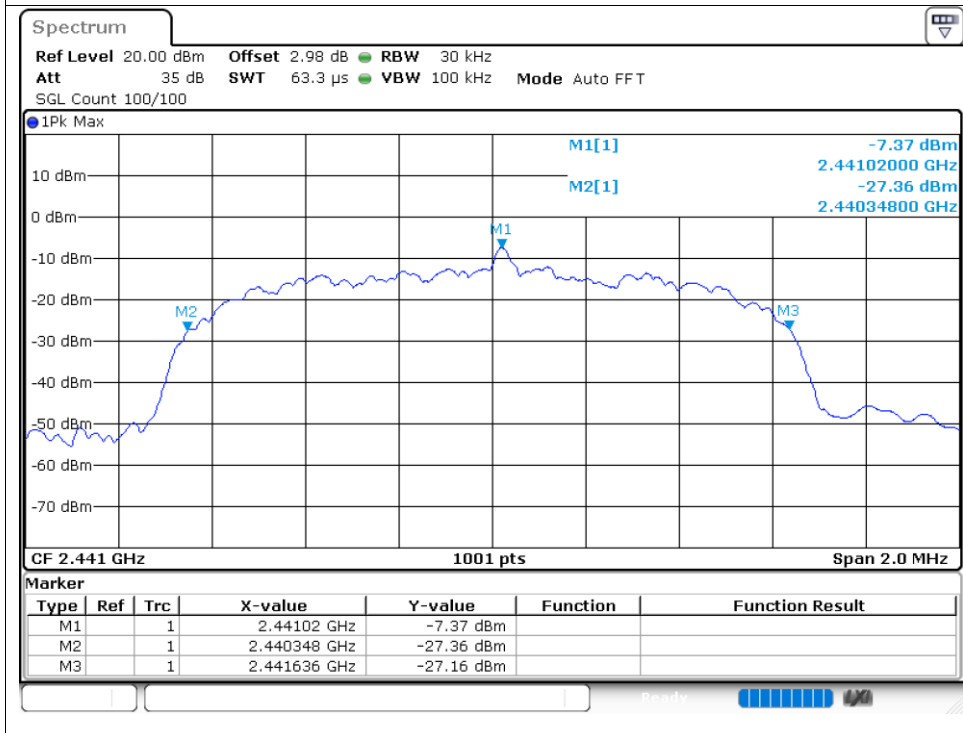


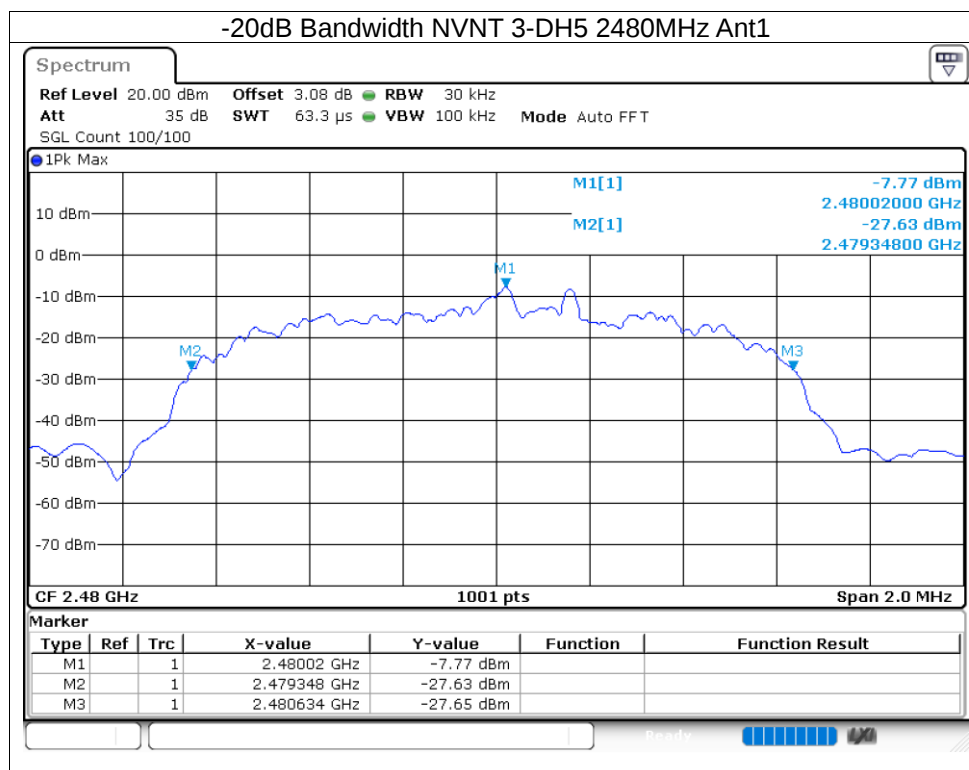


8.4 OCCUPIED CHANNEL BANDWIDTH

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	1-DH5	2402	Ant1	0.881
NVNT	1-DH5	2441	Ant1	0.867
NVNT	1-DH5	2480	Ant1	0.875
NVNT	2-DH5	2402	Ant1	1.183
NVNT	2-DH5	2441	Ant1	1.189
NVNT	2-DH5	2480	Ant1	1.177
NVNT	3-DH5	2402	Ant1	1.189
NVNT	3-DH5	2441	Ant1	1.191
NVNT	3-DH5	2480	Ant1	1.181

Test Graphs OBW NVNT 1-DH5 2402MHz Ant1

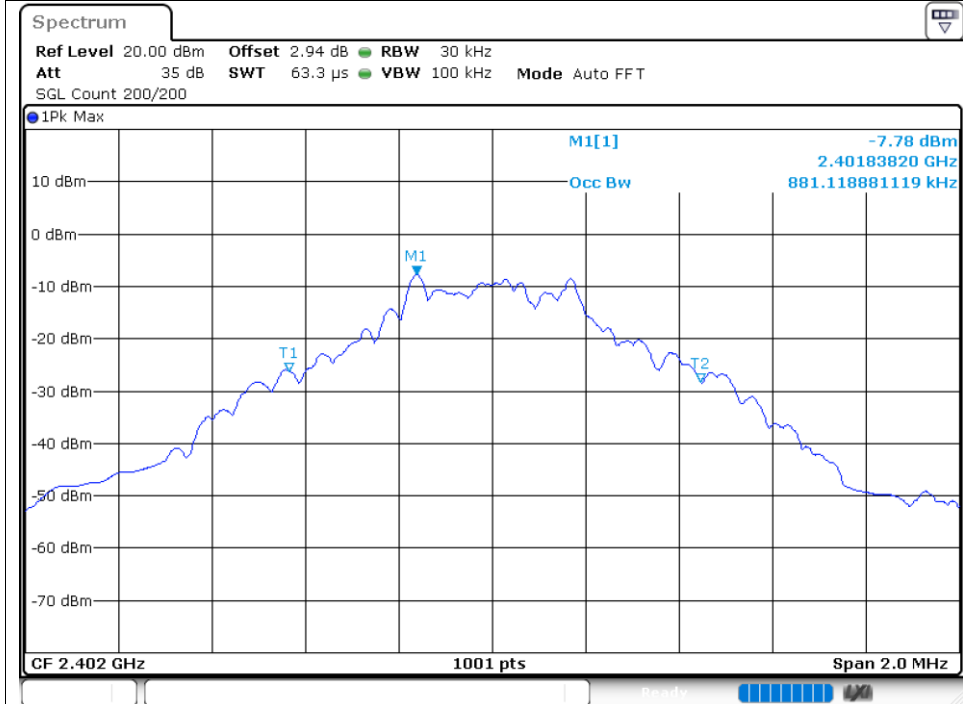


OBW NVNT 1-DH5 2441MHz Ant1

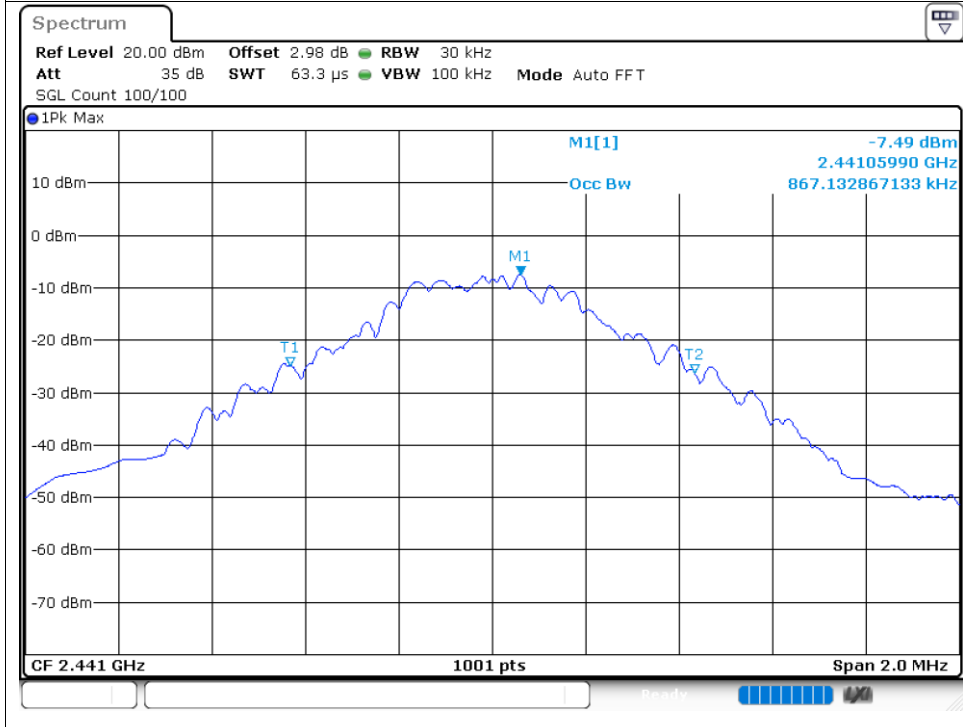


OBW NVNT 1-DH5 2480MHz Ant1




OBW NVNT 2-DH5 2402MHz Ant1

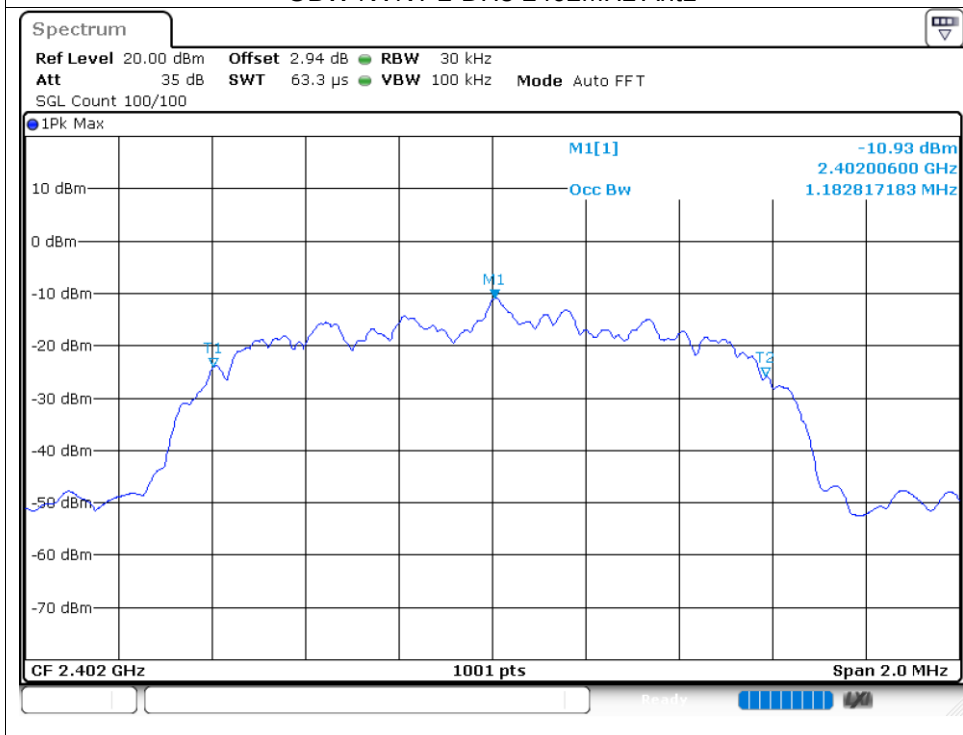


OBW NVNT 2-DH5 2441MHz Ant1

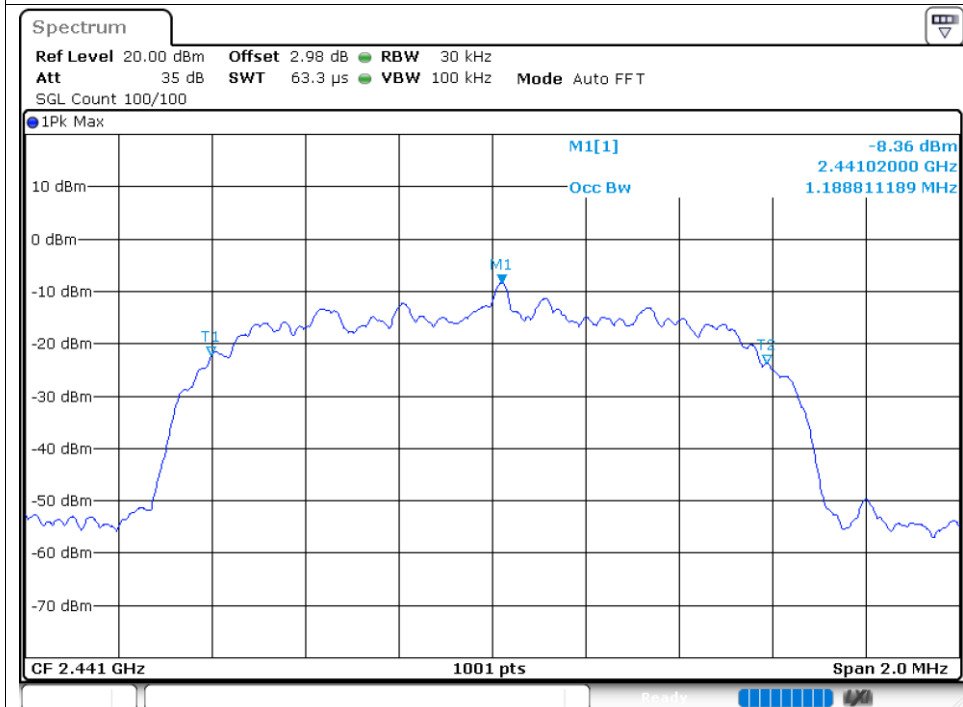


OBW NVNT 2-DH5 2480MHz Ant1

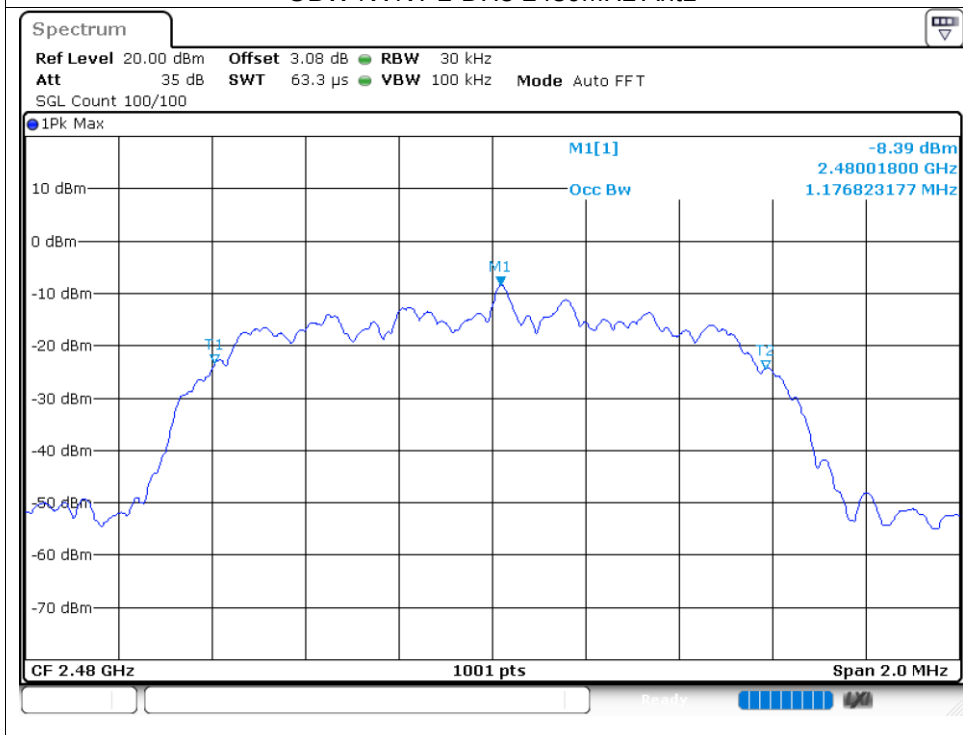


OBW NVNT 3-DH5 2402MHz Ant1

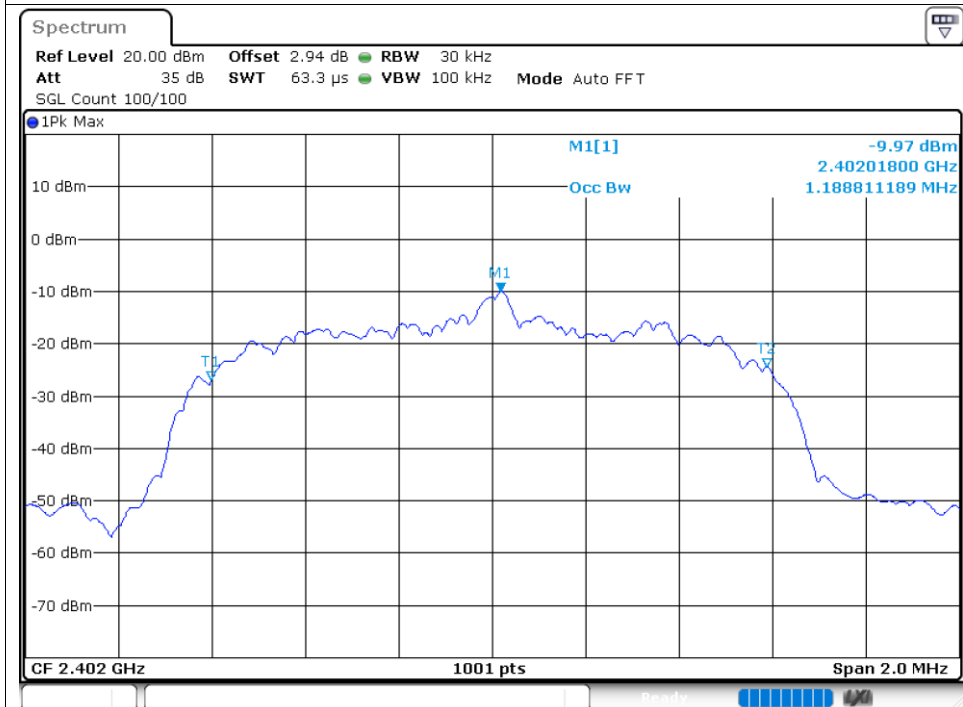

OBW NVNT 3-DH5 2441MHz Ant1

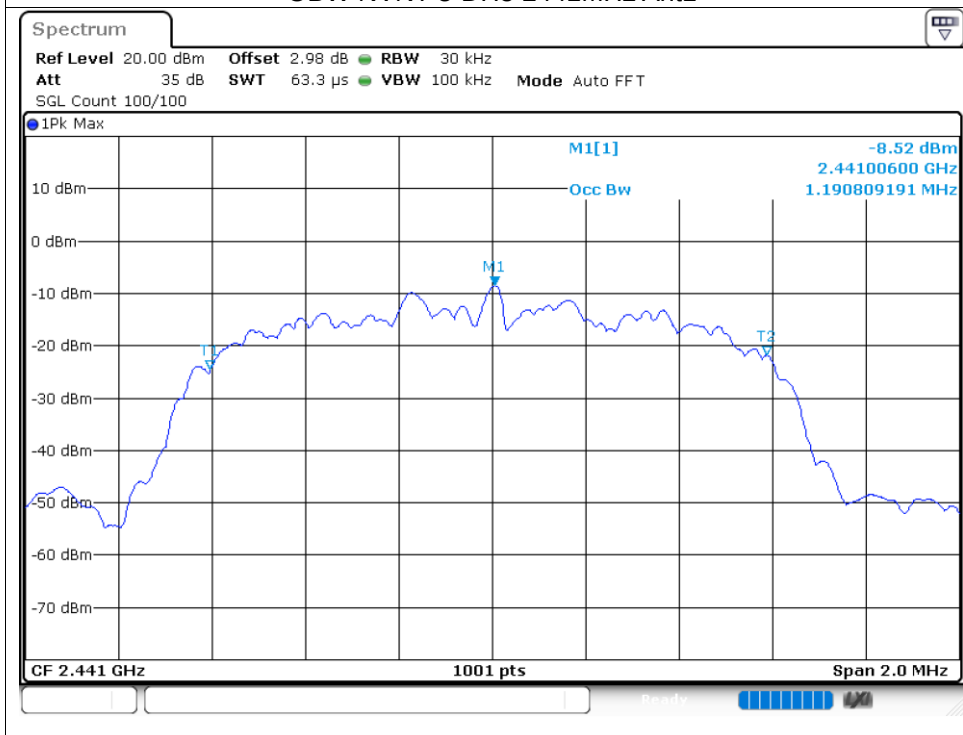

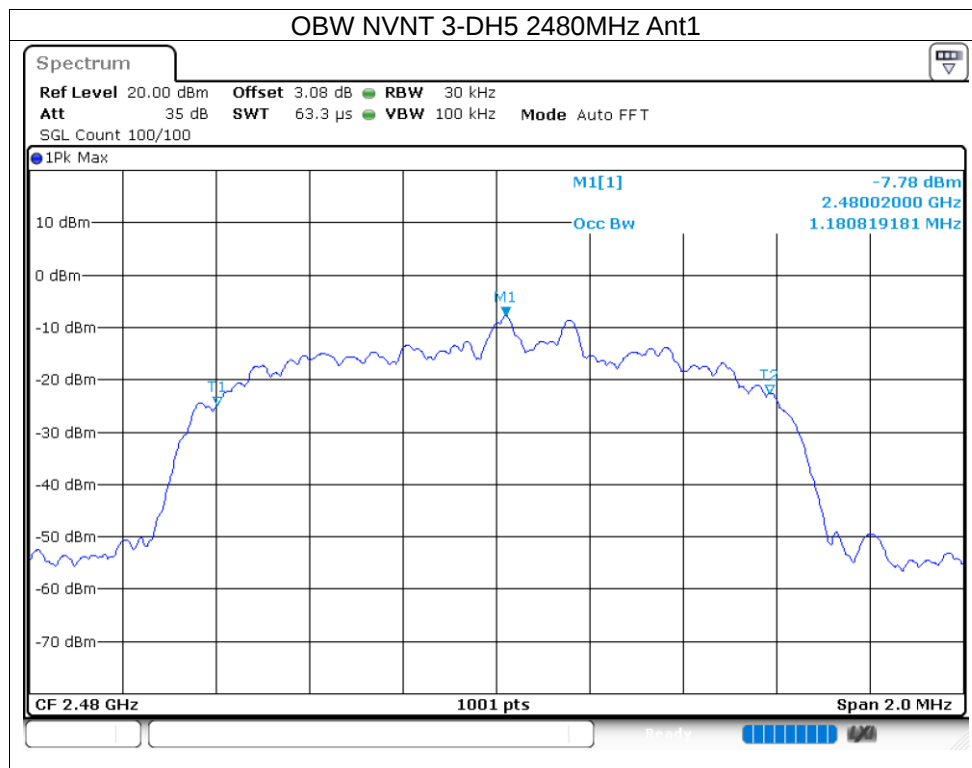


8.5 CARRIER FREQUENCIES SEPARATION


Condition	Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH5	Ant1	2401.83	2402.83	1	0.641	Pass
NVNT	1-DH5	Ant1	2440.97	2442.01	1.04	0.621	Pass
NVNT	1-DH5	Ant1	2478.97	2480.008	1.038	0.624	Pass
NVNT	2-DH5	Ant1	2402	2403.02	1.02	0.884	Pass
NVNT	2-DH5	Ant1	2441.018	2442.02	1.002	0.873	Pass
NVNT	2-DH5	Ant1	2479.066	2480.006	0.94	0.868	Pass
NVNT	3-DH5	Ant1	2402.016	2403.004	0.988	0.869	Pass
NVNT	3-DH5	Ant1	2441.016	2442.02	1.004	0.859	Pass
NVNT	3-DH5	Ant1	2478.808	2479.808	1	0.857	Pass

Test Graphs


CFS NVNT 1-DH5 2402MHz Ant1

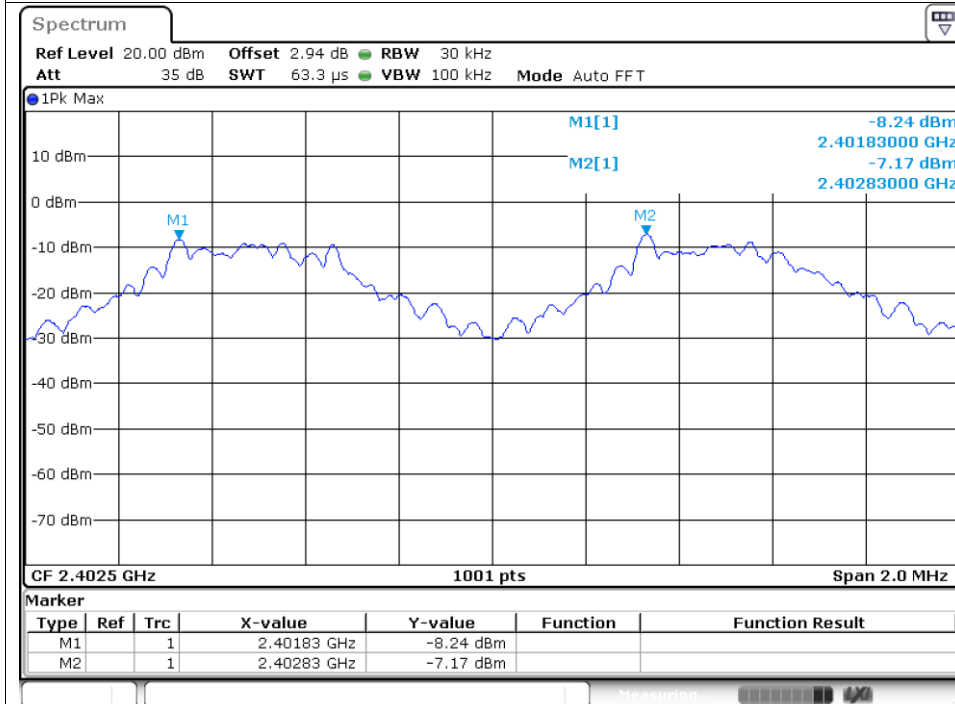


CFS NVNT 1-DH5 2441MHz Ant1

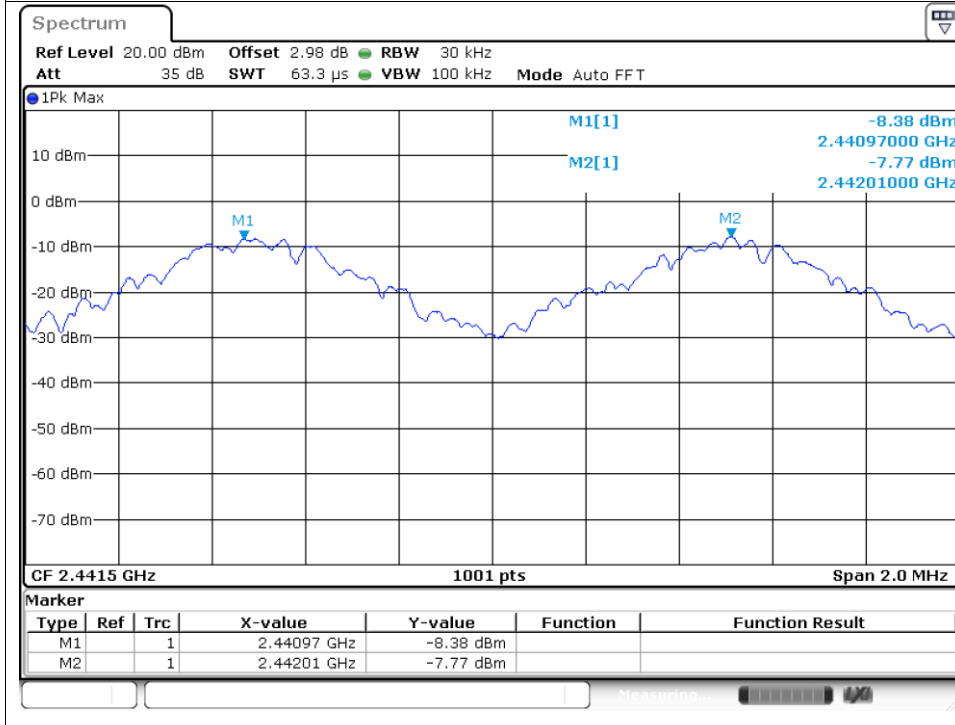


CFS NVNT 1-DH5 2480MHz Ant1

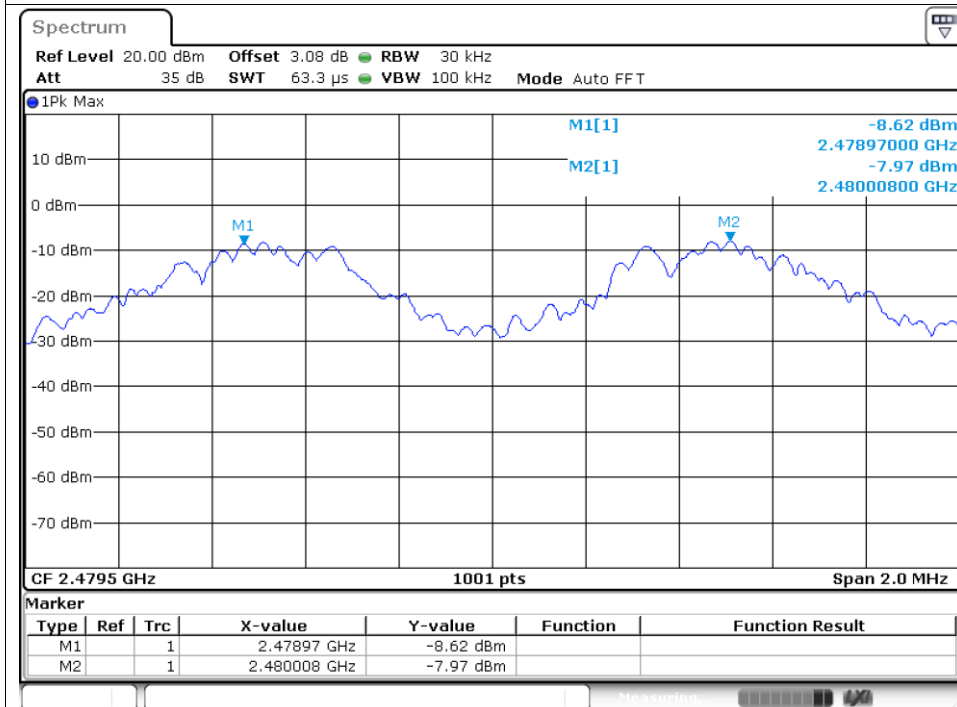


CFS NVNT 2-DH5 2402MHz Ant1

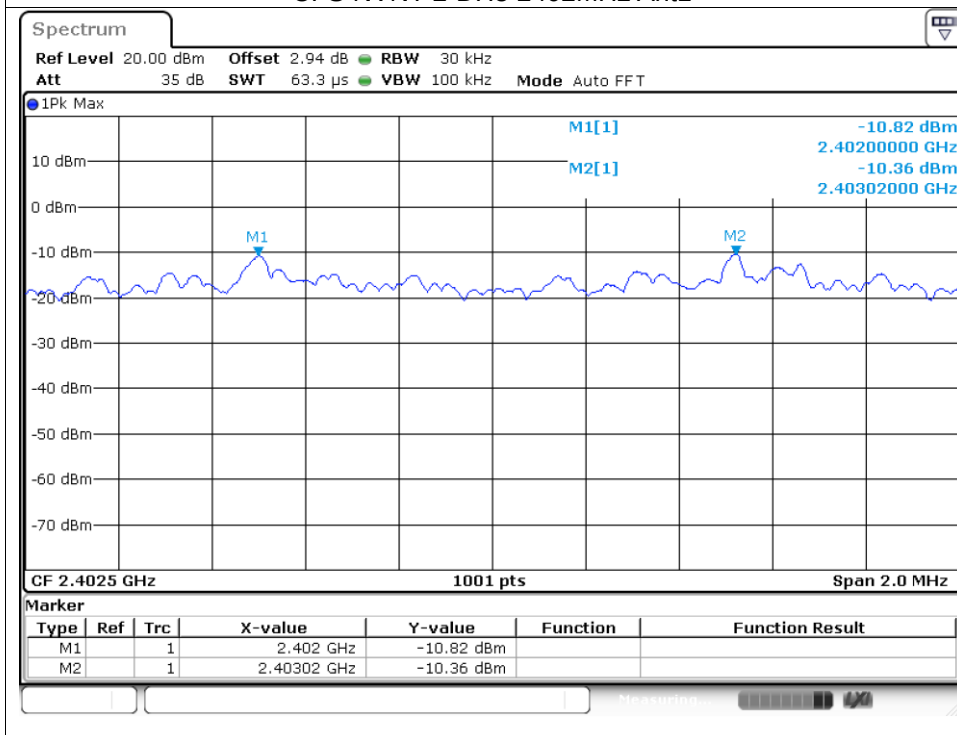


CFS NVNT 2-DH5 2441MHz Ant1

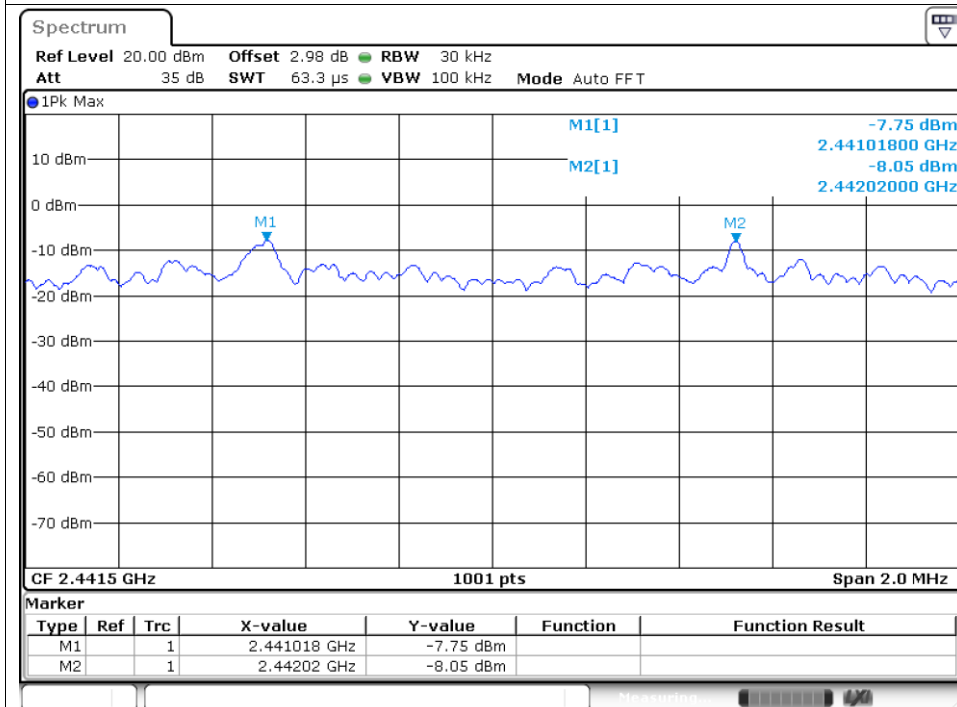

CFS NVNT 2-DH5 2480MHz Ant1

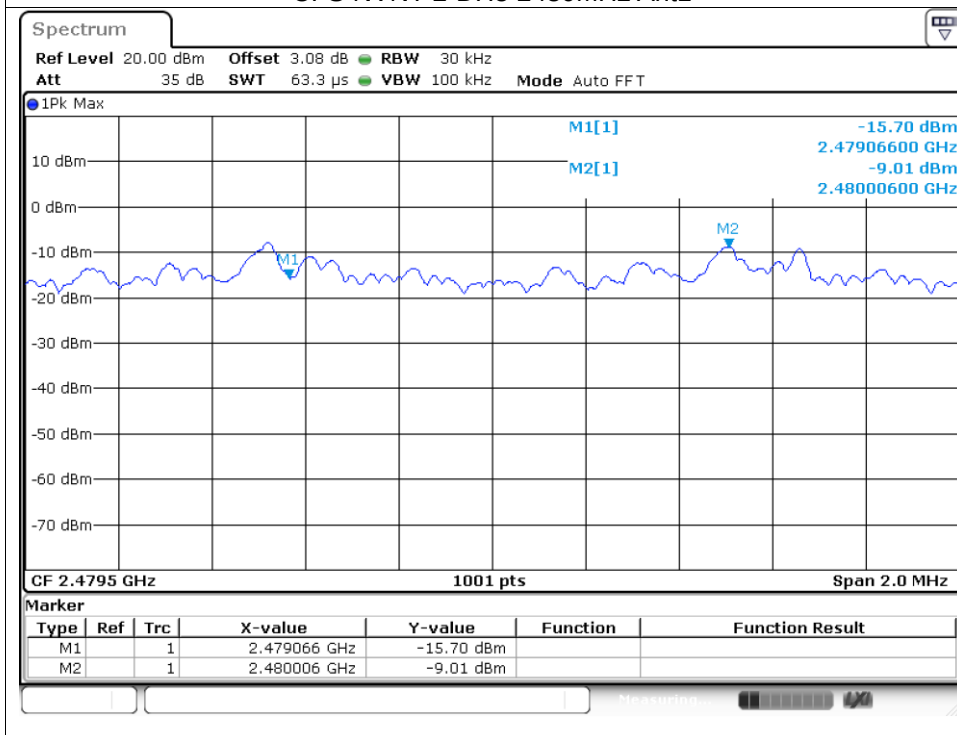

CFS NVNT 3-DH5 2402MHz Ant1

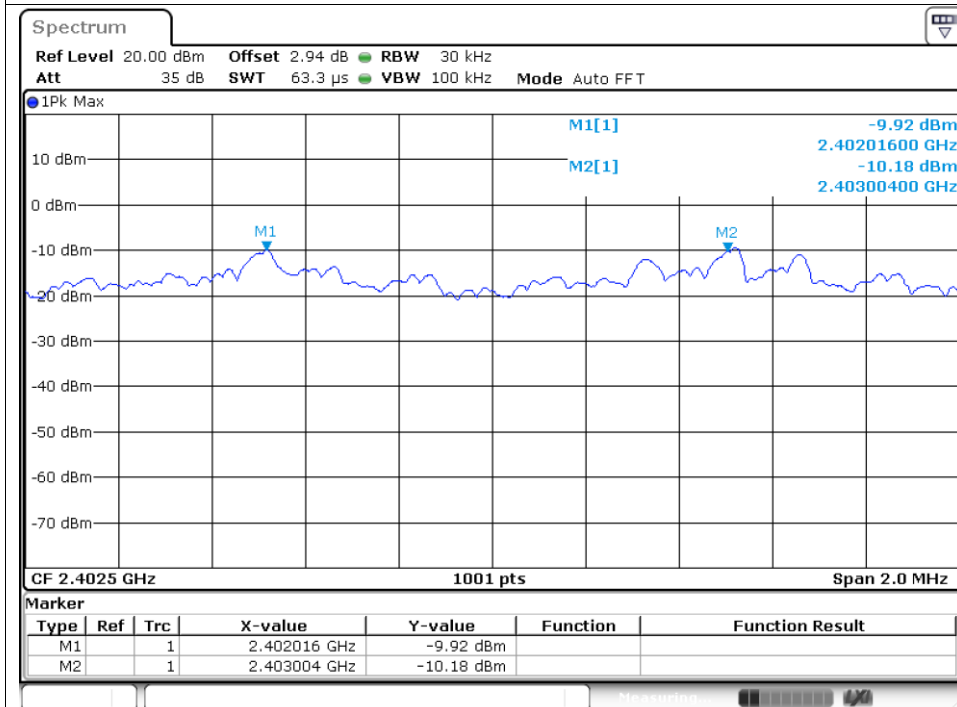

CFS NVNT 3-DH5 2441MHz Ant1

