

承 认 书

APPROVAL SHEET

客 户 名 称

CUSTOMER NAME:

产 品 名 称 315/433 内置天线

PRODUCT NAME:

客 户 料 号

CUSTOMER P/N: SK2534

优比电子料号

Youbi P/N: REV: E

	MANUFACTURER SIGNATURE	CUSTOMER SIGNATURE
CHECKED BY:		
APPROVED BY:		
DATE:	2026/08/04	

Modification History


Version	Content Revision	Issued by	Date
A	Original version	Zhuzhi jun	2026-08-04

Content

<i>Item</i>	<i>Description</i>
1.-----	Test Items and Equipment
2.-----	S Parameter
3.-----	Efficiency and Gain
4.-----	Radiation Pattern


1. Test Items and Equipment

	Test items	Test equipment
S Parameter	1.Return Loss 2.VSWR	Network analyzer (Agilent E5071B)
The whole machine of Passive parameters	1.Frequency 2.Gain 3.Radiation Pattern	1.3D microwave darkroom (5m*5m*5m) 2.Network analyzer (Agilent E5071B)
The whole machine of Active parameters	1.TRP 2.TIS	1.3D microwave darkroom (5m*5m*5m) 2.Comprehensive test instrument (CMW500)

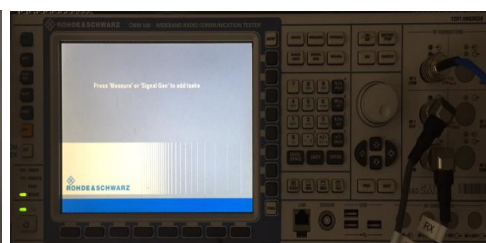

2. S Parameter

Frequency (MHz)	Return Loss (dB)
315	-0.30
433	-0.25


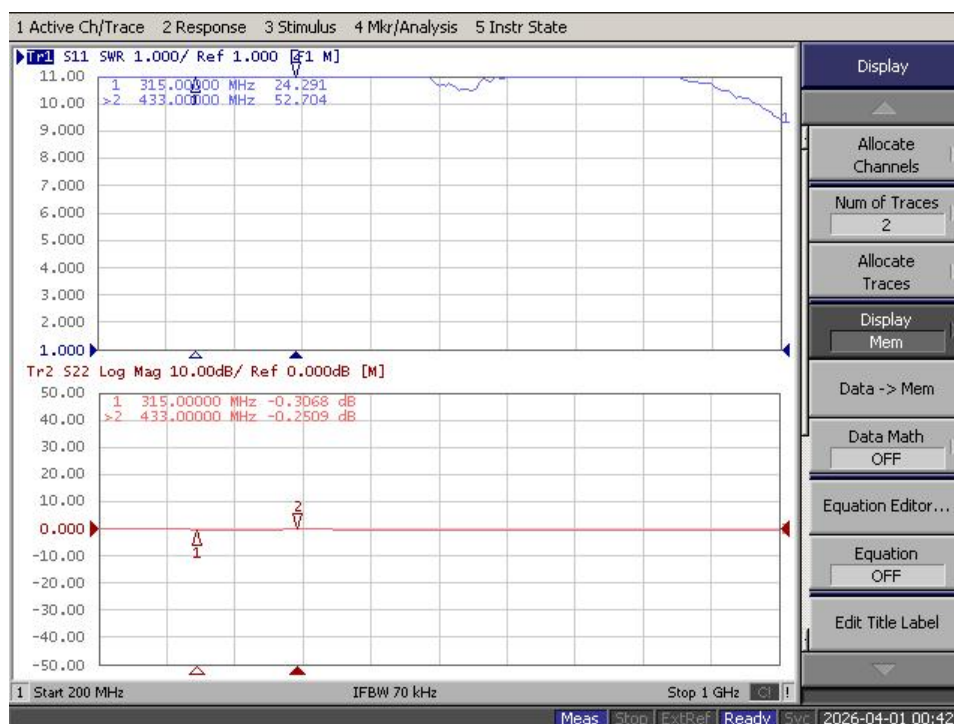


3. Efficiency and Gain


Frequency (MHz)	315	433
Efficiency (%)	0.09	1.01
Gain (dBi)	-23.65	-13.99

4. Radiation Pattern 2D&3D


315MHz

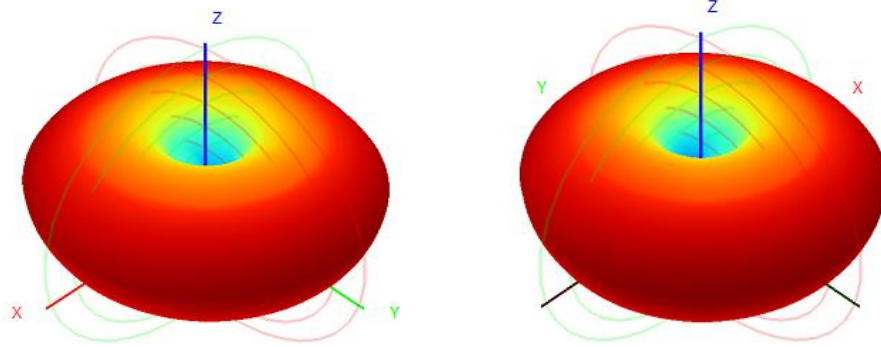

Phi 0





Phi 90

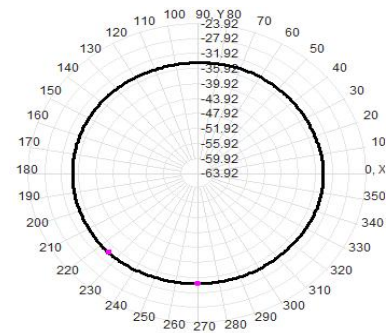


theta 90


433MHz

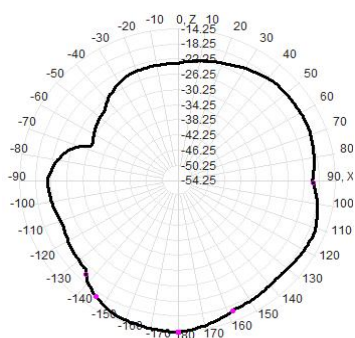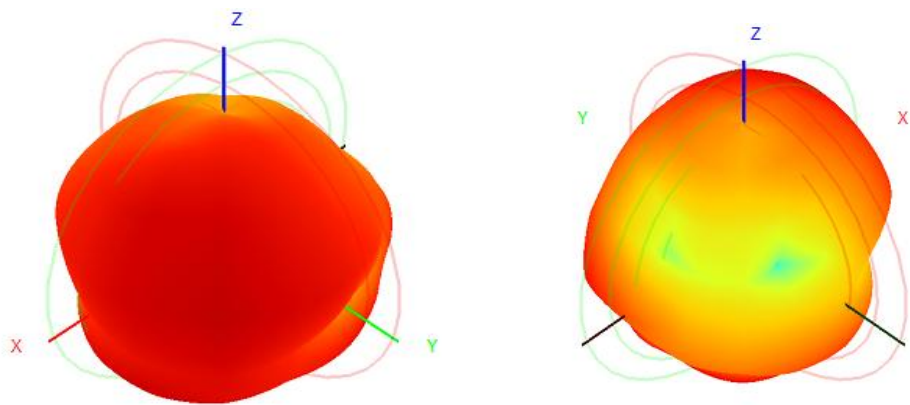

Phi 0

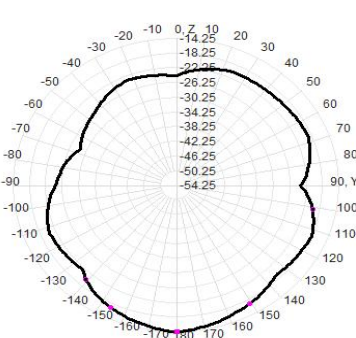

Phi 90

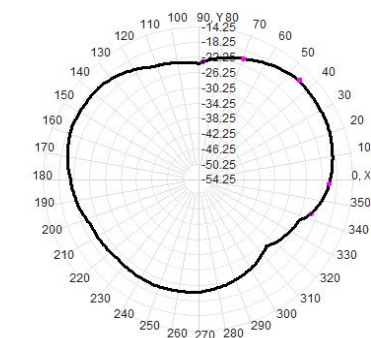

theta 90

22.26 ± 0.15 