

RF Test Report

For

Applicant name: Johnson Controls International
Address: 1101 E Whitaker Mill Rd suite 220, Raleigh, NC 27604, USA
EUT name: Meeting Room Display Tablet
Brand name: /
Model number: WA1099T
Series model number: /
FCC ID: 2BVHN-WA1099T

Issued By

Company name: BTF Testing Lab (Shenzhen) Co., Ltd.
Address: Plant 101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, Guangdong, China

Report number: BTF260413R00404
Test standards: FCC CFR Title 47 Part 15 Subpart E (§ 15.407)
Test conclusion: Pass

Date of sample receipt: 2026-4-3
Test date: 2026-4-3 to 2026-4-20
Date of issue: 2026-4-20

Prepared by:

Chris Liu

Chris Liu/Project engineer



Ryan.CJ /EMC manager

Note: All the test results in this report only related to the testing samples. Which can be duplicated completely for the legal use with approval of applicant; it shall not be reproduced except in full without the written approval of BTF Testing Lab (Shenzhen) Co., Ltd., All the objections should be raised within thirty days from the date of issue. To validate the report, you can contact us.

Revision History		
Version	Issue date	Revisions content
R_V0	2026-4-20	Original

Table of Contents

1	Introduction.....	4
1.1	Laboratory Location	4
1.2	Laboratory Facility.....	4
1.3	Announcement.....	4
2	Product Information	5
2.1	Application Information	5
2.2	Manufacturer Information	5
2.3	Factory Information	5
2.4	General Description of Equipment under Test (EUT)	5
2.5	Technical Information.....	5
2.6	Channel List.....	6
3	Test Information	7
3.1	Test Standards.....	7
3.2	Summary of Test.....	7
3.3	Uncertainty of Test.....	7
3.4	Additions to, deviations, or exclusions from the method.....	8
3.5	Test Auxiliary Equipment	8
3.6	Test Equipment List	8
4	Test Configuration.....	10
4.1	Environment Condition.....	10
4.2	Test mode	10
4.3	Test Channel of EUT	10
4.4	Test software	11
4.5	Test procedure.....	12
4.6	Test Setup Block.....	13
5	Technical requirements specification	15
5.1	Antenna Requirement.....	15
5.2	Conducted Emission at AC power line.....	15
5.2.1	Test Data:	15
5.3	Emissions in Restricted Frequency Bands	18
5.3.1	Test Data:	20
5.4	Undesirable emission limits (below 1GHz)	31
5.4.1	Test Data:	32
5.5	Undesirable emission limits (Above 1GHz).....	35
5.5.1	Test Data:	37
5.6	Duty Cycle.....	53
5.6.1	Test Data:	53
5.7	Emission bandwidth and Occupied bandwidth	54
5.7.1	Test Data:	55
5.8	Maximum Conducted Output Power	56
5.8.1	Test Data:	57
5.9	Power Spectral Density.....	58
5.9.1	Test Data:	59
5.10	Frequency Stability Measurement	60
5.10.1	Test Data:	60
6	Test Setup Photos	61
7	EUT Constructional Details (EUT Photos)	61

1 Introduction

1.1 Laboratory Location

Test location:	BTF Testing Lab (Shenzhen) Co., Ltd.
Address:	Plant 101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, Guangdong, China
Description:	All measurement facilities used to collect the measurement data are located at Plant 101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, Guangdong, China
Phone number:	+86-0755-23146130
Fax number:	+86-0755-23146130

1.2 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC - Designation No.: CN1409**
BTF Testing Lab (Shenzhen) Co., Ltd. has been accredited as a testing laboratory by FCC (Federal Communications Commission). The test firm Registration No. is 695374.
- **CNAS - Registration No.: CNAS L17568**
BTF Testing Lab (Shenzhen) Co., Ltd. is accredited to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L17568.
- **A2LA - Registration No.: 6660.01**
BTF Testing Lab (Shenzhen) Co., Ltd. is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories.

1.3 Announcement

- (1) The test report reference to the report template version v0.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing, reviewing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) This document may not be altered or revised in any way unless done so by BTF and all revisions are duly noted in the revisions section.
- (5) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (6) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.
- (7) All entrusted information in this report is provided by the client and has been confirmed through consultation with the client; The testing items for this report have been discussed and confirmed with the client, and our company is only responsible for the content reflected in the report.

2 Product Information

2.1 Application Information

Company name:	Johnson Controls International
Address:	1101 E Whitaker Mill Rd suite 220, Raleigh, NC 27604, USA

2.2 Manufacturer Information

Company name:	Johnson Controls International
Address:	1101 E Whitaker Mill Rd suite 220, Raleigh, NC 27604, USA

2.3 Factory Information

Company name:	SHENZHEN ELECTRON TECHNOLOGY CO.,LTD.
Address:	Bld.2, Yingfeng Industrial Zone, Tantou Community, Songgang Street, Bao'an, Shenzhen, China.

2.4 General Description of Equipment under Test (EUT)

EUT name	Meeting Room Display Tablet
Under test model name	WA1099T
Series model name	N/A
Description of model name differentiation	N/A
Hardware Version	N/A
Software Version	N/A
Rating:	Adapter Model: FJ-SW1202000N Input: 100-240V, 50/60Hz Output: DC 12.0V 24W or DC 48V, 0.5A by POE power supply

2.5 Technical Information

Operation frequency:	Band 1: 5150MHz ~ 5250MHz Band 3: 5725MHz ~ 5850MHz
Modulation technology: (IEEE 802.11a/n)	OFDM-BPSK, QPSK, 16QAM, 64QAM
Modulation technology: (IEEE 802.11ac)	OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM
Modulation technology: (IEEE 802.11ax)	OFDMA-up to 1024QAM
Equipment type:	Adaptive equipment
Max. Conducted Power:	9.81 dBm
Antenna type:	FPC Antenna
Antenna gain:	2.98 dBi (declare by Applicant)

Antenna transmit mode:	SISO (1TX, 1RX)
------------------------	-----------------

Note: 802.11ax not support partial RU mode, all test configurations are solely applicable to Full RU.

2.6 Channel List

Band 1: 5150MHz ~ 5250MHz							
20MHz		40MHz		80MHz			
Channel	Frequency	Channel	Frequency	Channel	Frequency		
36	5180	38	5190	42	5210		
40	5200	46	5230	--	--		
48	5240	--	--	--	--		

Band 3: 5725MHz ~ 5850MHz						
20MHz		40MHz		80MHz		
Channel	Frequency	Channel	Frequency	Channel	Frequency	
149	5745	151	5755	155	5775	
157	5785	159	5795	--	--	
165	5825	--	--	--	--	

3 Test Information

3.1 Test Standards

Identity	Document Title
FCC CFR Title 47 Part 15 Subpart E (§15.407)	Unlicensed National Information Infrastructure Devices
ANSI C63.10-2020+Cor 1-2023	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 789033 D02 General U-NII Test Procedures New Rules v02r01	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E

3.2 Summary of Test

Clauses	Test Items	Result
Part 15.203	Antenna requirement	PASS
47 CFR 15.207(a)	Conducted Emission at AC power line	PASS
47 CFR 15.407(a)(1)(iv)-(B1), (a)(2)-(B2/3), (a)(3)(i)-(B4)	Duty Cycle	PASS
47 CFR 15.407(a)(12)	26dB Emission Bandwidth 99% Occupied Bandwidth	PASS
47 CFR 15.407(a)(1)(iv)-(B1), (a)(2)-(B2/3), (a)(3)(i)-(B4)	Maximum Conducted Output Power	PASS
47 CFR 15.407(a)(1)(iv)-(B1), (a)(2)-(B2/3), (a)(3)(i)-(B4)	Power Spectral Density	PASS
47 CFR 15.407(e)	6dB Emission Bandwidth	PASS
47 CFR 15.205 47 CFR 15.209 47 CFR 15.407(b)(1) - (B1), (2) -(B2), (3) -(B3), (4) -(B4), (9), (10)	Unwanted Emissions	PASS
47 CFR 15.407(g)	Frequency Stability	PASS
Remark: 1. Pass: met the requirements. 2. N/A: not applicable.		

3.3 Uncertainty of Test

Measurement	Value
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±1.5 dB
Power Spectral Density, conducted	±3.0 dB
Unwanted Emissions, conducted	±3.0 dB

Supply voltages	±3 %
Time	±5 %
Conducted Emission for LISN (9kHz ~ 150kHz)	±2.97 dB
Conducted Emission for LISN (150kHz ~ 30MHz)	±2.45 dB
Radiated Emission (30MHz ~ 1000MHz)	±4.80 dB
Radiated Emission (1GHz ~ 18GHz)	±4.82 dB
Radiated Emission (above 18GHz)	±5.08 dB
The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

3.4 Additions to, deviations, or exclusions from the method

None

3.5 Test Auxiliary Equipment

No.	Description	Manufacturer	Model	Serial Number	Certification
1	PC	HP	Zhan 66P	N/A	N/A

3.6 Test Equipment List

Radiated Emission Test						
Test Equipment	Manufacturer	Model	Serial No.	Last Cal.	Cal. Date	Cal. Due
EMI Receiver	Rohde & Schwarz	ESCI7	101032	2024/10/18	2025/10/17	2026/10/16
Signal Analyzer	Rohde & Schwarz	FSQ40	100010	2024/10/18	2025/10/17	2026/10/16
Log periodic antenna	Schwarzbeck	VULB 9168	01328	2024/10/19	2025/10/18	2026/10/17
Preamplifier (30MHz ~ 1GHz)	Schwarzbeck	BBV9744	00246	2024/5/27	2025/5/26	2026/5/25
BELOW-Cable	REBES Talent	9K1G	21101576	2024/8/24	2025/8/23	2026/8/22
Horn Antenna	Schwarzbeck	BBHA9120D	2597	2024/10/19	2025/10/18	2026/10/17
Preamplifier (1GHz ~ 18GHz)	Schwarzbeck	BBV9718D	00008	2024/5/27	2025/5/26	2026/5/25
Preamplifier	TSTPASS	LNA10180G45	TS2215007	2024/5/27	2025/5/26	2026/5/25
ABOVE-Cable	REBES Talent	1~18G	21101558	2024/8/24	2025/8/23	2026/8/22
Horn Antenna	SCHWARZBECK	BBHA9170	1157	2024/10/19	2025/10/18	2026/10/17
Low Noise Pre-amplifier	Sket	LNPA_1840G-50	SK2022032902	2024/10/18	2025/10/17	2026/10/16
ABOVE-Cable2	REBES Talent	18~40G	21101686	2024/8/24	2025/8/23	2026/8/22
ABOVE-Cable1	REBES Talent	18~40G	21101687	2024/8/24	2025/8/23	2026/8/22
Test Software	Frad	EZ_EMG	Version: FA-03A2 RE+			

Conducted Emission Test						
Description	Manufacturer	Model	Serial No.	Last Cal.	Cal. Date	Cal. Due
EMI Receiver	Rohde & Schwarz	ESCI3	101422	2024/10/18	2025/10/17	2026/10/16
V-LISN	Schwarzbeck	NSLK 8127	01073	2024/8/24	2025/8/23	2026/8/22
Coaxial Switcher	Schwarzbeck	CX210	CX210	/	/	/
Pulse Limiter	Schwarzbeck	VTSD 9561-F	00953	/	/	/
LISN-Cable	REBES Talent	LISN9K30M	21101580	2024/8/24	2025/8/23	2026/8/22
Test Software	Frad	EZ EMC	Version: EMC-CON 3A1.1+			

Conducted test method						
Description	Manufacturer	Model	Serial No.	Last Cal.	Cal. Date	Cal. Due
Cell Site Test Set	HP	8921A	US35010158	2024/10/18	2025/10/17	2026/10/16
Spectrum Analyzer	Keysight	N9020A	MY50410020	2024/10/18	2025/10/17	2026/10/16
ESG Vector Signal Generator	Agilent	E4438C	MY45094854	2024/10/18	2025/10/17	2026/10/16
MXG Vector Signal Generator	Agilent	N5182A	MY46240163	2024/10/18	2025/10/17	2026/10/16
Wideband Radio Communication Tester	Rohde&Schwarz	CMW500	161997	2024/10/18	2025/10/17	2026/10/16
Programmable Constant Temperature And Humidity Test Chamber	ZZCKONG	ZZ-K02A	20210928007	2024/10/18	2025/10/17	2026/10/16
DC Power Supply	Tongmen	etm-6050c	20211026123	2024/10/18	2025/10/17	2026/10/16
RF Control Unit	Techy	TR1029-1	/	2024/10/18	2025/10/17	2026/10/16
RF Sensor Unit	Techy	TR1029-2	/	2024/10/18	2025/10/17	2026/10/16
RF shielding box	YinuoXin Electronics	50*50*50 cm	N/A	2024/5/27	2025/5/26	2026/5/25
Test Software	TST Pass	/	Version: 2.0			

4 Test Configuration

4.1 Environment Condition

Selected Values During Tests		
Temperature	Relative Humidity	Ambient Pressure
Normal: +15°C to +35°C Extreme: -30°C to +50°C	20% to 75%	86 kPa to 106 kPa

4.2 Test mode

(TM1)Transmitting mode:	Keep the EUT in continuously transmitting mode with modulation	
We have verified the construction and function in typical operation. All the test items were carried out with the EUT in above test modes.		
Clauses	Test Items	Test mode
47 CFR 15.207(a)	Conducted Emission at AC power line	TM1
47 CFR 15.407(a)(1)(iv)-(B1), (a)(2)-(B2/3), (a)(3)(i)-(B4)	Duty Cycle	TM1
47 CFR 15.407(a)(12)	26dB Emission Bandwidth 99% Occupied Bandwidth	TM1
47 CFR 15.407(a)(1)(iv)-(B1), (a)(2)-(B2/3), (a)(3)(i)-(B4)	Maximum Conducted Output Power	TM1
47 CFR 15.407(a)(1)(iv)-(B1), (a)(2)-(B2/3), (a)(3)(i)-(B4)	Power Spectral Density	TM1
47 CFR 15.407(e)	6dB Emission Bandwidth	TM1
47 CFR 15.205 47 CFR 15.209 47 CFR 15.407(b)(1) - (B1), (2) -(B2), (3) -(B3), (4) -(B4), (9), (10)	Unwanted Emissions	TM1
47 CFR 15.407(g)	Frequency Stability	TM1

4.3 Test Channel of EUT

In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Operation frequency: 5150 MHz – 5250 MHz 802.11b/g/n-HT20/ac-VHT20/ax-HE20					
Lowest channel		Middle channel		Highest channel	
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
36	5180	40	5200	48	5240
802.11n-HT40/ac-VHT40/ax-HE40					

Lowest channel		Middle channel		Highest channel	
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
38	5190	/	/	46	5230
802.11ac-VHT80/ax-HE80					
Lowest channel		Middle channel		Highest channel	
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
/	/	42	5210	/	/

Operation frequency: 5725 MHz – 5850 MHz					
802.11b/g/n-HT20/ac-VHT20/ax-HE20					
Lowest channel		Middle channel		Highest channel	
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
149	5745	157	5785	165	5825
802.11n-HT40/ac-VHT40/ax-HE40					
Lowest channel		Middle channel		Highest channel	
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
151	5755	/	/	159	5795
802.11ac-VHT80/ax-HE80					
Lowest channel		Middle channel		Highest channel	
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
/	/	155	5775	/	/

4.4 Test software

Test software:	Version:	Power Class:
CMD	/	Default

4.5 Test procedure

AC Power Line Conducted Emission

The EUT is connected to the power mains through a LISN which provides 50 Ω /50 μ H of coupling impedance for the measuring instrument. The test frequency range is from 150 kHz to 30 MHz. The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels that are more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed.

1. Level= Read Level+ Cable Loss+ LISN Factor
2. Margin=Level-Limit=Reading+factor-Limit

Radiated test method

1. The EUT was placed on the tabletop of a rotating table 1.5 m the ground at a 3 m semi anechoic chamber. The measurement distance from the EUT to the receiving antenna is 3 m.
2. EUT works in each mode of operation that needs to be tested, and having the EUT continuously working, respectively on 3 axis (X, Y & Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations.
3. Open the test software to control the test antenna and test turntable. Perform the test, recorded the test results.
4. The substitution antenna shall be used to replace the equipment under test.
5. The reference point of the substitution antenna shall coincide with the volume centre of the UUT when its antenna is internal.
6. Set the required test frequency for the signal generator, adjust the emission level, until the spectrum analyzer reading on the receiving link is consistent with the recorded value in step 3, and the recorded signal generator emission level.
7. Final results = S.G. output (dBm) + Antenna Gain(dB/dBi) – Cable Loss (dB). This report only reflects the final results.


1. Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor
2. Margin=Level-Limit=Reading+factor-Limit

Conducted test method


1. The WiFi antenna port of EUT was connected to the test port of the test system through an RF cable.
2. The EUT is keeping in continuous transmission mode and tested in all modulation modes.
3. Open the test software, prepare a test plan, and control the system through the software. After the test is completed, the test report is exported through the test software.

4.6 Test Setup Block




1) Conducted emission measurement:

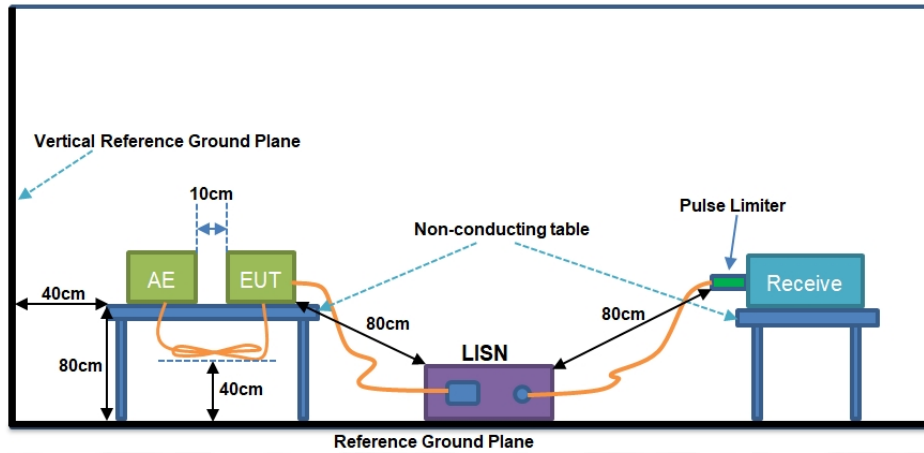

2) Conducted test method:

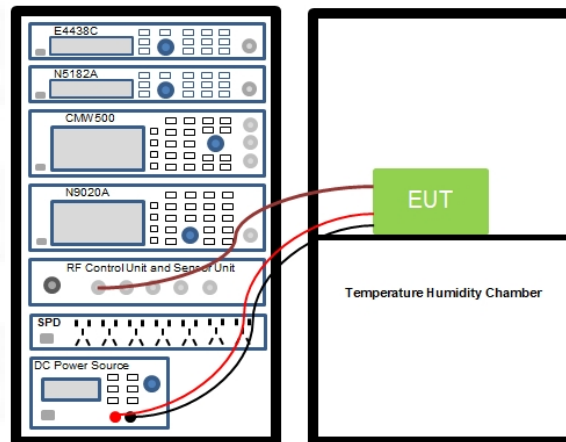

3) Radiated test method:

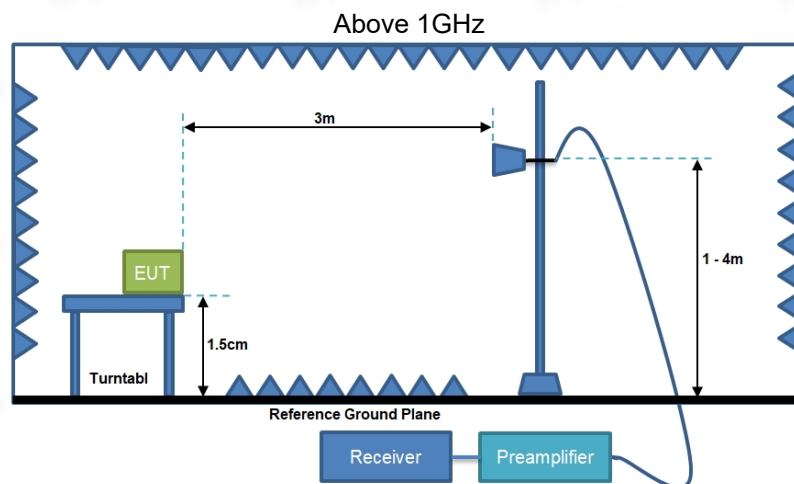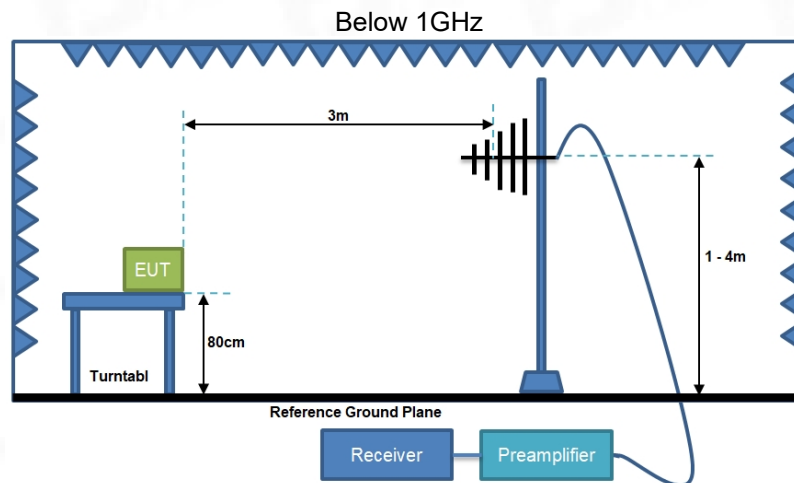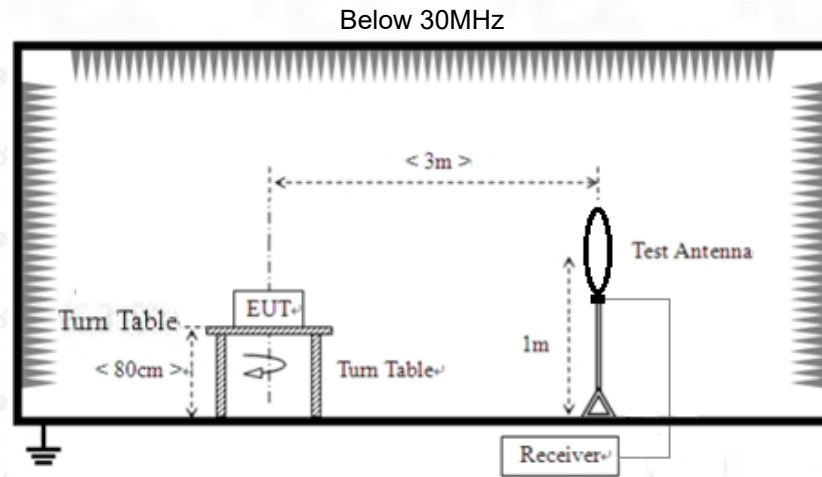

5 Technical requirements specification

5.1 Antenna Requirement

§15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

E.U.T Antenna:

The Bluetooth antenna is a FPC antenna which permanently attached, and the best case gain of the antenna is 2.98 dBi. See product internal photos for details.


5.2 Conducted Emission at AC power line

Test Requirement:	Except as shown in paragraphs (b)and (c)of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μH/50 ohms line impedance stabilization network (LISN).		
Test Method:	Refer to ANSI C63.10-2020+Cor 1-2023 section 6.2, standard test method for ac power-line conducted emissions from unlicensed wireless devices		
Test Limit:	Frequency of emission (MHz)	Conducted limit (dBμV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
	*Decreases with the logarithm of the frequency.		
Test Setup:	See section 4.6 for test setup description. The photo of test setup please refer to Appendix I Test Setup Photos		
Operating Environment:			
Temperature:	22.5℃		
Humidity:	46%RH		
Atmospheric Pressure:	1010 hpa		
Test voltage:	AC 120V 60Hz		

5.2.1 Test Data:

Remark: The report only reflects the test data of worst mode(802.11ac, 5180MHz).


Test phase: L phase

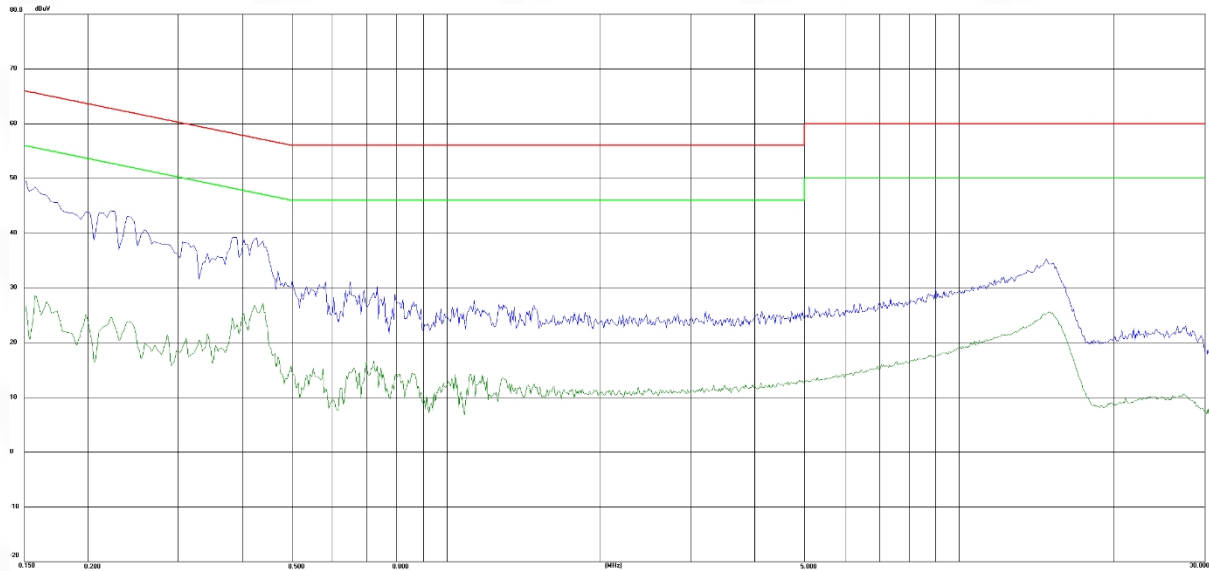

No.	Frequency (MHz)	QP Value (dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVG Value (dBuV)	AVG Limit (dBuV)	AVG Margin (dB)	Result	Line
1	0.150	50.33	66.00	-15.67	28.41	56.00	-27.59	Pass	Line 1
2	0.223	44.02	62.71	-18.69	24.61	52.71	-28.10	Pass	Line 1
3	0.238	43.10	62.17	-19.07	23.84	52.17	-28.33	Pass	Line 1
4	0.386	39.29	58.15	-18.86	24.54	48.15	-23.61	Pass	Line 1
5	0.438	38.54	57.10	-18.56	27.20	47.10	-19.90	Pass	Line 1
6	15.042	35.34	60.00	-24.66	25.50	50.00	-24.50	Pass	Line 1

Note:Margin=Level-Limit=Reading+factor-Limit

Test phase: N phase

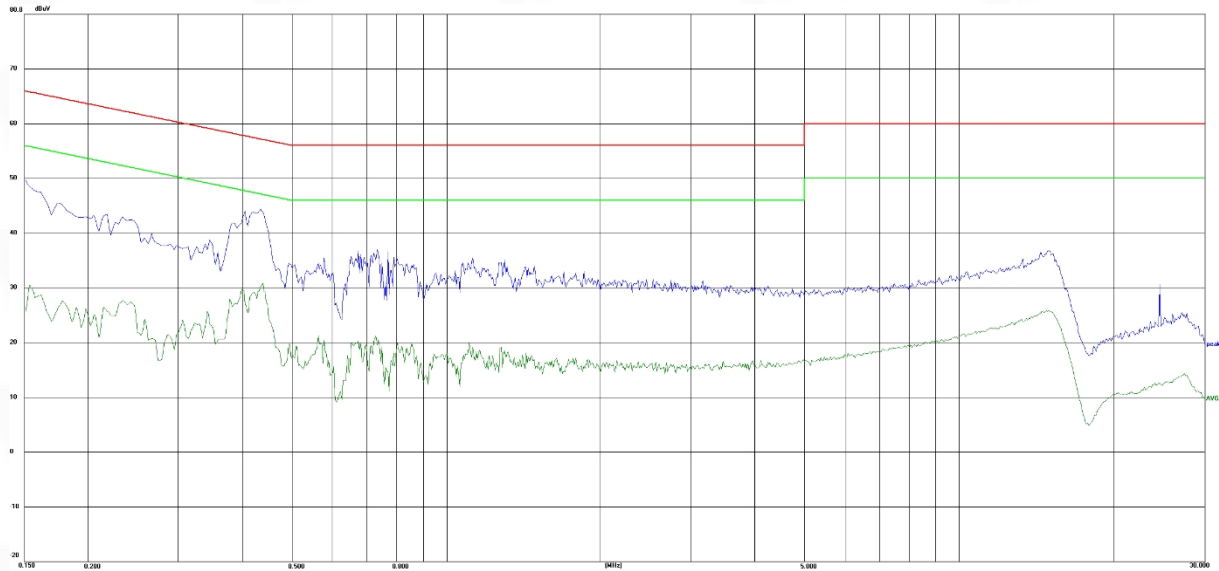

No.	Frequency (MHz)	QP Value (dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVG Value (dBuV)	AVG Limit (dBuV)	AVG Margin (dB)	Result	Line
1	0.154	50.13	65.79	-15.66	30.47	55.79	-25.32	Pass	Neutral
2	0.178	45.56	64.58	-19.02	27.63	54.58	-26.95	Pass	Neutral
3	0.218	43.46	62.89	-19.43	26.50	52.89	-26.39	Pass	Neutral
4	0.406	43.98	57.73	-13.75	29.65	47.73	-18.08	Pass	Neutral
5	0.438	44.39	57.10	-12.71	30.86	47.10	-16.24	Pass	Neutral
6	14.934	36.76	60.00	-23.24	25.87	50.00	-24.13	Pass	Neutral

Note:Margin=Level-Limit=Reading+factor-Limit

5.3 Emissions in Restricted Frequency Bands

Test Requirement:	47 CFR Part 15.407(b)(1) 47 CFR Part 15.407(b)(2) 47 CFR Part 15.407(b)(4) 47 CFR Part 15.407(b)(10)			
Test Method:	ANSI C63.10-2020+Cor 1-2023, section 12.7.4, 12.7.5, 12.7.6			
Test Limit:	For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.			
	For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.			
	For transmitters operating solely in the 5.725-5.850 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.			
	MHz	MHz	MHz	GHz
	0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
	¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
	2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
	4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
	4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
	4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
	6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
	6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
	6.31175-6.31225	123-138	2200-2300	14.47-14.5
	8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
	8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
	8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
	8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8	
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5	
12.57675-12.57725	322-335.4	3600-4400	(²)	
13.36-13.41				
	¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.			
	² Above 38.6			
	The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in § 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in § 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in § 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in § 15.35 apply to these measurements.			

	Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:																								
	<table><tr><td>Frequency (MHz)</td><td>Field strength (microvolts/meter)</td><td>Measurement distance (meters)</td></tr><tr><td>0.009-0.490</td><td>2400/F(kHz)</td><td>300</td></tr><tr><td>0.490-1.705</td><td>24000/F(kHz)</td><td>30</td></tr><tr><td>1.705-30.0</td><td>30</td><td>30</td></tr><tr><td>30-88</td><td>100 **</td><td>3</td></tr><tr><td>88-216</td><td>150 **</td><td>3</td></tr><tr><td>216-960</td><td>200 **</td><td>3</td></tr><tr><td>Above 960</td><td>500</td><td>3</td></tr></table>	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)	0.009-0.490	2400/F(kHz)	300	0.490-1.705	24000/F(kHz)	30	1.705-30.0	30	30	30-88	100 **	3	88-216	150 **	3	216-960	200 **	3	Above 960	500	3
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)																							
0.009-0.490	2400/F(kHz)	300																							
0.490-1.705	24000/F(kHz)	30																							
1.705-30.0	30	30																							
30-88	100 **	3																							
88-216	150 **	3																							
216-960	200 **	3																							
Above 960	500	3																							
Procedure:	Above 1GHz: a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel, the middle channel, the Highest channel. h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. i. Repeat above procedures until all frequencies measured was complete. Remark: 1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor 2. Scan from 18GHz to 40GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. 3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report. 4. The disturbance above 18GHz were very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.																								
Test Setup:	See section 4.6 for test setup description. The photo of test setup please refer to Appendix I Test Setup Photos																								
Operating Environment:																									


Temperature:	22.5℃
Humidity:	46%RH
Atmospheric Pressure:	1010 hpa
Test voltage:	AC 120V/60Hz

5.3.1 Test Data:

Remark: The report only reflects the test data of worst mode(802.11ax).


Note: Margin=Level-Limit=Reading+factor-Limit

Test Frequency(MHz)	5180	Polarity	Horizontal
---------------------	------	----------	------------

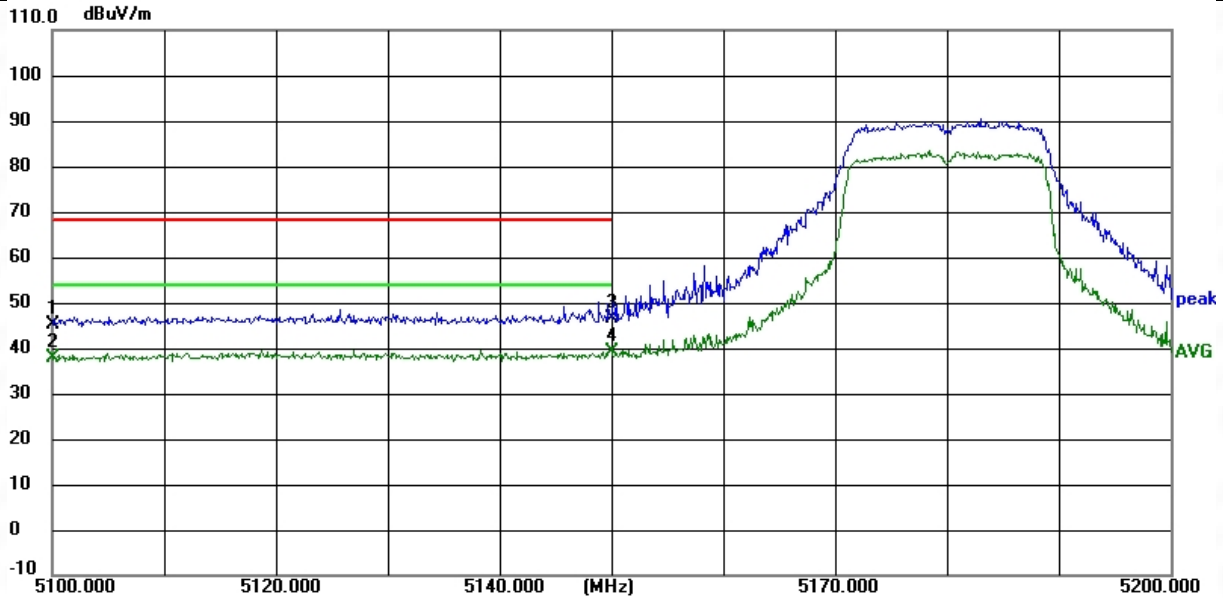


No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measurement(dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment
1	5100.000	57.94	-12.78	45.16	68.20	-23.04	peak	
2	5100.000	50.51	-12.78	37.73	54.00	-16.27	AVG	
3	5150.000	59.15	-12.77	46.38	68.20	-21.82	peak	
4 *	5150.000	52.01	-12.77	39.24	54.00	-14.76	AVG	

Test Frequency(MHz)	5180	Polarity	Vertical
---------------------	------	----------	----------

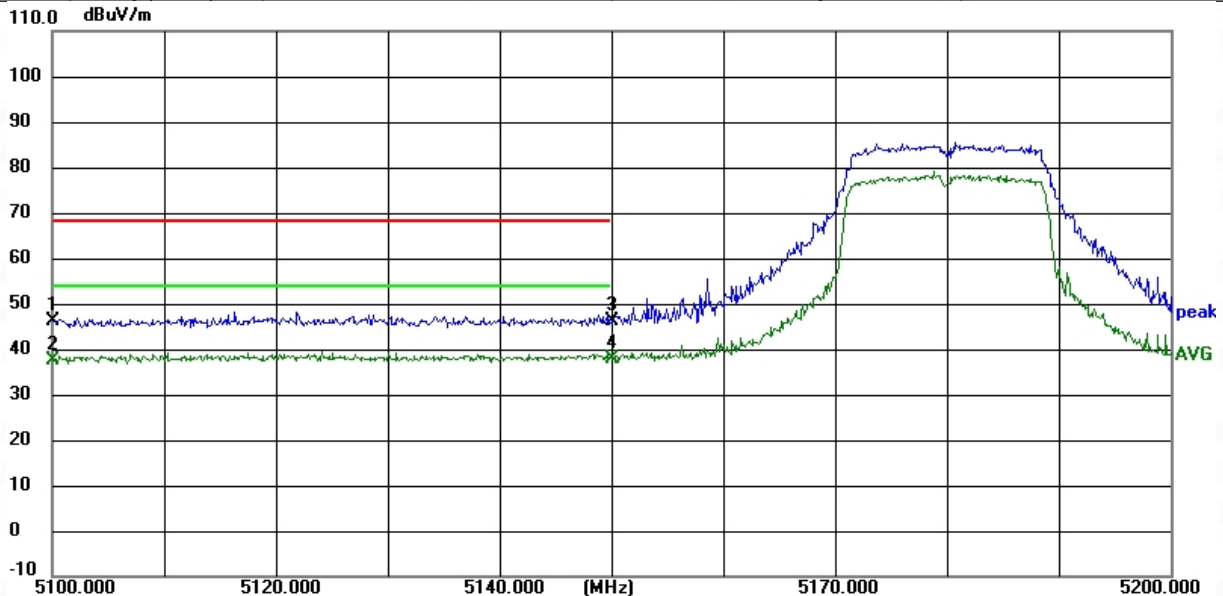


No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measurement(dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment
1	5100.000	58.95	-12.78	46.17	68.20	-22.03	peak	
2	5100.000	50.26	-12.78	37.48	54.00	-16.52	AVG	
3	5150.000	58.94	-12.77	46.17	68.20	-22.03	peak	
4 *	5150.000	50.64	-12.77	37.87	54.00	-16.13	AVG	

Test Frequency(MHz)	5190	Polarity	Horizontal
---------------------	------	----------	------------

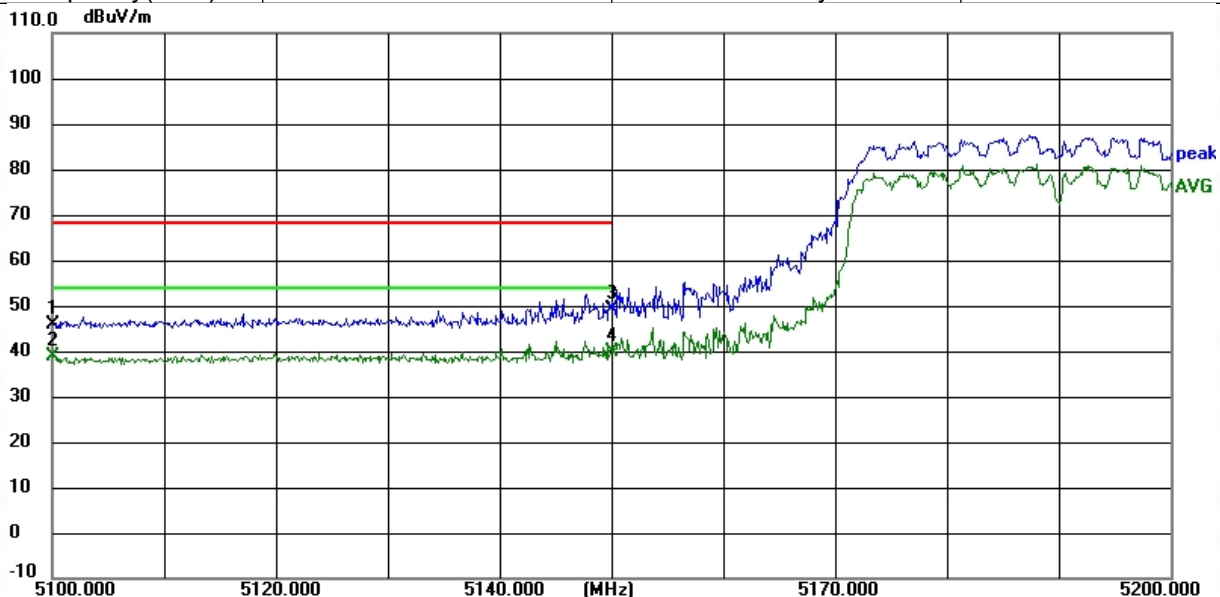


No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measurement(dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment
1	5100.000	58.60	-12.78	45.82	68.20	-22.38	peak	
2	5100.000	51.62	-12.78	38.84	54.00	-15.16	AVG	
3	5150.000	61.86	-12.77	49.09	68.20	-19.11	peak	
4 *	5150.000	52.47	-12.77	39.70	54.00	-14.30	AVG	

Test Frequency(MHz)	5190	Polarity	Vertical
---------------------	------	----------	----------

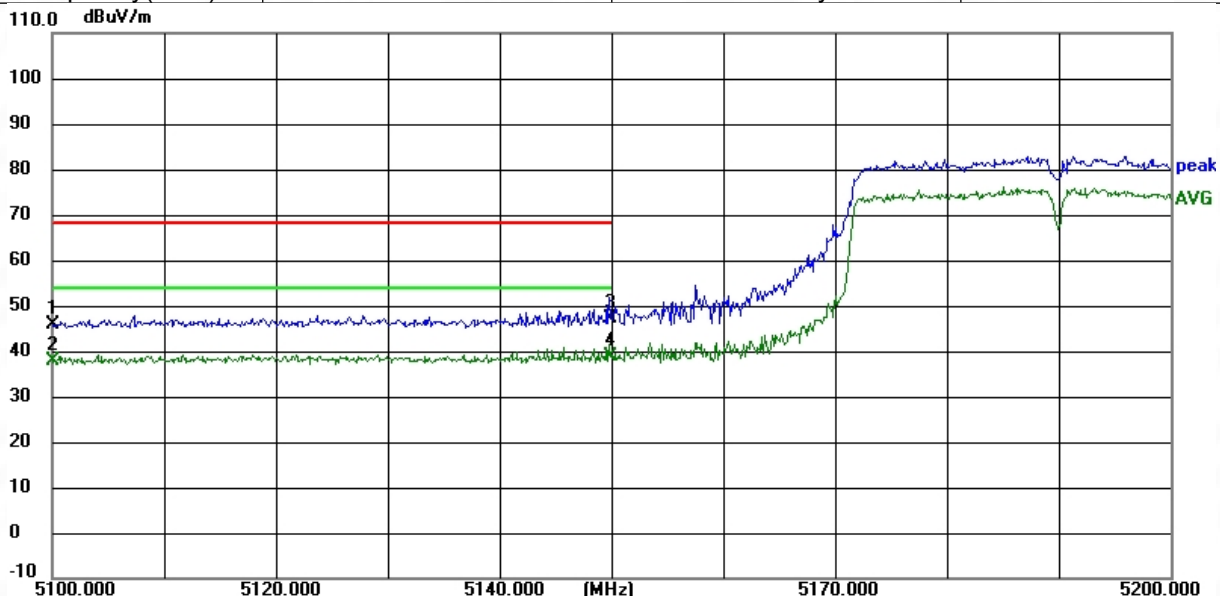


No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measurement(dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment
1	5100.000	58.63	-12.78	45.85	68.20	-22.35	peak	
2	5100.000	50.75	-12.78	37.97	54.00	-16.03	AVG	
3	5150.000	59.86	-12.77	47.09	68.20	-21.11	peak	
4 *	5150.000	51.65	-12.77	38.88	54.00	-15.12	AVG	

Test Frequency(MHz)	5210	Polarity	Horizontal
---------------------	------	----------	------------

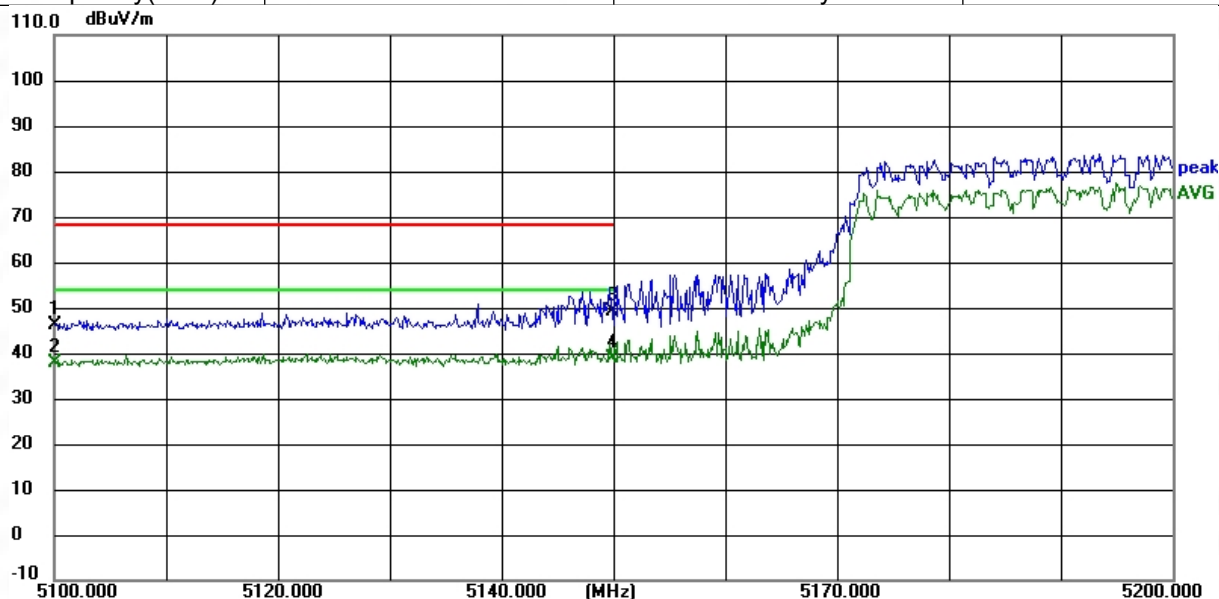


No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measurement(dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment
1	5100.000	58.84	-12.78	46.06	68.20	-22.14	peak	
2	5100.000	50.66	-12.78	37.88	54.00	-16.12	AVG	
3	5150.000	61.83	-12.77	49.06	68.20	-19.14	peak	
4 *	5150.000	51.45	-12.77	38.68	54.00	-15.32	AVG	

Test Frequency(MHz)	5210	Polarity	Vertical
---------------------	------	----------	----------

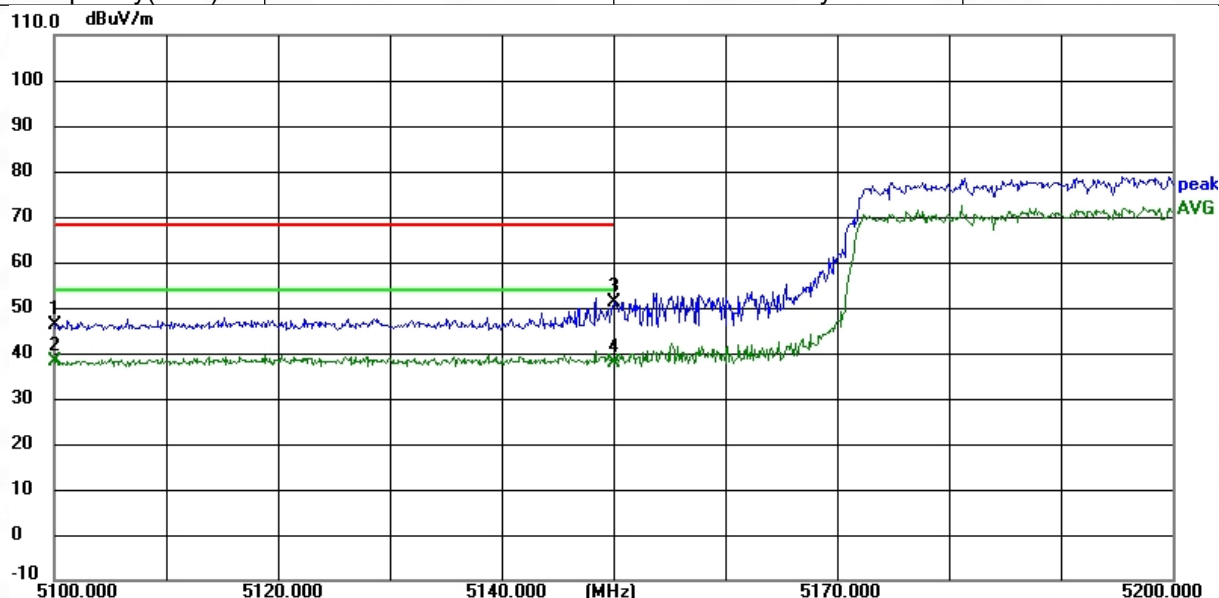


No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measurement(dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment
1	5100.000	59.07	-12.78	46.29	68.20	-21.91	peak	
2 *	5100.000	50.79	-12.78	38.01	54.00	-15.99	AVG	
3	5150.000	64.04	-12.77	51.27	68.20	-16.93	peak	
4	5150.000	50.72	-12.77	37.95	54.00	-16.05	AVG	

Test Frequency(MHz)	5230	Polarity	Horizontal
---------------------	------	----------	------------

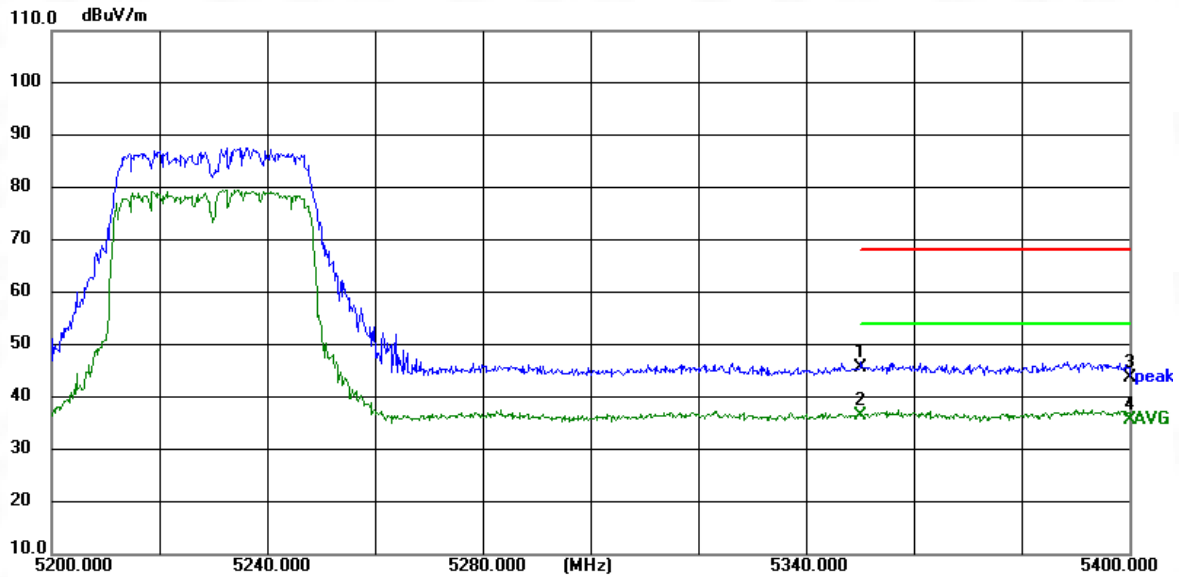


No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measurement(dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment
1	5350.000	58.40	-12.73	45.67	68.20	-22.53	peak	
2 *	5350.000	49.27	-12.73	36.54	54.00	-17.46	AVG	
3	5400.000	56.58	-12.72	43.84	68.20	-24.34	peak	
4	5400.000	48.46	-12.72	35.74	54.00	-18.26	AVG	

Test Frequency(MHz)	5230	Polarity	Vertical
---------------------	------	----------	----------

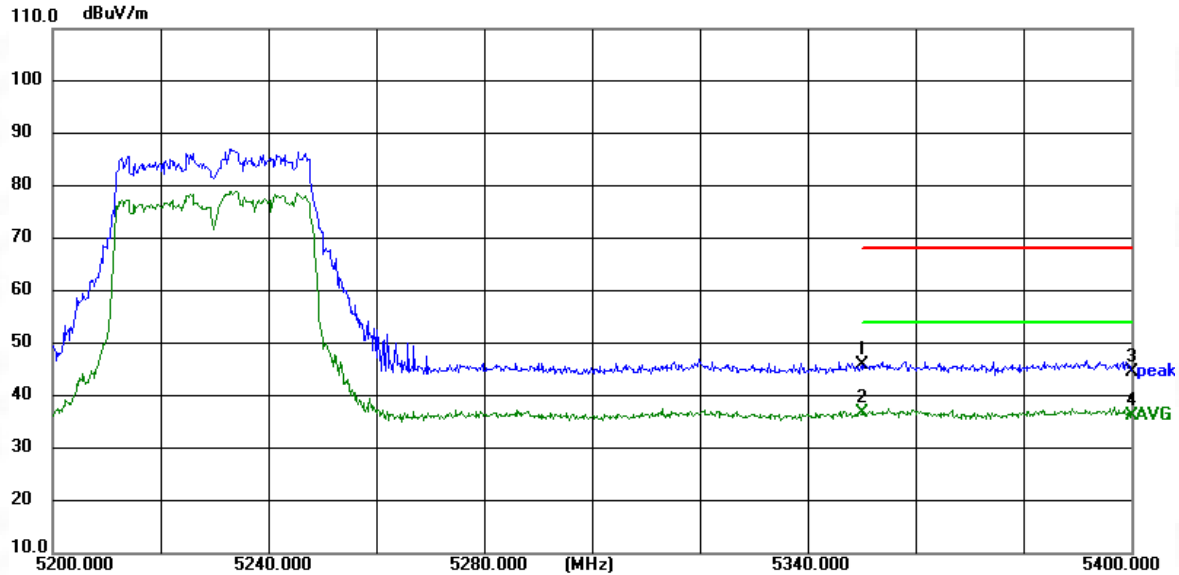


No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measurement(dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment
1	5350.000	58.66	-12.73	45.93	68.20	-22.27	peak	
2 *	5350.000	49.44	-12.73	36.71	54.00	-17.29	AVG	
3	5400.000	57.18	-12.72	44.46	68.20	-23.74	peak	
4	5400.000	49.03	-12.72	36.31	54.00	-17.69	AVG	

Test Frequency(MHz)	5240	Polarity	Horizontal
---------------------	------	----------	------------

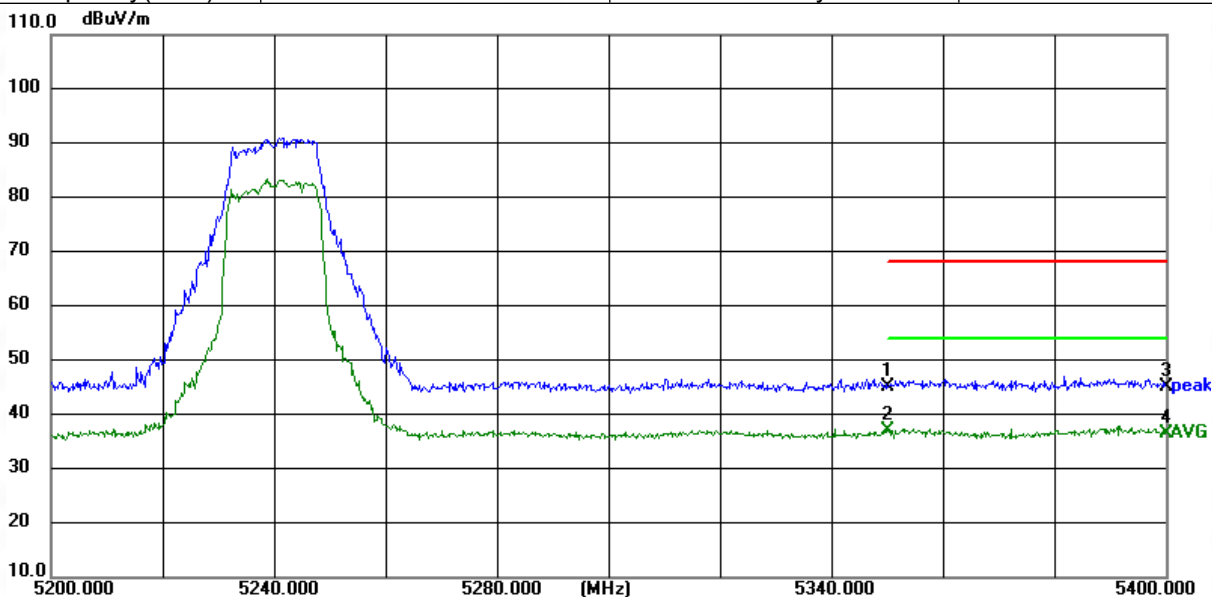


No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measurement(dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment
1	5350.000	57.87	-12.73	45.14	68.20	-23.06	peak	
2 *	5350.000	49.83	-12.73	37.10	54.00	-16.90	AVG	
3	5400.000	57.88	-12.72	45.16	68.20	-23.04	peak	
4	5400.000	49.21	-12.72	36.49	54.00	-17.51	AVG	

Test Frequency(MHz)	5240	Polarity	Vertical
---------------------	------	----------	----------

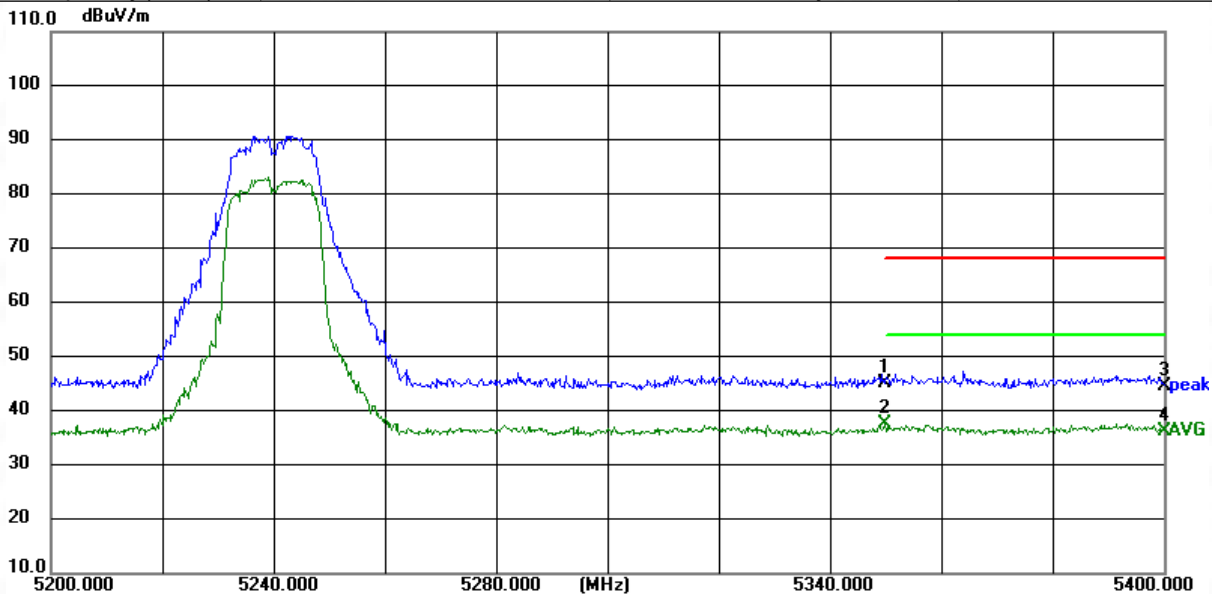


No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measurement(dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment
1	5350.000	57.99	-12.73	45.26	68.20	-22.94	peak	
2 *	5350.000	50.25	-12.73	37.52	54.00	-16.48	AVG	
3	5400.000	57.17	-12.72	44.45	68.20	-23.75	peak	
4	5400.000	49.02	-12.72	36.30	54.00	-17.70	AVG	

Test Frequency(MHz)	5745	Polarity	Horizontal
---------------------	------	----------	------------

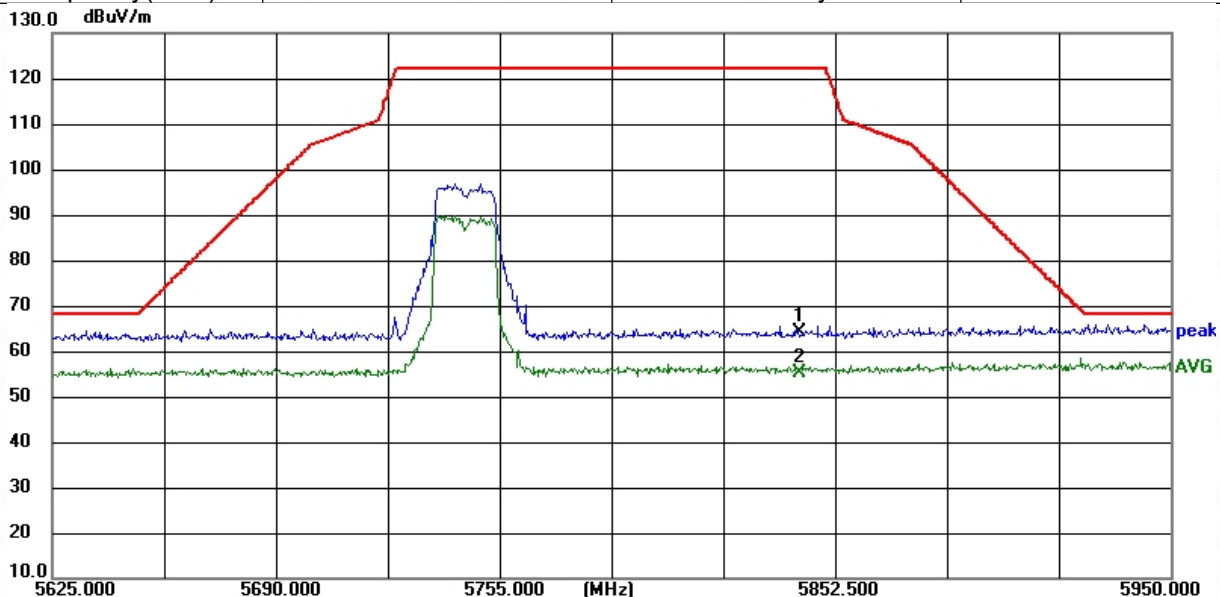


No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measurement(dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment
1 *	5842.000	75.60	-11.54	64.06	122.30	-58.24	peak	
2	5842.000	66.85	-11.54	55.31	122.30	-66.99	AVG	

Test Frequency(MHz)	5745	Polarity	Vertical
---------------------	------	----------	----------

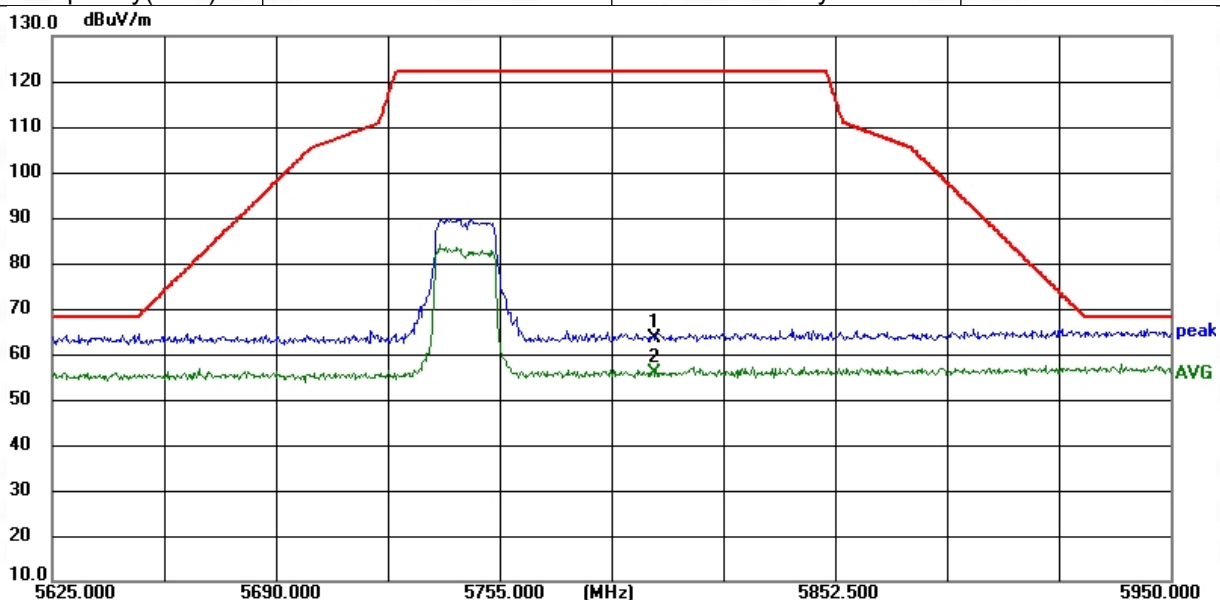


No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measurement(dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment
1 *	5800.000	75.09	-11.69	63.40	122.30	-58.90	peak	
2	5800.000	67.63	-11.69	55.94	122.30	-66.36	AVG	

Test Frequency(MHz)	5755	Polarity	Horizontal
---------------------	------	----------	------------

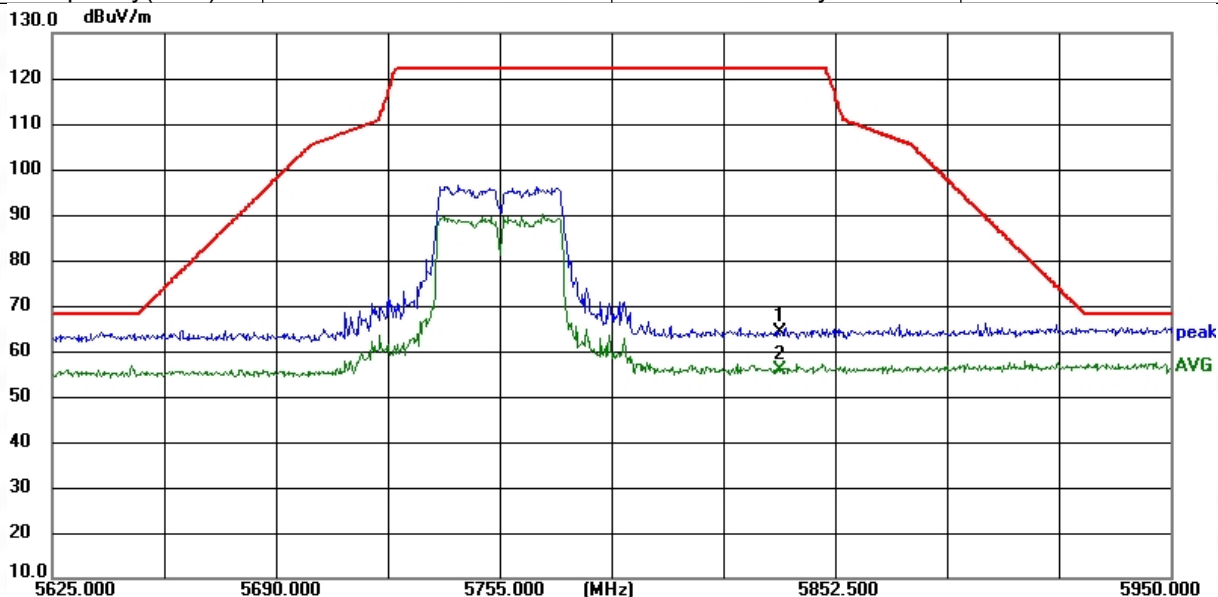


No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measurement(dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment
1 *	5836.000	75.69	-11.57	64.12	122.30	-58.18	peak	
2	5836.000	67.35	-11.57	55.78	122.30	-66.52	AVG	

Test Frequency(MHz)	5755	Polarity	Vertical
---------------------	------	----------	----------

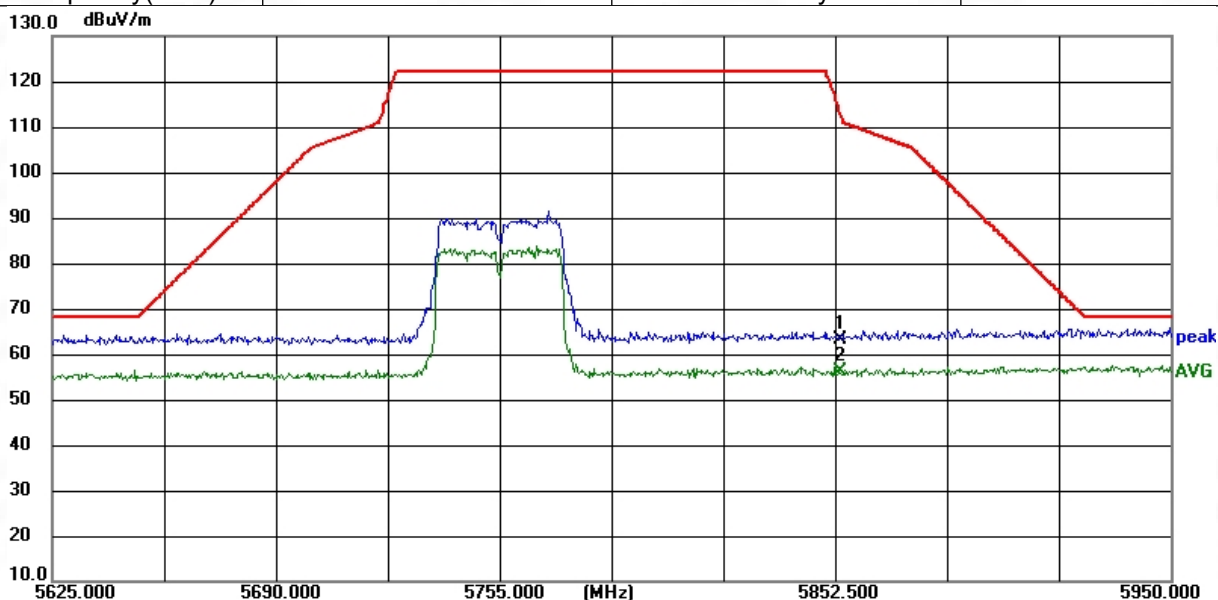


No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measurement(dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment
1 *	5854.000	74.65	-11.51	63.14	113.18	-50.04	peak	
2	5854.000	67.62	-11.51	56.11	113.18	-57.07	AVG	

Test Frequency(MHz)	5775	Polarity	Horizontal
---------------------	------	----------	------------

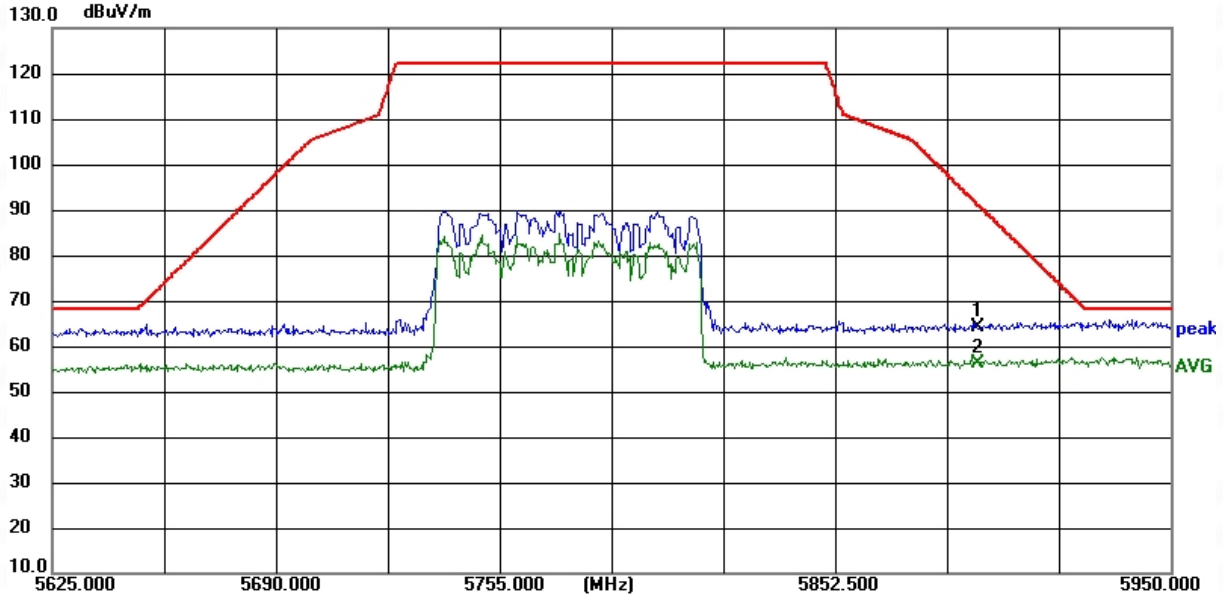


No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measurement(dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment
1 *	5894.000	75.65	-11.36	64.29	91.20	-26.91	peak	
2	5894.000	67.48	-11.36	56.12	91.20	-35.08	AVG	

Test Frequency(MHz)	5775	Polarity	Vertical
---------------------	------	----------	----------

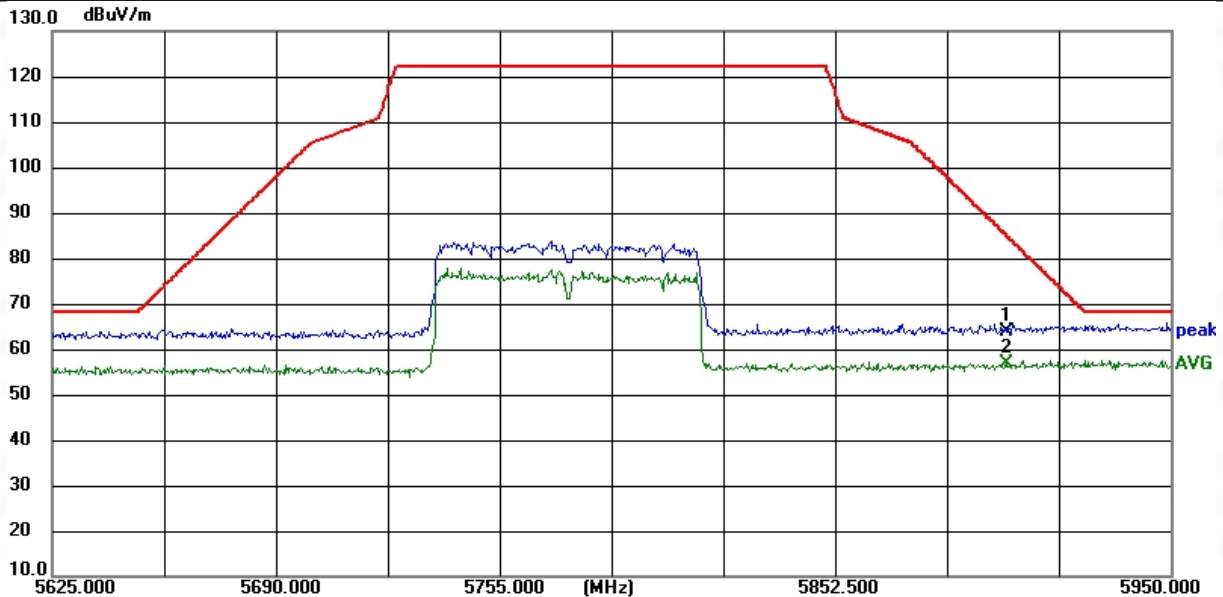


No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measurement(dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment
1 *	5902.000	75.31	-11.35	63.96	85.28	-21.32	peak	
2	5902.000	68.13	-11.35	56.78	85.28	-28.50	AVG	

Test Frequency(MHz)	5795	Polarity	Horizontal
---------------------	------	----------	------------

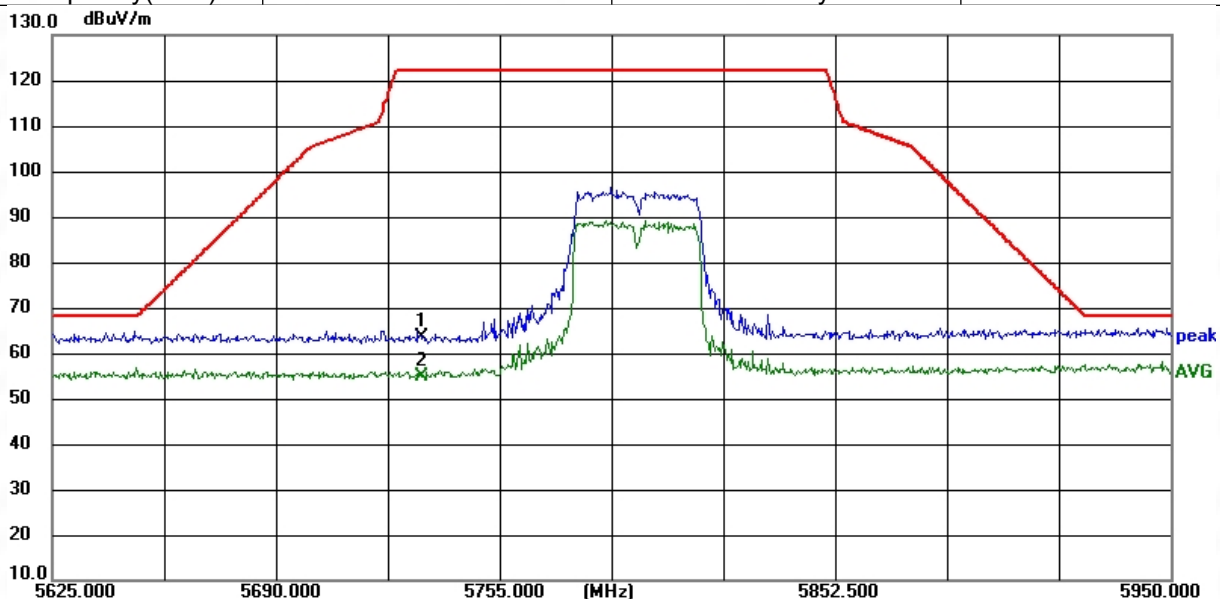


No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measurement(dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment
1 *	5732.000	75.50	-11.92	63.58	122.30	-58.72	peak	
2	5732.000	66.74	-11.92	54.82	122.30	-67.48	AVG	

Test Frequency(MHz)	5795	Polarity	Vertical
---------------------	------	----------	----------

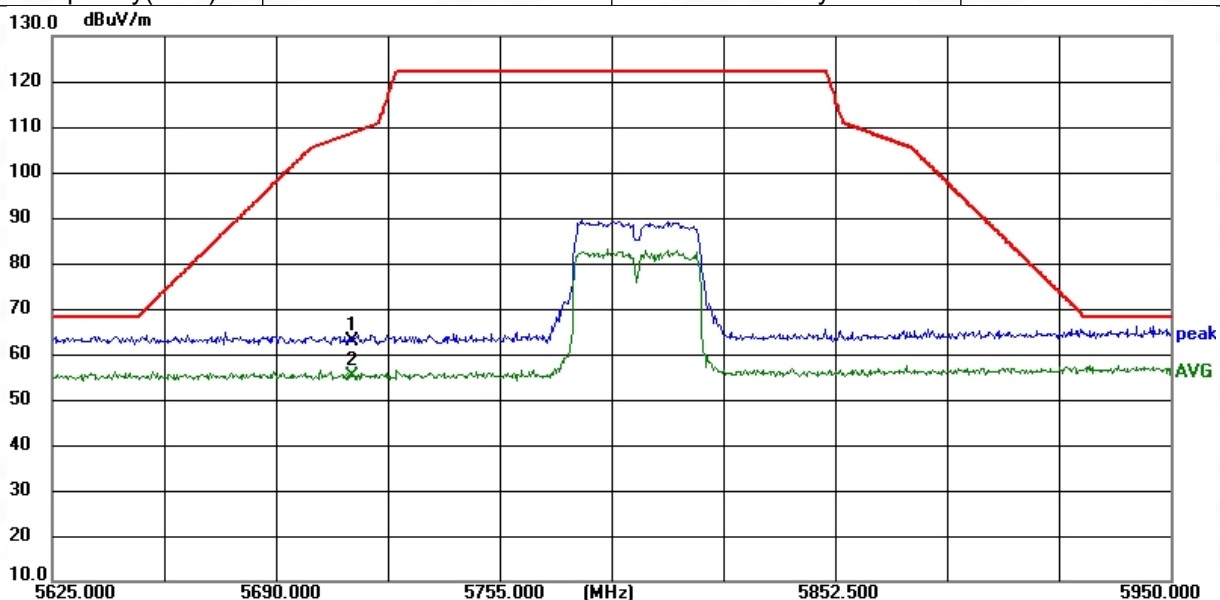


No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measurement(dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment
1 *	5712.000	74.73	-11.99	62.74	108.66	-45.92	peak	
2	5712.000	67.12	-11.99	55.13	108.66	-53.53	AVG	

Test Frequency(MHz)	5825	Polarity	Horizontal
---------------------	------	----------	------------

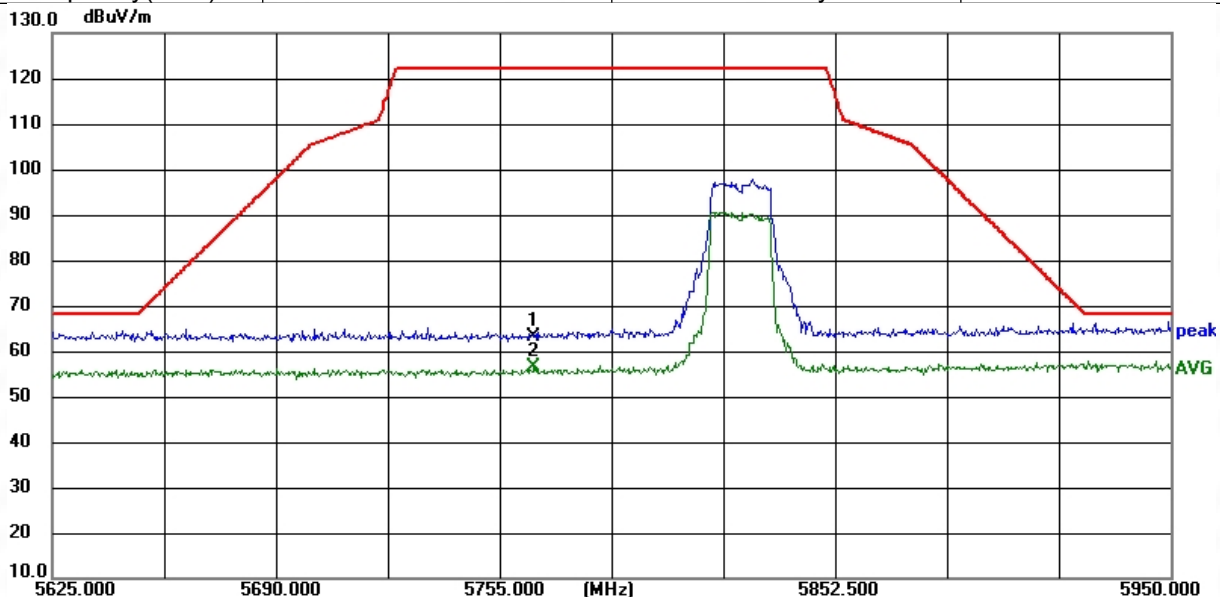

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measurement(dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment
1 *	5765.000	74.97	-11.81	63.16	122.30	-59.14	peak	
2	5765.000	68.19	-11.81	56.38	122.30	-65.92	AVG	

Test Frequency(MHz)	5825	Polarity	Vertical
---------------------	------	----------	----------

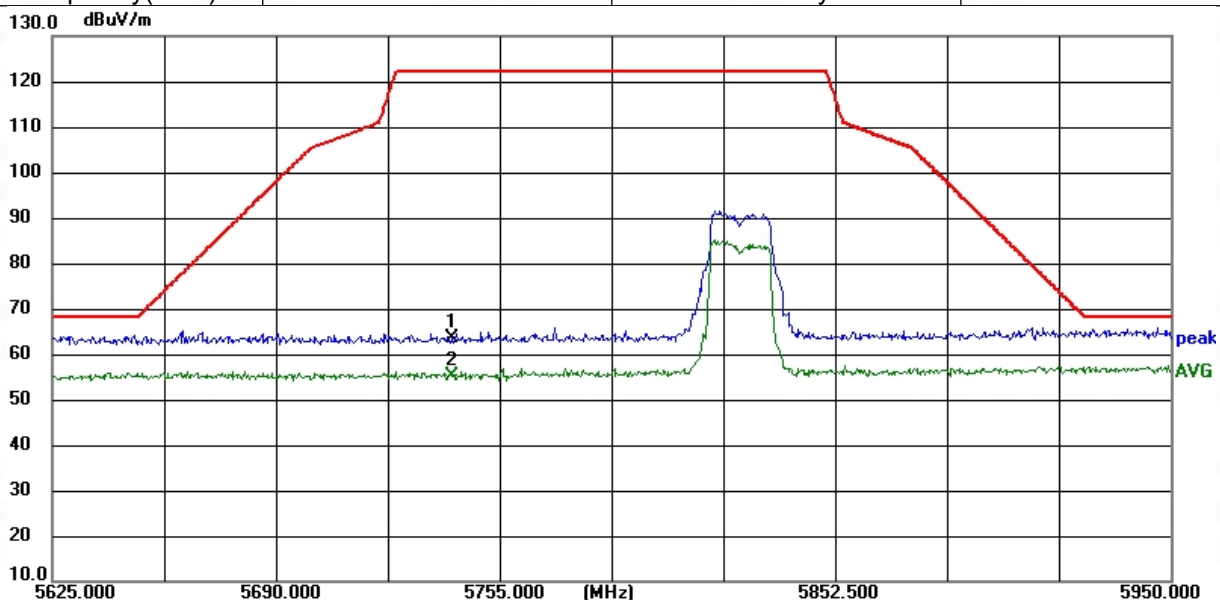

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measurement(dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment
1 *	5741.000	75.27	-11.89	63.38	122.30	-58.92	peak	
2	5741.000	66.91	-11.89	55.02	122.30	-67.28	AVG	

5.4 Undesirable emission limits (below 1GHz)

Test Requirement:	47 CFR Part 15.407(b)(9)		
Test Method:	ANSI C63.10-2020+Cor 1-2023, section 12.7.4, 12.7.5, 12.7.6		
Test Limit:	Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209.		
	Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:		
	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
Above 960	500	3	
Procedure:	Below 1GHz:		
	a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.		
	b. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.		
	c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.		
	d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.		
	e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.		
	f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.		
	g. Test the EUT in the lowest channel, the middle channel, the Highest channel.		
	h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.		
	i. Repeat above procedures until all frequencies measured was complete.		
	Remark:		
	1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor		
	2. Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.		
	3. The disturbance below 1GHz was very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.		


	Above 1GHz: a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel, the middle channel, the Highest channel. h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. i. Repeat above procedures until all frequencies measured was complete. Remark: 1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor 2. Scan from 18GHz to 40GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. 3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report. 4. The disturbance above 18GHz were very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.
Test Setup:	See section 4.6 for test setup description. The photo of test setup please refer to Appendix I Test Setup Photos
Operating Environment:	
Temperature:	22.5°C
Humidity:	46%RH
Atmospheric Pressure:	1010 hpa
Test voltage:	AC 120V/60Hz

5.4.1 Test Data:

Remark: The report only reflects the test data of worst mode(802.11ac, 5180MHz).


Note: There were no emissions found below 30MHz within 20dB of the limit.

Test antenna polarization: Horizontal(30 MHz to 1 GHz)

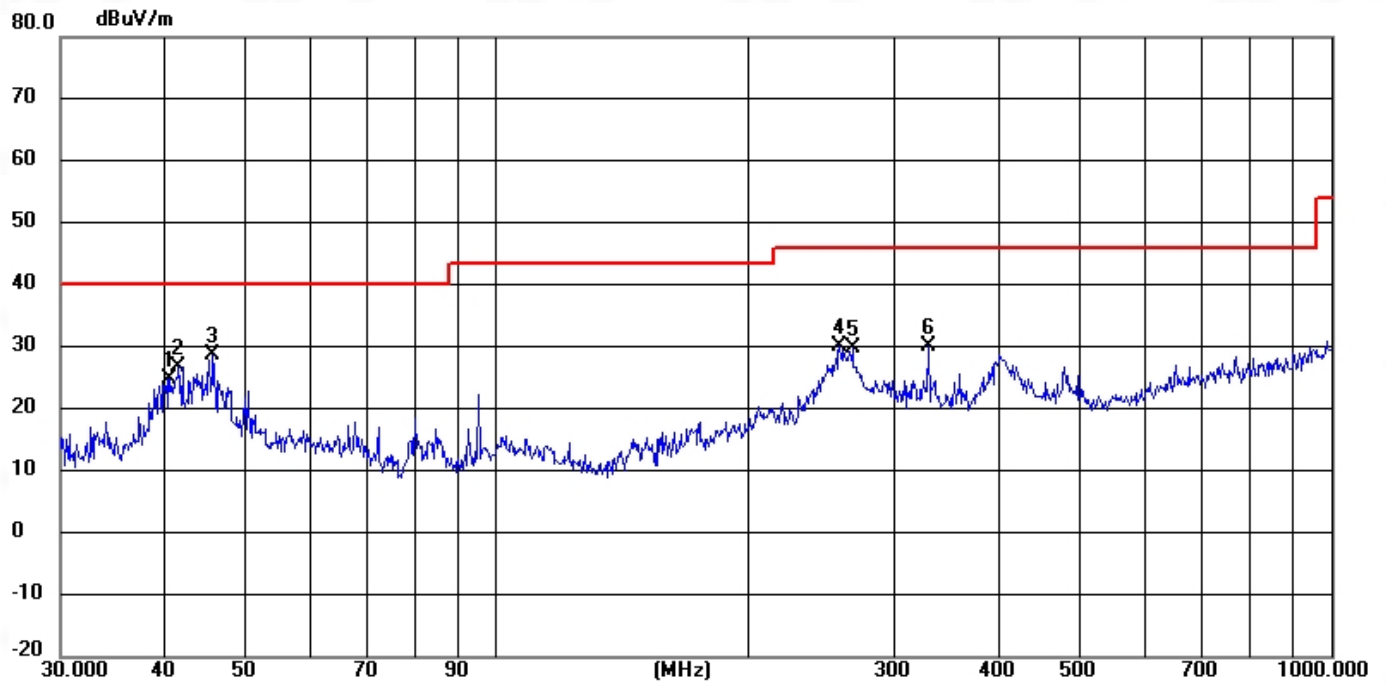

Note: Margin=Level-Limit=Reading+factor-Limit

Test antenna polarization: Vertical (30 MHz to 1 GHz)

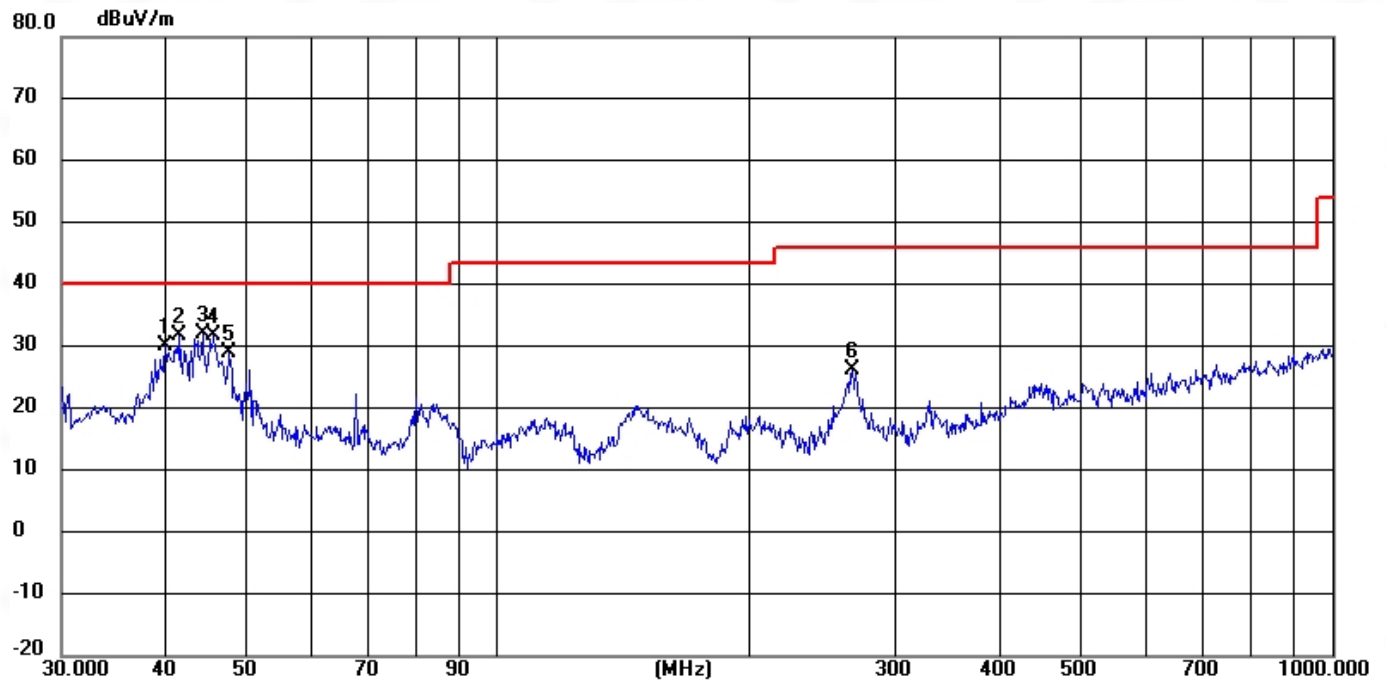

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measure-ment(dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment
1	40.117	16.58	13.67	30.25	40.00	-9.75	QP	
2	41.640	18.19	13.65	31.84	40.00	-8.16	QP	
3 *	44.392	17.83	14.19	32.02	40.00	-7.98	QP	
4	45.755	17.61	14.32	31.93	40.00	-8.07	QP	
5	47.784	14.22	14.71	28.93	40.00	-11.07	QP	
6	265.792	11.70	14.48	26.18	46.00	-19.82	QP	

Note:Margin=Level-Limit=Reading+factor-Limit

5.5 Undesirable emission limits (Above 1GHz)

Test Requirement:	47 CFR Part 15.407(b)(1) 47 CFR Part 15.407(b)(2) 47 CFR Part 15.407(b)(4) 47 CFR Part 15.407(b)(10)			
Test Method:	ANSI C63.10-2020+Cor 1-2023, section 12.7.4, 12.7.5, 12.7.6			
Test Limit:	For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.			
	For transmitters operating solely in the 5.725-5.850 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.			
	MHz	MHz	MHz	GHz
	0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
	¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
	2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
	4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
	4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
	4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
	6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
	6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
	6.31175-6.31225	123-138	2200-2300	14.47-14.5
	8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
	8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
	8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
	8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
	12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
	12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
	12.57675-12.57725	322-335.4	3600-4400	(²)
	13.36-13.41			
	¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz. ² Above 38.6			
	The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in § 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in § 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in § 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in § 15.35 apply to these measurements.			
	Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:			

	Frequency (MHz) Field strength (microvolts/meter) Measurement distance (meters) 0.009-0.490 2400/F(kHz) 300 0.490-1.705 24000/F(kHz) 30 1.705-30.0 30 30 30-88 100 ** 3 88-216 150 ** 3 216-960 200 ** 3 Above 960 500 3
Procedure:	Above 1GHz: a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel, the middle channel, the Highest channel. h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. i. Repeat above procedures until all frequencies measured was complete. Remark: 1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor 2. Scan from 18GHz to 40GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. 3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report. 4. The disturbance above 18GHz were very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.
Test Setup:	See section 4.6 for test setup description. The photo of test setup please refer to Appendix I Test Setup Photos
Operating Environment:	
Temperature:	22.5°C
Humidity:	46%RH
Atmospheric Pressure:	1010 hpa

Test voltage: AC 120V/60Hz

5.5.1 Test Data:

Remark: The report only reflects the test data of worst mode.

Test frequency up to 40GHz and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.

802.11a:

Band 1: 5150 MHz - 5250 MHz							
Test Channel: Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10360.00	89.35	-44.13	45.22	68.20	-22.98	Peak	Pass
10360.00	76.39	-45.18	31.21	54.00	-22.79	AVG	Pass
15540.00	91.21	-41.89	49.32	68.20	-18.88	Peak	Pass
15540.00	77.10	-42.94	34.16	54.00	-19.84	AVG	Pass
Test Channel: Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10360.00	90.02	-44.13	45.89	68.20	-22.31	Peak	Pass
10360.00	78.17	-45.18	32.99	54.00	-21.01	AVG	Pass
15540.00	89.19	-41.89	47.30	68.20	-20.90	Peak	Pass
15540.00	79.04	-42.94	36.10	54.00	-17.90	AVG	Pass
Test Channel: Middle channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10400.00	88.29	-45.04	43.25	68.20	-24.95	Peak	Pass
10400.00	79.52	-45.18	34.34	54.00	-19.66	AVG	Pass
15600.00	89.87	-42.80	47.07	68.20	-21.13	Peak	Pass
15600.00	79.68	-42.94	36.74	54.00	-17.26	AVG	Pass
Test Channel: Middle channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10400.00	89.41	-45.04	44.37	68.20	-23.83	Peak	Pass
10400.00	79.09	-45.18	33.91	54.00	-20.09	AVG	Pass
15600.00	92.86	-42.80	50.06	68.20	-18.14	Peak	Pass
15600.00	75.94	-42.94	33.00	54.00	-21.00	AVG	Pass
Test Channel: Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10480.00	88.90	-44.13	44.77	68.20	-23.43	Peak	Pass
10480.00	76.55	-45.18	31.37	54.00	-22.63	AVG	Pass

15720.00	89.35	-41.89	47.46	68.20	-20.74	Peak	Pass
15720.00	80.72	-42.94	37.78	54.00	-16.22	AVG	Pass
Test Channel: Highest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10480.00	90.98	-44.13	46.85	68.20	-21.35	Peak	Pass
10480.00	76.30	-45.18	31.12	54.00	-22.88	AVG	Pass
15720.00	90.82	-41.89	48.93	68.20	-19.27	Peak	Pass
15720.00	75.27	-42.94	32.33	54.00	-21.67	AVG	Pass
Remark: Test frequency up to 40GHz and the emission levels of other frequencies are lower than the limit 20dB, not show in test report. Note: Margin=Level-Limit=Reading+factor-Limit							

802.11n-HT20:

Band 1: 5150 MHz - 5250 MHz							
Test Channel: Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10360.00	92.65	-44.13	48.52	68.20	-19.68	Peak	Pass
10360.00	75.02	-45.18	29.84	54.00	-24.16	AVG	Pass
15540.00	91.62	-41.89	49.73	68.20	-18.47	Peak	Pass
15540.00	78.30	-42.94	35.36	54.00	-18.64	AVG	Pass
Test Channel: Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10360.00	91.95	-44.13	47.82	68.20	-20.38	Peak	Pass
10360.00	75.11	-45.18	29.93	54.00	-24.07	AVG	Pass
15540.00	92.33	-41.89	50.44	68.20	-17.76	Peak	Pass
15540.00	78.62	-42.94	35.68	54.00	-18.32	AVG	Pass
Test Channel: Middle channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10400.00	91.86	-45.04	46.82	68.20	-21.38	Peak	Pass
10400.00	75.48	-45.18	30.30	54.00	-23.70	AVG	Pass
15600.00	92.47	-42.80	49.67	68.20	-18.53	Peak	Pass
15600.00	78.05	-42.94	35.11	54.00	-18.89	AVG	Pass
Test Channel: Middle channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10400.00	89.69	-45.04	44.65	68.20	-23.55	Peak	Pass
10400.00	75.97	-45.18	30.79	54.00	-23.21	AVG	Pass
15600.00	90.04	-42.80	47.24	68.20	-20.96	Peak	Pass
15600.00	78.64	-42.94	35.70	54.00	-18.30	AVG	Pass
Test Channel: Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10480.00	89.47	-44.13	45.34	68.20	-22.86	Peak	Pass
10480.00	76.72	-45.18	31.54	54.00	-22.46	AVG	Pass
15720.00	89.56	-41.89	47.67	68.20	-20.53	Peak	Pass
15720.00	77.65	-42.94	34.71	54.00	-19.29	AVG	Pass
Test Channel: Highest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result

10480.00	88.74	-44.13	44.61	68.20	-23.59	Peak	Pass
10480.00	75.34	-45.18	30.16	54.00	-23.84	AVG	Pass
15720.00	91.38	-41.89	49.49	68.20	-18.71	Peak	Pass
15720.00	76.44	-42.94	33.50	54.00	-20.50	AVG	Pass

Remark: Test frequency up to 40GHz and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.

Note:Margin=Level-Limit=Reading+factor-Limit

802.11ac-VHT20:

Band 1: 5150 MHz - 5250 MHz							
Test Channel: Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10360.00	89.07	-44.13	44.94	68.20	-23.26	Peak	Pass
10360.00	78.55	-45.18	33.37	54.00	-20.63	AVG	Pass
15540.00	89.77	-41.89	47.88	68.20	-20.32	Peak	Pass
15540.00	80.02	-42.94	37.08	54.00	-16.92	AVG	Pass
Test Channel: Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10360.00	89.73	-44.13	45.60	68.20	-22.60	Peak	Pass
10360.00	79.09	-45.18	33.91	54.00	-20.09	AVG	Pass
15540.00	91.32	-41.89	49.43	68.20	-18.77	Peak	Pass
15540.00	76.38	-42.94	33.44	54.00	-20.56	AVG	Pass
Test Channel: Middle channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10400.00	89.81	-45.04	44.77	68.20	-23.43	Peak	Pass
10400.00	80.83	-45.18	35.65	54.00	-18.35	AVG	Pass
15600.00	89.91	-42.80	47.11	68.20	-21.09	Peak	Pass
15600.00	80.28	-42.94	37.34	54.00	-16.66	AVG	Pass
Test Channel: Middle channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10400.00	92.90	-45.04	47.86	68.20	-20.34	Peak	Pass
10400.00	80.42	-45.18	35.24	54.00	-18.76	AVG	Pass
15600.00	88.71	-42.80	45.91	68.20	-22.29	Peak	Pass
15600.00	78.50	-42.94	35.56	54.00	-18.44	AVG	Pass
Test Channel: Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10480.00	88.17	-44.13	44.04	68.20	-24.16	Peak	Pass
10480.00	77.41	-45.18	32.23	54.00	-21.77	AVG	Pass
15720.00	88.60	-41.89	46.71	68.20	-21.49	Peak	Pass
15720.00	79.18	-42.94	36.24	54.00	-17.76	AVG	Pass
Test Channel: Highest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result

10480.00	90.20	-44.13	46.07	68.20	-22.13	Peak	Pass
10480.00	80.37	-45.18	35.19	54.00	-18.81	AVG	Pass
15720.00	91.86	-41.89	49.97	68.20	-18.23	Peak	Pass
15720.00	80.38	-42.94	37.44	54.00	-16.56	AVG	Pass

Remark: Test frequency up to 40GHz and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.

Note:Margin=Level-Limit=Reading+factor-Limit

802.11ax-HEW20:

Band 1: 5150 MHz - 5250 MHz							
Test Channel: Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10360.00	88.12	-44.13	43.99	68.20	-24.21	Peak	Pass
10360.00	79.66	-45.18	34.48	54.00	-19.52	AVG	Pass
15540.00	89.36	-41.89	47.47	68.20	-20.73	Peak	Pass
15540.00	80.76	-42.94	37.82	54.00	-16.18	AVG	Pass
Test Channel: Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10360.00	88.48	-44.13	44.35	68.20	-23.85	Peak	Pass
10360.00	77.85	-45.18	32.67	54.00	-21.33	AVG	Pass
15540.00	88.70	-41.89	46.81	68.20	-21.39	Peak	Pass
15540.00	80.00	-42.94	37.06	54.00	-16.94	AVG	Pass
Test Channel: Middle channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10400.00	88.04	-45.04	43.00	68.20	-25.20	Peak	Pass
10400.00	79.32	-45.18	34.14	54.00	-19.86	AVG	Pass
15600.00	92.40	-42.80	49.60	68.20	-18.60	Peak	Pass
15600.00	78.69	-42.94	35.75	54.00	-18.25	AVG	Pass
Test Channel: Middle channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10400.00	90.64	-45.04	45.60	68.20	-22.60	Peak	Pass
10400.00	78.94	-45.18	33.76	54.00	-20.24	AVG	Pass
15600.00	92.85	-42.80	50.05	68.20	-18.15	Peak	Pass
15600.00	75.76	-42.94	32.82	54.00	-21.18	AVG	Pass
Test Channel: Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10480.00	91.81	-44.13	47.68	68.20	-20.52	Peak	Pass
10480.00	77.52	-45.18	32.34	54.00	-21.66	AVG	Pass
15720.00	92.12	-41.89	50.23	68.20	-17.97	Peak	Pass
15720.00	78.64	-42.94	35.70	54.00	-18.30	AVG	Pass
Test Channel: Highest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result

10480.00	89.00	-44.13	44.87	68.20	-23.33	Peak	Pass
10480.00	76.09	-45.18	30.91	54.00	-23.09	AVG	Pass
15720.00	92.45	-41.89	50.56	68.20	-17.64	Peak	Pass
15720.00	79.18	-42.94	36.24	54.00	-17.76	AVG	Pass

Remark: Test frequency up to 40GHz and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.

Note:Margin=Level-Limit=Reading+factor-Limit

802.11a:

Band 3: 5725 MHz - 5825 MHz							
Test Channel: Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11490.00	88.20	-42.04	46.16	68.20	-22.04	Peak	Pass
11490.00	77.96	-44.70	33.26	54.00	-20.74	AVG	Pass
17235.00	91.02	-37.95	53.07	68.20	-15.13	Peak	Pass
17235.00	78.28	-40.61	37.67	54.00	-16.33	AVG	Pass
Test Channel: Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11490.00	92.81	-42.04	50.77	68.20	-17.43	Peak	Pass
11490.00	76.91	-44.70	32.21	54.00	-21.79	AVG	Pass
17235.00	89.92	-37.95	51.97	68.20	-16.23	Peak	Pass
17235.00	78.08	-40.61	37.47	54.00	-16.53	AVG	Pass
Test Channel: Middle channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11570.00	88.26	-41.56	46.70	68.20	-21.50	Peak	Pass
11570.00	78.20	-44.70	33.50	54.00	-20.50	AVG	Pass
17355.00	88.66	-37.47	51.19	68.20	-17.01	Peak	Pass
17355.00	80.37	-40.61	39.76	54.00	-14.24	AVG	Pass
Test Channel: Middle channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11570.00	88.92	-41.56	47.36	68.20	-20.84	Peak	Pass
11570.00	78.55	-44.70	33.85	54.00	-20.15	AVG	Pass
17355.00	89.69	-37.47	52.22	68.20	-15.98	Peak	Pass
17355.00	75.88	-40.61	35.27	54.00	-18.73	AVG	Pass
Test Channel: Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11650.00	91.03	-43.62	47.41	68.20	-20.79	Peak	Pass
11650.00	78.42	-44.70	33.72	54.00	-20.28	AVG	Pass
17475.00	91.79	-39.53	52.26	68.20	-15.94	Peak	Pass
17475.00	79.77	-40.61	39.16	54.00	-14.84	AVG	Pass
Test Channel: Highest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result

11650.00	90.88	-43.62	47.26	68.20	-20.94	Peak	Pass
11650.00	76.56	-44.70	31.86	54.00	-22.14	AVG	Pass
17475.00	91.16	-39.53	51.63	68.20	-16.57	Peak	Pass
17475.00	79.18	-40.61	38.57	54.00	-15.43	AVG	Pass

Remark: Test frequency up to 40GHz and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.

Note:Margin=Level-Limit=Reading+factor-Limit

802.11n-HT20:

Band 3: 5725 MHz - 5825 MHz							
Test Channel: Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11490.00	88.74	-42.04	46.70	68.20	-21.50	Peak	Pass
11490.00	80.99	-44.70	36.29	54.00	-17.71	AVG	Pass
17235.00	90.13	-37.95	52.18	68.20	-16.02	Peak	Pass
17235.00	78.82	-40.61	38.21	54.00	-15.79	AVG	Pass
Test Channel: Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11490.00	89.47	-42.04	47.43	68.20	-20.77	Peak	Pass
11490.00	80.59	-44.70	35.89	54.00	-18.11	AVG	Pass
17235.00	89.64	-37.95	51.69	68.20	-16.51	Peak	Pass
17235.00	78.19	-40.61	37.58	54.00	-16.42	AVG	Pass
Test Channel: Middle channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11570.00	92.47	-41.56	50.91	68.20	-17.29	Peak	Pass
11570.00	79.48	-44.70	34.78	54.00	-19.22	AVG	Pass
17355.00	92.07	-37.47	54.60	68.20	-13.60	Peak	Pass
17355.00	75.82	-40.61	35.21	54.00	-18.79	AVG	Pass
Test Channel: Middle channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11570.00	91.61	-41.56	50.05	68.20	-18.15	Peak	Pass
11570.00	77.39	-44.70	32.69	54.00	-21.31	AVG	Pass
17355.00	90.43	-37.47	52.96	68.20	-15.24	Peak	Pass
17355.00	79.28	-40.61	38.67	54.00	-15.33	AVG	Pass
Test Channel: Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11650.00	89.69	-43.62	46.07	68.20	-22.13	Peak	Pass
11650.00	77.90	-44.70	33.20	54.00	-20.80	AVG	Pass
17475.00	92.08	-39.53	52.55	68.20	-15.65	Peak	Pass
17475.00	76.32	-40.61	35.71	54.00	-18.29	AVG	Pass
Test Channel: Highest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result

11650.00	92.81	-43.62	49.19	68.20	-19.01	Peak	Pass
11650.00	76.14	-44.70	31.44	54.00	-22.56	AVG	Pass
17475.00	90.46	-39.53	50.93	68.20	-17.27	Peak	Pass
17475.00	79.38	-40.61	38.77	54.00	-15.23	AVG	Pass

Remark: Test frequency up to 40GHz and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.

Note:Margin=Level-Limit=Reading+factor-Limit

802.11ac-VHT20:

Band 3: 5725 MHz - 5825 MHz							
Test Channel: Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11490.00	91.00	-42.04	48.96	68.20	-19.24	Peak	Pass
11490.00	79.76	-44.70	35.06	54.00	-18.94	AVG	Pass
17235.00	88.97	-37.95	51.02	68.20	-17.18	Peak	Pass
17235.00	75.45	-40.61	34.84	54.00	-19.16	AVG	Pass
Test Channel: Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11490.00	91.39	-42.04	49.35	68.20	-18.85	Peak	Pass
11490.00	75.27	-44.70	30.57	54.00	-23.43	AVG	Pass
17235.00	91.91	-37.95	53.96	68.20	-14.24	Peak	Pass
17235.00	79.52	-40.61	38.91	54.00	-15.09	AVG	Pass
Test Channel: Middle channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11570.00	91.29	-41.56	49.73	68.20	-18.47	Peak	Pass
11570.00	76.77	-44.70	32.07	54.00	-21.93	AVG	Pass
17355.00	88.76	-37.47	51.29	68.20	-16.91	Peak	Pass
17355.00	79.40	-40.61	38.79	54.00	-15.21	AVG	Pass
Test Channel: Middle channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11570.00	91.06	-41.56	49.50	68.20	-18.70	Peak	Pass
11570.00	79.85	-44.70	35.15	54.00	-18.85	AVG	Pass
17355.00	89.20	-37.47	51.73	68.20	-16.47	Peak	Pass
17355.00	77.18	-40.61	36.57	54.00	-17.43	AVG	Pass
Test Channel: Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11650.00	88.70	-43.62	45.08	68.20	-23.12	Peak	Pass
11650.00	75.72	-44.70	31.02	54.00	-22.98	AVG	Pass
17475.00	88.80	-39.53	49.27	68.20	-18.93	Peak	Pass
17475.00	77.43	-40.61	36.82	54.00	-17.18	AVG	Pass
Test Channel: Highest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result

11650.00	88.62	-43.62	45.00	68.20	-23.20	Peak	Pass
11650.00	80.27	-44.70	35.57	54.00	-18.43	AVG	Pass
17475.00	88.04	-39.53	48.51	68.20	-19.69	Peak	Pass
17475.00	76.11	-40.61	35.50	54.00	-18.50	AVG	Pass

Remark: Test frequency up to 40GHz and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.

Note:Margin=Level-Limit=Reading+factor-Limit

802.11ax-HEW20:

Band 3: 5725 MHz - 5825 MHz							
Test Channel: Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11490.00	90.22	-42.04	48.18	68.20	-20.02	Peak	Pass
11490.00	79.07	-44.70	34.37	54.00	-19.63	AVG	Pass
17235.00	89.68	-37.95	51.73	68.20	-16.47	Peak	Pass
17235.00	79.53	-40.61	38.92	54.00	-15.08	AVG	Pass
Test Channel: Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11490.00	88.16	-42.04	46.12	68.20	-22.08	Peak	Pass
11490.00	79.18	-44.70	34.48	54.00	-19.52	AVG	Pass
17235.00	90.94	-37.95	52.99	68.20	-15.21	Peak	Pass
17235.00	79.89	-40.61	39.28	54.00	-14.72	AVG	Pass
Test Channel: Middle channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11570.00	91.79	-41.56	50.23	68.20	-17.97	Peak	Pass
11570.00	80.05	-44.70	35.35	54.00	-18.65	AVG	Pass
17355.00	88.08	-37.47	50.61	68.20	-17.59	Peak	Pass
17355.00	78.53	-40.61	37.92	54.00	-16.08	AVG	Pass
Test Channel: Middle channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11570.00	90.41	-41.56	48.85	68.20	-19.35	Peak	Pass
11570.00	77.10	-44.70	32.40	54.00	-21.60	AVG	Pass
17355.00	89.39	-37.47	51.92	68.20	-16.28	Peak	Pass
17355.00	76.83	-40.61	36.22	54.00	-17.78	AVG	Pass
Test Channel: Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11650.00	89.82	-43.62	46.20	68.20	-22.00	Peak	Pass
11650.00	78.23	-44.70	33.53	54.00	-20.47	AVG	Pass
17475.00	88.72	-39.53	49.19	68.20	-19.01	Peak	Pass
17475.00	77.42	-40.61	36.81	54.00	-17.19	AVG	Pass
Test Channel: Highest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result

11650.00	88.32	-43.62	44.70	68.20	-23.50	Peak	Pass
11650.00	78.74	-44.70	34.04	54.00	-19.96	AVG	Pass
17475.00	91.04	-39.53	51.51	68.20	-16.69	Peak	Pass
17475.00	75.97	-40.61	35.36	54.00	-18.64	AVG	Pass

Remark: Test frequency up to 40GHz and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.

Note:Margin=Level-Limit=Reading+factor-Limit

5.6 Duty Cycle

Test Requirement:	All measurements are to be performed with the EUT transmitting at 100% duty cycle at its maximum power control level; however, if 100% duty cycle cannot be achieved, measurements of duty cycle, x , and maximum-power transmission duration, T , are required for each tested mode of operation.
Test Method:	ANSI C63.10-2020+Cor 1-2023
Test Limit:	No limits, only for report use.
Procedure:	i) Set the center frequency of the instrument to the center frequency of the transmission. ii) Set RBW $\geq$ EBW if possible; otherwise, set RBW to the largest available value. iii) Set VBW $\geq$ RBW. iv) Set detector = peak. v) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$, where T is defined in item a1) of 12.2, and the number of sweep points across duration T exceeds 100.
Test Setup:	See section 4.6 for test setup description. The photo of test setup please refer to Appendix I Test Setup Photos
Operating Environment:	
Temperature:	22.5°C
Humidity:	46%RH
Atmospheric Pressure:	1010 hpa
Test voltage:	AC 120V/60Hz

5.6.1 Test Data:

Please Refer to Appendix-5G WIFI for Details

5.7 Emission bandwidth and Occupied bandwidth

Test Requirement:	U-NII 1, U-NII 2A, U-NII 2C: No limits, only for report use. U-NII 3, U-NII 4: 47 CFR Part 15.407(e)
Test Method:	ANSI C63.10-2020+Cor 1-2023, section 6.9.3 & 12.4 KDB 789033 D02, Clause C.2
Test Limit:	U-NII 1, U-NII 2A, U-NII 2C: No limits, only for report use. U-NII 3, U-NII 4: Within the 5.725-5.850 GHz and 5.850-5.895 GHz bands, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.
Procedure:	Emission bandwidth: - Set RBW = approximately 1%~5% of the emission bandwidth. - Set the VBW > RBW. - Detector = peak. - Trace mode = max hold. - Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%~5%. Occupied bandwidth: - The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW. - The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement. - Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2. - Step a) through step c) might require iteration to adjust within the specified range. - Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used. - Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth. - If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies. - The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s). 6 dB emission bandwidth: - Set RBW = 100 kHz. - Set the video bandwidth (VBW) $\geq 3 \times$ RBW. - Detector = Peak. - Trace mode = max hold. - Sweep = auto couple. - Allow the trace to stabilize.

	g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
Test Setup:	See section 4.6 for test setup description. The photo of test setup please refer to Appendix I Test Setup Photos
Operating Environment:	
Temperature:	22.5°C
Humidity:	46%RH
Atmospheric Pressure:	1010 hpa
Test voltage:	AC 120V/60Hz

5.7.1 Test Data:

Please Refer to Appendix-5G WIFI for Details

5.8 Maximum Conducted Output Power

Test Requirement:	47 CFR Part 15.407(a)(1)(i) 47 CFR Part 15.407(a)(1)(ii) 47 CFR Part 15.407(a)(1)(iii) 47 CFR Part 15.407(a)(1)(iv) 47 CFR Part 15.407(a)(2) 47 CFR Part 15.407(a)(3)(i)
Test Method:	ANSI C63.10-2020+Cor 1-2023, section 12.3
Test Limit:	For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm). For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations. For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. For the band 5.725-5.850 GHz, the maximum conducted output power over the

	frequency band of operation shall not exceed 1 W. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
Procedure:	1. The testing follows the Measurement Procedure of KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section E, 3, a 2. The RF output of EUT was connected to the power meter by RF cable. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Measure the conducted output power and record the results in the test report.
Test Setup:	See section 4.6 for test setup description. The photo of test setup please refer to Appendix I Test Setup Photos
Operating Environment:	
Temperature:	22.5℃
Humidity:	46%RH
Atmospheric Pressure:	1010 hpa
Test voltage:	AC 120V/60Hz

5.8.1 Test Data:

Please Refer to Appendix-5G WIFI for Details

5.9 Power Spectral Density

Test Requirement:	47 CFR Part 15.407(a)(1)(i) 47 CFR Part 15.407(a)(1)(ii) 47 CFR Part 15.407(a)(1)(iii) 47 CFR Part 15.407(a)(1)(iv) 47 CFR Part 15.407(a)(2) 47 CFR Part 15.407(a)(3)(i)
Test Method:	ANSI C63.10-2020+Cor 1-2023, section 12.5
Test Limit:	For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations. For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. For the band 5.725-5.850 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power.

	Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
Procedure:	a) Create an average power spectrum for the EUT operating mode being tested by following the instructions in 12.3.2 for measuring maximum conducted output power using a spectrum analyzer or EMI receiver; that is, select the appropriate test method (SA-1, SA-2, SA-3, or their respective alternatives) and apply it up to, but not including, the step labeled, "Compute power...." (This procedure is required even if the maximum conducted output power measurement was performed using the power meter method PM.) b) Use the peak search function on the instrument to find the peak of the spectrum. c) Make the following adjustments to the peak value of the spectrum, if applicable: 1) If method SA-2 or SA-2A was used, then add $[10 \log (1 / D)]$, where D is the duty cycle, to the peak of the spectrum. 2) If method SA-3A was used and the linear mode was used in step h) of 12.3.2.7, add 1 dB to the final result to compensate for the difference between linear averaging and power averaging. d) The result is the PPSD. e) The procedure in item a) through item c) requires the use of 1 MHz resolution bandwidth to satisfy the 1 MHz measurement bandwidth specified by some regulatory authorities. This requirement also permits use of resolution bandwidths less than 1 MHz "provided that the measured power is integrated to show the total power over the measurement bandwidth" (i.e., 1 MHz). If measurements are performed using a reduced resolution bandwidth and integrated over 1 MHz bandwidth, the following adjustments to the procedures apply: 1) Set $RBW \geq 1 / T$, where T is defined in 12.2 a). 2) Set $VBW \geq [3 \times RBW]$. 3) Care shall be taken such that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.
Test Setup:	See section 4.6 for test setup description. The photo of test setup please refer to Appendix I Test Setup Photos
Operating Environment:	
Temperature:	22.5°C
Humidity:	46%RH
Atmospheric Pressure:	1010 hpa
Test voltage:	AC 120V/60Hz

5.9.1 Test Data:

Please Refer to Appendix-5G WIFI for Details

5.10 Frequency Stability Measurement

Test Requirement:	FCC Part15 Section 15.407(g) &Part2 J Section 2.1055
Test Method:	ANSI C63.10-2020+Cor 1-2023
Test Limit:	The frequency tolerance shall be maintained within the band of operation frequency over a temperature variation of 0 degrees to 45 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.
Procedure:	The EUT was placed inside the environmental test chamber and powered by nominal AC/DC voltage. b. Turn the EUT on and couple its output to a spectrum analyzer. c. Turn the EUT off and set the chamber to the highest temperature specified. d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. e. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature. f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.
Test Setup:	See section 4.6 for test setup description. The photo of test setup please refer to Appendix I Test Setup Photos
Operating Environment:	
Temperature:	22.5°C
Humidity:	46%RH
Atmospheric Pressure:	1010 hpa
Test voltage:	AC 120V/60Hz

5.10.1 Test Data:

Please Refer to Appendix-5G WIFI for Details

6 Test Setup Photos

Please refer to the Appendix I Test Setup Photos

7 EUT Constructional Details (EUT Photos)

Please refer to the Appendix II External Photos & Appendix III External Photos



BTF Testing Lab (Shenzhen) Co., Ltd.

Plant 101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street,
Bao'an District, Shenzhen, Guangdong, China

www.btf-lab.com

--END OF REPORT--