



Appendix A

Detailed System Check Results

1. System Performance Check
System Performance Check 2450 MHz Head


System Performance Check 2450MHz

Communication System: ; Frequency: 2450.000
Medium: HSL. Medium parameters used: $f= 2450.000$ MHz; $\sigma= 1.76$ S/m; $\epsilon_r = 38.6$

- DASY8 Configuration:
- Probe: EX3DV4 - SN3826; ConvF(6.85, 6.73, 6.96); Calibrated: 2025-07-03
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1826; Calibrated: 2026-04-27
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
 - Measurement Software: cDASY8 V18.0.0.7250

Area Scan (40.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 12.4 W/kg; SAR (10g) = 5.96 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.03 dB
SAR (1g) = 12.5 W/kg; SAR (10g) = 5.89 W/kg;
M2/M1 [%] 81.9
Dist 3dB Peak [mm] 9.0

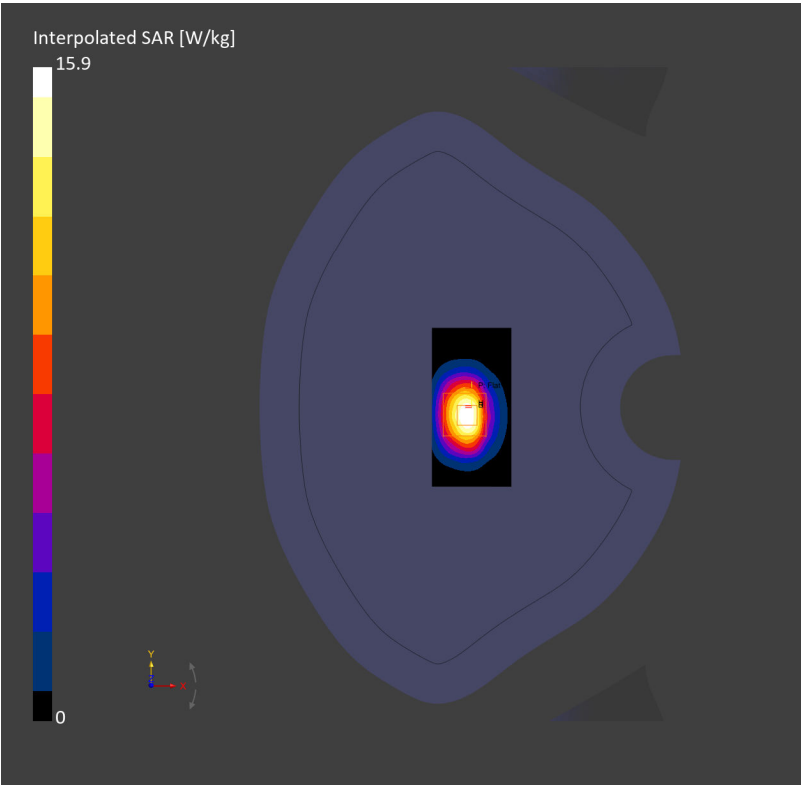



Report No.: SUCR260600048401
Page: 3 of 3

- End of the Appendix -