




Test Graphs

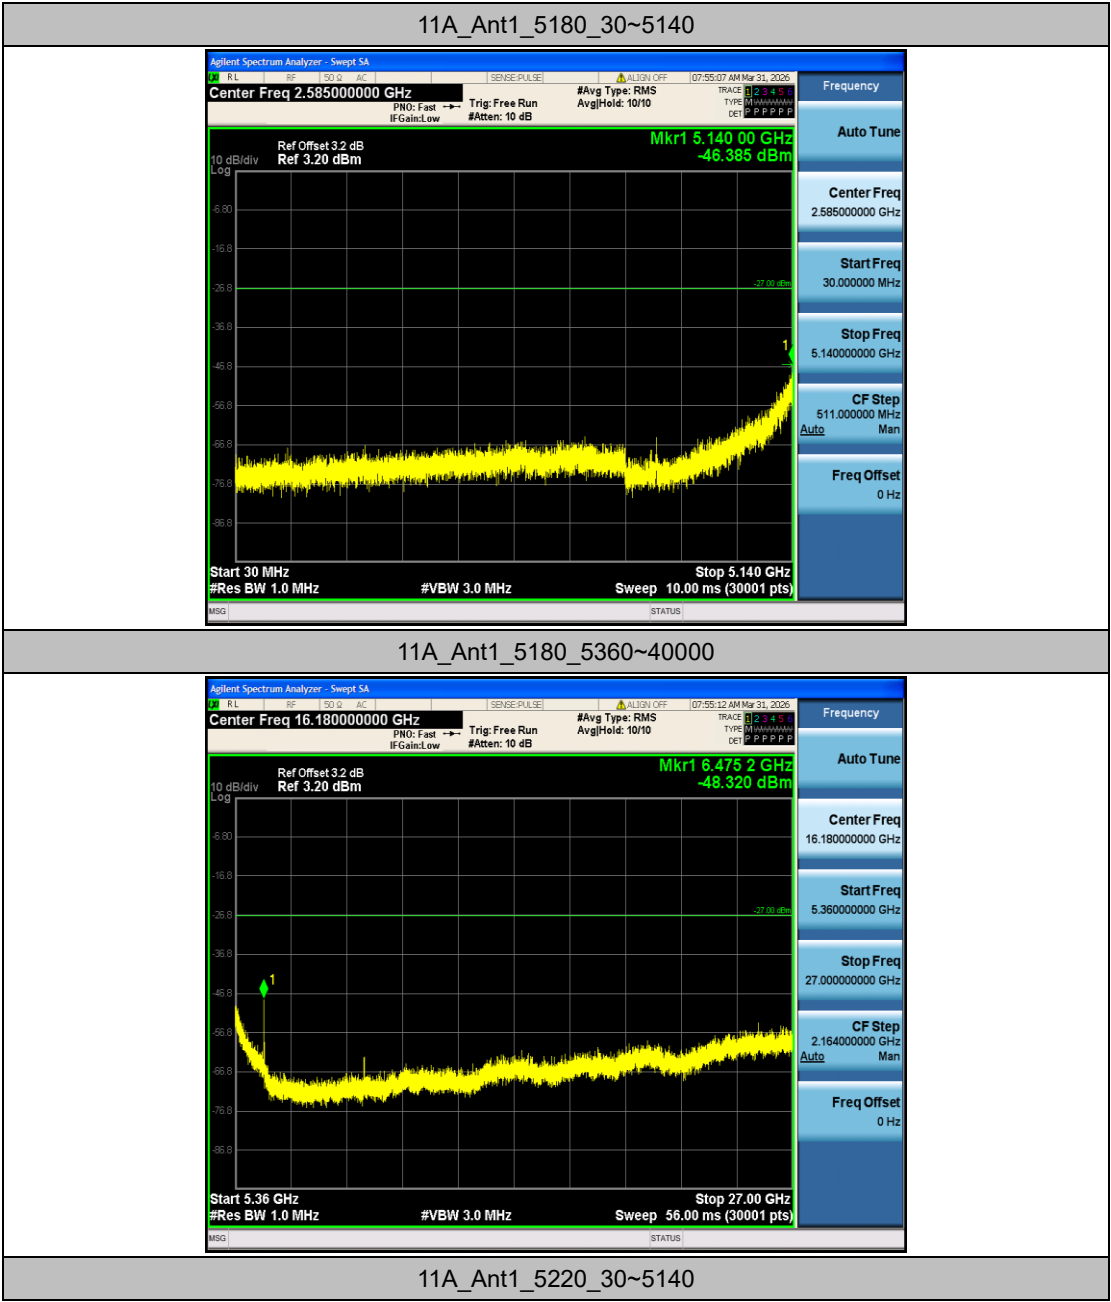


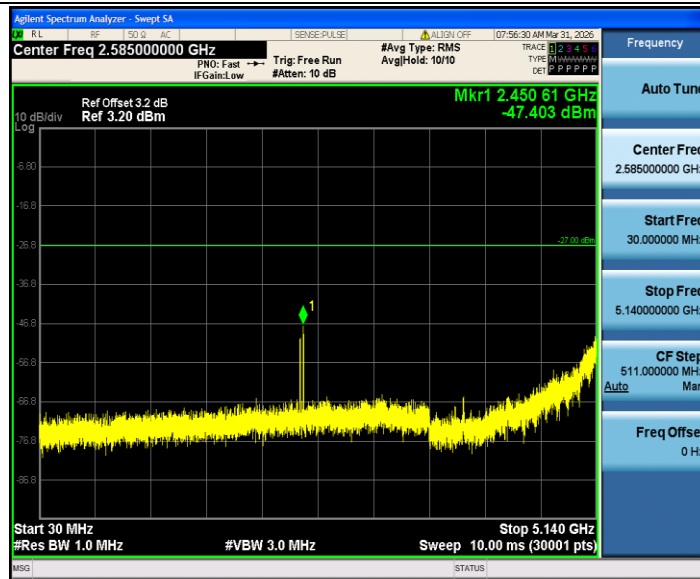

11A_Ant1_5220_5360~40000

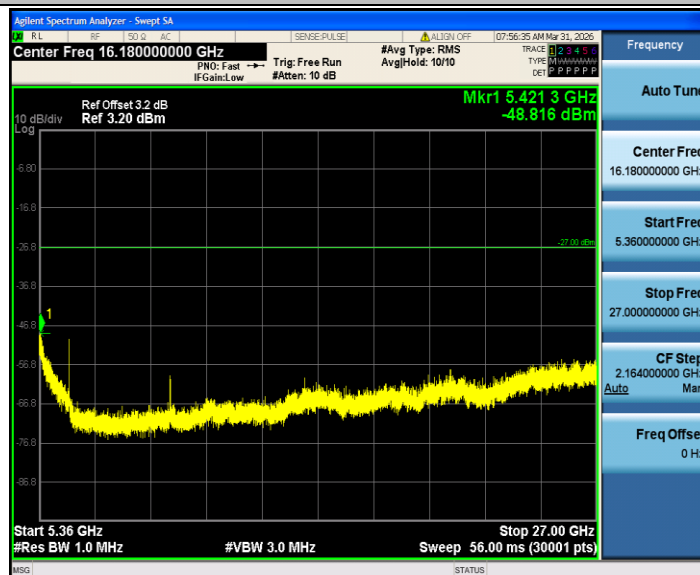


11A_Ant1_5240_30~5140

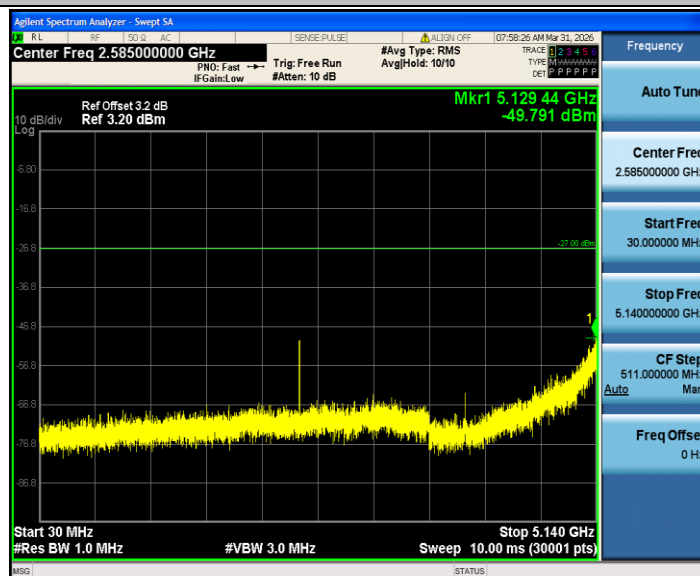

11A_Ant1_5240_5360~40000




11A_Ant1_5745_30~5650

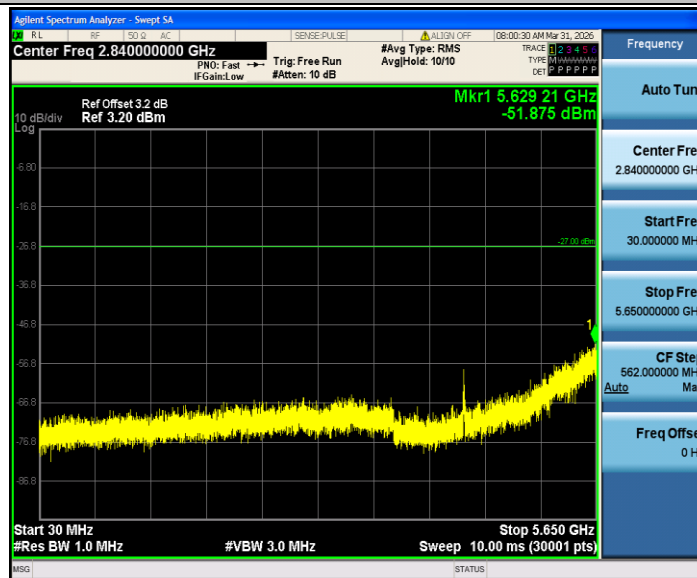


11A_Ant1_5745_5925~40000




11A_Ant1_5785_30~5650

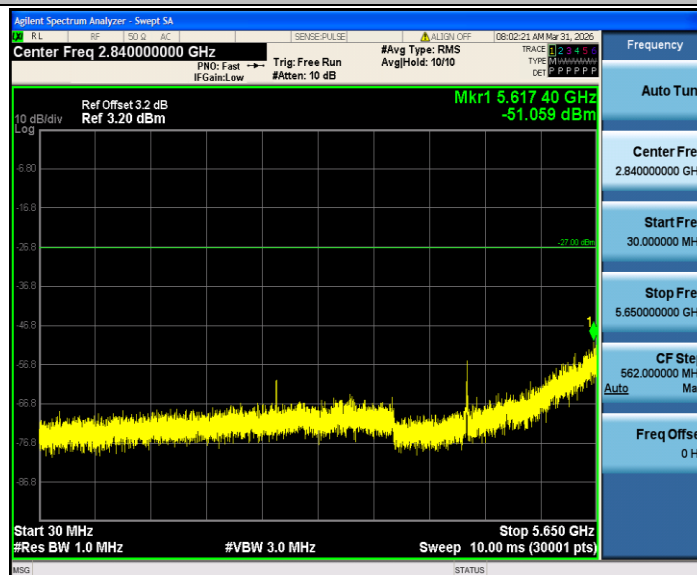


11A_Ant1_5785_5925~40000

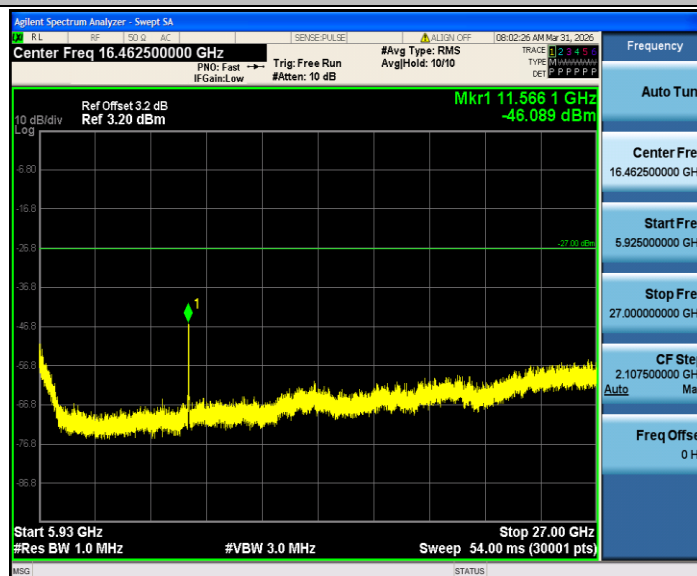


11A_Ant1_5825_30~5650

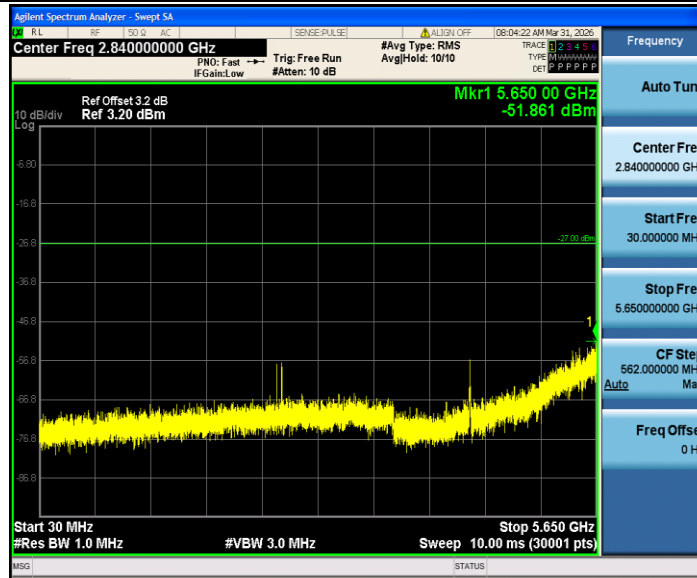


11A_Ant1_5825_5925~40000

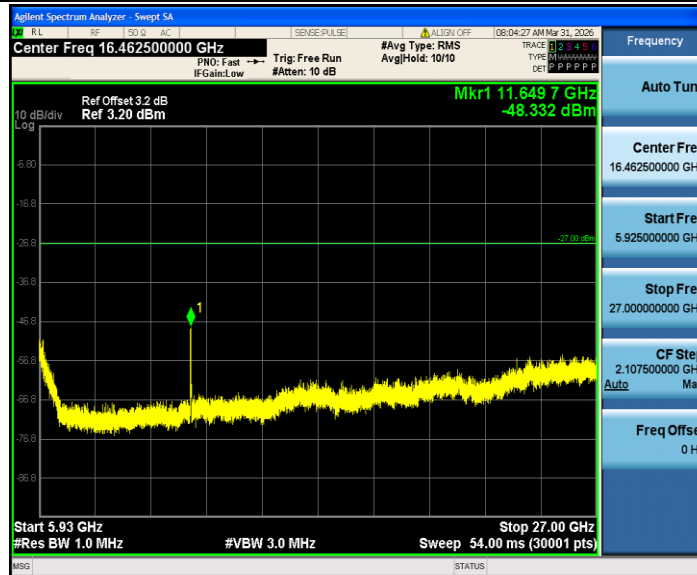


11N20SISO_Ant1_5180_30~5140

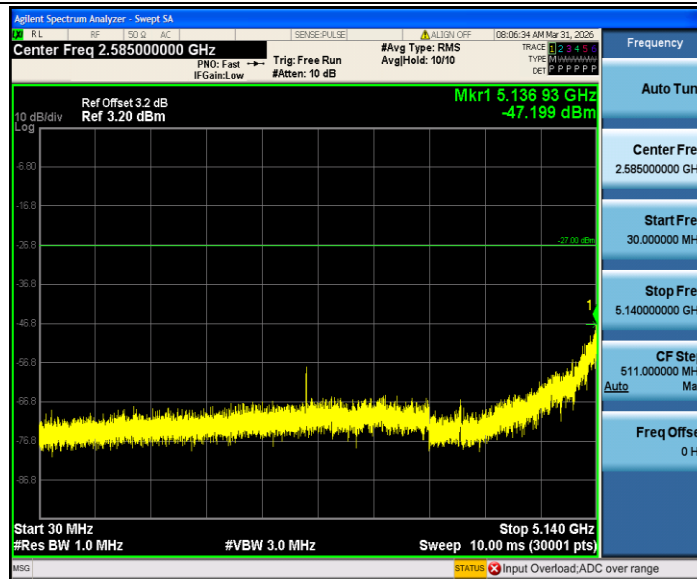


11N20SISO_Ant1_5180_5360~40000

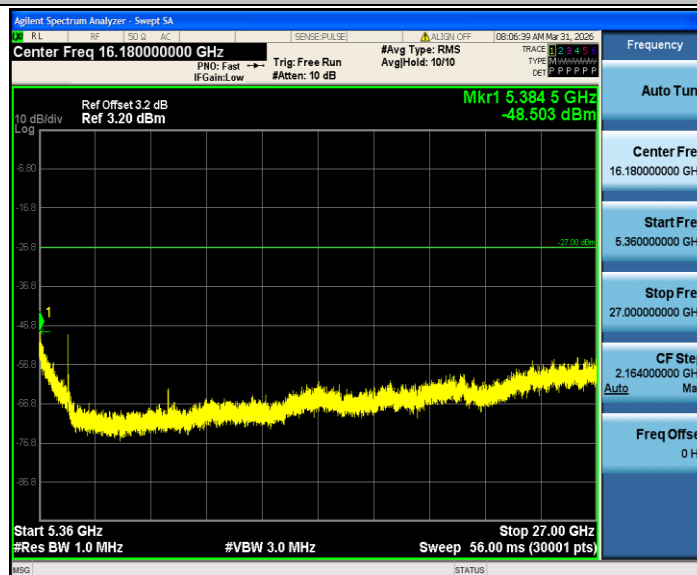


11N20SISO_Ant1_5220_30~5140

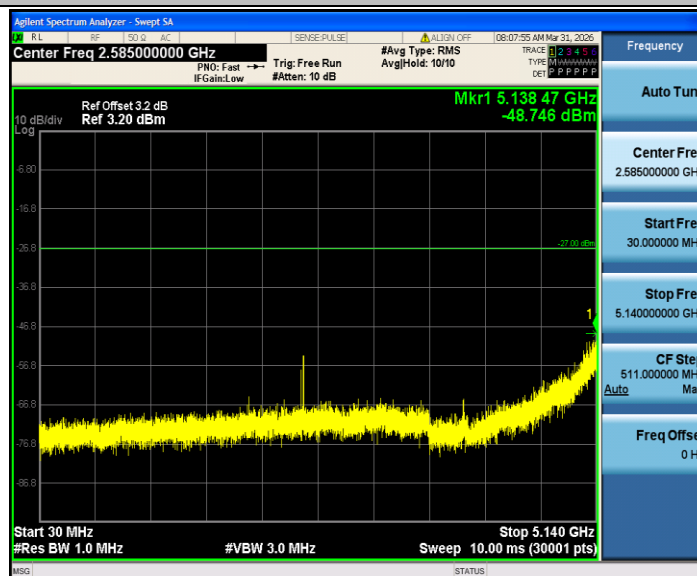

11N20SISO_Ant1_5220_5360~40000

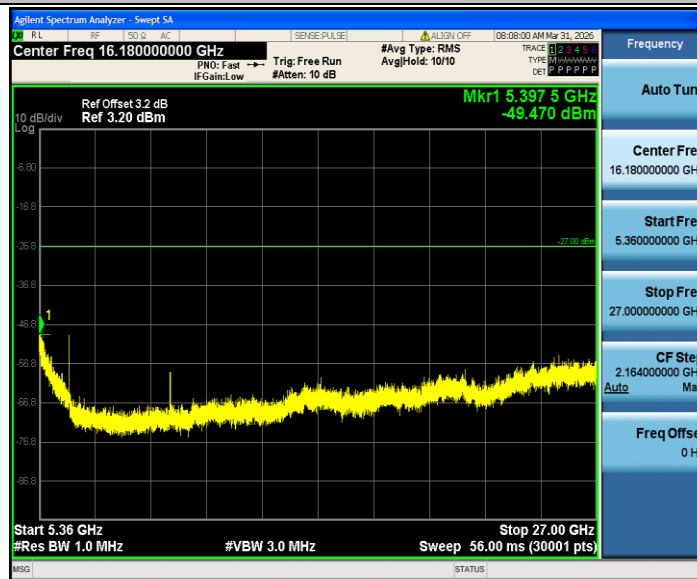


11N20SISO_Ant1_5240_30~5140

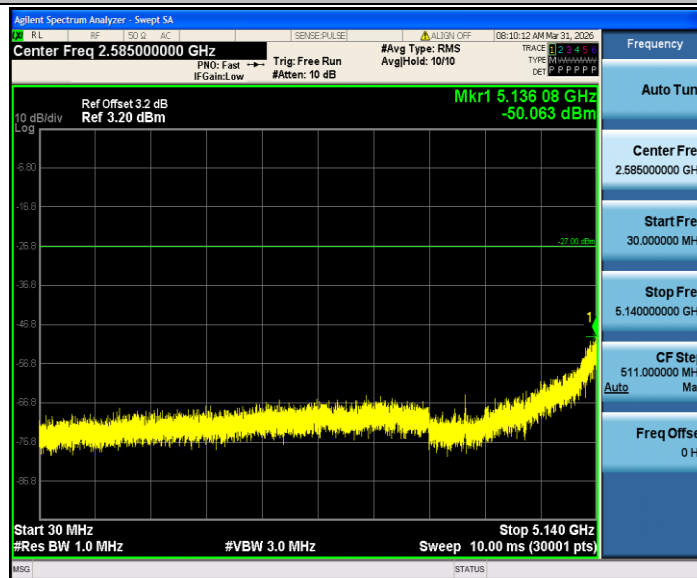


11N20SISO_Ant1_5240_5360~40000



11N20SISO_Ant1_5745_30~5650

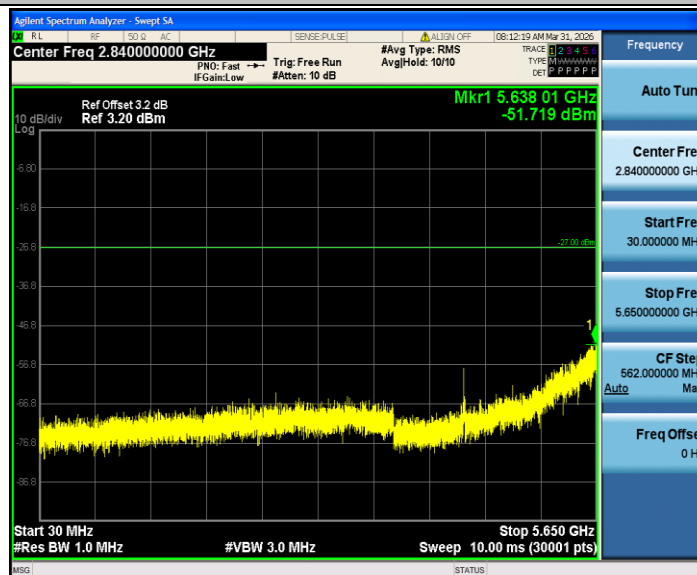


11N20SISO_Ant1_5745_5925~40000

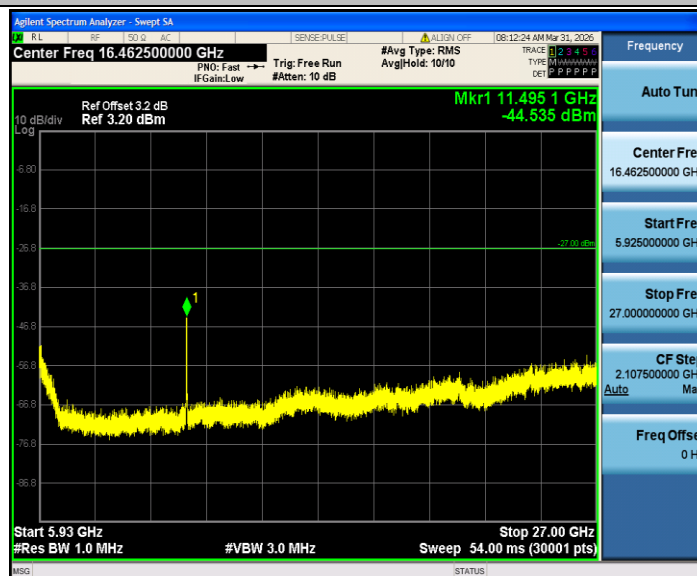


11N20SISO_Ant1_5785_30~5650




11N20SISO_Ant1_5785_5925~40000

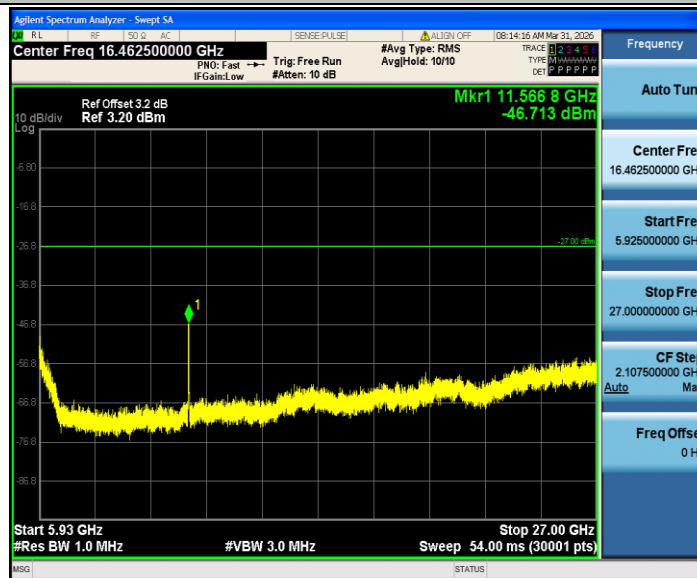

11N20SISO_Ant1_5825_30~5650

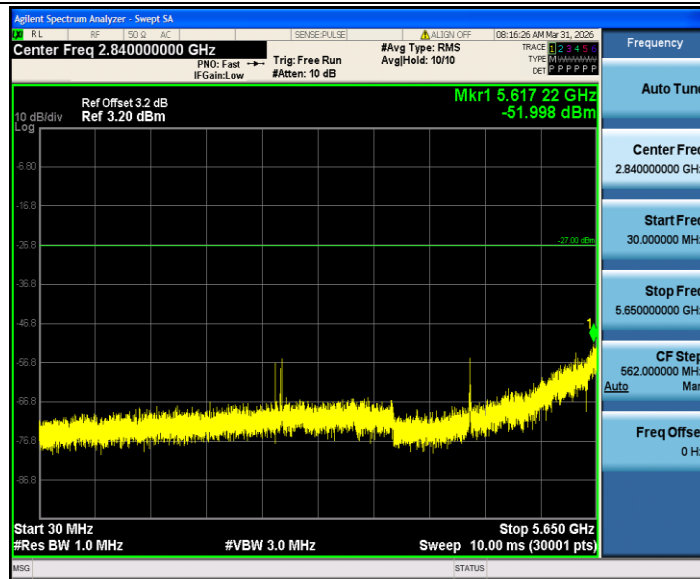

11N20SISO_Ant1_5825_5925~40000

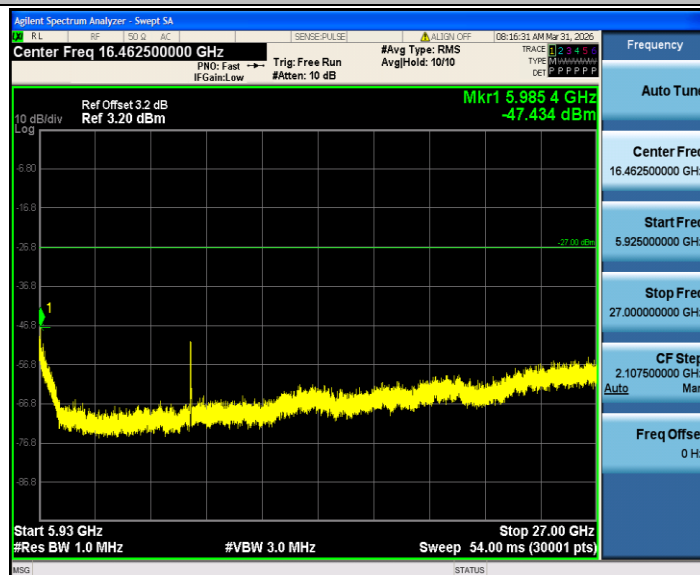

Appendix G: Emissions in Restricted Bands

Test Result


TestMode	ChName	Freq(MHz)	Detector	Freq [MHz]	Result [dBm]	Gain [dB]	DC Factor [dB]	EIRP [dBm]	Limit [dBm]	Verdict
11A	Low	5180	AV	4500.000	-62.49	2.41	1.33	-58.75	≤-41.20	PASS
			AV	5148.200	-56.13	2.41	1.33	-52.39	≤-41.20	PASS
			AV	5150.000	-56.4	2.41	1.33	-52.66	≤-41.20	PASS
			Peak	4500.000	-53.06	2.41	0.00	-50.65	≤-27.00	PASS
			Peak	5149.600	-45.43	2.41	0.00	-43.02	≤-27.00	PASS
			Peak	5150.000	-47.57	2.41	0.00	-45.16	≤-27.00	PASS
	High	5240	AV	5350.000	-58.71	2.41	1.25	-55.05	≤-41.20	PASS
			AV	5369.040	-57.27	2.41	1.25	-53.61	≤-41.20	PASS
			AV	5460.000	-59.21	2.41	1.25	-55.55	≤-41.20	PASS
			Peak	5350.000	-49.09	2.41	0.00	-46.68	≤-27.00	PASS
			Peak	5395.200	-47.39	2.41	0.00	-44.98	≤-27.00	PASS
			Peak	5460.000	-51.47	2.41	0.00	-49.06	≤-27.00	PASS
	Low	5745	Peak	5650.000	-50.209	2.0	0.00	-48.209	≤-27.00	PASS
			Peak	5700.000	-50.26	2.0	0.00	-48.26	≤10.00	PASS
			Peak	5720.000	-47.25	2.0	0.00	-45.25	≤15.60	PASS
			Peak	5725.000	-41.53	2.0	0.00	-39.53	≤27.00	PASS
	High	5825	Peak	5850.000	-46.512	2.0	0.00	-44.512	≤27.00	PASS
			Peak	5855.000	-47.91	2.0	0.00	-45.91	≤15.60	PASS
			Peak	5875.000	-49.17	2.0	0.00	-47.17	≤10.00	PASS
			Peak	5925.000	-50.94	2.0	0.00	-48.94	≤-27.00	PASS
11N20SISO	Low	5180	AV	4500.000	-62.1	2.41	1.06	-58.63	≤-41.20	PASS
			AV	5148.900	-55.61	2.41	1.06	-52.14	≤-41.20	PASS
			AV	5150.000	-56.12	2.41	1.06	-52.65	≤-41.20	PASS
			Peak	4500.000	-53.59	2.41	0.00	-51.18	≤-27.00	PASS
			Peak	5147.500	-46	2.41	0.00	-43.59	≤-27.00	PASS
			Peak	5150.000	-47.23	2.41	0.00	-44.82	≤-27.00	PASS
	High	5240	AV	5350.000	-58.09	2.41	1.06	-54.62	≤-41.20	PASS
			AV	5351.040	-57.29	2.41	1.06	-53.82	≤-41.20	PASS
			AV	5460.000	-59.45	2.41	1.06	-55.98	≤-41.20	PASS
			Peak	5350.000	-50.12	2.41	0.00	-47.71	≤-27.00	PASS
			Peak	5355.120	-46.76	2.41	0.00	-44.35	≤-27.00	PASS
			Peak	5460.000	-51.48	2.41	0.00	-49.07	≤-27.00	PASS
	Low	5745	Peak	5650.000	-49.658	2.0	0.00	-47.658	≤-27.00	PASS
			Peak	5700.000	-49.54	2.0	0.00	-47.54	≤10.00	PASS
			Peak	5720.000	-47.62	2.0	0.00	-45.62	≤15.60	PASS
			Peak	5725.000	-44.0	2.0	0.00	-42	≤27.00	PASS


	High	5825	Peak	5850.000	-45.058	2.0	0.00	-43.058	≤27.00	PASS
			Peak	5855.000	-47.38	2.0	0.00	-45.38	≤15.60	PASS
			Peak	5875.000	-50.01	2.0	0.00	-48.01	≤10.00	PASS
			Peak	5925.000	-49.04	2.0	0.00	-47.04	≤-27.00	PASS

Note:


1. For transmitters operating in 5150-5350 GHz band and 5470-5725 GHz band: The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm.

Test Graphs

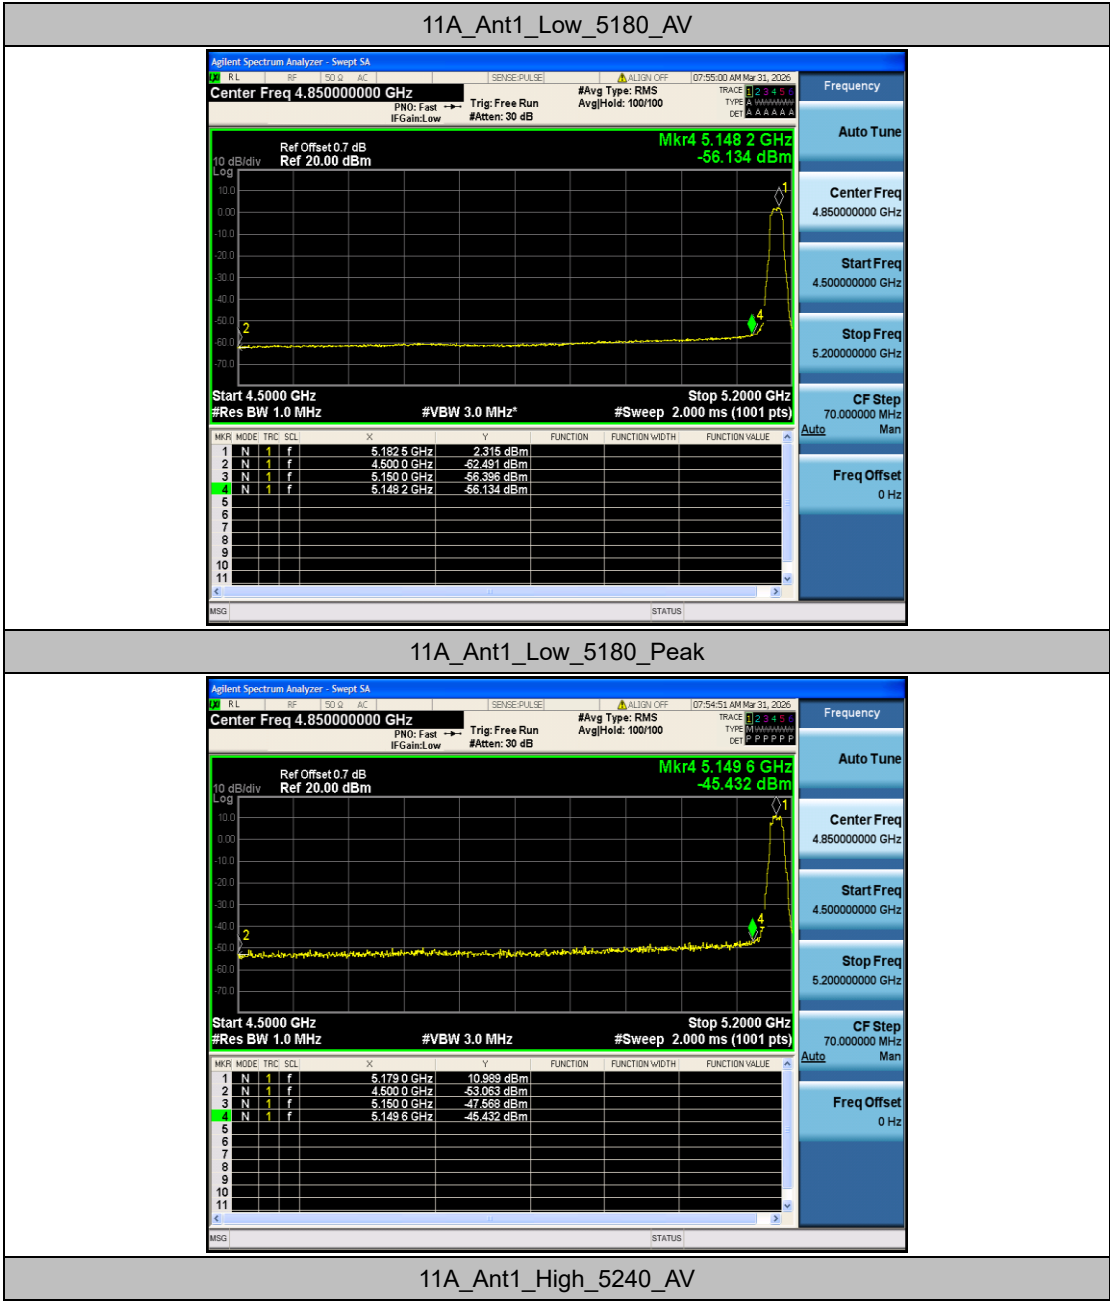


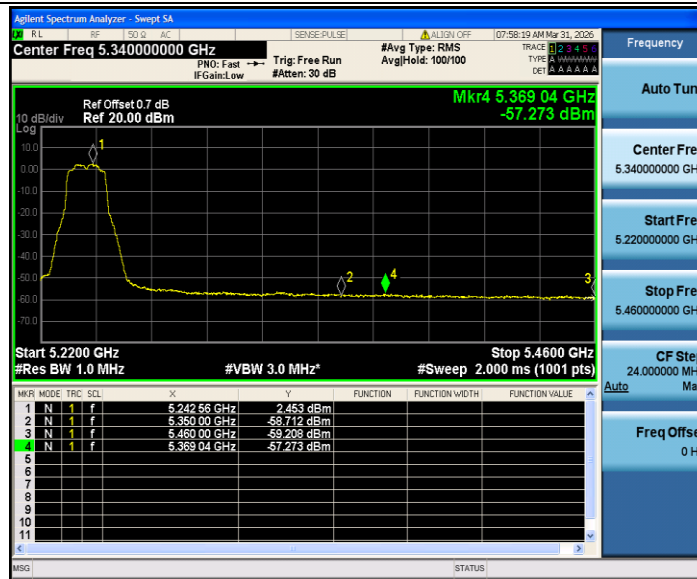


11A_Ant1_High_5240_Peak

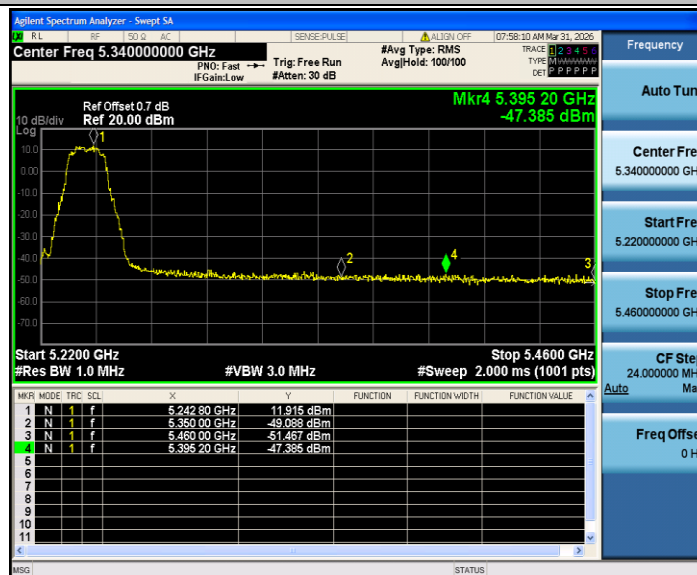

11A_Ant1_Low_5745_Peak

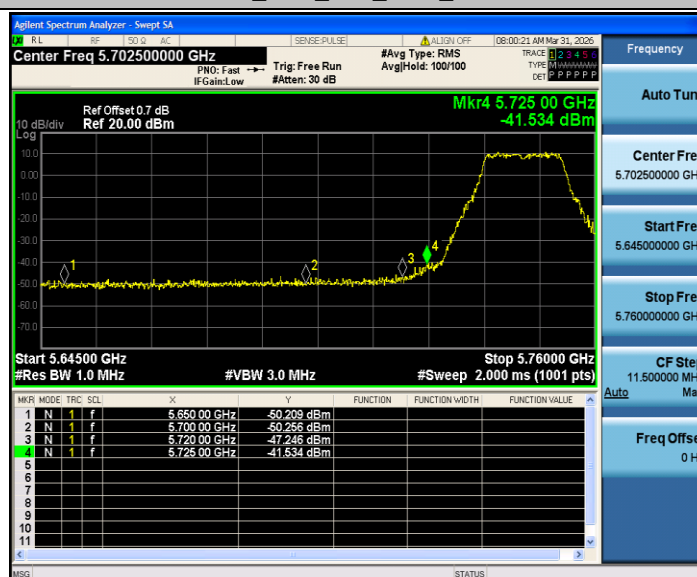


11A_Ant1_High_5825_Peak

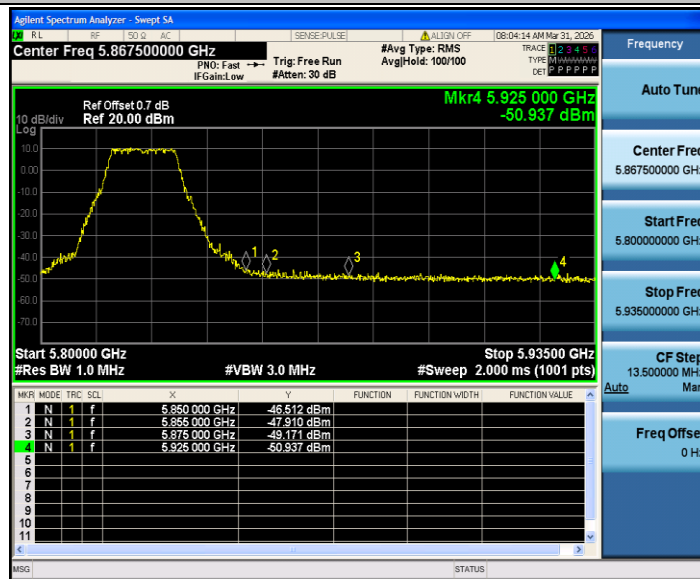


11N20SISO_Ant1_Low_5180_AV




11N20SISO_Ant1_Low_5180_Peak

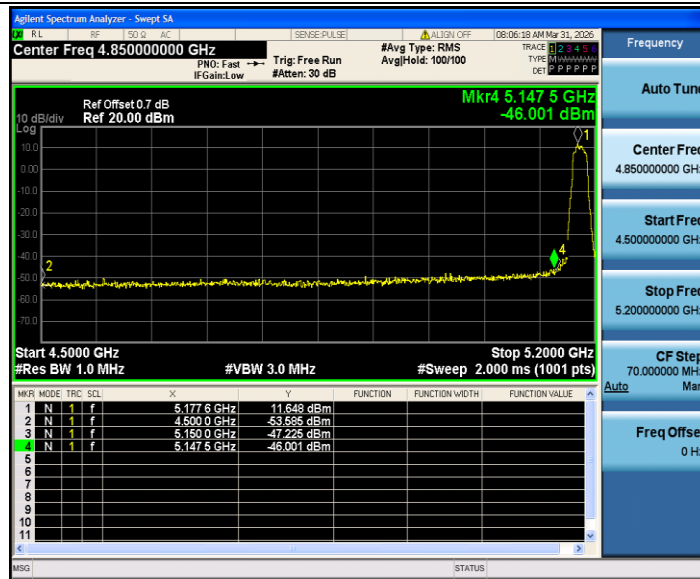


11N20SISO_Ant1_High_5240_AV

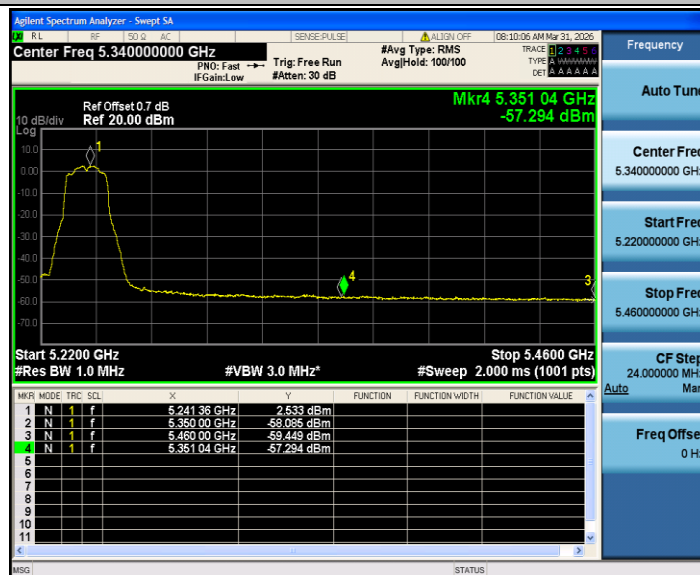

11N20SISO_Ant1_High_5240_Peak

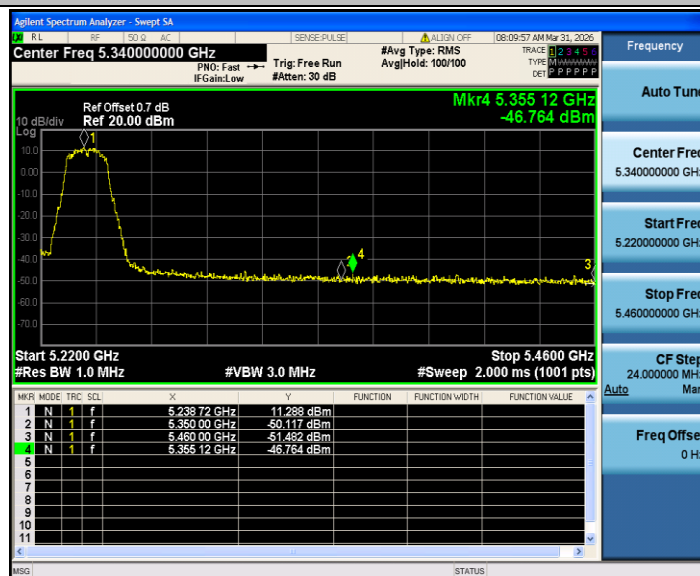

11N20SISO_Ant1_Low_5745_Peak

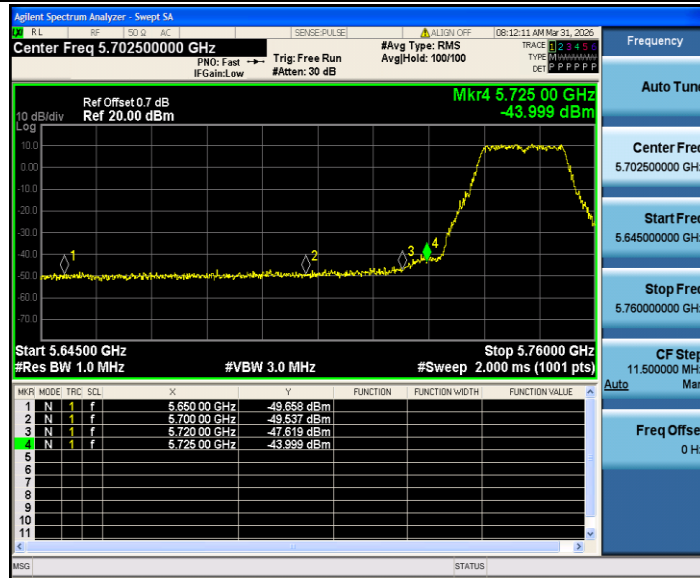

11N20SISO_Ant1_High_5825_Peak

