

	R1394A-R	
Date of Issue: 2026/5/26		dipole antenna
Page (1) of (14)	i-Top Drawing # 20260526	Revision #: Initial Release

承 认 书

SPECIFICATION FOR APPROVAL

产品描述说明: Product Description:	R1394A_FPC天线
客 户 料 号: Customer part number	1411020071
客户规格描述: Customer specification description:	R1394A-RF_FPC天线_R
公司内部编码: Internal company code:	D7.TX1394R1
版本: Software version:	V1.1
描述: Hardware description:	FPC天线-YH-R1394A-R-V1.1

物料满足如下环保要求: The materials meet the following environmental requirements: ☒ 禁用及监控物质控制标准(最新版本) Banned and Monitored Substances Control Standard(Latest Edition) ☒ 无卤素技术标准 Halogen-free technical standard
--

供应商确认 Vender Confirm (盖章) (Stamp)	制 作 Prepared by	审 核 Checked by	批 准 Approved by

客户确认 Customer Approved (盖章) (Stamp)	采 购 Sourcing	品质管理部 DQ	研发 RD	批 准 Approved by

	R1394A-R	
Date of Issue: 2026/5/26		dipole antenna
Page (2) of (14)	i-Top Drawing # 20260526	Revision #: Initial Release

发布记录							
Revision	ECO	Description	Date	Prep' d By	Ck' d By	Ck' d By	Appr' d By
V1.0		初次发布	2026-05-26	李良			

<u>PROPRIETARY NOTICE</u> These documents, and the contained information herein, are proprietary and are not to be reproduced, used or disclosed to others for manufacture or for any other purpose, except as specifically authorized, in writing, by i-Top Corporation.	<u>i-Top Contact Information:</u> 张双红 Mb: 13760173603 Email: zsh@i-Toptek.com 地址: 深圳市宝安区新安街道隆昌路高新奇二期2号楼711
--	---

	R1394A-R	
Date of Issue: 2026/5/26		dipole antenna
Page (3) of (14)	i-Top Drawing # 20260526	Revision #: Initial Release

目录 Index

一、 封面 (Cover) 1

二、 目录 (Index) 2

三、 变更履历 (Change history) 3

四、 基本参数 (The basic parameters) 4

五、 测试设备 (TestEquipment & Conditions) 5

六、 性能测试Performance testing..... 6-12

七、 工程图纸 (Product Drawing) 13

八、 环保标准 (RoHS) 14

九、 产品包装说明 (Product packaging instructions) 14

	R1394A-R	
Date of Issue: 2026/5/26		dipole antenna
Page (4) of (14)	i-Top Drawing # 20260526	Revision #: Initial Release

四、基本参数 (The basic parameters)

A. 电气参数/Electrical Characteristics	
频率/Frequency	2400MHZ-2500MHZ
驻波比/VSWR	< 3.5
效率/Avg Efficiency	>10%
阻抗/Impedance	50 ± 25 Ohm
极化方向/Polarization	Linear
最大增益/Peak Gain	0.40dBi
B. 材料和机械特性/Material & Mechanical Characteristics	
天线材料/Material of Radiator	FPC black
电缆类型/Cable Type	/
连接器类型/Connector Type	POGOPIN
尺寸/Dimension	12.02MM*11.01MM±0.20MM
C. 环境Environmental	
工作温度Operation Temperature	- 20 °C ~ + 60 °C
储存温度Storage Temperature	- 20 °C ~ + 60 °C

	R1394A-R	
Date of Issue: 2026/5/26		dipole antenna
Page (5) of (14)	i-Top Drawing # 20260526	Revision #: Initial Release

五、测试设备（Introduction）

微波暗室，吸波室，电波暗室。微波暗室由电磁屏蔽室、滤波隔离室、接地装置、通风管道、室内配电系统、监控系统、吸波材料部分组成。它基于吸波材料作为屏蔽室的衬里，可以将大部分电磁能吸收到六面墙中，是一种更好的模拟自由空间条件的方法。

Microwave darkroom and no reflection chamber, absorbing short wave darkroom dark room. Microwave darkroom by electromagnetic shielding room, filtering and isolation, grounding device, the ventilation duct, indoor distribution system, monitoring system, ceiling wave material part. It is based on the wave absorbing material as the lining of the shield room, it can absorb the most of the electromagnetic energy into the six wall is a better simulation of the free space conditions.


微波暗室的主要工作原理是根据电磁波在介质中从低磁导向高磁导方向传播的规律，利用高磁导率吸波材料引导电磁波，通过共振，大量吸收电磁波的辐射能量，再通过耦合把电磁波的能量转变成热能。

The main working principle of microwave anechoic chamber is according to the electromagnetic wave in the medium from the low magnetic guide magnetic direction of propagation rules, absorbing materials to guide the electromagnetic wave using high permeability, through resonance, a substantial absorption of electromagnetic wave radiation energy, by coupling the electromagnetic energy into heat energy.

主要性能 main performance:

频率范围：400MHz~6GHz天花板反射波损耗材料：400MHz~6GHz等于或大于15dB（微波吸收材料由复合吸波材料制成，即锥形含碳海绵吸波材料在铁氧体中粘贴）。

Frequency range:400MHz ~ 6GHz ceiling reflected wave loss materials: 400MHz ~ 6GHz is equal to or more than 15dB (microwave absorbing material by composite wave absorbing materials, namely tapered containing carbon sponge suction wave material paste in ferrite).

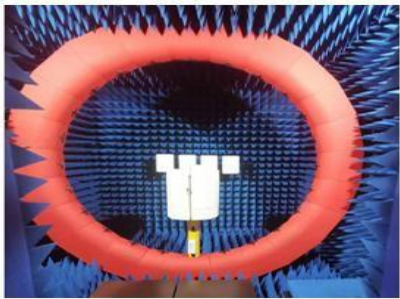

	R1394A-R	
Date of Issue: 2026/5/26		dipole antenna
Page (6) of (14)	i-Top Drawing # 20260526	Revision #: Initial Release

六、性能测试报告 (Test Report)

这些规格是专门为 R1394A-R 定义的模型。

Those specifications were specially defined for R1394A-R model.

1. 天线位置Prototype position:

2. 环境处理Environmental treatment:


机台原环境



顶设科技 i-Top	R1394A-R	Pb RoHS Compliant
Date of Issue: 2026/5/26		dipole antenna
Page (8) of (14)	i-Top Drawing # 20260526	Revision #: Initial Release


3. 2D/3D场型图
2D/3D field pattern diagram

R -2400MHZ

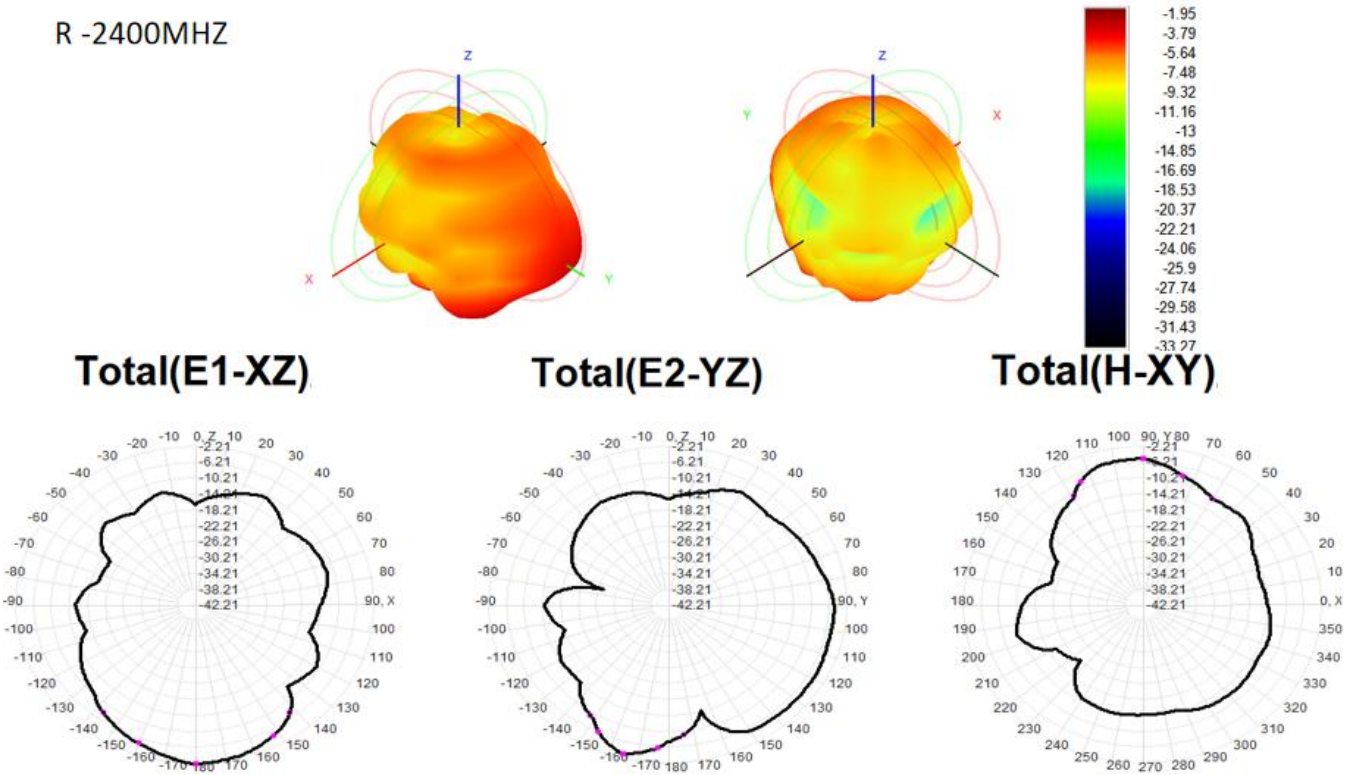


顶设科技 i-Top	R1394A-R	Pb RoHS Compliant
Date of Issue: 2026/5/26		dipole antenna
Page (9) of (14)	i-Top Drawing # 20260526	Revision #: Initial Release

R -2450MHZ

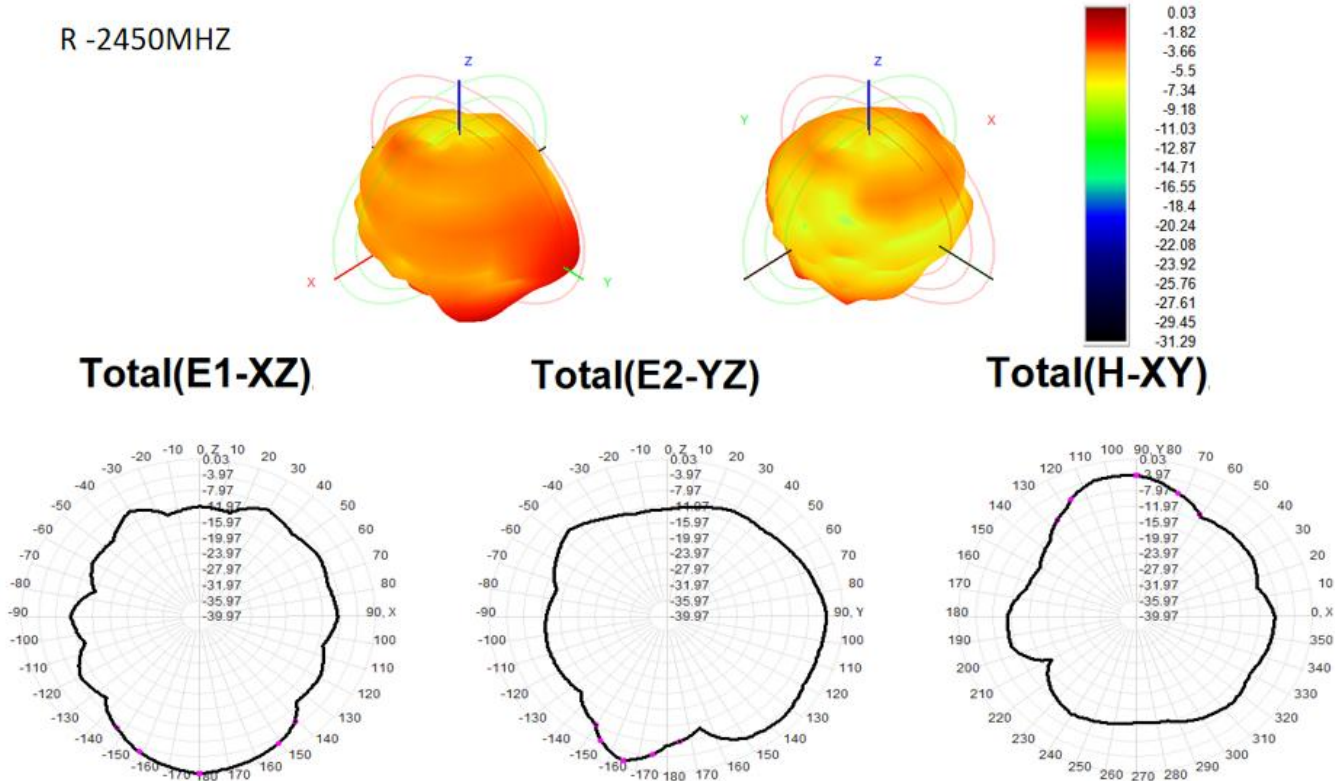

R -2500MHZ

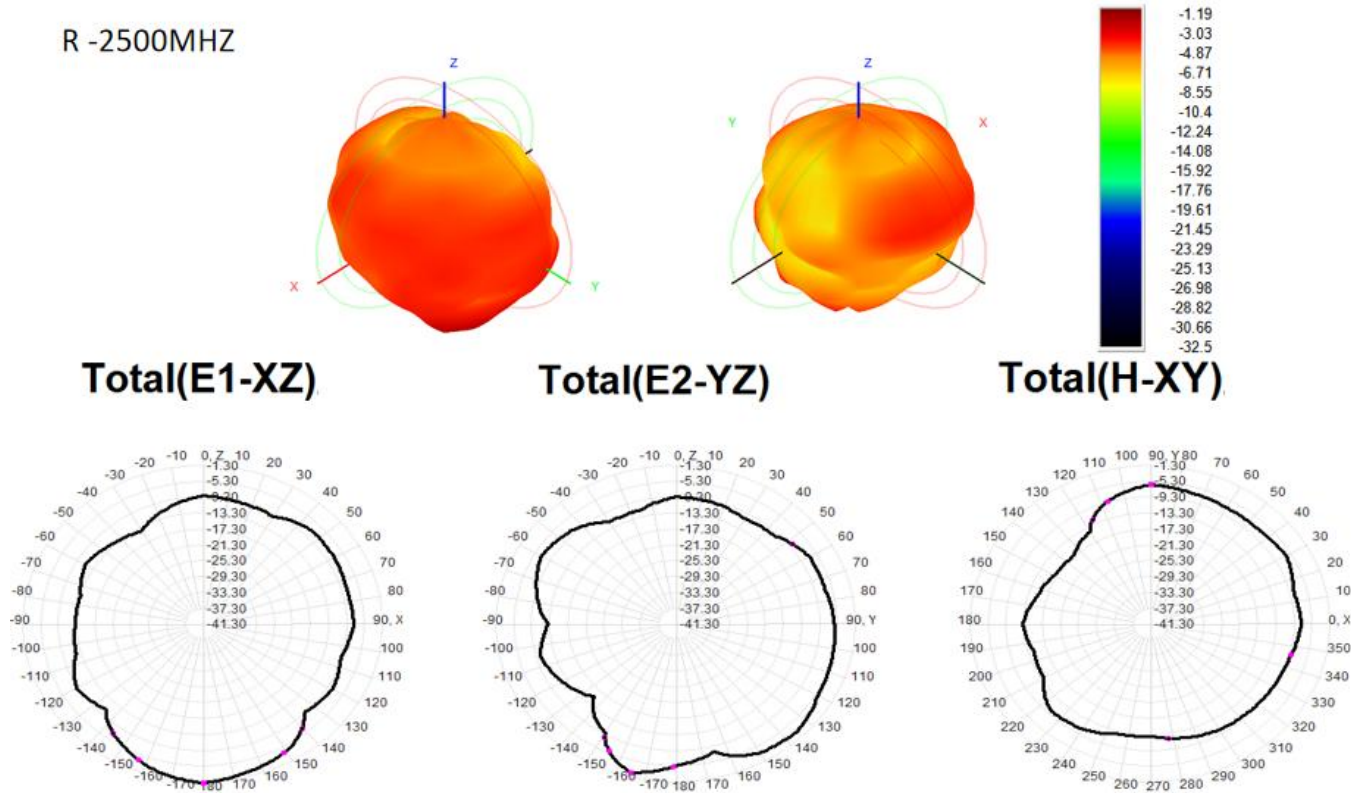

	R1394A-R	
Date of Issue: 2026/5/26		dipole antenna
Page (10) of (14)	i-Top Drawing # 20260526	Revision #: Initial Release

4. 无源效率&增益

Passive efficiency & Gain

2400MHZ-2500MHZ		
R		
Frequency (MHz)	Gain (dBi)	Efficiency (%)
2400	-1.95	14.31
2410	-1.54	15.22
2420	-1.27	16.40
2430	-0.70	18.12
2440	-0.49	18.57
2450	0.03	20.00
2460	0.40	22.08
2470	0.27	20.19
2480	0.16	18.90
2490	-0.30	15.01
2500	-1.19	16.21

5. OTA有源

OTA active


OTA有源					
Test Condition		自由空间		头模	
band	Channel	TRP (dBm)	TIS (dBm)	TRP (dBm)	TIS (dBm)
R	0	3.4	-85.7	1.98	-83.12
	39	3.38	-85	1.5	-83.95
	78	2.87	-85.26	0.57	-83.82

顶设科技 i-Top	R1394A-R	Pb RoHS Compliant
Date of Issue: 2026/5/26		dipole antenna
Page (11) of (14)	i-Top Drawing # 20260526	Revision #: Initial Release


6. 有源3D&2D场型图

Active 3D&2D field pattern diagrams

自由空间-TRP

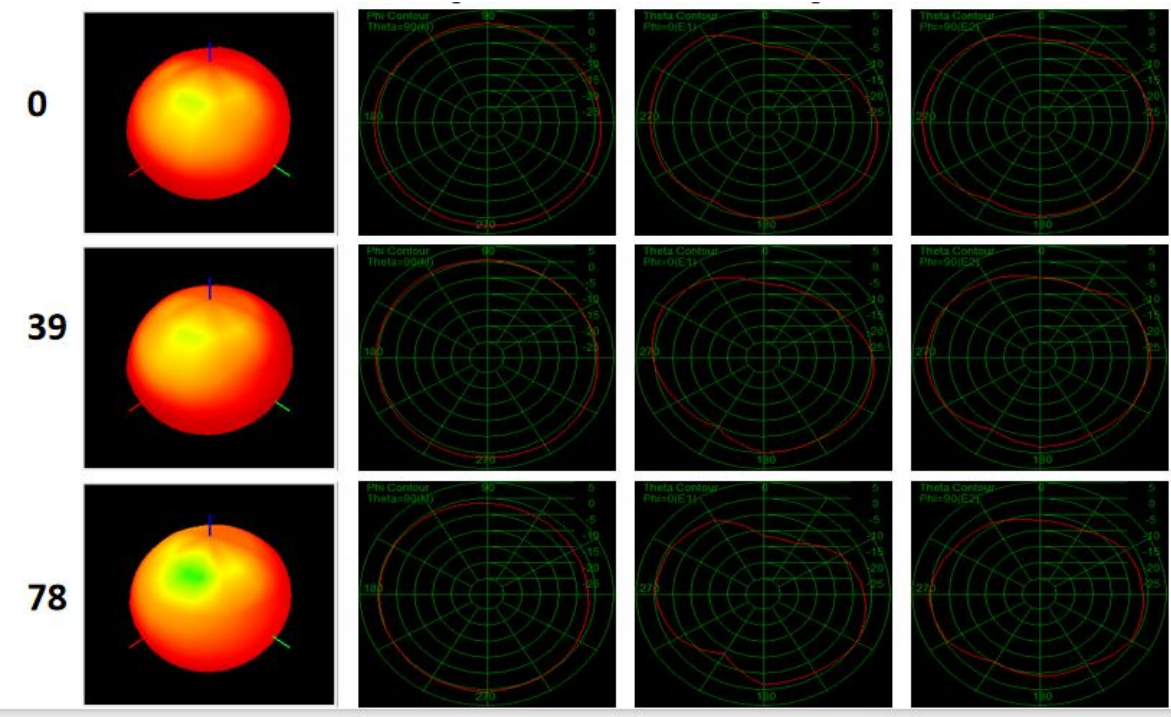


自由空间-TIS

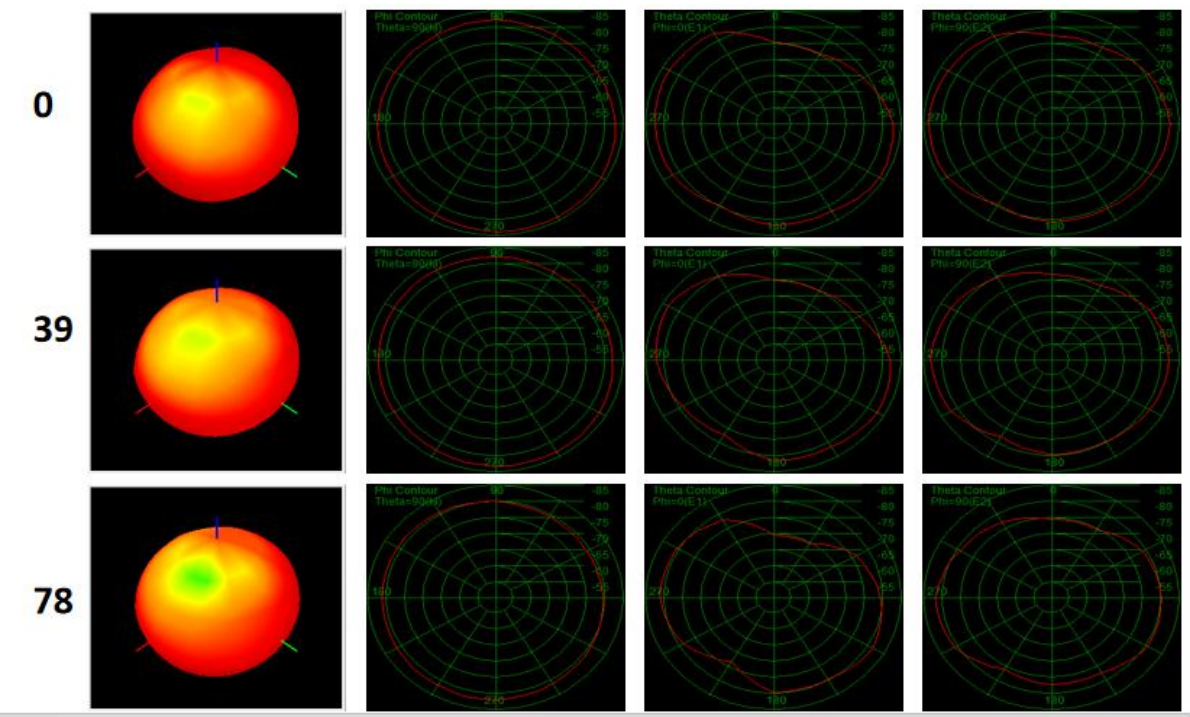


顶设科技 i-Top	R1394A-R	
Date of Issue: 2026/5/26		dipole antenna
Page (12) of (14)	i-Top Drawing # 20260526	Revision #: Initial Release

头模-TRP

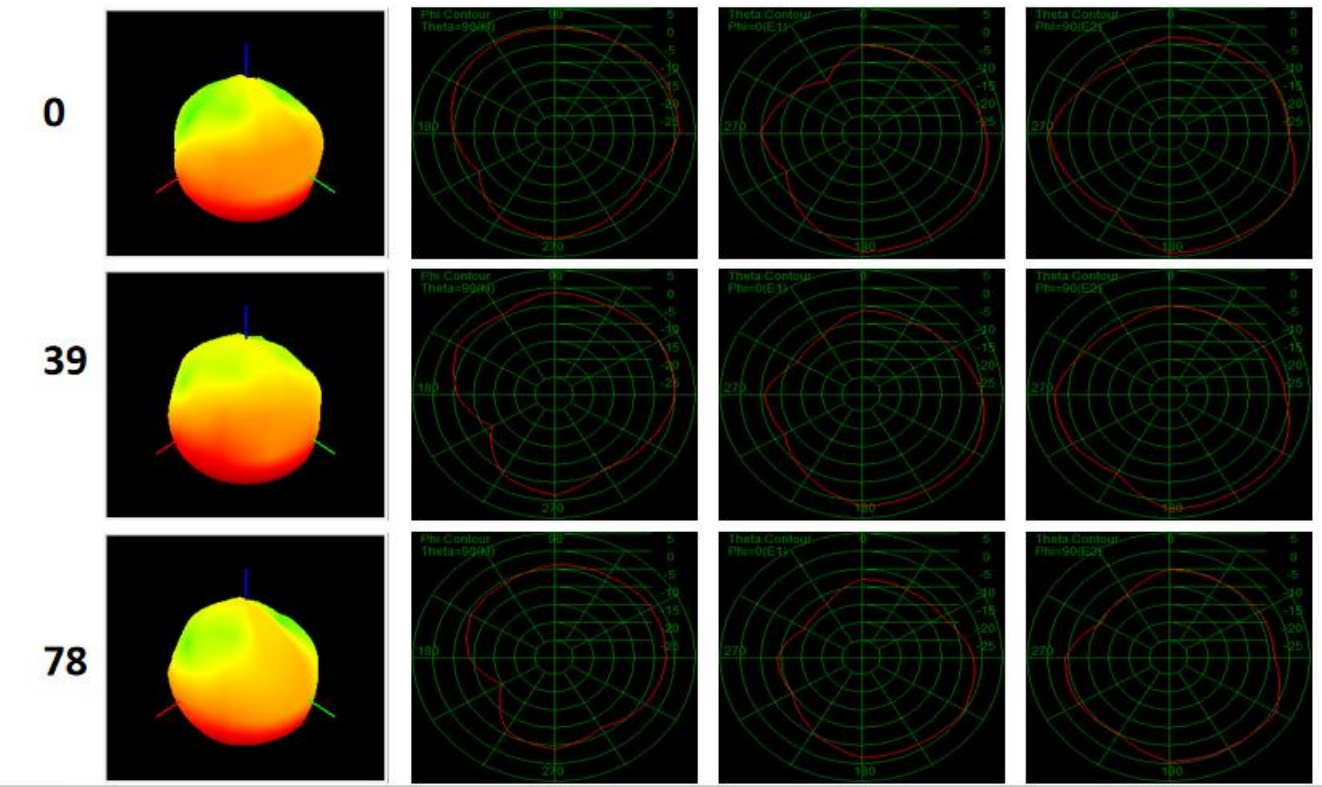

头模-TIS

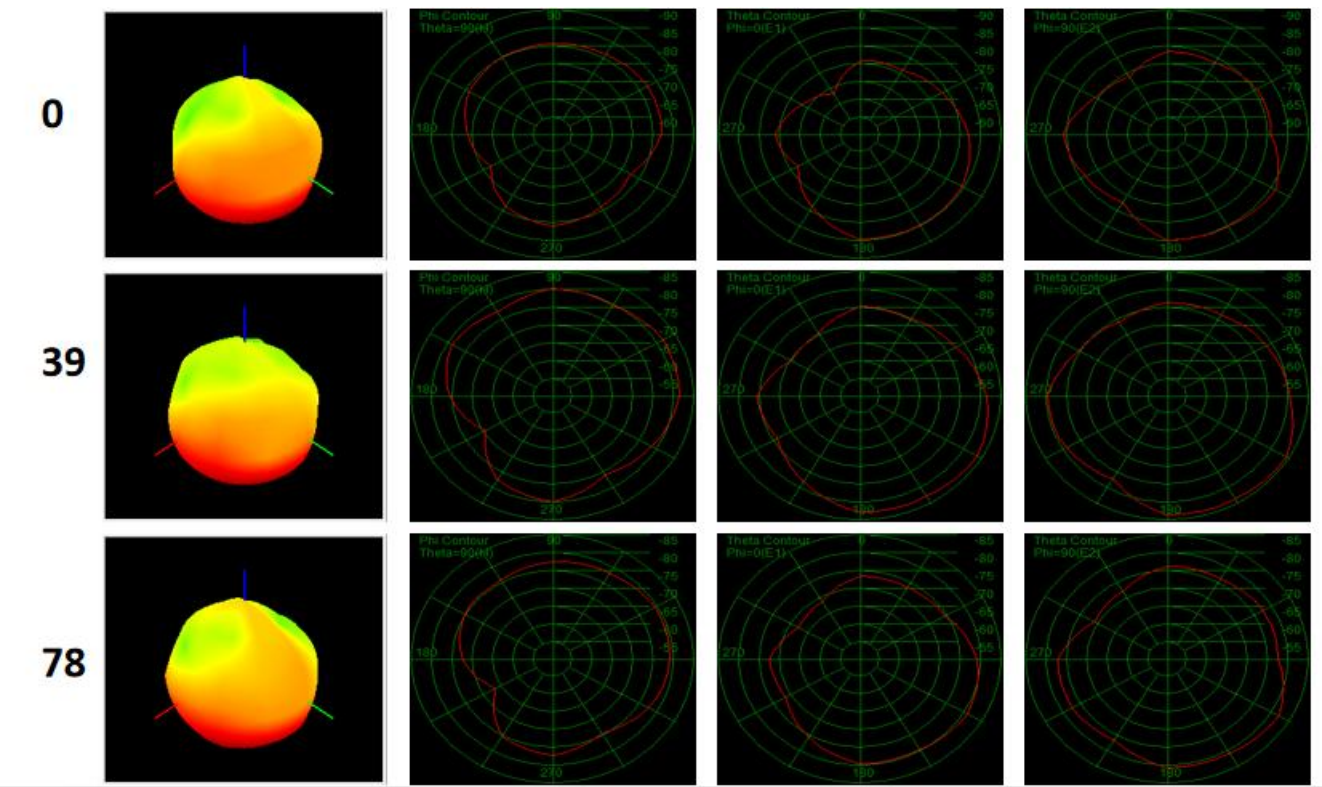

	R1394A-R	
Date of Issue: 2026/5/26		dipole antenna
Page (14) of (14)	i-Top Drawing # 20260526	Revision #: Initial Release

八、环保标准/RoHS

天线____符合RoHS环保要求，详情请参阅电子文件。

Antenna____meets RoHS requirements See electronic file for details.

九、产品包装说明/Product packaging instructions

A.包装应符合防潮、防震、耐压、防霉等要求。

A. packing should meet the moistureproof, vibration, pressure and mildew proof, etc.

B.最小包装单位标志必须有制造商商标、产品型号、名称、代码和数量。

B. the smallest packing unit logo must have the manufacturer trademarks, product model, name, code and quantity.

C.在随附的装箱单、批准证书和工厂检验报告中。

C. in the attached packing list, certificate of approval, and the factory inspection report.

*****END*****