



Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street,
Bao'an District, Shenzhen, China

TEST REPORT C2PC

FCC PART 15 SUBPART E 15.407

Report Reference No.: CTA26062900802

FCC ID.....: 2BVLN-QS

Compiled by

(position+printed name+signature)...: File administrators Zoey Cao

Supervised by

(position+printed name+signature)...: Project Engineer Ace Chai

Approved by

(position+printed name+signature)...: RF Manager Eric Wang

Date of issue.....: Jul. 27, 2026

Testing Laboratory Name: Shenzhen CTA Testing Technology Co., Ltd.

Address.....: Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community,
Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name.....: Wuhan Qinggou Intelligent Technology Co., Ltd.

Address: No. 64, Jiukang Avenue, Caidian Economic Development Zone, Caidian
District Wuhan City, Hubei Province, 430120 China

Test specification

Standard: FCC Part 15 Subpart E 15.407

TRF Originator.....: Shenzhen CTA Testing Technology Co., Ltd.

Shenzhen CTA Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTA Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTA Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description: Qingo AI Vending

Trade Mark: N/A

Manufacturer: Wuhan Qinggou Intelligent Technology Co., Ltd.

Model/Type reference.....: QS-669CRSW(G)-US

Listed Models: QS-409CRSW(G)-US, QS-509CRSWD-US, QS-509CREWD-US

Modulation: OFDM

Frequency.....: From 5180MHz-5240MHz, 5745MHz-5825MHz

Rating: AC 120V, 60Hz

Result.....: PASS

Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China
Tel:+86-755 2322 5875 E-mail:cta@cta-test.cn Web:http://www.cta-test.cn

TEST REPORT

Equipment under Test : Qingo AI Vending

Model /Type : QS-669CRSW(G)-US

Listed Models : QS-409CRSW(G)-US, QS-509CRSWD-US, QS-509CREWD-US

Model difference : The PCB board, circuit, structure and internal of these models are the same, only model number and colour are different for these models. So the tests were performed on model QS-669CRSW(G)-US and the test results for the main test model can cover the listed models.

Applicant : Wuhan Qinggou Intelligent Technology Co., Ltd.

Address : No. 64, Jiukang Avenue, Caidian Economic Development Zone, Caidian District Wuhan City, Hubei Province, 430120 China

Manufacturer : Wuhan Qinggou Intelligent Technology Co., Ltd.

Address : No. 64, Jiukang Avenue, Caidian Economic Development Zone, Caidian District Wuhan City, Hubei Province, 430120 China

Test Result:	PASS
---------------------	-------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1	TEST STANDARDS.....	4
2	SUMMARY.....	5
2.1	General Remarks	5
2.2	Product Description	5
2.3	Equipment Under Test.....	5
2.4	Short description of the Equipment under Test (EUT)	5
2.5	EUT configuration.....	6
2.6	EUT operation mode	6
2.7	Block Diagram of Test Setup.....	6
2.8	Related Submittal(s) / Grant (s).....	6
2.9	Modifications.....	7
3	TEST ENVIRONMENT	8
3.1	Address of the test laboratory.....	8
3.2	Test Facility	8
3.3	Environmental conditions	8
3.4	Test Description.....	9
3.5	Statement of the measurement uncertainty	9
3.1	Equipments Used during the Test	10
4	TEST CONDITIONS AND RESULTS	11
4.1	AC Power Conducted Emission	11
4.2	Radiated and Conducted Unwanted Emissions	16
4.3	Antenna Requirement.....	25
5	Test Setup Photos of the EUT	26
6	Photos of the EUT	27

1 TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15 Subpart E](#)—Unlicensed National Information Infrastructure Devices

[ANSI C63.10-2020 +Cor. 1-2023+ C63.10a-2024+ Errata to C63.10a-2024](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB789033 D02](#): General UNII Test Procedures New Rules v02r01

2 SUMMARY

2.1 General Remarks

Date of receipt of test sample	:	Jun. 29, 2026
Testing commenced on	:	Jun. 29, 2026
Testing concluded on	:	Jul. 27, 2026

2.2 Product Description

Product Description:	Qingo AI Vending			
Model:	QS-669CRSW(G)-US			
Power supply:	AC 120V, 60Hz			
Hardware version:	V1.0			
Software version:	V1.0			
Testing sample ID:	CTA260629008-1# (Engineer sample) CTA260629008-2# (Normal sample)			
WIFI				
Supported type:	20MHz system	40MHz system	80MHz system	160MHz system
	802.11a 802.11n 802.11ac	802.11n 802.11ac	802.11ac	N/A
Operation frequency:	5180MHz-5240MHz 5745MHz-5825MHz	5190MHz-5230MHz 5755MHz-5795MHz	5210MHz 5775MHz	N/A
Modulation:	OFDM	OFDM	OFDM	N/A
Channel number:	9	4	2	N/A
Channel separation:	20MHz	40MHz	80MHz	N/A
Antenna type:	PCB Antenna+External Antenna			
Antenna gain:	2.08 dBi for 5180-5240MHz 2.12 dBi for 5745-5825MHz			

2.3 Equipment Under Test

Power supply system utilised

Refer to section 2.2

2.4 Short description of the Equipment under Test (EUT)

This is a Qingo AI Vending.

For more details, refer to the user's manual of the EUT.

Test Software Version	Tools software(ADB command)		
Frequency	5180 MHz	5220 MHz	5240 MHz
802.11a	16	16	16
802.11n20	16	16	16
802.11ac20	16	16	16
Frequency	5190 MHz	/	5230 MHz
802.11n40	16	/	16
802.11ac40	16	/	16
Frequency	/	5210 MHz	/
802.11ac80	/	16	/

Test Software Version	Tools software(ADB command)		
Frequency	5745 MHz	5785 MHz	5825 MHz
802.11a	16	16	16
802.11n20	16	16	16
802.11ac20	16	16	16
Frequency	5755 MHz	/	5795 MHz
802.11n40	16	/	16
802.11ac40	16	/	16
Frequency	/	5775 MHz	/
802.11ac80	/	16	/

2.5 EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

--	--	--

2.6 EUT operation mode

The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing.


All test performed at the low, middle and high of operational frequency range of each mode.

Operation Frequency List WIFI on 5G Band:

Operating band	20MHz		40MHz		80MHz	
	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
U-NII 1 (5150MHz-5250MHz)	36	5180	38	5190	42	5210
	40	5200				
	44	5220	46	5230		
	48	5240				
U-NII 3 (5725MHz-5850MHz)	149	5745	151	5755	155	5775
	153	5765				
	157	5785	159	5795		
	161	5805				
	165	5825	--	--	--	--

Note: The line display in grey is those Channels/Frequencies select to test in this report for each operation mode.

2.7 Block Diagram of Test Setup

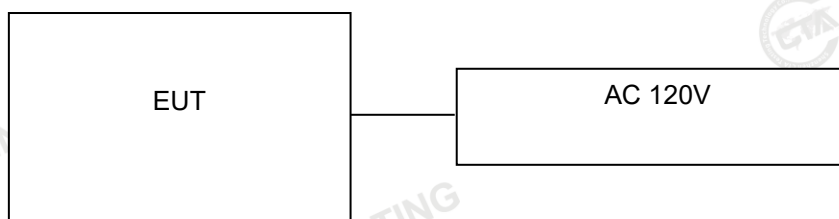

2.8 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended to comply with Section 15.407 of the FCC Part 15, Subpart E Rules.

2.9 Modifications

No modifications were implemented to meet testing criteria.

3 TEST ENVIRONMENT

3.1 Address of the test laboratory

Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 517856 Designation Number: CN1318

Shenzhen CTA Testing Technology Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA-Lab Cert. No.: 6534.01

Shenzhen CTA Testing Technology Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010.

3.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Radiated Emission:

Temperature:	25 ° C
Humidity:	45 %
Atmospheric pressure:	950-1050mbar

Conducted testing:

Temperature:	25 ° C
Humidity:	44 %
Atmospheric pressure:	950-1050mbar

AC Power Conducted Emission

Temperature:	24 ° C
Humidity:	44 %
Atmospheric pressure:	950-1050mbar

3.4 Test Description

FCC Requirement		
FCC Part 15.207	AC Power Conducted Emission	PASS
FCC Part 15.407(b)/15.205/15.209	Radiated Emissions	PASS
FCC Part 15.203/15.247(b)	Antenna Requirement	PASS

Data Rate Used:

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate
Maximum Conducted Output Power Power Spectral Density Emission Bandwidth(26dBm Bandwidth) Minimum Emission Bandwidth(6dBm Bandwidth) Undesirable emission Frequency Stability	11a/OFDM	6 Mbps
	11n(20MHz),11ac(20MHz)/OFDM	MCS0
	11n(40MHz),11ac(40MHz)/OFDM	MCS0
	11ac(80MHz)/OFDM	MCS0

3.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 2 " and is documented in the Shenzhen CTA Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen CTA Testing Technology Co., Ltd. :

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	9KHz~30MHz	3.02 dB	(1)
Radiated Emission	30~1000MHz	4.06 dB	(1)
Radiated Emission	1~18GHz	5.14 dB	(1)
Radiated Emission	18-40GHz	5.38 dB	(1)
Conducted Disturbance	0.15~30MHz	2.14 dB	(1)
Output Peak power	30MHz~18GHz	0.55 dB	(1)
Power spectral density	/	0.57 dB	(1)
Spectrum bandwidth	/	1.1%	(1)
Radiated spurious emission (30MHz-1GHz)	30~1000MHz	4.10 dB	(1)
Radiated spurious emission (1GHz-18GHz)	1~18GHz	4.32 dB	(1)
Radiated spurious emission (18GHz-40GHz)	18-40GHz	5.54 dB	(1)
Time	/	±2%	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.1 Equipments Used during the Test


Item.	Test Equipment	Manufacturer	Model No.	Equipment No.	Calibration Date	Calibration Due Date
AC Conducted Test Equipment						
☒ 1	LISN	R&S	ENV216	CTA-308	2025/08/04	2026/08/03
☒ 2	LISN	R&S	ENV216	CTA-314	2025/07/30	2026/07/29
☒ 3	EMI Test Receiver	R&S	ESPI	CTA-307	2025/07/30	2026/07/29
☒ 4	CE Cable	SKET	RF Cable (9kHz-30MHz)	CTA-367	2025/07/30	2026/07/29
☒ 5	Temperature and humidity meter	Chigo	ZG-7020	CTA-327	2025/07/31	2026/07/30
☒ 6	EMI Test Software	Tonscend	TS@JS32-CE	5.0.0.1	N/A	N/A
RF Radiation Test Equipment						
☒ 1	EMI Test Receiver	R&S	ESCI	CTA-306	2025/07/30	2026/07/29
☒ 2	Spectrum analyzer	R&S	FSV40-N	CTA-344	2026/05/16	2027/05/15
☒ 3	Ultra-Broadband Antenna	Schwarzbeck	VULB9163	CTA-310	2023/10/17	2026/10/16
☒ 4	Horn Antenna	Schwarzbeck	BBHA 9120D	CTA-309	2023/10/13	2026/10/12
☒ 5	Loop Antenna	Zhinan	ZN30900C	CTA-311	2023/10/17	2026/10/16
☒ 6	Horn Antenna	Schwarzbeck	BBHA 9170	CTA-346	2025/05/18	2028/05/17
☒ 7	Amplifier	Schwarzbeck	BBV9745	CTA-312	2025/07/30	2026/07/29
☒ 8	Amplifier	Tonscend	TAP-011840	CTA-313	2025/07/30	2026/07/29
☒ 9	Amplifier	SKET	LNPA 1840G-50	CTA-345	2026/05/16	2027/05/15
☒ 10	6dB attenuator	Shanghaihuaxiang	GZL-TS5-6-6	CTA-347	2026/05/16	2027/05/15
☒ 11	RF cable	SKET	RF Cable (9kHz-1GHz)	CTA-360	2025/09/25	2026/09/24
☒ 12	RF cable	SKET	RF Cable (1GHz-18GHz)	CTA-361	2025/09/25	2026/09/24
☒ 13	Coaxialcable (1GHz-40GHz)	SKET	RE-04-D	CTA-348	2026/05/16	2027/05/15
☒ 14	Coaxialcable (1GHz-40GHz)	SKET	RE-04-M	CTA-349	2026/05/16	2027/05/15
☒ 15	Coaxialcable (1GHz-40GHz)	SKET	RE-04-L	CTA-350	2026/05/16	2027/05/15
☒ 16	Temperature and humidity meter	Chigo	ZG-7020	CTA-328	2025/07/31	2026/07/30
☐ 17	2.4GFilter	HX Microwave	HXLBQ-DZA61	CTA-365	2025/07/31	2026/07/30
☒ 18	5GFilter	CONCEPT	CNF05150M058 50Q16A	CTA-366	2025/07/31	2026/07/30
☐ 19	High-Pass Filter	XingBo	XBLBQ-GTA18	CTA-402	2025/07/30	2026/07/29
☐ 20	High-Pass Filter	XingBo	XBLBQ-GTA27	CTA-403	2025/07/30	2026/07/29
☐ 21	High-Pass Filter	XingBo	XBLBQ-GTA10	CTA-364	2025/07/30	2026/07/29
☒ 22	EMI Test Software	Tonscend	TS@JS32-RE	5.0.0.2	N/A	N/A

Note: The automatic control unit integrated Power sensor

4 TEST CONDITIONS AND RESULTS

4.1 AC Power Conducted Emission

TEST CONFIGURATION

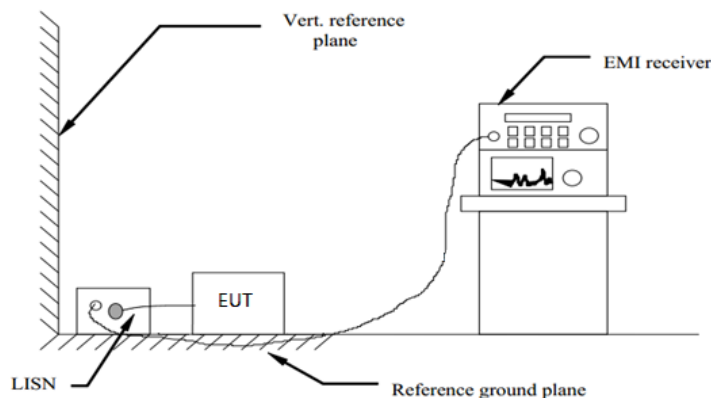

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a Multi-System Scannerop system, a wooden table with a height of 0 meters is used and is placed on the ground plane as per ANSI C63.10-2020 +Cor. 1-2023+ C63.10a-2024+ Errata to C63.10a-2024.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2020 +Cor. 1-2023+ C63.10a-2024+ Errata to C63.10a-2024
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2020 +Cor. 1-2023+ C63.10a-2024+ Errata to C63.10a-2024
- 4 The EUT received power from adapter, the adapter received AC120V/60Hz and AC 240V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST RESULTS

Passed


Please refer to the below test data:

Remark:

1. All modes of 802.11a/n/11ac were test at Low, Middle, and High channel; only the worst result of a Middle Channel was reported as below:
 2. Both 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz power supply have been tested, only the worst result of 120 VAC, 60 Hz was reported as below:
- 5.2GWIFI:

Polarization:

L

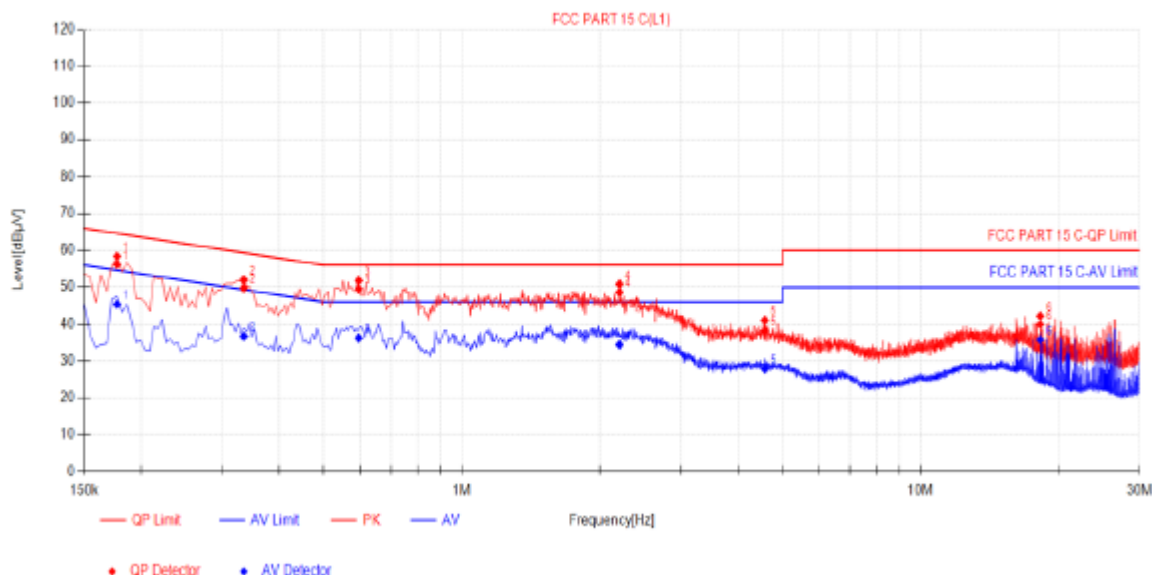

Final Data List

NO.	Freq. [MHz]	Factor [dB]	QP Reading [dBμV]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.177	9.92	46.25	56.17	64.63	8.46	35.44	45.36	54.63	9.27	PASS
2	0.3345	10.16	39.59	49.75	59.34	9.59	26.54	36.70	49.34	12.64	PASS
3	0.5955	10.13	39.41	49.54	56.00	6.46	26.11	36.24	46.00	9.76	PASS
4	2.2065	10.52	38.08	48.60	56.00	7.40	23.90	34.42	46.00	11.58	PASS
5	4.5735	10.82	27.37	38.19	56.00	17.81	16.99	27.81	46.00	18.19	PASS
6	18.2445	12.66	27.24	39.90	60.00	20.10	23.09	35.75	50.00	14.25	PASS

Note: 1). QP Value (dBμV) = QP Reading (dBμV) + Factor (dB)


2). Factor (dB) = insertion loss of LISN (dB) + Cable loss (dB)

3). QPMargin(dB) = QP Limit (dBμV) - QP Value (dBμV)

4). AVMargin(dB) = AV Limit (dBμV) - AV Value (dBμV)

Polarization:

N

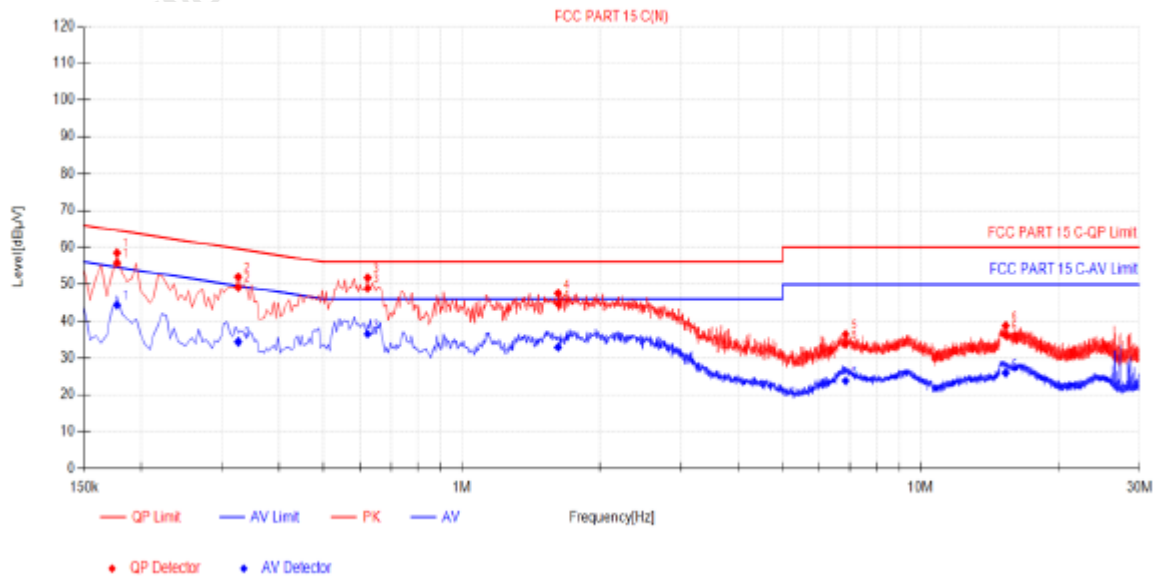

Final Data List

NO.	Freq. [MHz]	Factor [dB]	QP Reading[dB μV]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.177	9.91	45.80	55.71	64.63	8.92	34.38	44.29	54.63	10.34	PASS
2	0.3255	10.09	39.02	49.11	59.57	10.46	24.28	34.37	49.57	15.20	PASS
3	0.6225	10.24	38.63	48.87	56.00	7.13	26.27	36.51	46.00	9.49	PASS
4	1.6215	10.42	34.26	44.68	56.00	11.32	22.49	32.91	46.00	13.09	PASS
5	6.8595	11.16	22.60	33.76	60.00	26.24	12.61	23.77	50.00	26.23	PASS
6	15.3285	12.39	23.80	36.19	60.00	23.81	13.57	25.96	50.00	24.04	PASS

Note:1).QP Value (dBμV)= QP Reading (dBμV)+ Factor (dB)

2). Factor (dB)=insertion loss of LISN (dB) + Cable loss (dB)


3). QPMargin(dB) = QP Limit (dBμV) - QP Value (dBμV)

4). AVMargin(dB) = AV Limit (dBμV) - AV Value (dBμV)

5.8GWIFI:

Polarization:

L

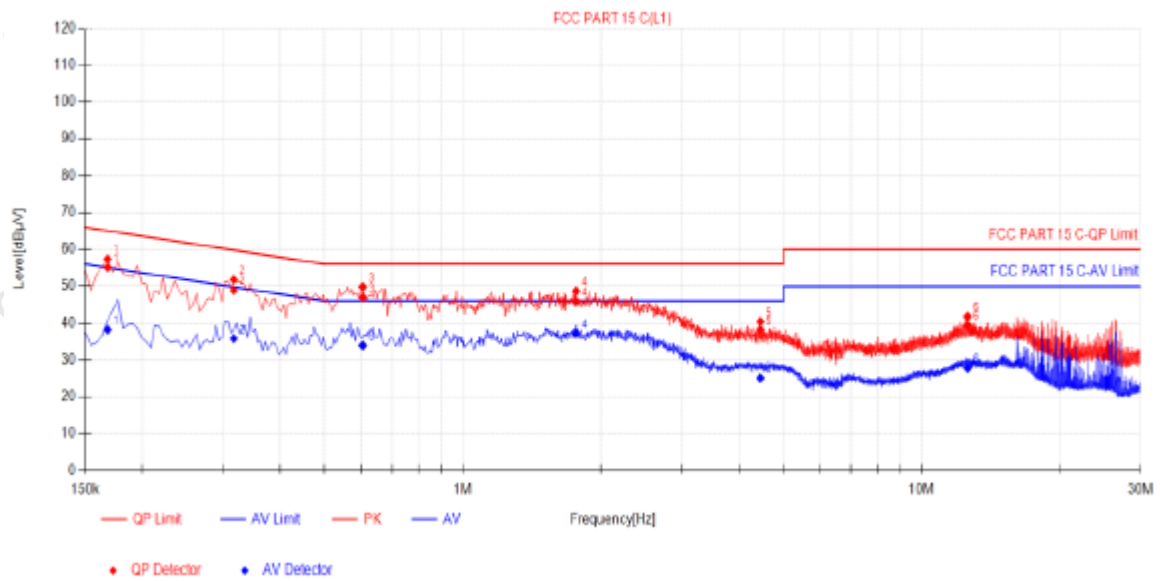

Final Data List

NO.	Freq. [MHz]	Factor [dB]	QP Reading [dBμV]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.168	9.90	45.23	55.13	65.06	9.93	28.31	38.21	55.06	16.85	PASS
2	0.3165	10.09	38.80	48.89	59.80	10.91	25.73	35.82	49.80	13.98	PASS
3	0.6045	10.14	36.81	46.95	56.00	9.05	23.82	33.96	46.00	12.04	PASS
4	1.7655	10.48	35.33	45.81	56.00	10.19	26.76	37.24	46.00	8.76	PASS
5	4.452	10.80	27.30	38.10	56.00	17.90	14.28	25.08	46.00	20.92	PASS
6	12.597	11.90	27.51	39.41	60.00	20.59	15.86	27.76	50.00	22.24	PASS

Note:1).QP Value (dBμV)= QP Reading (dBμV)+ Factor (dB)


2). Factor (dB)=insertion loss of LISN (dB) + Cable loss (dB)

3). QPMargin(dB) = QP Limit (dBμV) - QP Value (dBμV)

4). AVMargin(dB) = AV Limit (dBμV) - AV Value (dBμV)

Polarization:

N

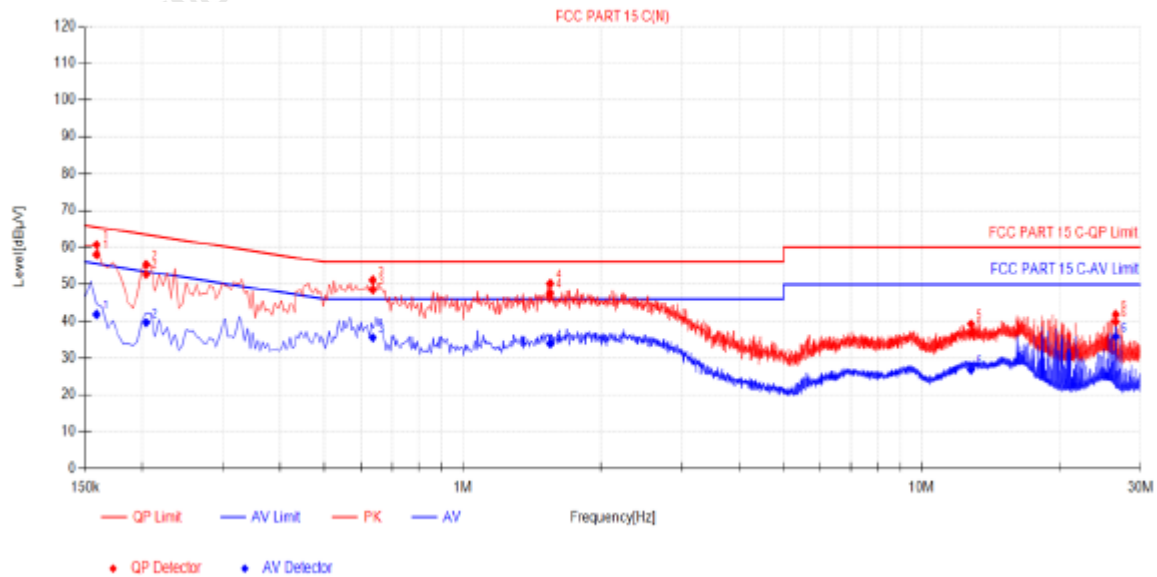

Final Data List

NO.	Freq. [MHz]	Factor [dB]	QP Reading [dBμV]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.159	9.88	48.21	58.09	65.52	7.43	31.95	41.83	55.52	13.69	PASS
2	0.204	9.94	42.73	52.67	63.45	10.78	29.65	39.59	53.45	13.86	PASS
3	0.636	10.26	38.20	48.46	56.00	7.54	25.24	35.50	46.00	10.50	PASS
4	1.5485	10.41	37.17	47.58	56.00	8.42	23.51	33.92	46.00	12.08	PASS
5	12.813	12.02	24.74	36.76	60.00	23.24	14.65	26.67	50.00	23.33	PASS
6	26.4885	13.54	26.23	39.77	60.00	20.23	22.26	35.80	50.00	14.20	PASS

Note:1). QP Value (dBμV) = QP Reading (dBμV) + Factor (dB)

2). Factor (dB) = insertion loss of LISN (dB) + Cable loss (dB)

3). QPMargin (dB) = QP Limit (dBμV) - QP Value (dBμV)

4). AVMargin (dB) = AV Limit (dBμV) - AV Value (dBμV)

4.2 Radiated and Conducted Unwanted Emissions

Limit

The maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Undesirable emission limits

Requirement	Limit(EIRP)	Limit (Field strength at 3m) ^{Note1}
15.407(b)(1)	PK:-27(dBm/MHz)	PK:68.2(dBμV/m)
15.407(b)(2)		
15.407(b)(3)		
15.407(b)(4)		

Note1: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

- (5) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209
- (6) In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

Radiated emission limits

Frequency (MHz)	Distance (Meters)	Radiated (dBμV/m)	Radiated (μV/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz}))+40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz}))+40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

Conducted measurement Test Procedure:

The testing follows the ANSI C63.10 Section 12.7.6 and 6.10.4:

The procedure for peak unwanted emissions measurements above 1000 MHz is as follows:

b) Peak emission levels are measured by setting the instrument as follows:

- 1) RBW = 1 MHz.
- 2) VBW $\geq [3 \times \text{RBW}]$
- 3) Detector = peak.
- 4) Sweep time = No faster than coupled (auto) time.
- 5) Trace mode = max-hold.
- 6) Allow sweeps to continue until the trace stabilizes. Note that if the transmission is not continuous, then the time required for the trace to stabilize will increase by a factor of approximately $1 / D$, where D is the duty cycle. For example, at 50% duty cycle, the measurement time will increase by a factor of two, relative to measurement time for continuous transmission.


Test Results

Please refer to FCC Appendix RF Test Data for 5GWIFI


Note: RF Conducted test Offset= cable loss, For conducted spurious emission test, cable loss is the maximum value in the range of test.

TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

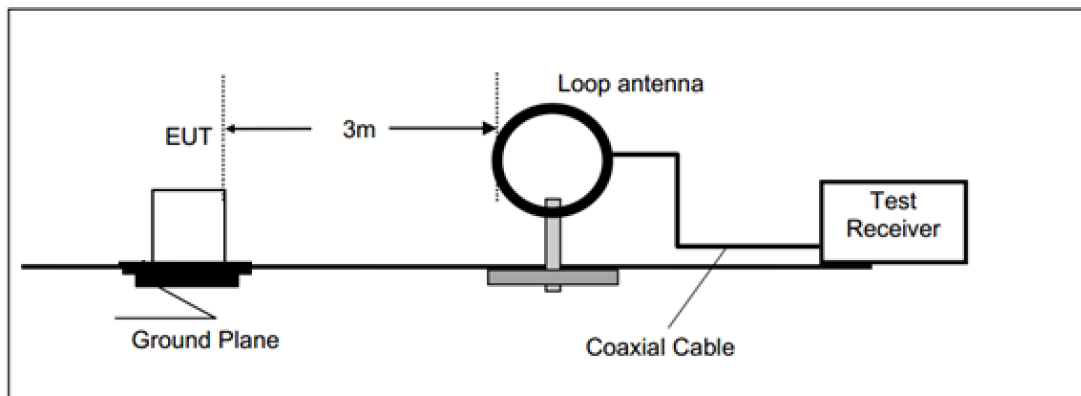


(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

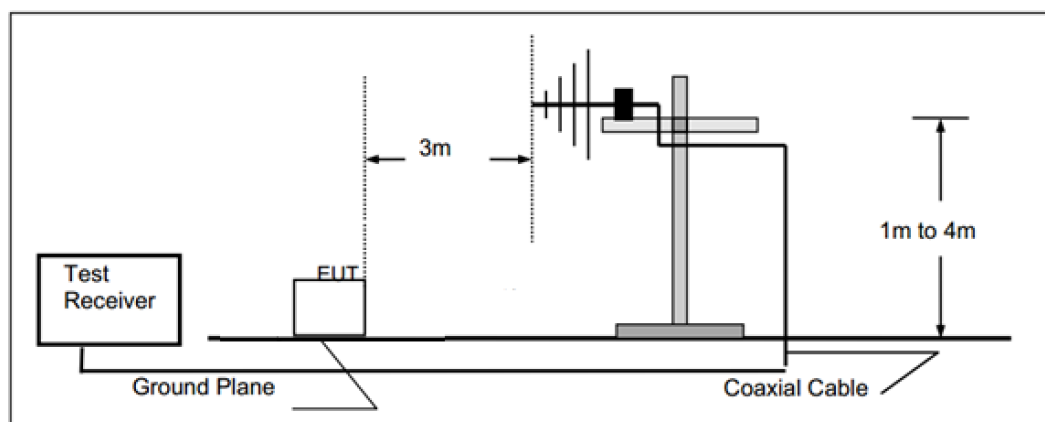

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

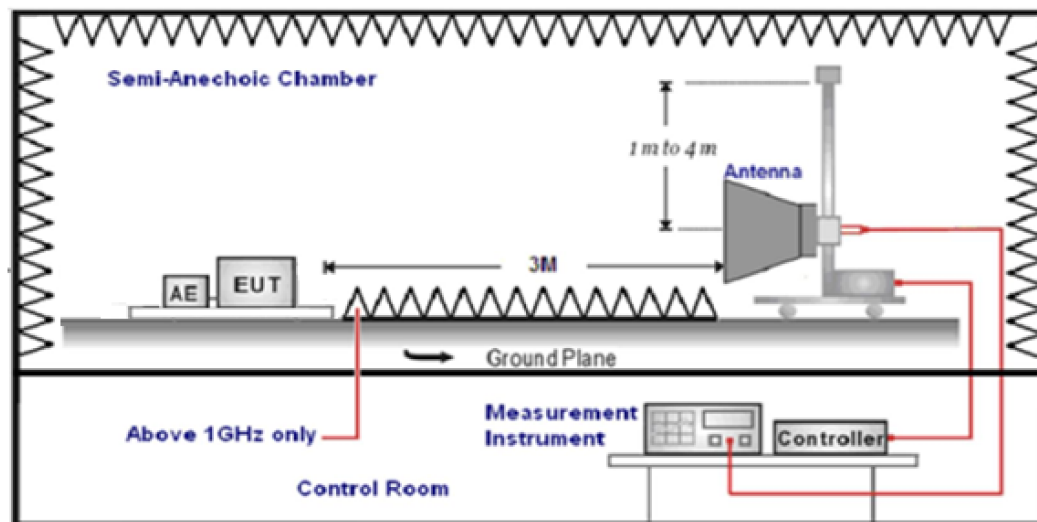

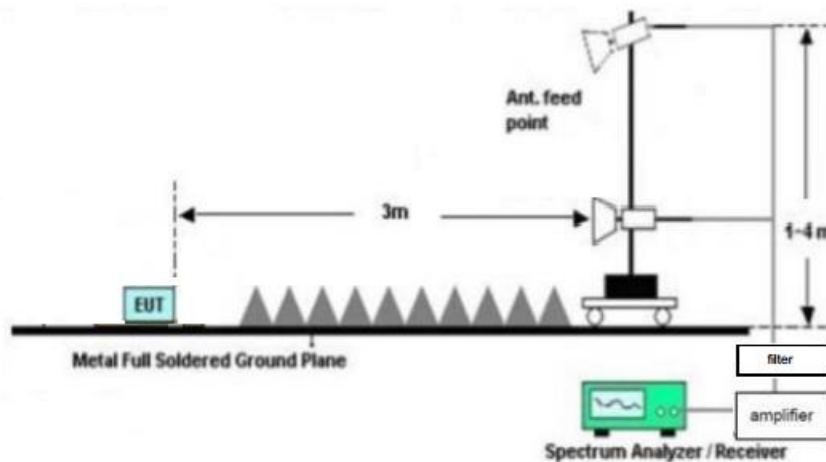

Test Procedure

- Below 1GHz measurement the EUT is placed on a turntable which is 0m above ground plane, and above 1GHz measurement EUT was placed on a low permittivity and low loss tangent turn table which is 0m above ground plane.
- Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT
- And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- Repeat above procedures until all frequency measurements have been completed.
- Radiated emission test frequency band from 9KHz to 40GHz.
- The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Bilog Antenna	3
1GHz-18GHz	Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

- Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz, Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz, Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz, Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

TEST RESULTS

Remark:

- This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position.
1. All modes of 802.11a/n/11ac have been tested for below 1GHz test, only the worst case 802.11a low channel was recorded.
- All modes of 802.11a/n/11ac have been tested for above 1GHz test, only the worst case 802.11a was recorded.
- Radiated emission test from 9 KHz to 40GHz harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.
- Radiated emission test at 1G-40G range we use a 5GFilter


5.2G WIFI :

For 30MHz-1GHz

Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China
Tel:+86-755 2322 5875 E-mail:cta@cta-test.cn Web:http://www.cta-test.cn

Horizontal

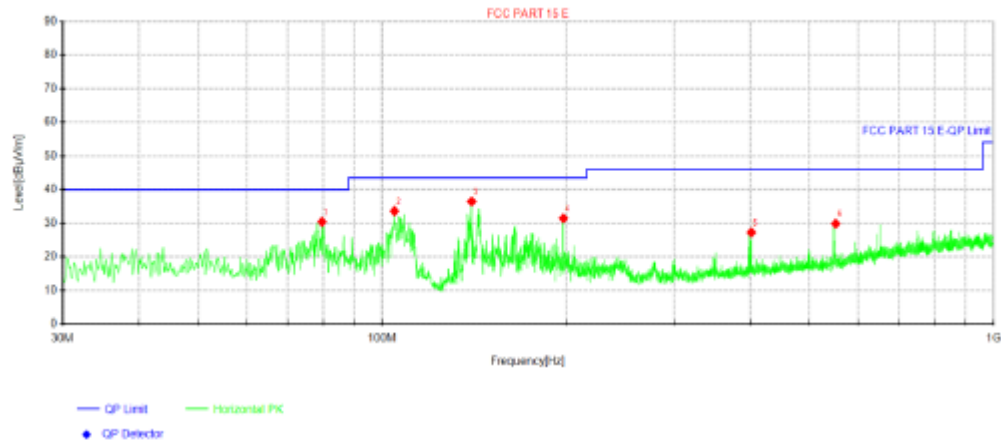

Suspected Data List


NO.	Freq. [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	79.7125	47.40	30.41	-16.99	40.00	9.59	100	207	Horizontal
2	104.69	46.06	33.62	-12.44	43.50	9.88	100	353	Horizontal
3	139.973	53.58	36.47	-17.11	43.50	7.03	100	183	Horizontal
4	197.931	44.80	31.47	-13.33	43.50	12.03	100	147	Horizontal
5	401.631	37.21	27.24	-9.97	46.00	18.76	100	159	Horizontal
6	551.981	37.86	29.87	-7.99	46.00	16.13	100	207	Horizontal

Note: 1). Level (dBμV/m) = Reading (dBμV) + Factor (dB/m)

2). Factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)

3). Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)

Vertical

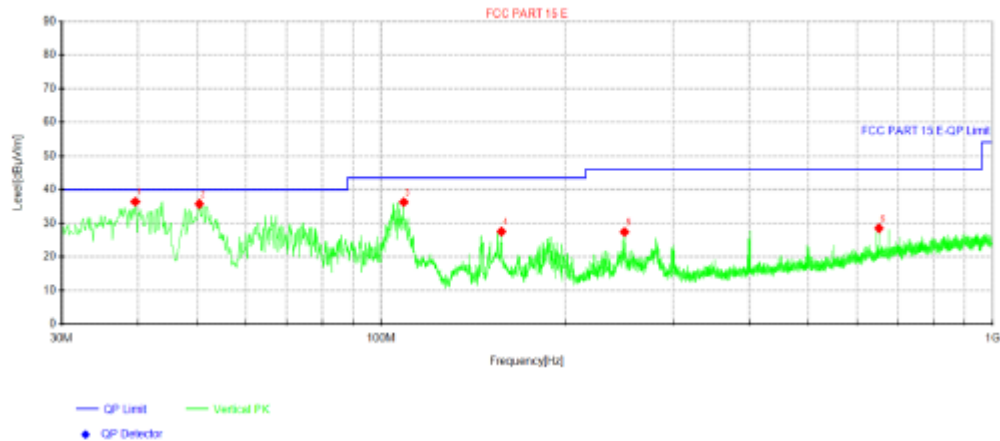

Suspected Data List


NO.	Freq. [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	39.5788	48.46	36.39	-12.07	40.00	3.61	100	152	Vertical
2	50.37	46.43	35.75	-10.68	40.00	4.25	100	142	Vertical
3	108.812	49.29	36.27	-13.02	43.50	7.23	100	188	Vertical
4	157.191	43.73	27.52	-16.21	43.50	15.98	100	152	Vertical
5	250.068	40.08	27.38	-12.70	46.00	18.62	100	152	Vertical
6	652.376	33.64	28.51	-5.13	46.00	17.49	100	152	Vertical

Note: 1). Level (dBμV/m) = Reading (dBμV) + Factor (dB/m)


2). Factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)

3). Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)

5.8G WIFI :
For 30MHz-1GHz

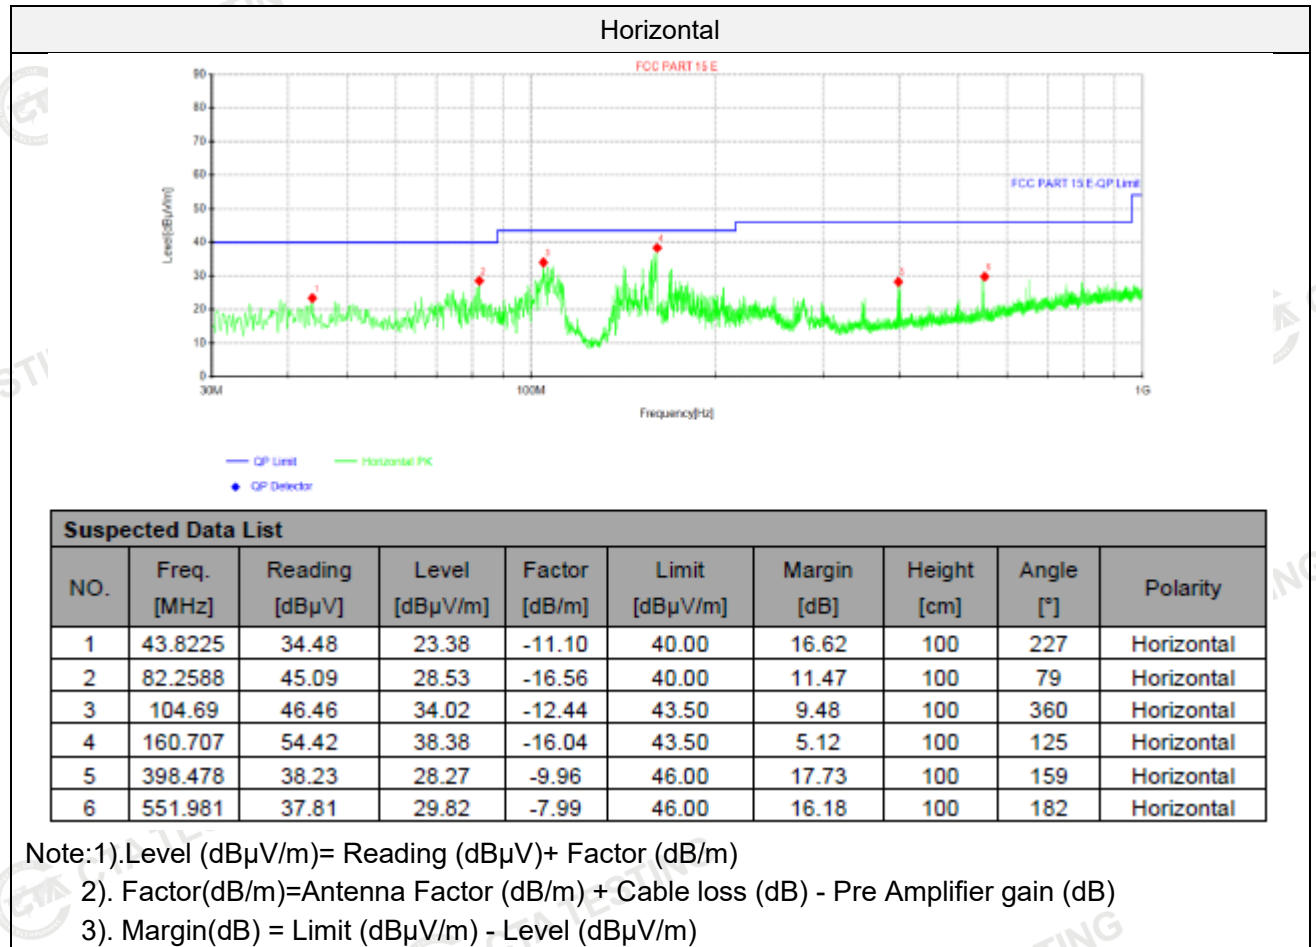

Vertical

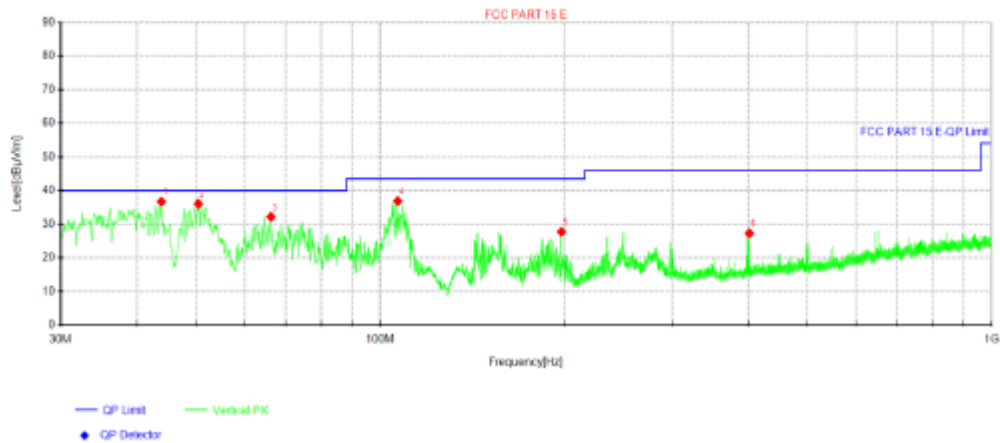

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	43.8225	47.85	36.75	-11.10	40.00	3.25	100	164	Vertical
2	50.37	46.75	36.07	-10.68	40.00	3.93	100	164	Vertical
3	66.2538	45.50	32.20	-13.30	40.00	7.80	100	164	Vertical
4	106.751	49.64	36.92	-12.72	43.50	6.58	100	177	Vertical
5	197.931	41.10	27.77	-13.33	43.50	15.73	100	177	Vertical
6	401.631	37.25	27.28	-9.97	46.00	18.72	100	201	Vertical

Note: 1). Level (dBμV/m) = Reading (dBμV) + Factor (dB/m)

2). Factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)

3). Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)

For 1GHz to 40GHz

Note: All modes of 802.11a/n/11ac have been tested for above 1GHz test, only the worst case 802.11a was recorded.

U-NII 1 & 802.11a Mode (above 1GHz)

Tested	Frequency	Emission	Detector	ANT	Limit	Margin	Raw	Antenna	Cable	Pre	Correction
Channel	(MHz)	Level	Mode	Pol	(dBuV/m)	(dB)	Value	Factor	Factor	amplifier	Factor
		(dBuV/m)					(dBuV)	(dB/m)	(dB)	(dB)	(dB/m)
36.00	10360.0	42.53	PK	H	68.3	25.77	48.23	38.90	8.19	52.79	-5.70
(5180MHz)	10360.0	33.04	AV	H	54.0	20.96	38.74	38.90	8.19	52.79	-5.70
44.00	10440.0	42.93	PK	H	68.3	25.37	48.62	38.94	8.22	52.85	-5.69
(5220MHz)	10440.0	32.87	AV	H	54.0	21.13	38.56	38.94	8.22	52.85	-5.69
48.00	10480.0	42.97	PK	H	68.3	25.33	48.63	38.98	8.24	52.88	-5.66
(5240MHz)	10480.0	32.53	AV	H	54.0	21.47	38.19	38.98	8.24	52.88	-5.66

Tested	Frequency	Emission	Detector	ANT	Limit	Margin	Raw	Antenna	Cable	Pre	Correction
Channel	(MHz)	Level	Mode	Pol	(dBuV/m)	(dB)	Value	Factor	Factor	amplifier	Factor
		(dBuV/m)					(dBuV)	(dB/m)	(dB)	(dB)	(dB/m)
36.00	10360.0	42.59	PK	V	68.3	25.71	48.29	38.90	8.19	52.79	-5.70
(5180MHz)	10360.0	32.67	AV	V	54.0	21.33	38.37	38.90	8.19	52.79	-5.70
44.00	10440.0	43.00	PK	V	68.3	25.30	48.69	38.94	8.22	52.85	-5.69
(5220MHz)	10440.0	32.68	AV	V	54.0	21.32	38.37	38.94	8.22	52.85	-5.69
48.00	10480.0	43.37	PK	V	68.3	24.93	49.03	38.98	8.24	52.88	-5.66
(5240MHz)	10480.0	33.35	AV	V	54.0	20.65	39.01	38.98	8.24	52.88	-5.66

U-NII 3 & 802.11n20 Mode (above 1GHz)

Tested	Frequency	Emission	Detector	ANT	Limit	Margin	Raw	Antenna	Cable	Pre	Correction
Channel	(MHz)	Level	Mode	Pol	(dBuV/m)	(dB)	Value	Factor	Factor	amplifier	Factor
		(dBuV/m)					(dBuV)	(dB/m)	(dB)	(dB)	(dB/m)
149.00	11490.0	61.53	PK	H	68.3	6.77	66.83	39.41	8.69	53.40	-5.30
(5745MHz)	11490.0	51.00	AV	H	54.0	3.00	56.30	39.41	8.69	53.40	-5.30
157.00	11570.0	62.10	PK	H	68.3	6.20	67.46	39.33	8.72	53.41	-5.36
(5785MHz)	11570.0	51.27	AV	H	54.0	2.73	56.63	39.33	8.72	53.41	-5.36
165.00	11650.0	62.60	PK	H	68.3	5.70	68.02	39.25	8.76	53.43	-5.42
(5825MHz)	11650.0	51.02	AV	H	54.0	2.98	56.44	39.25	8.76	53.43	-5.42

Tested	Frequency	Emission	Detector	ANT	Limit	Margin	Raw	Antenna	Cable	Pre	Correction
Channel	(MHz)	Level	Mode	Pol	(dBuV/m)	(dB)	Value	Factor	Factor	amplifier	Factor
		(dBuV/m)					(dBuV)	(dB/m)	(dB)	(dB)	(dB/m)
149.00	11490.0	56.84	PK	V	68.3	11.46	62.14	39.41	8.69	53.40	-5.30
(5745MHz)	11490.0	47.44	AV	V	54.0	6.56	52.74	39.41	8.69	53.40	-5.30
157.00	11570.0	58.70	PK	V	68.3	9.60	64.06	39.33	8.72	53.41	-5.36
(5785MHz)	11570.0	47.52	AV	V	54.0	6.48	52.88	39.33	8.72	53.41	-5.36
165.00	11650.0	59.07	PK	V	68.3	9.23	64.49	39.25	8.76	53.43	-5.42
(5825MHz)	11650.0	47.60	AV	V	54.0	6.40	53.02	39.25	8.76	53.43	-5.42

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
3. Margin value = Limit value - Emission level.
4. -- Mean the other emission levels were very low against the limit.
5. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.

4.3 Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1) (I):

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

Antenna Connected Construction

The PCB Antenna+External Antenna maximum gain of antenna was 2.08 dBi for 5180-5240MHz
2.12 dBi for 5745-5825MHz.

Remark: The antenna gain is provided by the customer, if the data provided by the customer is not accurate, Shenzhen CTA Testing Technology Co., Ltd. does not assume any responsibility.

5 Test Setup Photos of the EUT



6 Photos of the EUT

Reference to the test report No. CTA26062900801

***** End of Report *****