

REMOTE CONTROL OPERATING



MODEL: 206

Guangdong Biki Intelligent Sanitary Ware Co.,Ltd.

PRECAUTIONS

Warning: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

INSTALLATION PREPARATION


Method 1

(Apply for smooth tiles,glass and smooth wall).


- 1.Choose proper installation location (Not easy to get wet,easy to takeout or operate).
- 2.Clean the dust,oil stains,water droplets etc.on the installation wall.
- 3.Peel off the adhesive tape on the back of theremote control bracket,align the position,and press evenly for 1-2 minutes to make it stick tightly,Place the remote control after 12 hours from installation.

Method 2

- 1.Choose proper installation location.
- 2.Fix the bracket on the wall by using the screws and plugs provided.
- 3.Place the remote control on the bracket.

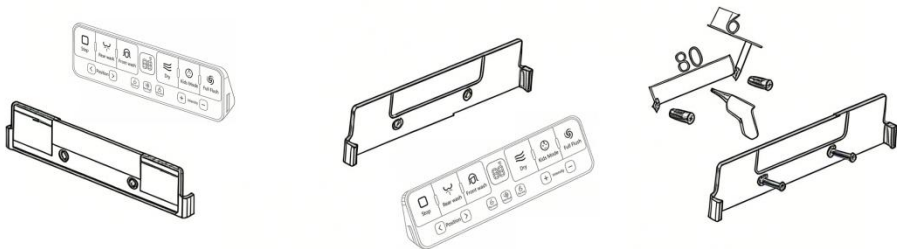

REMOTE CONTROL OPERATING

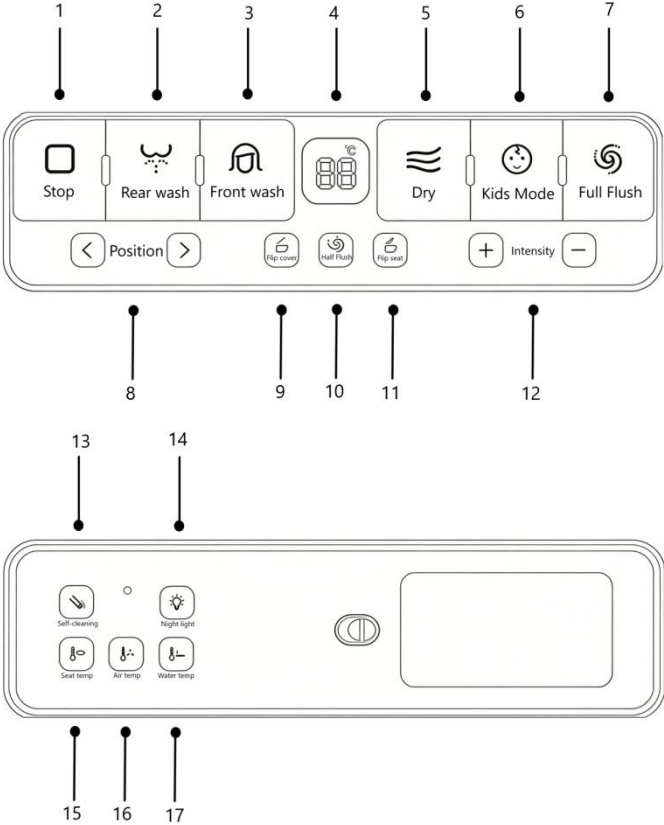

USAGE INSTRUCTION

FUNCTION		FUNCTION	DESCRIPTION
Remote Control Pairing			To power the unit on or off, press and hold the Side Stop Button. To pair the remote control, first press and hold the Feminine Wash Button within 20 seconds—the buzzer will emit one long beep to indicate pairing mode is active. Then, press any button on the remote control. The buzzer will respond with two short beeps, confirming successful pairing.
1	 Stop		During washing mode,short press the“+”key to increase the washingintensity; short press the“-”key to decrease the washingintensity. (There are 3 levels for adjustment).
2	 Rear wash		While seated, press the Bidet Wash Button to activate the bidet wash mode. The nozzle will spray water to cleanse your posterior. Press the button again to switch to the Oscillating Wash function for a wider cleaning coverage.
3	 Front wash		While seated, press the Feminine Wash Button to activate the feminine wash mode. The nozzle will provide a gentle front wash. Press the button again to switch to the Oscillating Wash function, which offers a wider, moving cleanse.
4			Temperature Display Area
5	 Dry		While seated, press the Dryer Button to activate the warm air drying function.
6	 Kids Mode		When no one is seated, a short press of the Child Wash button activates this mode. The Child Wash mode features fixed, non-adjustable water temperature and pressure settings, which are preset to a gentle Level 2 intensity for safety and comfort.
7	 Full Flush		●Manual Flush: Briefly press the Flush button to activate the flushing function. ●Auto-Flush Setting (Seat Sensor): The “auto-flush upon standing” feature is enabled by default. To toggle this setting within 10 seconds of entering standby mode: 1.Briefly press the Flush button. 2.Listen for the buzzer signal: ●One long beep: Auto-flush is ON. ●One short beep: Auto-flush is OFF.
8			While in either Bidet Wash or Feminine Wash mode, press the 【<】 or 【>】 buttons to adjust the nozzle’s front-to-back position. There are a total of 4 adjustable positions.
9			1.A short press on the button opens or closes the toilet lid. 2.Simultaneous Closing: When the seat is in the raised position, activating the lid-closing function will automatically lower the seat along with the lid.
10			A short press of the button activates the Reduced Flush function.

USAGE INSTRUCTION

11		1.A short press on the button raises or lowers the seat. 2.If the lid is fully closed when you press the button to raise the seat, the lid will open automatically first, followed by the seat.
12		While in Bidet Wash or Feminine Wash mode, press the 【+】 or 【-】 buttons to adjust the water pressure intensity. There are 4 adjustable pressure levels in total.
13		●Short Press: Initiates a standard self-cleaning cycle for the nozzle. ●Long Press: Activates an extended self-cleaning cycle where the nozzle moves back and forth for thorough cleaning.
14		A short press turns the Night Light on or off.
15		A short press of the button cycles the seat temperature through the available settings, from the default room temperature level up to the 3rd (warmest) level. The corresponding indicator light will illuminate for the selected setting.
16		While in the drying mode, a short press of the button cycles the air temperature through the available settings, from the default room temperature level up to the 3rd (warmest) level. The corresponding indicator light will illuminate for the selected temperature setting.
17		While in Bidet Wash or Feminine Wash mode, a short press of the button cycles through the available water temperature settings. The corresponding indicator light will illuminate to show the currently selected temperature level.

Guangdong Biki Intelligent Sanitary Ware Co.,Ltd.

No 9,Touchejian Industrial Zone, Guxiang Village, Guxiang Town,
Chao'an District, Chaozhou City,Guangdong,China

Made in China