

FCC CERTIFICATION TEST REPORT

Applicant	:	S&O Labs
Address	:	Room 206-409, 2nd Floor, Building 1, No.1 Gongyuan Street, Tongzhou District, Beijing
Manufacturer	:	S&O Labs
Address	:	Room 206-409, 2nd Floor, Building 1, No.1 Gongyuan Street, Tongzhou District, Beijing
Trade Mark	:	S&O Labs
Equipment under Test	:	SoClip Pebble
Model No.	:	SE2601P1
FCC ID	:	2BVOCSE2601P1
Report No.	:	LS-R26020502-9F01
Issue Date	:	Aug. 13, 2026

LabSure Testing Services (Suzhou) Co., Ltd.



Table of Contents

	Test report declares.....	4
1.	Summary of Test Results.....	6
2.	General Test Information	7
2.1.	Description of EUT	7
2.2.	Accessories of EUT.....	8
2.3.	Assistant equipment used for test.....	8
2.4.	Block diagram of EUT configuration for test	8
2.5.	Deviations of test standard.....	8
2.6.	Test environment conditions	8
2.7.	Test laboratory	8
2.8.	Measurement uncertainty.....	9
3.	Equipment Used During Test.....	10
4.	Maximum Peak Output Power	12
4.1.	Block diagram of test setup.....	12
4.2.	Limits	12
4.3.	Test procedure	12
4.4.	Test result.....	12
5.	20 dB Bandwidth and 99% Bandwidth.....	13
5.1.	Block diagram of test setup.....	13
5.2.	Limits	13
5.3.	Test procedure	13
5.4.	Test result.....	13
6.	Carrier Frequency Separation.....	14
6.1.	Block diagram of test setup.....	14
6.2.	Limits	14
6.3.	Test procedure	14
6.4.	Test result.....	14
7.	Number of Hopping Channel	15
7.1.	Block diagram of test setup.....	15
7.2.	Limits	15
7.3.	Test procedure	15
7.4.	Test result.....	15
8.	Dwell Time.....	16
8.1.	Block diagram of test setup.....	16
8.2.	Limits	16
8.3.	Test procedure	16

8.4.	Test result.....	16
9.	Band Edge Compliance (Conducted Method)	17
9.1.	Block diagram of test setup.....	17
9.2.	Limit.....	17
9.3.	Test result.....	17
10.	Radiated Emission	18
10.1.	Block diagram of test setup.....	18
10.2.	Limit.....	19
10.3.	Test Procedure.....	20
10.4.	Test result.....	22
11.	RF Conducted Spurious Emissions	105
11.1.	Block diagram of test setup.....	105
11.2.	Limits	105
11.3.	Test procedure	105
11.4.	Test result.....	106
12.	Band Edge Compliance (Radiated Method)	107
12.1.	Block diagram of test setup.....	107
12.2.	Limit.....	107
12.3.	Test Procedure.....	107
12.4.	Test result.....	107
13.	Power Line Conducted Emission	132
13.1.	Block diagram of test setup.....	132
13.2.	Power line conducted emission limits	132
13.3.	Test procedure	132
13.4.	Test result.....	133
14.	Antenna Requirements	134
14.1.	Limit.....	134
14.2.	Result	134
15.	Test Setup Photograph	135
16.	Photos of the EUT	136

Test Report Declare

Applicant	:	S&O Labs
Address	:	Room 206-409, 2nd Floor, Building 1, No.1 Gongyuan Street, Tongzhou District, Beijing
Equipment under Test	:	SoClip Pebble
Model No.	:	SE2601P1
Trade Mark	:	S&O Labs
Manufacturer	:	S&O Labs
Address	:	Room 206-409, 2nd Floor, Building 1, No.1 Gongyuan Street, Tongzhou District, Beijing

Test Standard Used: 47 CFR FCC Part 15 Subpart C (Section 15.247)




Test Procedure Used: ANSI C63.10-2020+ANSI/USEMCSC C63.10-2020/Cor 1-2023+
ANSI/USEMCSC C63.10a-2024 + ANSI/USEMCSC Errata to C63.10a-2024

We Declare:

The equipment described above is tested by LabSure Testing Services (Suzhou) Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and LabSure Testing Services (Suzhou) Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above standards.

Report No:	LS-R26020502-9F01		
Date of Receipt:	Jul. 08, 2026	Date of Test:	Jul. 08, 2026 ~ Aug. 13, 2026

Prepared By: 	Reviewed By: 	Authorized By: 
Bacon Dong/Engineer	Leon Wu/Director	Chris Zhong/EMC Manager

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of LabSure Testing Services (Suzhou) Co., Ltd. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products. This report does not imply that the product(s) has met the criteria for certification.

The results reported herein have been performed in accordance with the laboratory's terms of accreditation.

Revision History

Rev.	Revisions	Issue Date	Revised By
---	Initial issue	Aug. 13, 2026	

1. Summary of Test Results

Description of Test Item	Standard	Verdict
Maximum Peak Output Power	FCC Part 15: 15.247(b)(1) ANSI C63.10:2020	Pass
20 dB Bandwidth and 99% Bandwidth	FCC Part 15: 15.215 ANSI C63.10:2020	Pass
Carrier Frequency Separation	FCC Part 15: 15.247(a)(1) ANSI C63.10:2020	Pass
Number of Hopping Channel	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10:2020	Pass
Dwell Time	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10:2020	Pass
Radiated Emission	FCC Part 15: 15.209 FCC Part 15: 15.247(d) ANSI C63.10:2020	Pass
Band Edge Compliance	FCC Part 15: 15.247(d) ANSI C63.10:2020	Pass
Power Line Conducted Emissions	FCC Part 15: 15.207 ANSI C63.10:2020	N/A
Antenna Requirement	FCC Part 15: 15.203	Pass
Note: The measurement result for the sample received is <Pass> according to < ANSI C63.10-2020, FCC CFR 47 Part 2, FCC CFR 47 Part 15C, when < Simple Acceptance decision rule > decision rule is applied.		

2. General Test Information

2.1. Description of EUT

EUT* Name	: SoClip Pebble
Model Number	: SE2601P1
EUT Function Description	: Please refer to user manual of this device
Power Supply	: DC 3.85V by Polymer Li-ion built-in battery
Radio Specification	: Bluetooth
Operation Frequency	: 2402 MHz-2480 MHz
Modulation	: GFSK, $\pi/4$ -DQPSK, 8DPSK
Antenna Type	: Integration antenna
Antenna Gain	Maximum PK gain: -2.55 dBi (Declare by customer and the lab isn't responsible for the value)

Note1: The lab isn't responsible for the value provide by customer(Such as RF cable loss, antenna gain etc..)

Channel information					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	27	2429	54	2456
1	2403	28	2430	55	2457
2	2404	29	2431	56	2458
3	2405	30	2432	57	2459
4	2406	31	2433	58	2460
5	2407	32	2434	59	2461
6	2408	33	2435	60	2462
7	2409	34	2436	61	2463
8	2410	35	2437	62	2464
9	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

2.2. Accessories of EUT

Description of Accessories	Manufacturer	Model number	Description	Remark
N/A	N/A	N/A	N/A	N/A

2.3. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	EMC Compliance	SN
Notebook	ASUS	FX506L	N/A	Supplied by lab

2.4. Block diagram of EUT configuration for test

Test software: FCC_assist1.0.4.EXE

The test software was used to control EUT work in Continuous Tx mode, and select test channel, wireless mode as below table.

Tested mode, channel, information			
Mode	Setting Tx Power	Channel	Frequency (MHz)
GFSK hopping on Tx mode	1	CH0 to CH78	2402 to 2480
$\pi/4$ -DQPSK hopping on Tx mode	1	CH0 to CH78	2402 to 2480
8DPSK hopping on Tx mode	1	CH0 to CH78	2402 to 2480
GFSK hopping off Tx mode	1	CH0	2402
	1	CH39	2441
	1	CH78	2480
$\pi/4$ -DQPSK hopping off Tx mode	1	CH0	2402
	1	CH39	2441
	1	CH78	2480
8DPSK hopping off Tx mode	1	CH0	2402
	1	CH39	2441
	1	CH78	2480

2.5. Deviations of test standard

No deviation.

2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	21-25 °C
Humidity range:	40-75%
Pressure range:	86-106 kPa

2.7. Test laboratory

Lab Information	Company Name: LabSure Testing Services (Suzhou) Co., Ltd. Address: Phase II, No.16 Runsheng Road, Suzhou Industrial Park, Suzhou,
-----------------	--

	People's Republic of China.
Accreditation Certificate	A2LA (Certificate No.: 7346.01) LabSure Testing Services (Suzhou) Co., Ltd.. has been assessed and proved to be in compliance with A2LA. FCC (FCC Designation No.: CN1397) LabSure Testing Services (Suzhou) Co., Ltd.. has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules. IC (IC Designation No.: 32952; CAB No.:CN0182) LabSure Testing Services (Suzhou) Co., Ltd.. has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules.
Note 1: All tests measurement facilities use to collect the measurement data are located at Phase II, No.16 Runsheng Road, Suzhou Industrial Park, Suzhou, China. Note 2: For below 30MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. These measurements below 30MHz had been correlated to measurements performed on an OFS. Note 3: The test anechoic chamber in LabSure Testing Services (Suzhou) Co., Ltd. had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.	

2.8. Measurement uncertainty

Test Item	Uncertainty
DTS Bandwidth	±1.9 %
Maximum Conducted Output Power	± 0.69dB
Maximum Power Spectral Density Level	±1.5 dB
Band-edge Compliance	± 1.9%
Conducted Spurious Emissions	9KHz-30MHz:±0.90dB
	30MHz-1GHz:±1.5 dB
	1GHz-12.75GHz: ±1.9dB
	12.75GHz-26.5GHz: ±2.1dB
Uncertainty for Radiation Emission Test (9kHz - 1 GHz)	9kHz-30MHz: 3.4 dB
	30MHz-1000MHz: 2.4 dB
Uncertainty for Radiation Emission Test (1 GHz - 40 GHz)	1GHz - 18 GHz:3.1 dB
	18GHz - 40 GHz: 4.3 dB
Uncertainty for Power Line Conduction Emission Test	3.0 dB (150 kHz - 30 MHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	


3. Equipment Used During Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
RF Conducted Test					
MXA Signal Analyzer (10Hz-50GHz)	Keysight	N9020B	MY63470246	2026/05/27	1 Year
MXA Signal Analyzer (10Hz-26.5GHz)	Keysight	N9020B	MY56080159	2026/03/06	1 Year
MXG Vector Signal Generator (100kHz-6GHz)	Agilent	N5182A	MY50144775	2026/01/25	1 Year
EXG Analog Signal Generator (9kHz-40GHz)	Keysight	N5173B	MY59101189	2026/05/27	1 Year
Vector Signal Generator (4kHz-7.125GHz)	Rohde&Schwarz	SMCV100B	1432.7000K02-106109-gD	2026/05/27	1 Year
Wireless Connectivity Test Set	Anritsu Corp.	MT8862A	6272445466	2026/05/27	1 Year
Wideband Radio Communication Tester	Rohde&Schwarz	CMW 500	1201.0002K50-158800-Qi	2026/02/11	1 Year
RF Control Unit	Tonscend	JS0806-2	806JS2X022505261006	2026/05/27	1 Year
Temperature, humidity and pressure recorder	Huahanwei	THP40W-E	c0222020002d	2026/03/02	1 Year
Programmable Temperature Humidity Chamber	Zhixiang	ZXGDJS-225L	ZX20171127A	2026/01/24	1 Year
RF Test Software	Tonscend	JS1120-3	3.6.21	N/A	N/A
Radiated Spurious Emission in 3m EMI Chamber					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
3m Anechoic Chamber	CRT	3m-SAC	N/A	2024/05/18	3 Year
Loop antenna (9kHz-30MHz)	SCHWARZBECK	FMZB1519-60D	00058	2024/11/05	3 Year
Hybrid antenna (30MHz-1GHz)	TESEQ	CBL6141B	27421	2024/01/10	3 Year
Horn antenna (1-18GHz)	ETS-Lindgren	3117	157735	2024/01/19	3 Year
Horn antenna (18-40GHz)	Tonscend	HA32-40	806HA006712251046	2026/05/11	3 Year
Low Noise Amplifier (30MHz-1GHz)	Tonscend	TAP10M1G40N	806JSAP039904251006	2026/01/25	1 Year
Pre-Amplifier_HF (1-18GHz)	COM-MW	DPA8-1000-18000-1012	05231257	2026/01/25	1 Year
Pre-Amplifier_HF (18-40GHz)	Tonscend	TAP18040050	806JSAP049504261033	2026/05/06	1Year
EMI Test Receiver	Rohde & Schwarz	ESC17	101138	2026/01/25	1 Year
Spectrum Analyzer(9kHz-40GHz)	Rohde & Schwarz	FSV40-N	101642	2026/01/25	1 Year
Temperature, humidity and pressure recorder	Huahanwei	TH10R	c00286000EE1	2026/1/29	1 Year

Test software	TONSCEND	JS36-RSE	5.0.0	N/A	N/A
Power Line Conducted Emissions Test					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
Shielding Room 1	Tai He Mao Rui	N/A	N/A	2024/01/25	3 Year
EMI Test Receiver	Rohde & Schwarz	ESC13	101705	2026/01/25	1 Year
Two-Line V-Network	Rohde & Schwarz	ENV216	101064	2026/01/25	1 Year
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	102704	2026/01/25	1 Year
Temperature, humidity and pressure recorder	HuaHanWei	THP40W-E	c0222020002 E	2026/01/25	1 Year
Test software	TONSCEND	JS32-CE	5.0.0	N/A	N/A

4. Maximum Peak Output Power

4.1. Block diagram of test setup

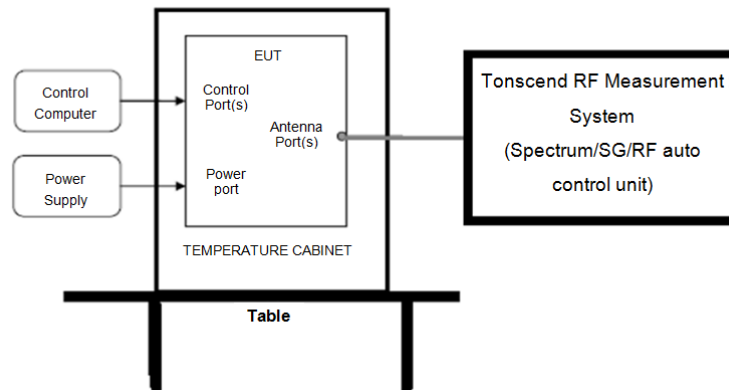

4.2. Limits

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W.

4.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Measure the maximum output power of EUT by spectrum analyzer with PK detector and RBW=3 MHz (above 20 dB bandwidth of measured signal), VBW=8 MHz.

Note: The attenuator loss was inputted into spectrum analyzer as amplitude offset.

4.4. Test result

Pass

Please find the detailed data in APPENDIXES-BT-FCC-Left and APPENDIXES-BT-FCC-Right.

5. 20 dB Bandwidth and 99% Bandwidth

5.1. Block diagram of test setup

Same as section 4.1.

5.2. Limits

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

5.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30 kHz RBW and 100 kHz VBW. The 20 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20 dB.

5.4. Test result

Pass

Please find the detailed data in APPENDIXES-BT-FCC-Left and APPENDIXES-BT-FCC-Right.

6. Carrier Frequency Separation

6.1. Block diagram of test setup

Same as section 4.1.

6.2. Limits

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

6.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) The carrier frequency was measured by spectrum analyzer with 30 kHz RBW and 100 kHz VBW.

6.4. Test result

Pass

Please find the detailed data in APPENDIXES-BT-FCC-Left and APPENDIXES-BT-FCC-Right.

7. Number of Hopping Channel

7.1. Block diagram of test setup

Same as section 4.1.

7.2. Limits

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

7.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) The number of hopping channels was measured by spectrum analyzer with 100 kHz RBW and 300 kHz VBW.

7.4. Test result

Pass

Please find the detailed data in APPENDIXES-BT-FCC-Left and APPENDIXES-BT-FCC-Right.

8. Dwell Time

8.1. Block diagram of test setup

Same as section 4.1.

8.2. Limits

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

8.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$
- (3) Measure the hopping number and on time of each pulse with spectrum analyzer in zero span set, and calculate dwell time with formula $\text{Dwell time} = \text{total hops} \times \text{pulse's on time}$.

8.4. Test result

Pass

Please find the detailed data in APPENDIXES-BT-FCC-Left and APPENDIXES-BT-FCC-Right.

9. Band Edge Compliance (Conducted Method)

9.1. Block diagram of test setup

Same as section 4.1.

9.2. Limit

All restriction band should comply with 15.209, other emission should be at least 20dB below the fundamental.

9.3. Test result


Pass

Please find the detailed data in APPENDIXES-BT-FCC-Left and APPENDIXES-BT-FCC-Right.


10. Radiated Emission

10.1. Block diagram of test setup


In 3 m Anechoic Chamber, test setup diagram for 9 kHz - 30 MHz:

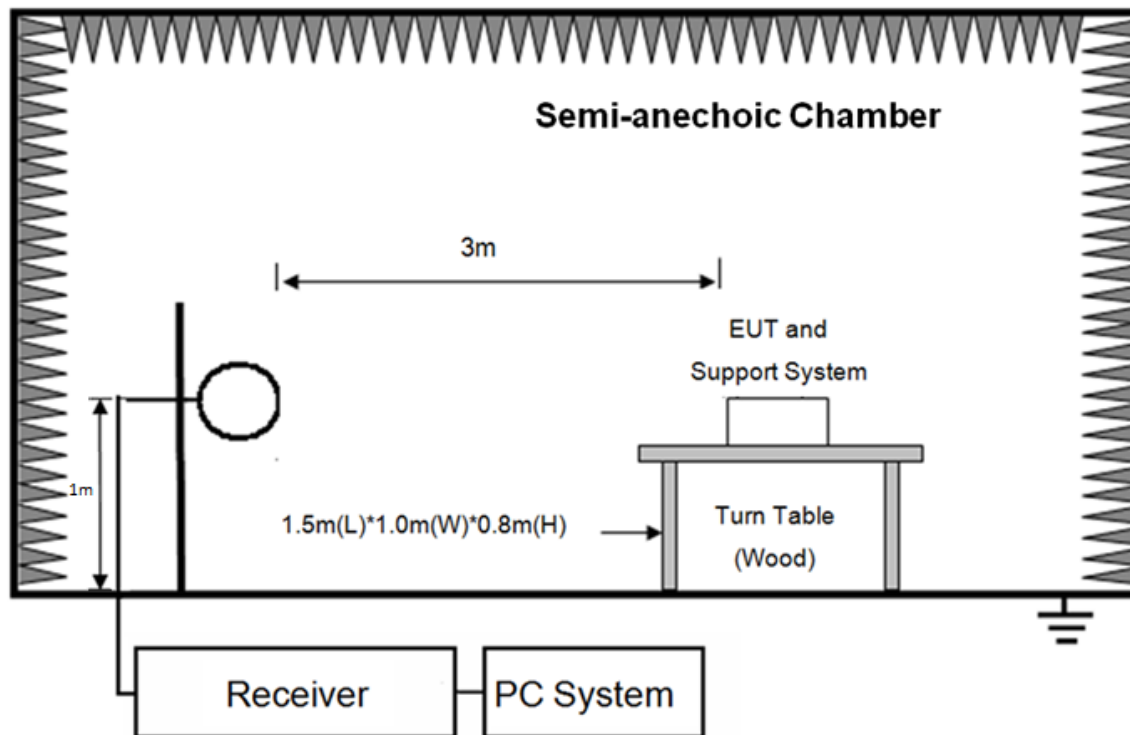

In 3 m Anechoic Chamber, test setup diagram for 30 MHz - 1 GHz:

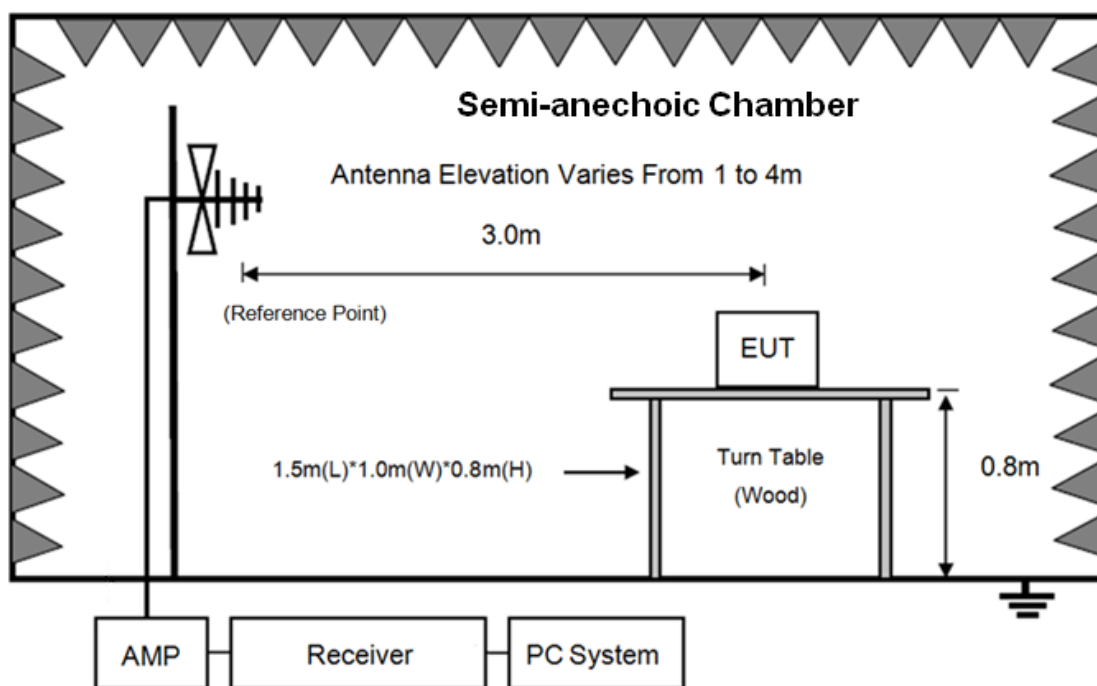

In 3 m Anechoic Chamber, test setup diagram for frequency above 1 GHz:

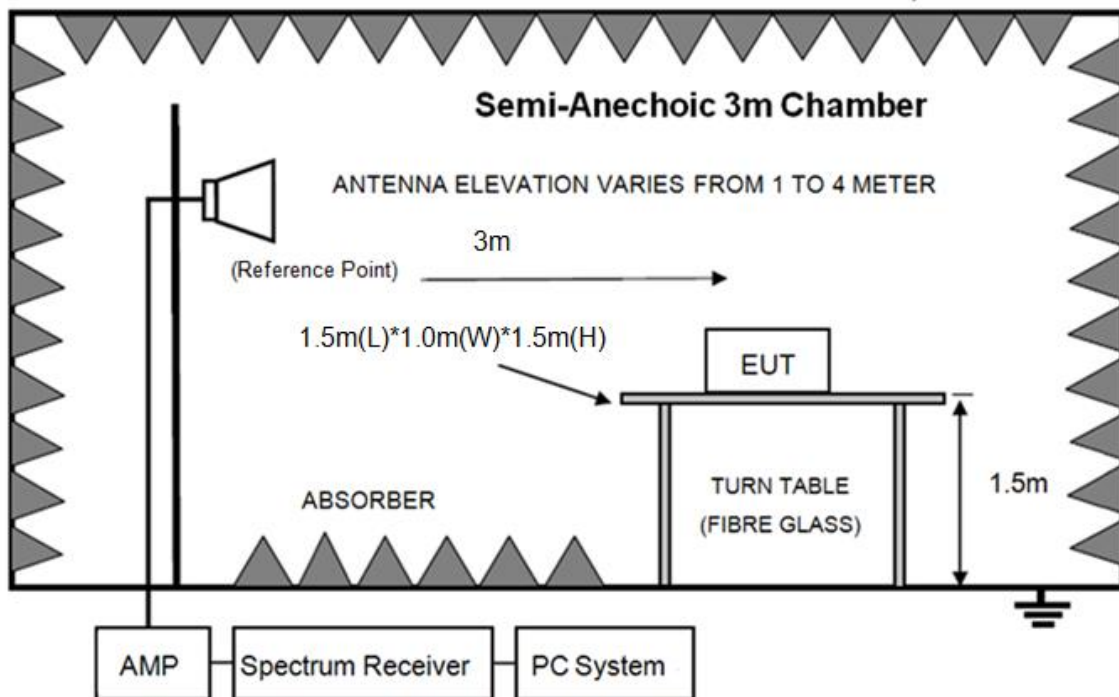

Note: For harmonic emissions test an appropriate high pass filter was inserted in the input port of AMP.

10.2. Limit

(1) FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6

(2) FCC 15.209 Limit.

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V/m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009 ~ 0.490	300	2400/F(kHz)	67.6-20log(F)
0.490 ~ 1.705	30	24000/F(kHz)	87.6-20log(F)
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

Note: (1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz and above 1000 MHz, radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30 MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3\text{m}}(\text{dB}\mu\text{V}/\text{m}) = \text{Limit}_{30\text{m}}(\text{dB}\mu\text{V}/\text{m}) + 40\text{Log}(30\text{m}/3\text{m})$$

(3) Limit for this EUT

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20 dB below the fundamental emissions or comply with 15.209 limits.

10.3. Test Procedure

(1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber for below 1G and 150 cm above the ground plane inside a fully-anechoic chamber for above 1G.

(2) Test antenna was located 3 m from the EUT on an adjustable mast, and the antenna used as below table.

Test frequency range	Test antenna used	Test antenna distance
9 kHz - 30 MHz	Active Loop antenna	3 m
30 MHz - 1 GHz	Trilog Broadband Antenna	3 m
1 GHz - 18 GHz	Double Ridged Horn Antenna (1 GHz - 18 GHz)	3 m
18 GHz - 40 GHz	Horn Antenna (18 GHz - 40 GHz)	1 m

According ANSI C63.10:2020 clause 6.4.4.2 and 6.5.3, for measurements below 30 MHz, the loop antenna was positioned with its plane vertical from the EUT and rotated about its vertical axis for maximum response at each azimuth position around the EUT. And the loop antenna also is positioned with its plane horizontal at the specified distance from the EUT. The center of the loop is 1 m above the ground. For measurement above 30 MHz, the trilog Broadband Antenna or Horn

Antenna was located 3 m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 25 GHz:

- (a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1 m to 4 m (Except loop antenna, it's fixed 1 m above ground.)
- (b) Change work frequency or channel of device if practicable.
- (c) Change modulation type of device if practicable.
- (d) Change power supply range from 85% to 115% of the rated supply voltage
- (e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 25 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 18 GHz to 25 GHz, so below final test was performed with frequency range from 9 kHz to 18 GHz.

- (4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed according to ANSI C63.10:2020 on Radiated Emission test.
- (5) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz, for emissions from 9 kHz - 90 kHz, 110 kHz - 490 kHz and above 1 GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.
- (6) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW.

Frequency band	RBW
9 kHz - 150 kHz	200 Hz
150 kHz - 30 MHz	9 kHz
30 MHz - 1 GHz	120 kHz

- (7) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3 MHz for Peak measure; According ANSI C63.10:2020 clause 4.1.4.2.2 procedure for average measure.
- (8) X axis, Y axis, Z axis are tested, and worse setup X axis is reported.

10.4. Test result

Pass. (See below detailed test result)


All the emissions except fundamental emission from 9 kHz to 25 GHz were comply with 15.209 limits.

Note1: For emissions from 9 kHz to 1GHz and 18 GHz to 25 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions from 9 kHz to 1GHz and 18 GHz to 25 GHz, the final test was only performed with EUT working in left side 3DH5 2480MHz and right side 3DH5 2480MHz.

Note2: For emissions above 1 GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit.


Radiated Emission test (9kHz - 30MHz)

Left side

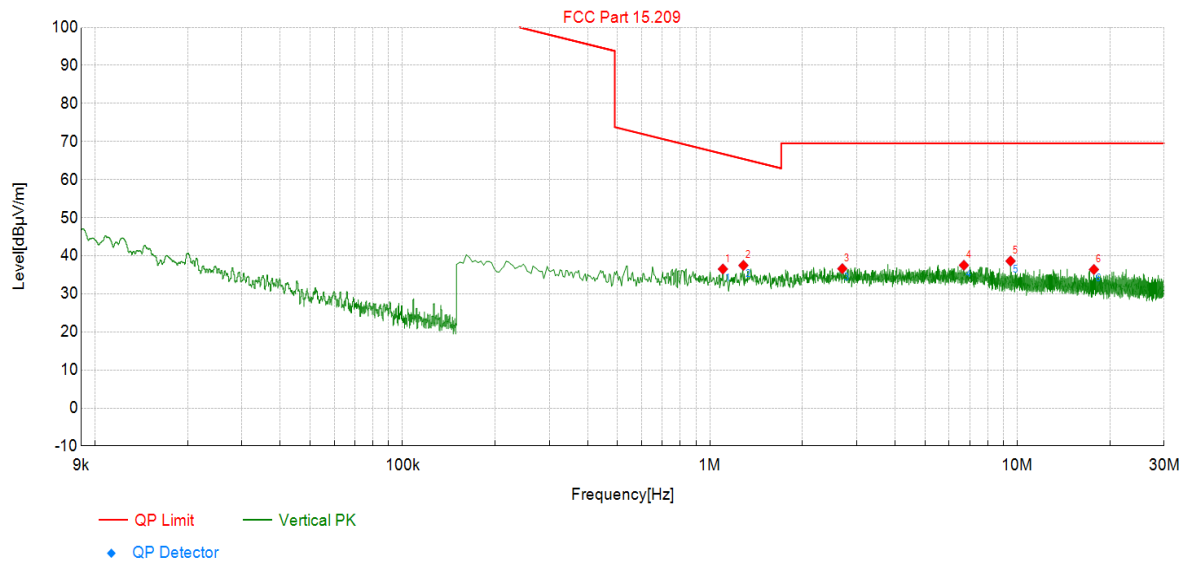

NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Verdict
1	1.10	16.47	36.52	20.05	66.76	30.24	PK	PASS
2	1.28	17.42	37.48	20.06	65.43	27.95	PK	PASS
3	2.69	16.47	36.61	20.14	69.54	32.93	PK	PASS
4	6.70	17.19	37.51	20.32	69.54	32.03	PK	PASS
5	9.50	18.39	38.61	20.22	69.54	30.93	PK	PASS
6	17.74	16.33	36.40	20.07	69.54	33.14	PK	PASS


Right side

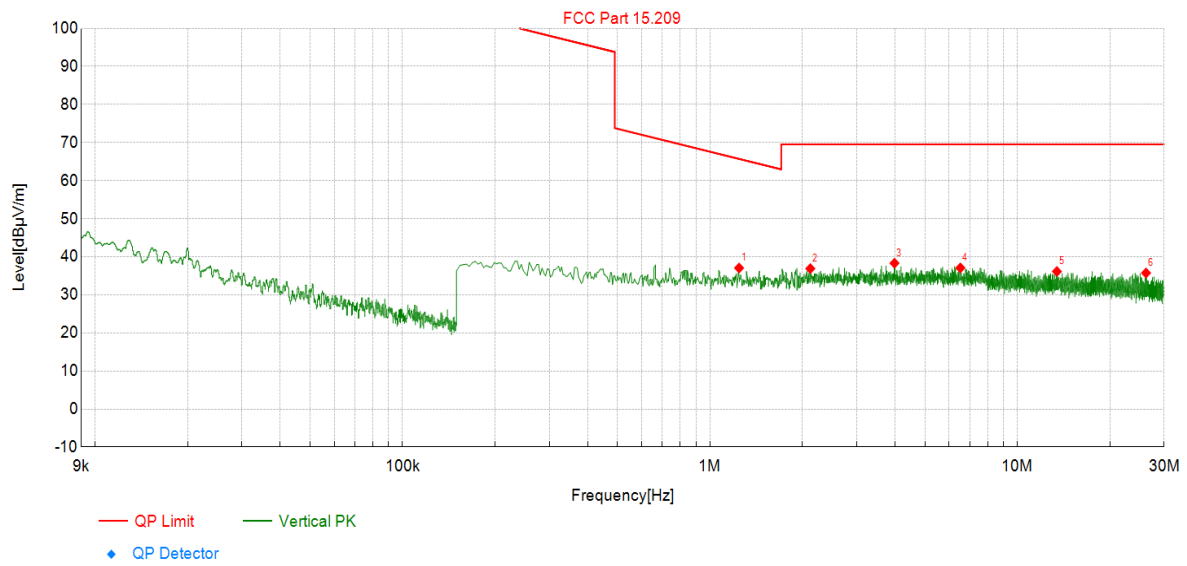


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Verdict
1	1.24	17.01	37.06	20.05	65.71	28.65	PK	PASS
2	2.12	16.82	36.90	20.08	69.54	32.64	PK	PASS
3	3.98	18.00	38.32	20.32	69.54	31.22	PK	PASS
4	6.52	16.76	37.08	20.32	69.54	32.46	PK	PASS
5	13.44	16.07	36.14	20.07	69.54	33.40	PK	PASS
6	26.20	15.46	35.75	20.29	69.54	33.79	PK	PASS

Radiated Emission test (30MHz - 1GHz)

Left side

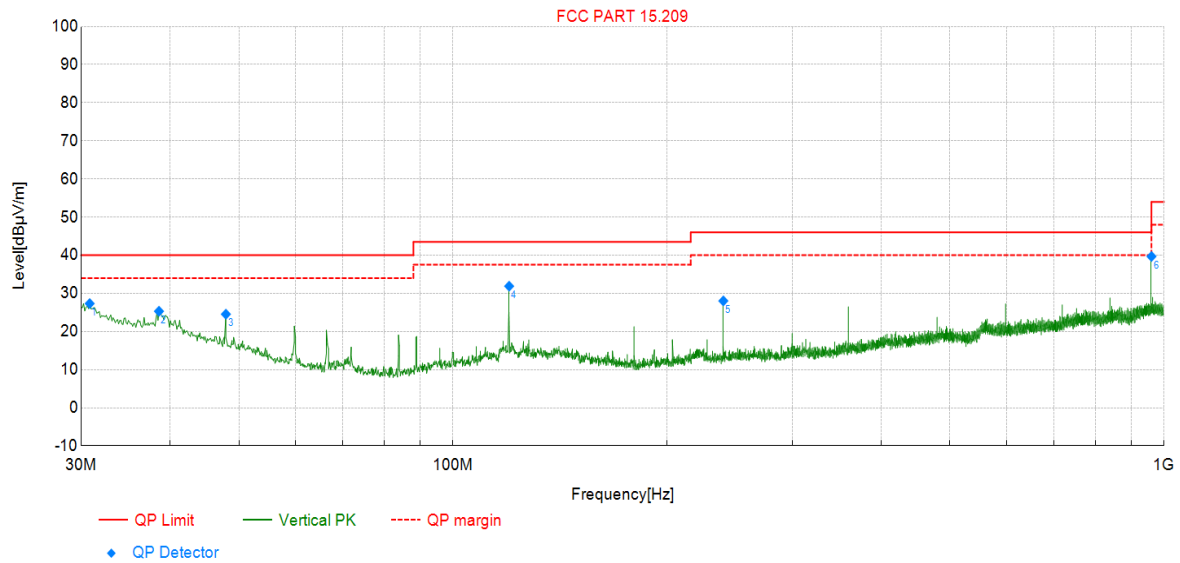


Final Data List								
NO.	Frequency [MHz]	Factor [dB/m]	QP Reading[dBμV]	QP Value[dBμV/m]	QP Limit[dBμV/m]	QP Margin[dB]	Pol	Verdict
1	30.85	-13.02	40.36	27.34	40.00	12.66	Vertical	PASS
2	38.61	-16.25	41.56	25.31	40.00	14.69	Vertical	PASS
3	47.95	-20.74	45.28	24.54	40.00	15.46	Vertical	PASS
4	119.97	-23.13	55.02	31.89	43.50	11.61	Vertical	PASS
5	240.01	-22.05	50.08	28.03	46.00	17.97	Vertical	PASS
6	960.11	-6.20	45.89	39.69	54.00	14.31	Vertical	PASS

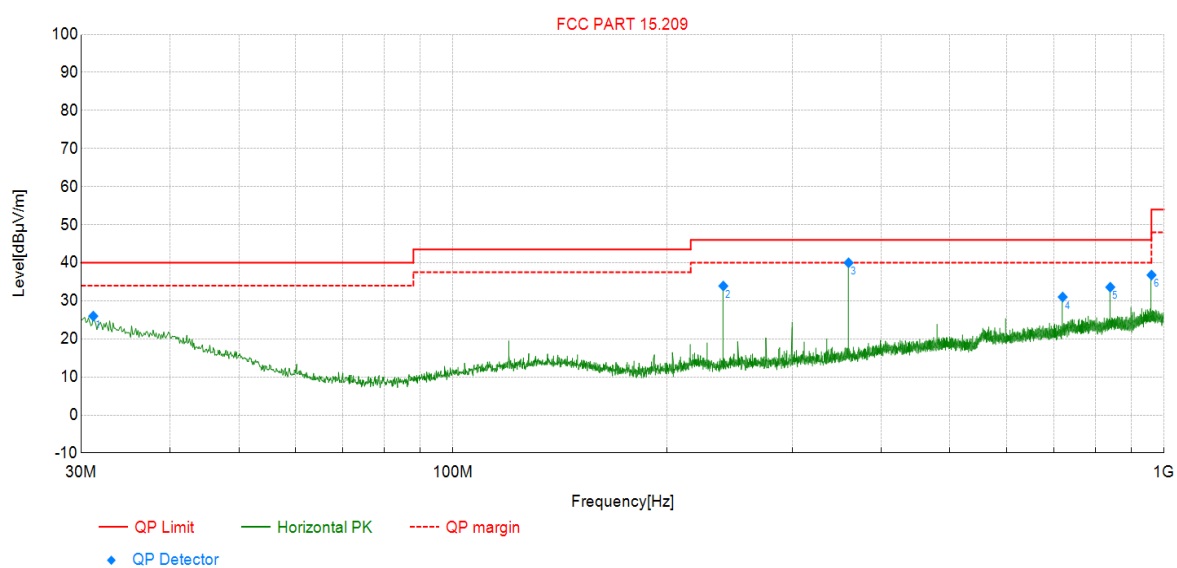


Final Data List								
NO.	Frequency [MHz]	Factor [dB/m]	QP Reading[dBμV]	QP Value[dBμV/m]	QP Limit[dBμV/m]	QP Margin[dB]	Pol	Verdict
1	31.21	-13.22	39.22	26.00	40.00	14.00	Horizontal	PASS
2	240.01	-22.05	55.95	33.90	46.00	12.10	Horizontal	PASS
3	360.04	-18.80	58.8	40.00	46.00	6.00	Horizontal	PASS
4	720.16	-10.87	41.88	31.01	46.00	14.99	Horizontal	PASS
5	840.07	-8.55	42.14	33.59	46.00	12.41	Horizontal	PASS
6	960.11	-6.20	42.98	36.78	54.00	17.22	Horizontal	PASS

Right side

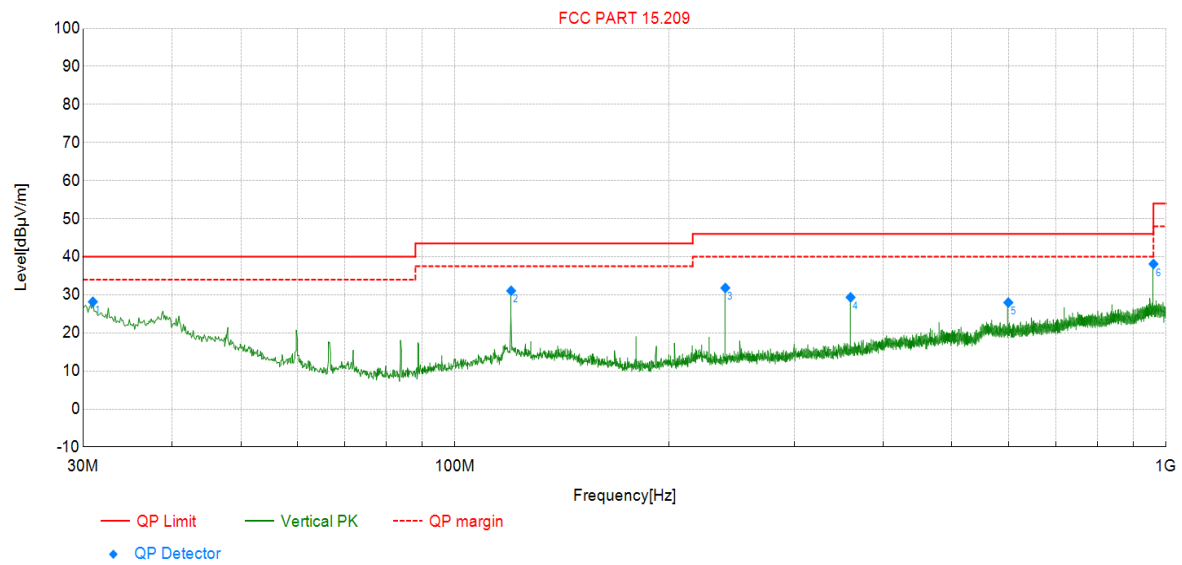

Final Data List								
NO.	Frequency [MHz]	Factor [dB/m]	QP Reading[dBμV]	QP Value[dBμV/m]	QP Limit[dBμV/m]	QP Margin[dB]	Pol	Verdict
1	30.97	-13.09	41.26	28.17	40.00	11.83	Vertical	PASS
2	119.97	-23.13	54.2	31.07	43.50	12.43	Vertical	PASS
3	240.01	-22.05	53.86	31.81	46.00	14.19	Vertical	PASS
4	360.04	-18.80	48.15	29.35	46.00	16.65	Vertical	PASS
5	600.00	-12.92	40.89	27.97	46.00	18.03	Vertical	PASS
6	960.11	-6.20	44.3	38.10	54.00	15.90	Vertical	PASS

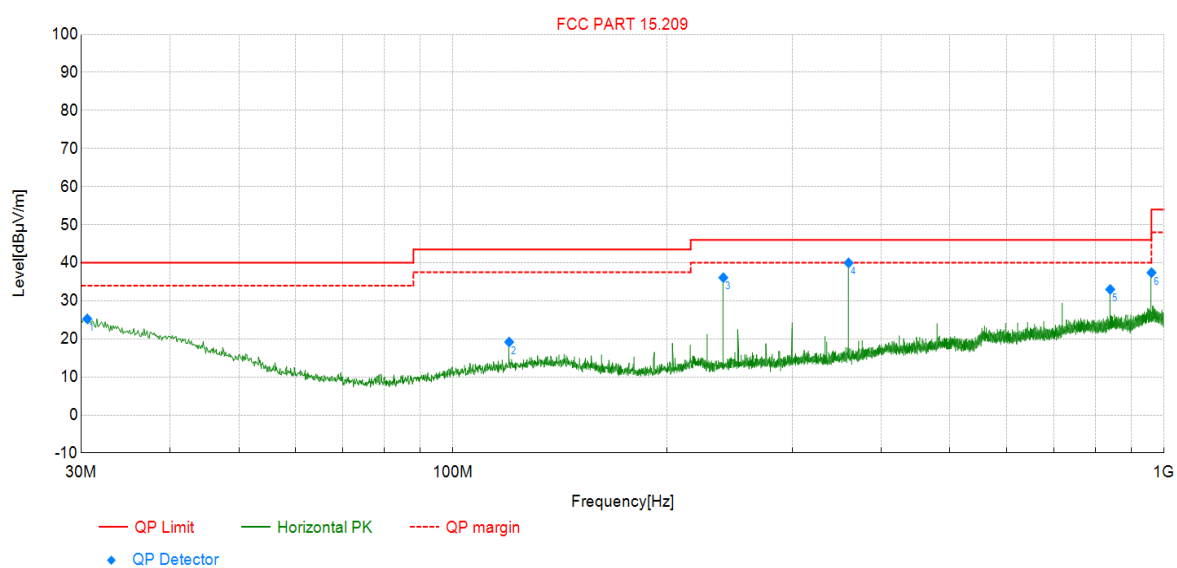


Final Data List


NO.	Frequency [MHz]	Factor [dB/m]	QP Reading[dBμV]	QP Value[dBμV/m]	QP Limit[dBμV/m]	QP Margin[dB]	Pol	Verdict
1	30.61	-12.87	38.13	25.26	40.00	14.74	Horizontal	PASS
2	119.97	-23.13	42.32	19.19	43.50	24.31	Horizontal	PASS
3	240.01	-22.05	58.15	36.10	46.00	9.90	Horizontal	PASS
4	360.04	-18.80	58.77	39.97	46.00	6.03	Horizontal	PASS
5	840.07	-8.55	41.55	33.00	46.00	13.00	Horizontal	PASS
6	960.11	-6.20	43.6	37.40	54.00	16.60	Horizontal	PASS

Radiated Emission test (1GHz - 3GHz)

Left DH5 2402MHz

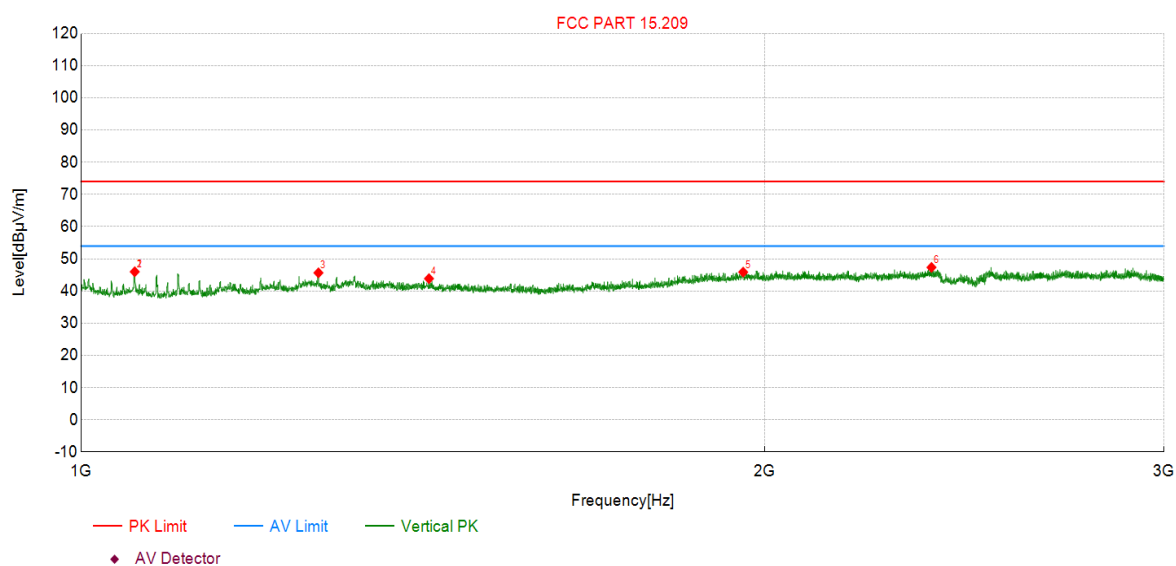


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	1056.00	64.08	46.00	-18.08	74.00	28.00	PK	Vert	PASS
2	1056.00	64.08	46.00	-18.08	74.00	28.00	PK	Vert	PASS
3	1272.25	60.60	45.67	-14.93	74.00	28.33	PK	Vert	PASS
4	1423.25	59.57	43.86	-15.71	74.00	30.14	PK	Vert	PASS
5	1957.50	57.92	45.89	-12.03	74.00	28.11	PK	Vert	PASS
6	2369.50	58.06	47.36	-10.70	74.00	26.64	PK	Vert	PASS

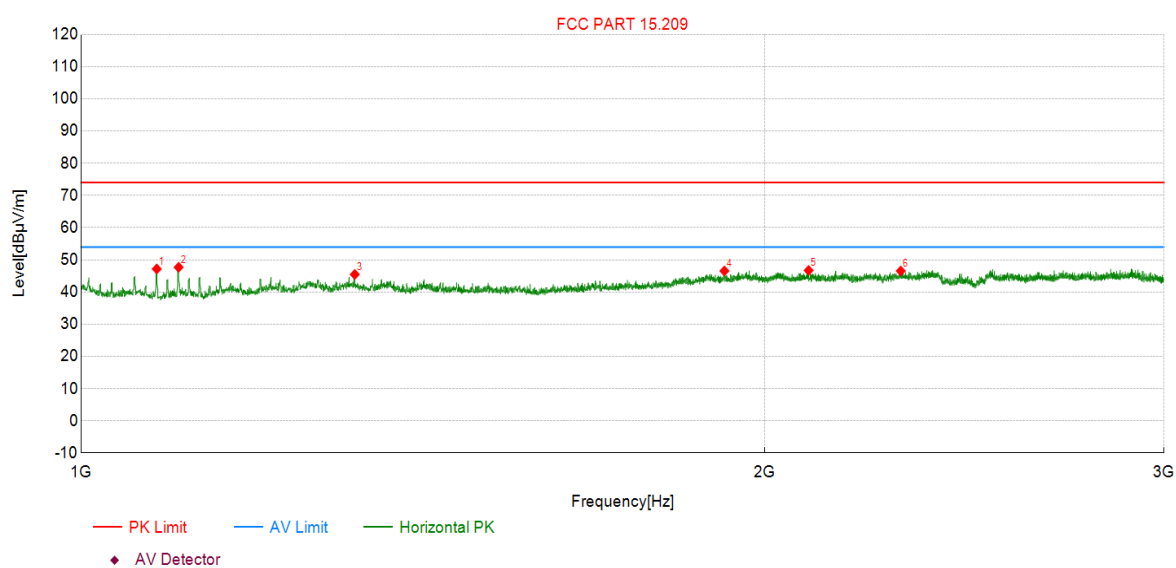


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	1079.75	65.46	47.18	-18.28	74.00	26.82	PK	Hori	PASS
2	1104.00	66.01	47.69	-18.32	74.00	26.31	PK	Hori	PASS
3	1320.00	60.40	45.48	-14.92	74.00	28.52	PK	Hori	PASS
4	1920.50	58.88	46.57	-12.31	74.00	27.43	PK	Hori	PASS
5	2091.75	58.45	46.73	-11.72	74.00	27.27	PK	Hori	PASS
6	2296.75	57.71	46.55	-11.16	74.00	27.45	PK	Hori	PASS

Left DH5 2441MHz

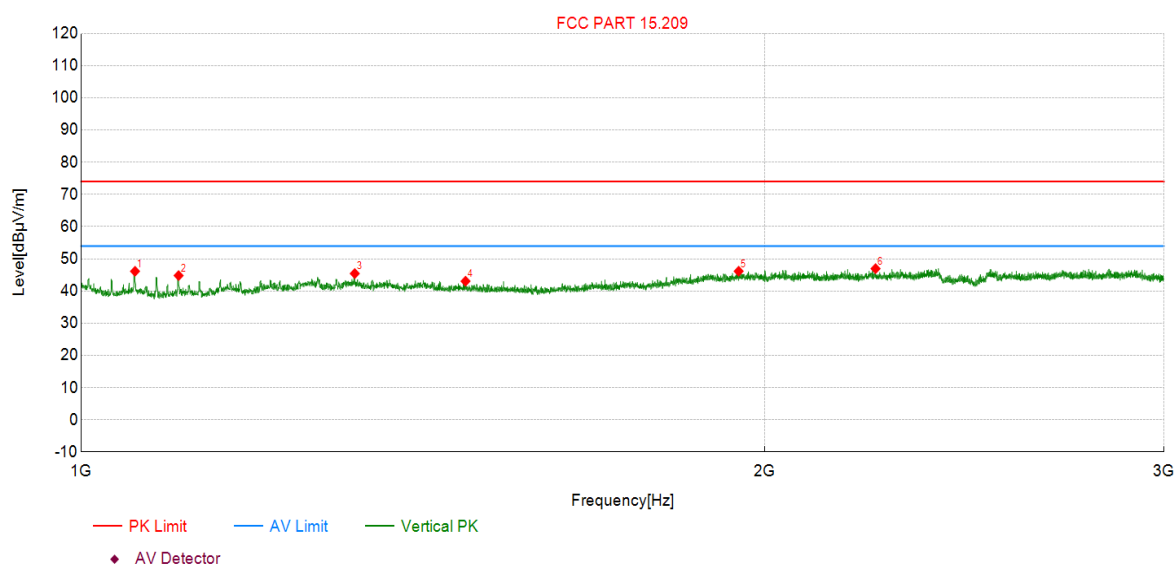


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	1056.25	64.22	46.15	-18.07	74.00	27.85	PK	Vert	PASS
2	1104.00	63.14	44.82	-18.32	74.00	29.18	PK	Vert	PASS
3	1320.00	60.37	45.45	-14.92	74.00	28.55	PK	Vert	PASS
4	1477.00	59.16	43.07	-16.09	74.00	30.93	PK	Vert	PASS
5	1948.50	58.25	46.16	-12.09	74.00	27.84	PK	Vert	PASS
6	2238.75	58.38	46.96	-11.42	74.00	27.04	PK	Vert	PASS

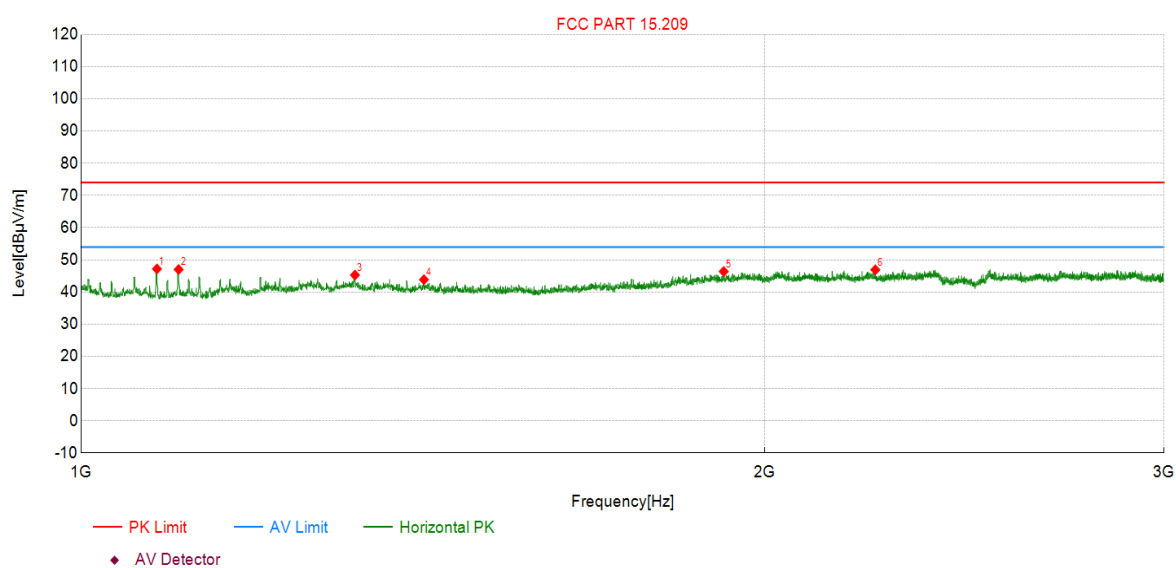


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	1080.00	65.48	47.20	-18.28	74.00	26.80	PK	Hori	PASS
2	1104.00	65.32	47.00	-18.32	74.00	27.00	PK	Hori	PASS
3	1320.25	60.21	45.29	-14.92	74.00	28.71	PK	Hori	PASS
4	1416.00	59.50	43.87	-15.63	74.00	30.13	PK	Hori	PASS
5	1919.25	58.70	46.39	-12.31	74.00	27.61	PK	Hori	PASS
6	2238.25	58.34	46.92	-11.42	74.00	27.08	PK	Hori	PASS

Left DH5 2480MHz

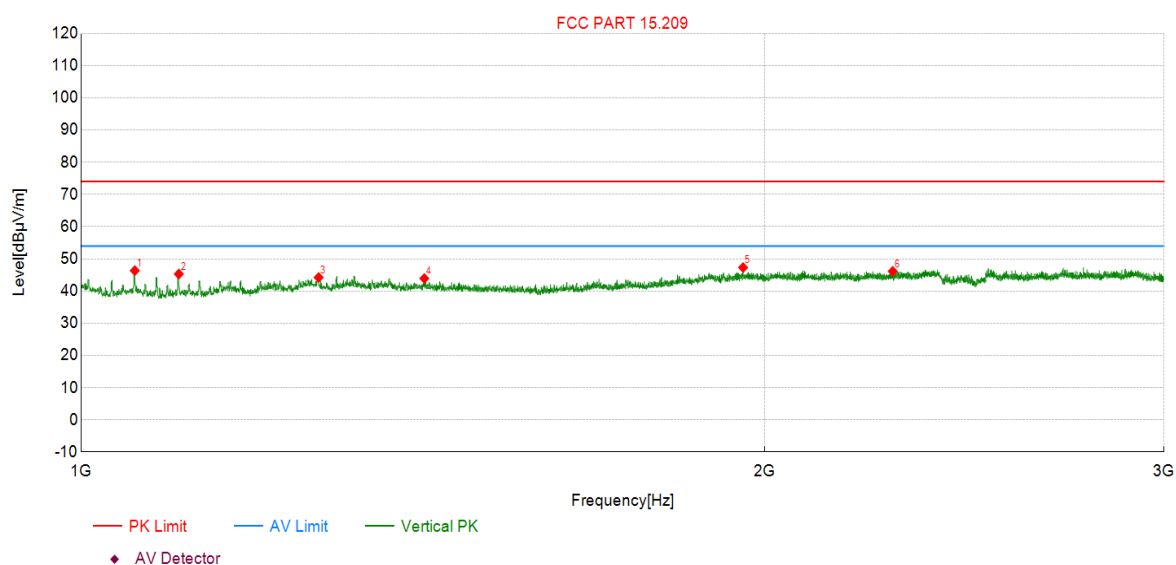


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	1056.00	64.43	46.35	-18.08	74.00	27.65	PK	Vert	PASS
2	1104.25	63.60	45.29	-18.31	74.00	28.71	PK	Vert	PASS
3	1272.50	59.14	44.22	-14.92	74.00	29.78	PK	Vert	PASS
4	1416.50	59.54	43.91	-15.63	74.00	30.09	PK	Vert	PASS
5	1957.25	59.34	47.30	-12.04	74.00	26.70	PK	Vert	PASS
6	2278.00	57.38	46.15	-11.23	74.00	27.85	PK	Vert	PASS

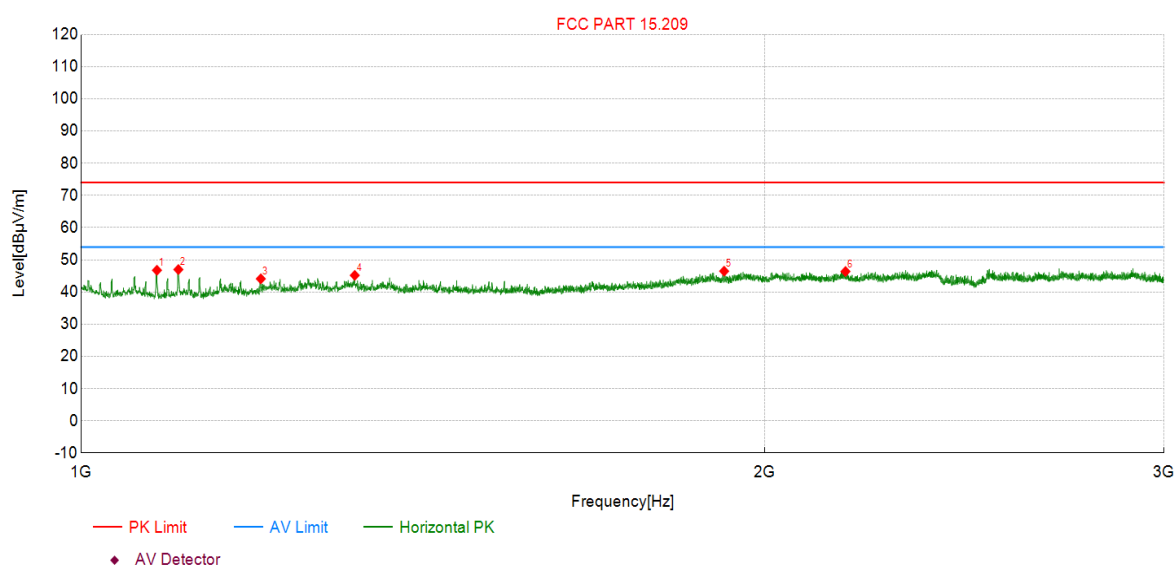


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	1080.00	65.06	46.78	-18.28	74.00	27.22	PK	Hori	PASS
2	1103.75	65.33	47.00	-18.33	74.00	27.00	PK	Hori	PASS
3	1200.00	60.48	44.12	-16.36	74.00	29.88	PK	Hori	PASS
4	1320.00	60.12	45.20	-14.92	74.00	28.80	PK	Hori	PASS
5	1920.00	58.81	46.50	-12.31	74.00	27.50	PK	Hori	PASS
6	2171.50	58.07	46.40	-11.67	74.00	27.60	PK	Hori	PASS

Left 2DH5 2402MHz

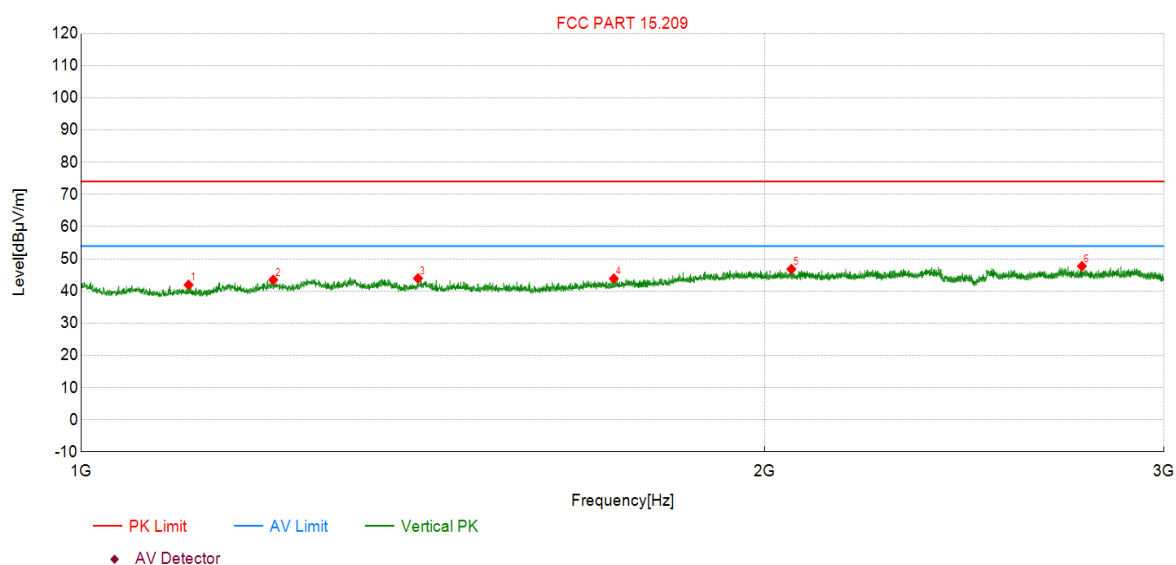


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	1115.25	59.90	41.92	-17.98	74.00	32.08	PK	Vert	PASS
2	1215.25	59.44	43.48	-15.96	74.00	30.52	PK	Vert	PASS
3	1407.50	59.46	43.93	-15.53	74.00	30.07	PK	Vert	PASS
4	1716.75	59.08	43.88	-15.20	74.00	30.12	PK	Vert	PASS
5	2055.50	58.59	46.81	-11.78	74.00	27.19	PK	Vert	PASS
6	2760.00	58.15	47.73	-10.42	74.00	26.27	PK	Vert	PASS

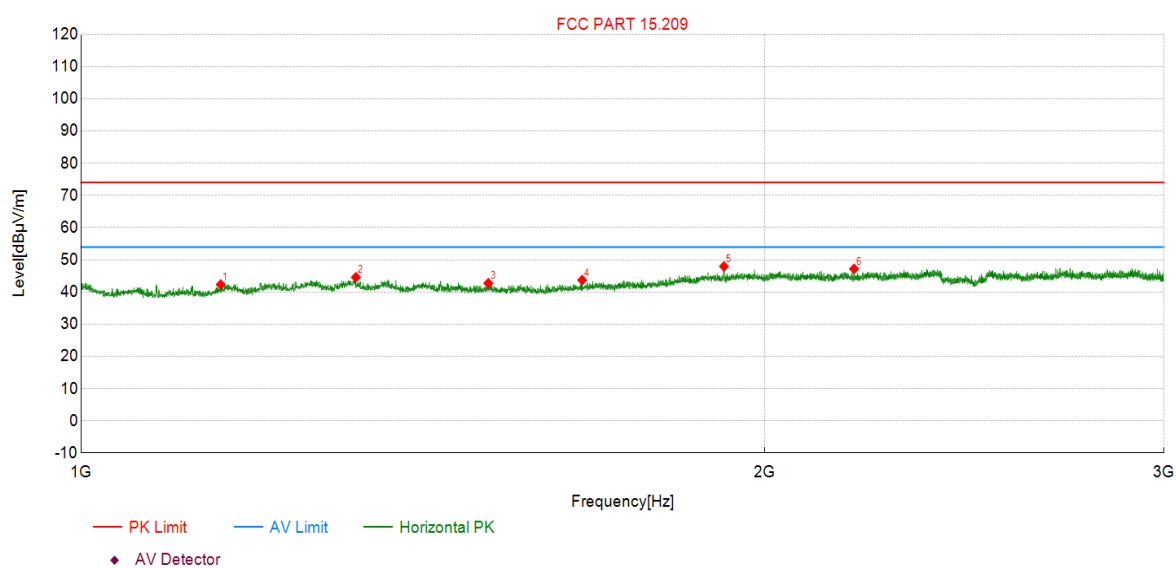


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	1152.25	59.20	42.32	-16.88	74.00	31.68	PK	Hori	PASS
2	1321.50	59.50	44.57	-14.93	74.00	29.43	PK	Hori	PASS
3	1511.50	58.99	42.74	-16.25	74.00	31.26	PK	Hori	PASS
4	1662.50	59.44	43.71	-15.73	74.00	30.29	PK	Hori	PASS
5	1919.75	60.27	47.96	-12.31	74.00	26.04	PK	Hori	PASS
6	2190.50	58.82	47.19	-11.63	74.00	26.81	PK	Hori	PASS

Left 2DH5 2441MHz

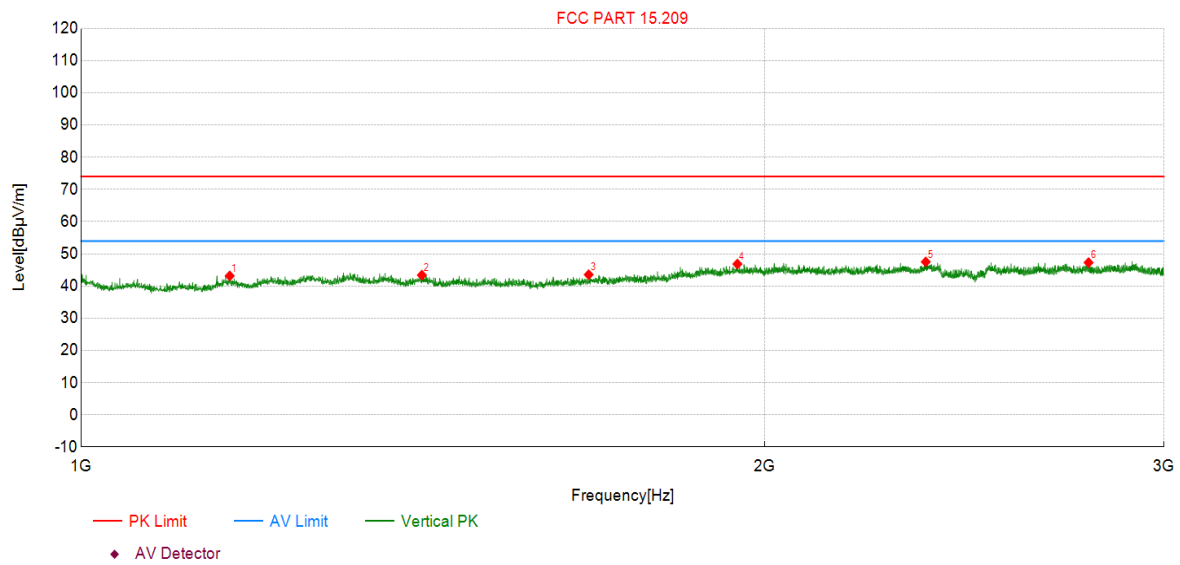


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	1162.75	59.90	43.15	-16.75	74.00	30.85	PK	Vert	PASS
2	1413.00	58.99	43.39	-15.60	74.00	30.61	PK	Vert	PASS
3	1673.50	59.15	43.54	-15.61	74.00	30.46	PK	Vert	PASS
4	1946.00	58.95	46.84	-12.11	74.00	27.16	PK	Vert	PASS
5	2355.75	58.35	47.51	-10.84	74.00	26.49	PK	Vert	PASS
6	2778.75	57.78	47.29	-10.49	74.00	26.71	PK	Vert	PASS

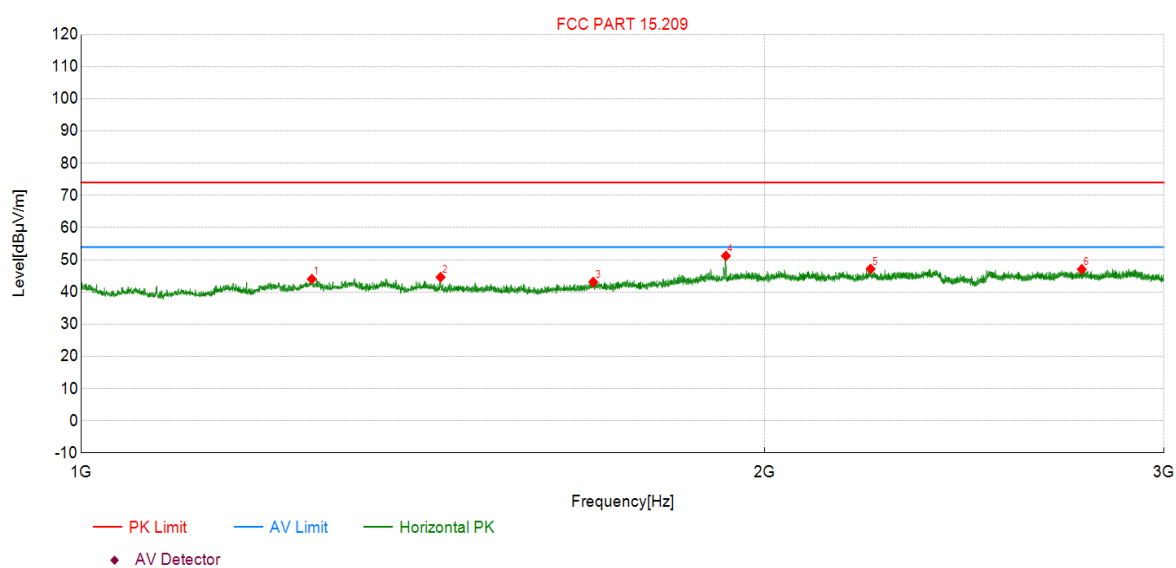


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	1263.75	58.98	44.02	-14.96	74.00	29.98	PK	Hori	PASS
2	1440.00	60.50	44.62	-15.88	74.00	29.38	PK	Hori	PASS
3	1681.25	58.64	43.12	-15.52	74.00	30.88	PK	Hori	PASS
4	1923.50	63.51	51.23	-12.28	74.00	22.77	PK	Hori	PASS
5	2227.50	58.63	47.17	-11.46	74.00	26.83	PK	Hori	PASS
6	2759.75	57.48	47.06	-10.42	74.00	26.94	PK	Hori	PASS

Left 2DH5 2480MHz

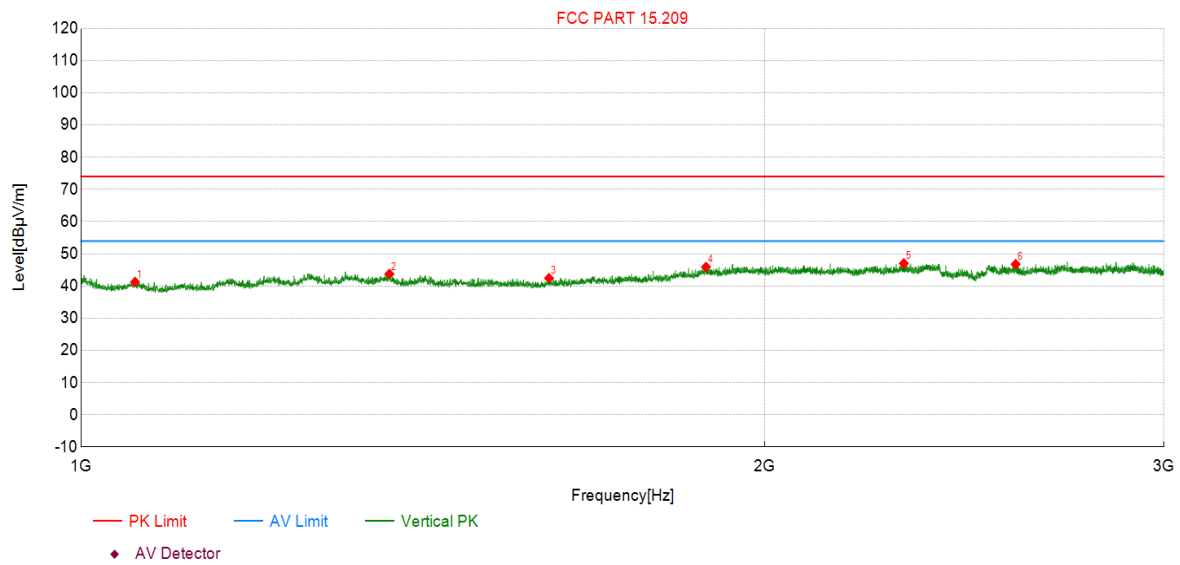


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	1056.25	59.34	41.27	-18.07	74.00	32.73	PK	Vert	PASS
2	1367.25	58.98	43.74	-15.24	74.00	30.26	PK	Vert	PASS
3	1607.50	58.95	42.45	-16.50	74.00	31.55	PK	Vert	PASS
4	1885.00	58.63	45.94	-12.69	74.00	28.06	PK	Vert	PASS
5	2304.00	58.15	47.02	-11.13	74.00	26.98	PK	Vert	PASS
6	2580.50	57.96	46.78	-11.18	74.00	27.22	PK	Vert	PASS

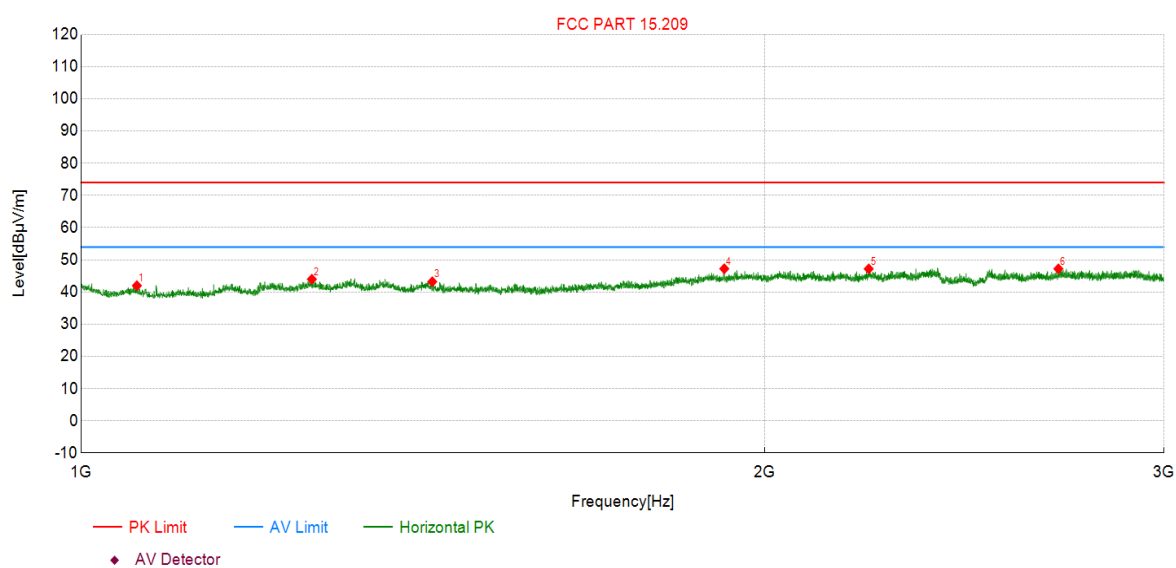


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	1058.25	60.10	42.00	-18.10	74.00	32.00	PK	Hori	PASS
2	1263.75	58.94	43.98	-14.96	74.00	30.02	PK	Hori	PASS
3	1428.00	58.97	43.22	-15.75	74.00	30.78	PK	Hori	PASS
4	1920.25	59.56	47.25	-12.31	74.00	26.75	PK	Hori	PASS
5	2223.25	58.70	47.21	-11.49	74.00	26.79	PK	Hori	PASS
6	2695.00	57.73	47.22	-10.51	74.00	26.78	PK	Hori	PASS

Left 3DH5 2402MHz

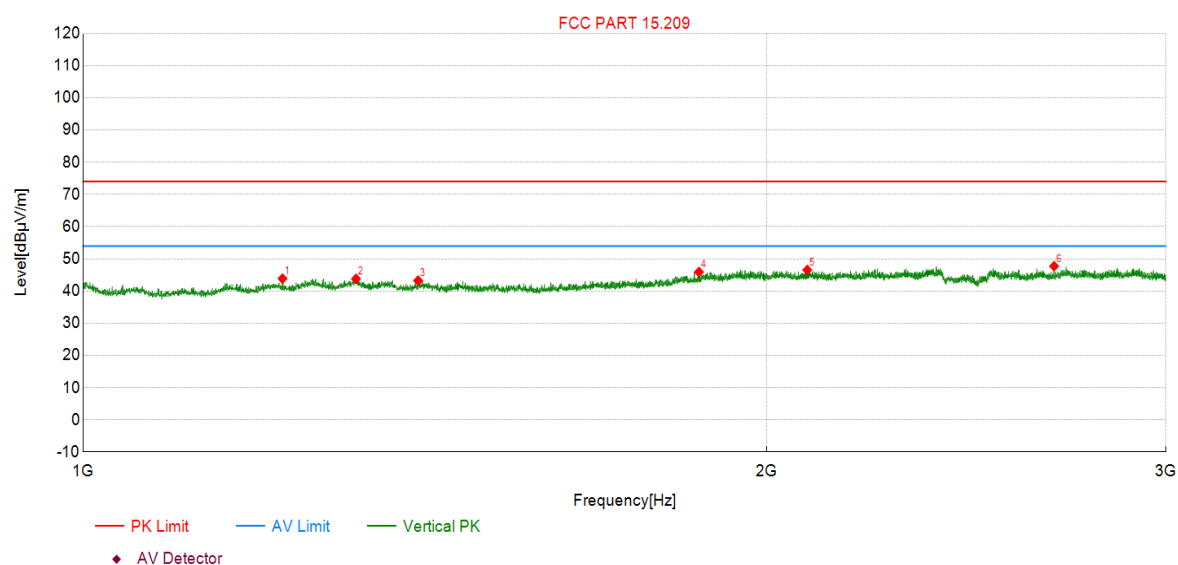


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	1224.25	59.59	43.88	-15.71	74.00	30.12	PK	Vert	PASS
2	1319.00	58.71	43.80	-14.91	74.00	30.20	PK	Vert	PASS
3	1404.75	58.76	43.25	-15.51	74.00	30.75	PK	Vert	PASS
4	1867.75	58.89	45.94	-12.95	74.00	28.06	PK	Vert	PASS
5	2084.75	58.27	46.55	-11.72	74.00	27.45	PK	Vert	PASS
6	2677.75	58.46	47.72	-10.74	74.00	26.28	PK	Vert	PASS

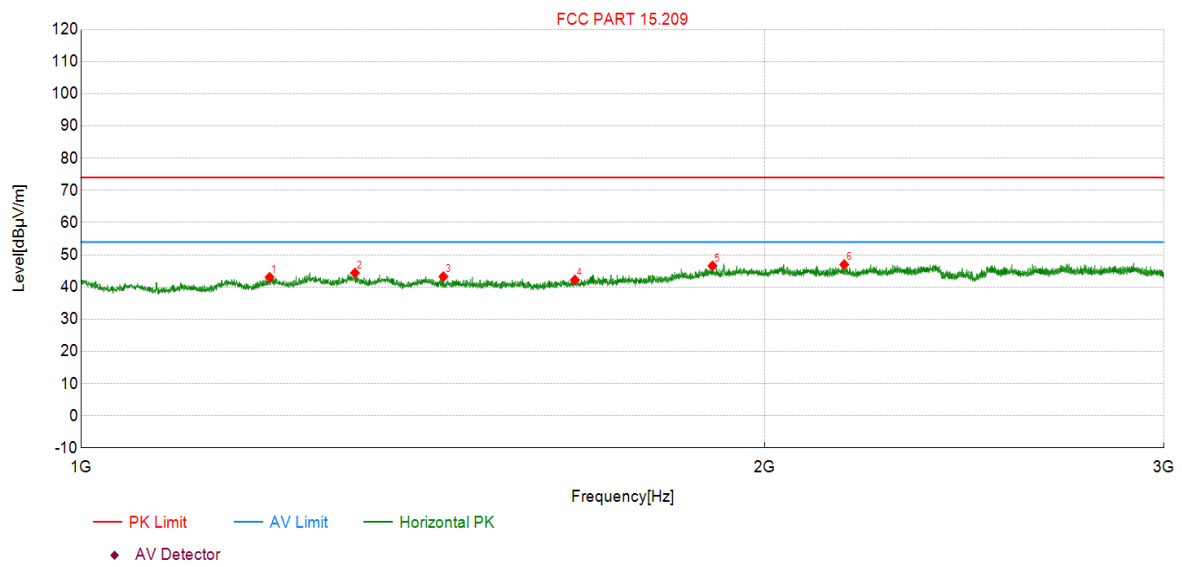


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	1210.75	59.15	43.07	-16.08	74.00	30.93	PK	Hori	PASS
2	1320.25	59.30	44.38	-14.92	74.00	29.62	PK	Hori	PASS
3	1444.25	59.17	43.25	-15.92	74.00	30.75	PK	Hori	PASS
4	1650.25	58.12	42.24	-15.88	74.00	31.76	PK	Hori	PASS
5	1897.50	59.10	46.61	-12.49	74.00	27.39	PK	Hori	PASS
6	2168.75	58.68	47.00	-11.68	74.00	27.00	PK	Hori	PASS

Left 3DH5 2441MHz

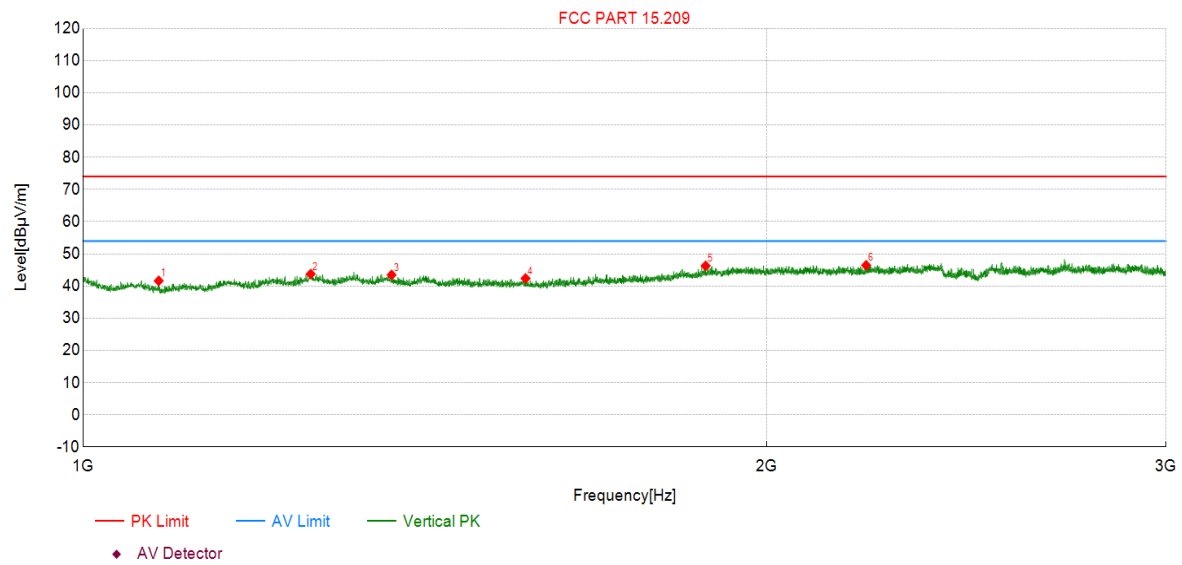


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	1079.75	59.92	41.64	-18.28	74.00	32.36	PK	Vert	PASS
2	1259.75	58.73	43.74	-14.99	74.00	30.26	PK	Vert	PASS
3	1367.50	58.71	43.47	-15.24	74.00	30.53	PK	Vert	PASS
4	1566.50	58.88	42.36	-16.52	74.00	31.64	PK	Vert	PASS
5	1880.50	59.04	46.28	-12.76	74.00	27.72	PK	Vert	PASS
6	2213.00	58.00	46.45	-11.55	74.00	27.55	PK	Vert	PASS

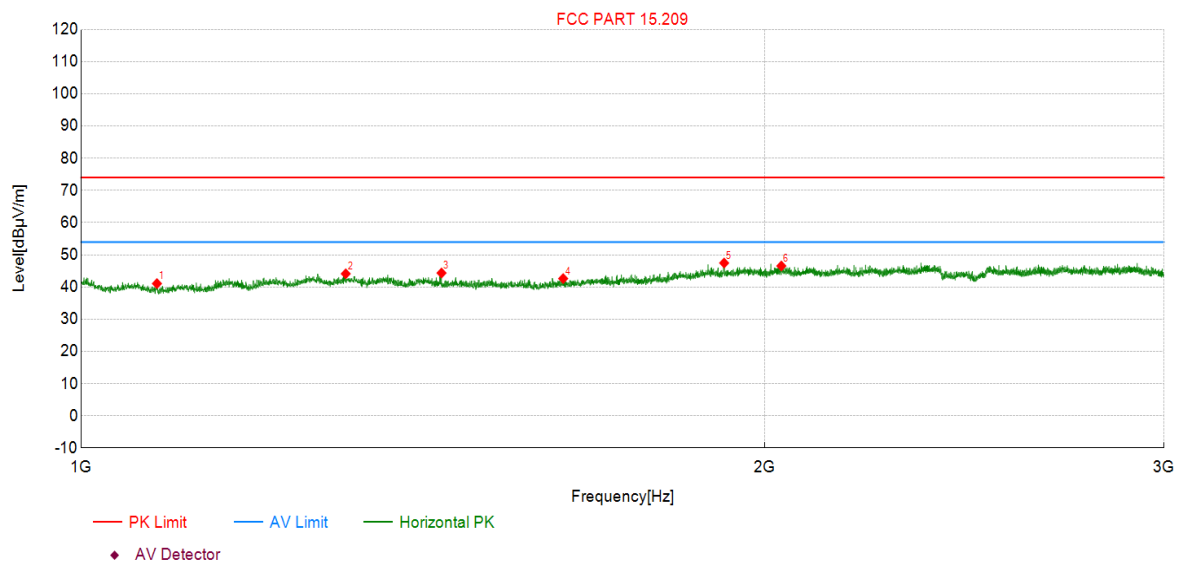


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	1080.00	59.37	41.09	-18.28	74.00	32.91	PK	Hori	PASS
2	1308.00	58.97	44.13	-14.84	74.00	29.87	PK	Hori	PASS
3	1441.50	60.26	44.37	-15.89	74.00	29.63	PK	Hori	PASS
4	1630.75	58.80	42.64	-16.16	74.00	31.36	PK	Hori	PASS
5	1920.00	59.78	47.47	-12.31	74.00	26.53	PK	Hori	PASS
6	2034.75	58.32	46.55	-11.77	74.00	27.45	PK	Hori	PASS

Left 3DH5 2480MHz

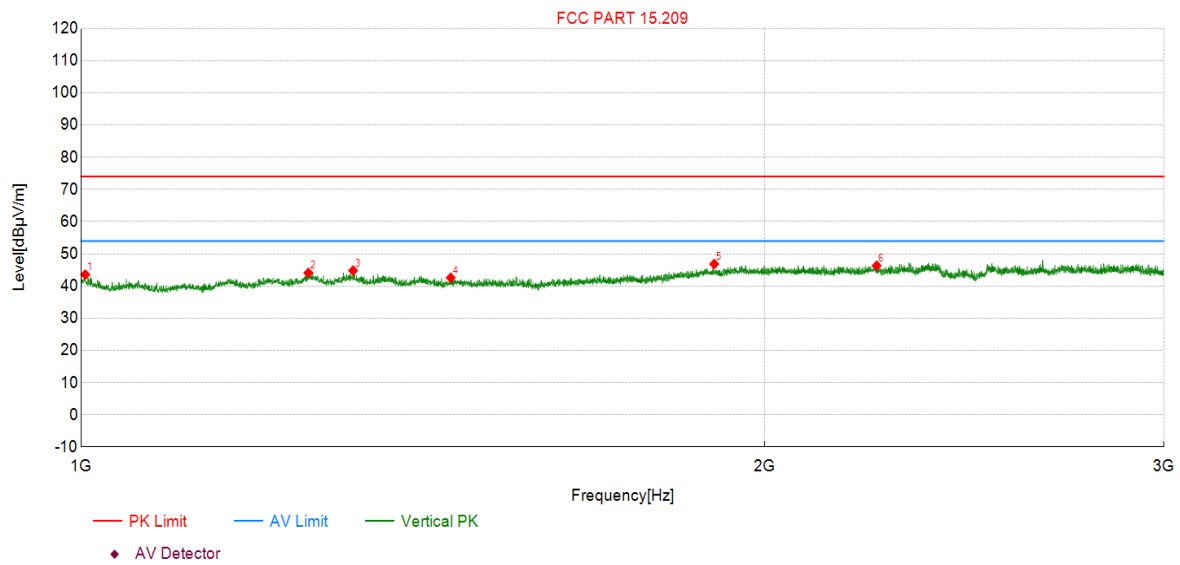


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	1004.25	60.41	43.54	-16.87	74.00	30.46	PK	Vert	PASS
2	1259.25	59.07	44.08	-14.99	74.00	29.92	PK	Vert	PASS
3	1317.75	59.71	44.81	-14.90	74.00	29.19	PK	Vert	PASS
4	1455.00	58.60	42.59	-16.01	74.00	31.41	PK	Vert	PASS
5	1900.75	59.30	46.84	-12.46	74.00	27.16	PK	Vert	PASS
6	2241.25	57.73	46.33	-11.40	74.00	27.67	PK	Vert	PASS

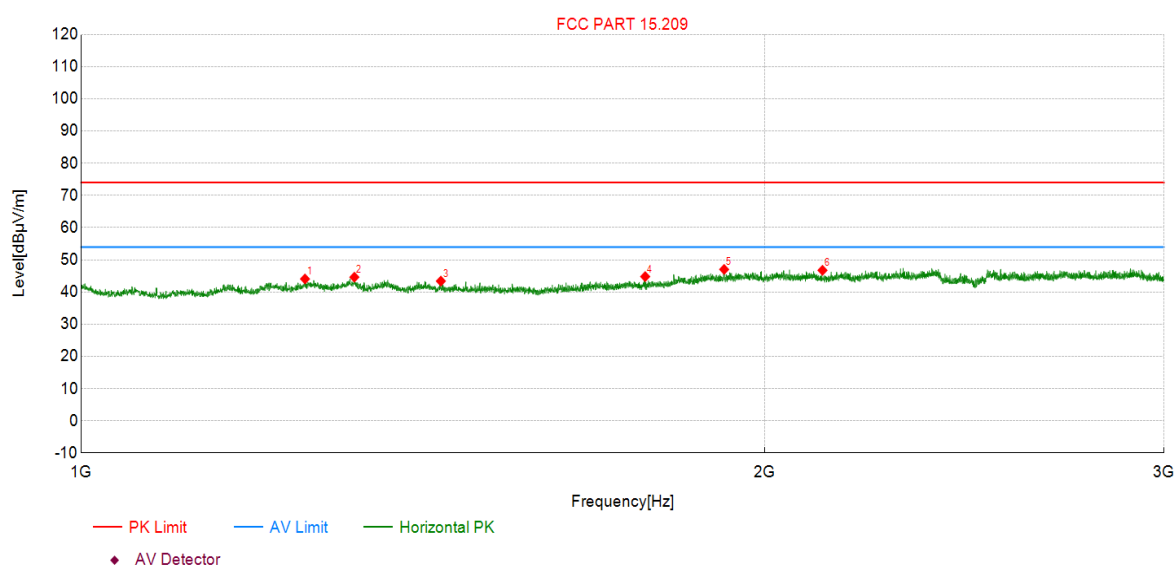


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	1255.00	59.08	44.07	-15.01	74.00	29.93	PK	Hori	PASS
2	1319.50	59.55	44.63	-14.92	74.00	29.37	PK	Hori	PASS
3	1440.50	59.29	43.41	-15.88	74.00	30.59	PK	Hori	PASS
4	1772.25	59.51	44.80	-14.71	74.00	29.20	PK	Hori	PASS
5	1920.00	59.35	47.04	-12.31	74.00	26.96	PK	Hori	PASS
6	2121.50	58.46	46.76	-11.70	74.00	27.24	PK	Hori	PASS

Right DH5 2402MHz

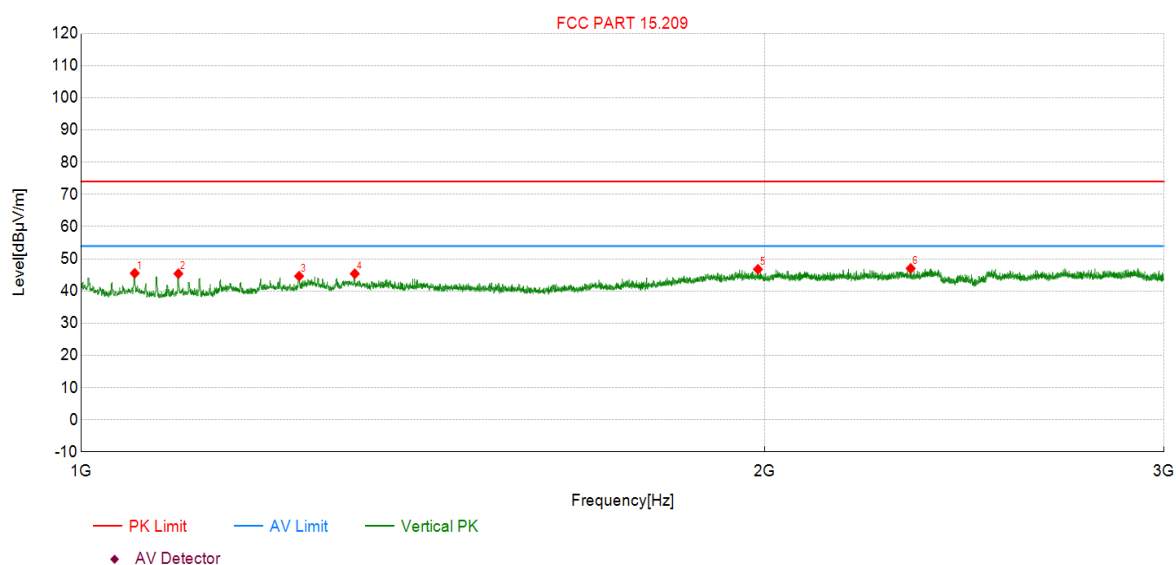


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	1056.00	63.61	45.53	-18.08	74.00	28.47	PK	Vert	PASS
2	1103.75	63.72	45.39	-18.33	74.00	28.61	PK	Vert	PASS
3	1247.50	59.73	44.63	-15.10	74.00	29.37	PK	Vert	PASS
4	1320.00	60.30	45.38	-14.92	74.00	28.62	PK	Vert	PASS
5	1987.00	58.61	46.77	-11.84	74.00	27.23	PK	Vert	PASS
6	2320.00	58.07	47.02	-11.05	74.00	26.98	PK	Vert	PASS

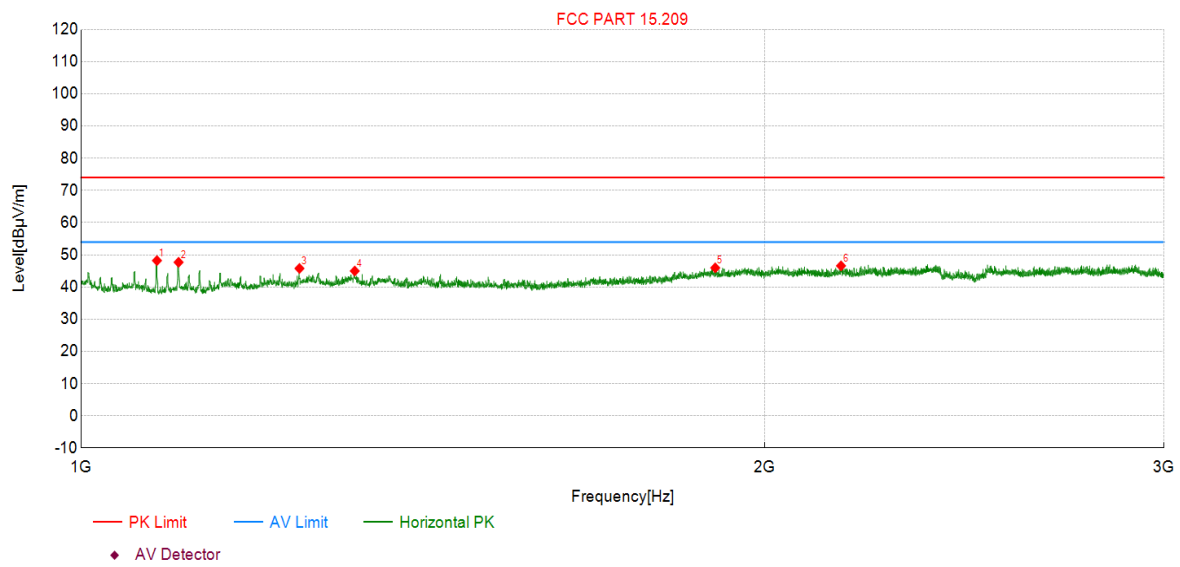


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	1080.00	66.51	48.23	-18.28	74.00	25.77	PK	Hori	PASS
2	1104.00	66.02	47.70	-18.32	74.00	26.30	PK	Hori	PASS
3	1248.00	60.87	45.78	-15.09	74.00	28.22	PK	Hori	PASS
4	1320.00	59.92	45.00	-14.92	74.00	29.00	PK	Hori	PASS
5	1902.75	58.42	45.98	-12.44	74.00	28.02	PK	Hori	PASS
6	2161.75	58.27	46.59	-11.68	74.00	27.41	PK	Hori	PASS

Right DH5 2441MHz

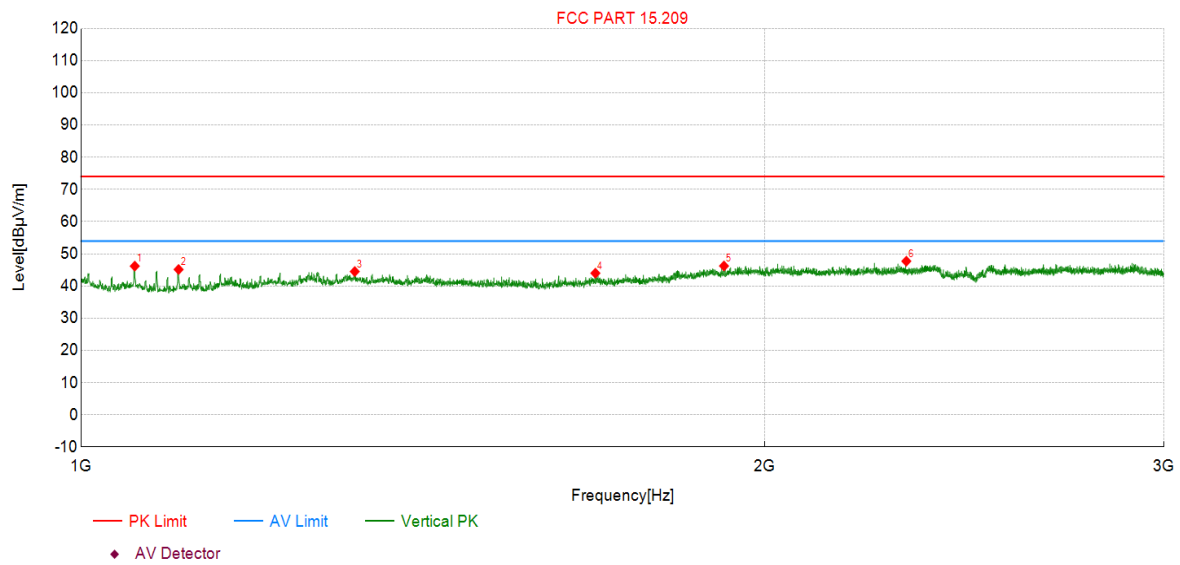


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	1056.00	64.28	46.20	-18.08	74.00	27.80	PK	Vert	PASS
2	1104.00	63.47	45.15	-18.32	74.00	28.85	PK	Vert	PASS
3	1320.00	59.44	44.52	-14.92	74.00	29.48	PK	Vert	PASS
4	1685.00	59.48	44.00	-15.48	74.00	30.00	PK	Vert	PASS
5	1919.75	58.55	46.24	-12.31	74.00	27.76	PK	Vert	PASS
6	2309.75	58.82	47.72	-11.10	74.00	26.28	PK	Vert	PASS

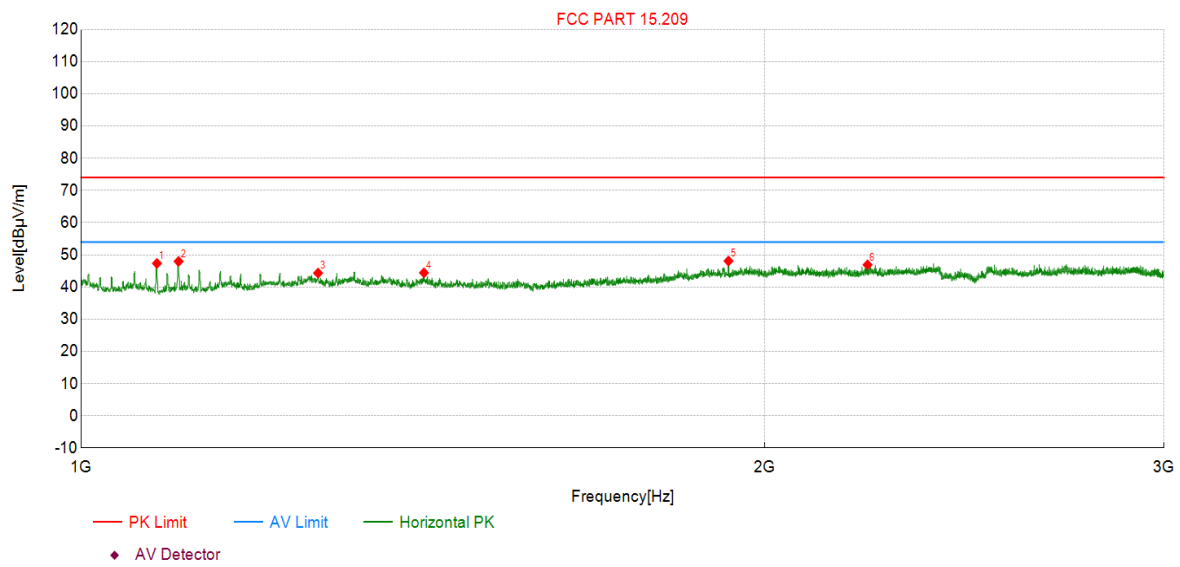


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	1080.00	65.63	47.35	-18.28	74.00	26.65	PK	Hori	PASS
2	1104.00	66.29	47.97	-18.32	74.00	26.03	PK	Hori	PASS
3	1271.75	59.28	44.35	-14.93	74.00	29.65	PK	Hori	PASS
4	1416.00	60.06	44.43	-15.63	74.00	29.57	PK	Hori	PASS
5	1928.50	60.35	48.11	-12.24	74.00	25.89	PK	Hori	PASS
6	2220.75	58.42	46.91	-11.51	74.00	27.09	PK	Hori	PASS

Right DH5 2480MHz

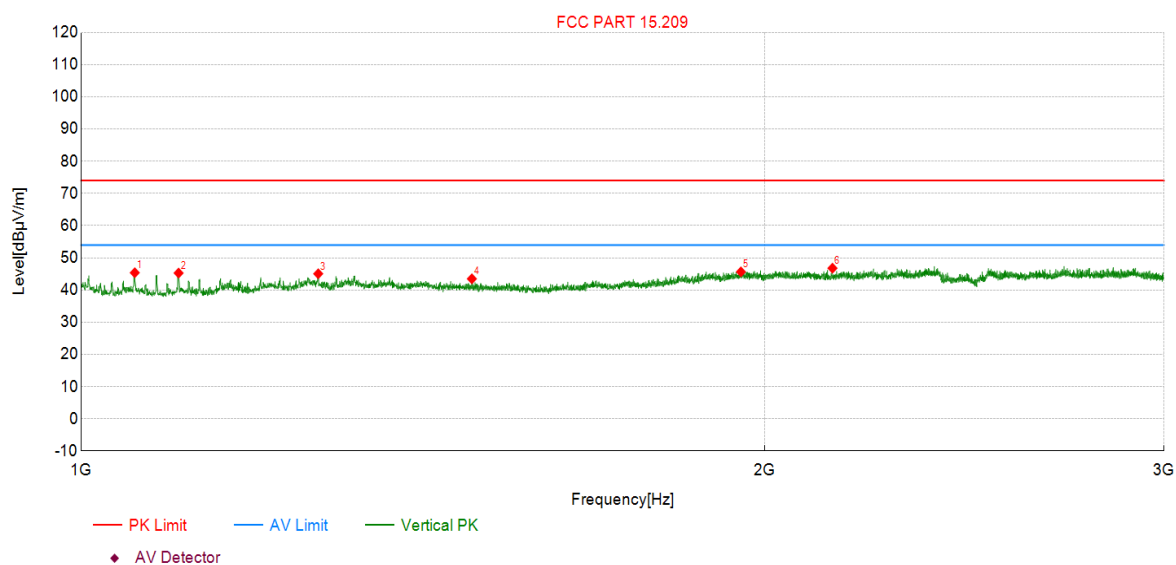


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	1056.00	63.47	45.39	-18.08	74.00	28.61	PK	Vert	PASS
2	1104.00	63.61	45.29	-18.32	74.00	28.71	PK	Vert	PASS
3	1272.00	60.00	45.07	-14.93	74.00	28.93	PK	Vert	PASS
4	1486.50	59.60	43.49	-16.11	74.00	30.51	PK	Vert	PASS
5	1953.00	57.72	45.66	-12.06	74.00	28.34	PK	Vert	PASS
6	2143.00	58.52	46.80	-11.72	74.00	27.20	PK	Vert	PASS

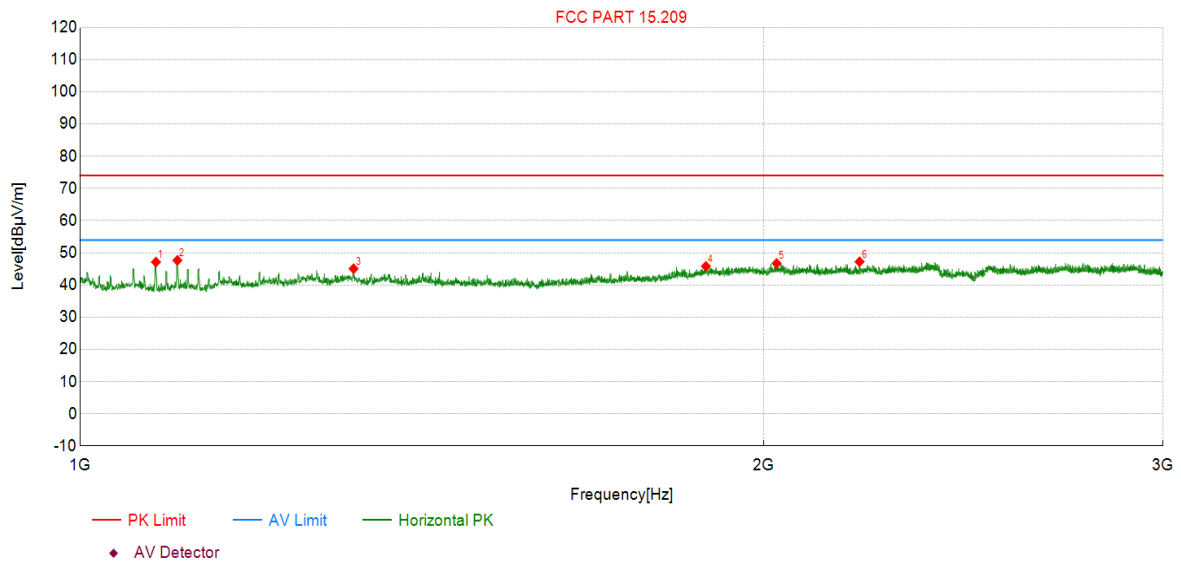


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	1080.00	65.42	47.14	-18.28	74.00	26.86	PK	Hori	PASS
2	1103.75	66.00	47.67	-18.33	74.00	26.33	PK	Hori	PASS
3	1319.75	60.00	45.08	-14.92	74.00	28.92	PK	Hori	PASS
4	1886.75	58.50	45.84	-12.66	74.00	28.16	PK	Hori	PASS
5	2027.00	58.52	46.74	-11.78	74.00	27.26	PK	Hori	PASS
6	2205.00	58.82	47.24	-11.58	74.00	26.76	PK	Hori	PASS

Right 2DH5 2402MHz

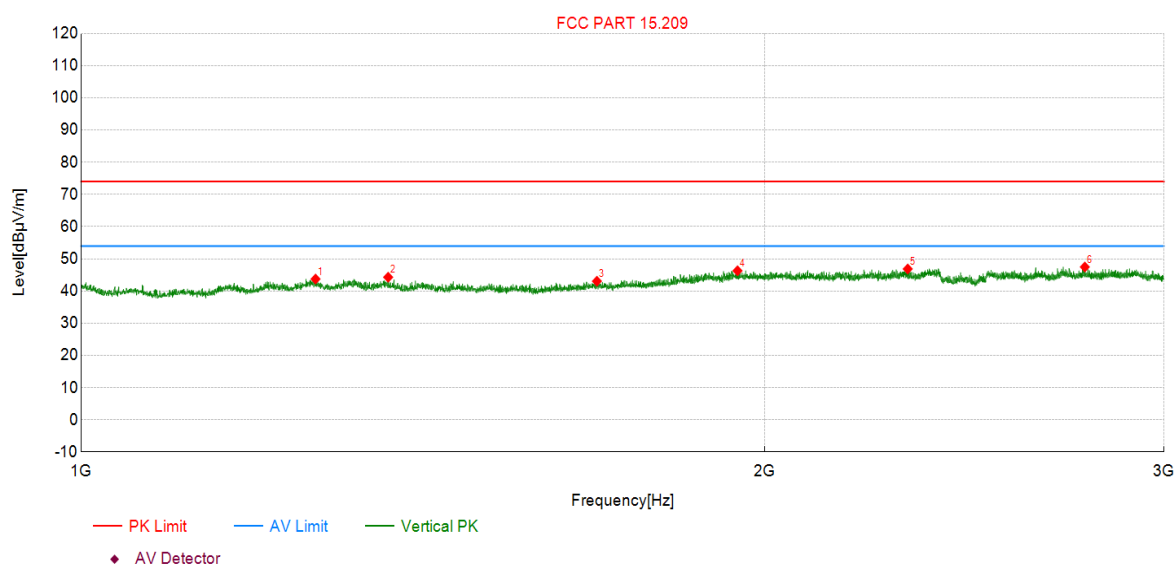


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	1268.50	58.68	43.74	-14.94	74.00	30.26	PK	Vert	PASS
2	1365.50	59.53	44.30	-15.23	74.00	29.70	PK	Vert	PASS
3	1687.50	58.51	43.06	-15.45	74.00	30.94	PK	Vert	PASS
4	1946.25	58.42	46.31	-12.11	74.00	27.69	PK	Vert	PASS
5	2313.00	57.96	46.87	-11.09	74.00	27.13	PK	Vert	PASS
6	2768.25	57.94	47.48	-10.46	74.00	26.52	PK	Vert	PASS

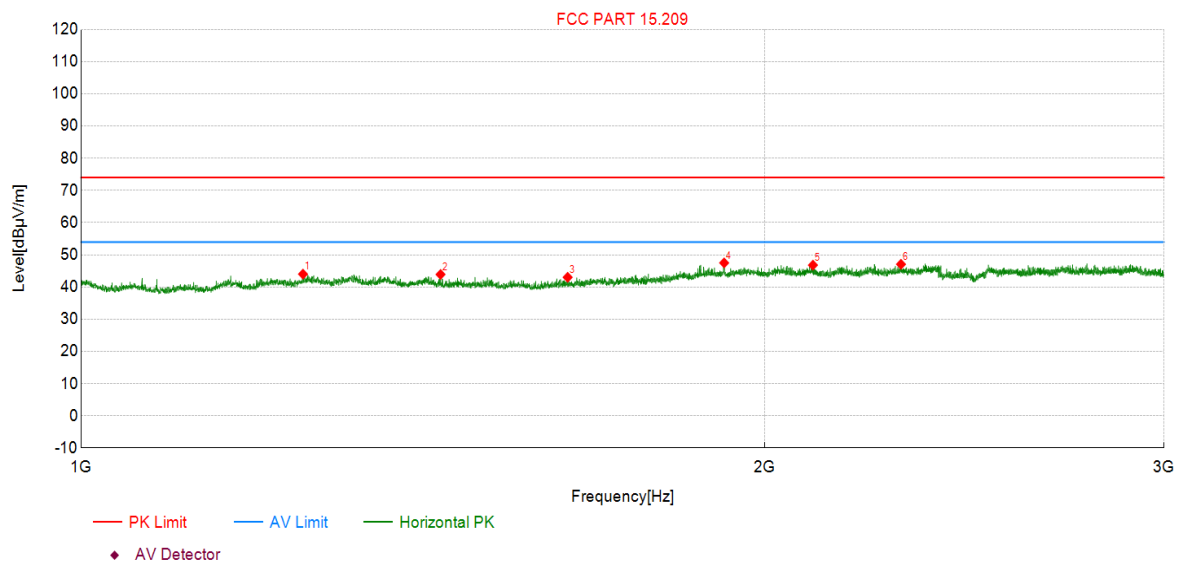


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	1252.50	59.05	44.02	-15.03	74.00	29.98	PK	Hori	PASS
2	1440.00	59.80	43.92	-15.88	74.00	30.08	PK	Hori	PASS
3	1638.25	59.09	43.04	-16.05	74.00	30.96	PK	Hori	PASS
4	1920.00	59.82	47.51	-12.31	74.00	26.49	PK	Hori	PASS
5	2101.00	58.52	46.82	-11.70	74.00	27.18	PK	Hori	PASS
6	2297.25	58.26	47.09	-11.17	74.00	26.91	PK	Hori	PASS

Right 2DH5 2441MHz

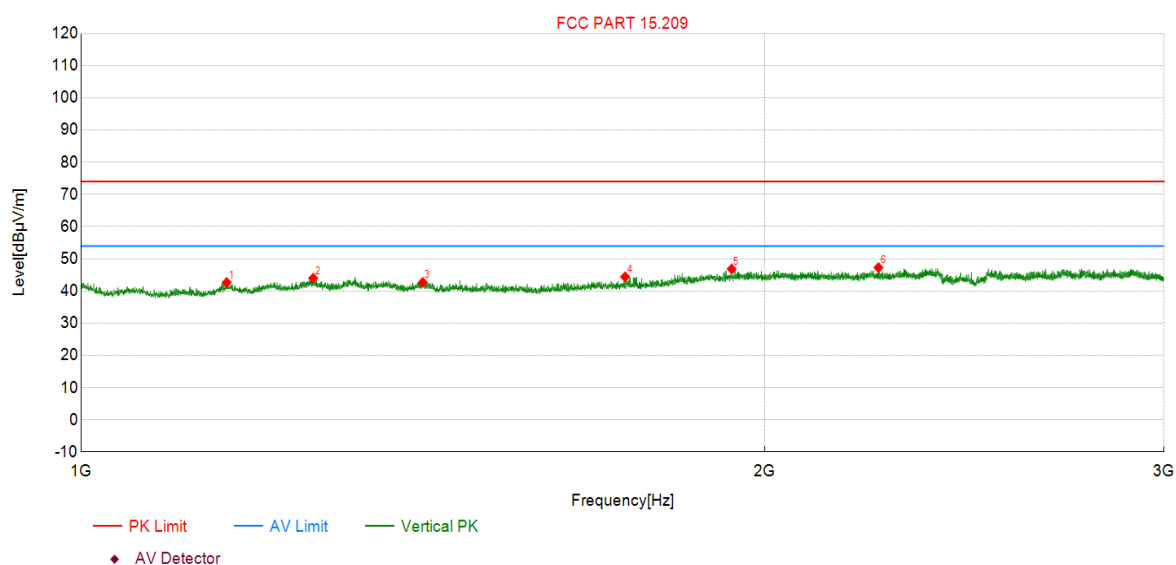


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	1159.25	59.47	42.67	-16.80	74.00	31.33	PK	Vert	PASS
2	1265.50	58.95	44.00	-14.95	74.00	30.00	PK	Vert	PASS
3	1414.25	58.30	42.69	-15.61	74.00	31.31	PK	Vert	PASS
4	1736.50	59.52	44.45	-15.07	74.00	29.55	PK	Vert	PASS
5	1934.75	59.08	46.87	-12.21	74.00	27.13	PK	Vert	PASS
6	2245.50	58.68	47.30	-11.38	74.00	26.70	PK	Vert	PASS

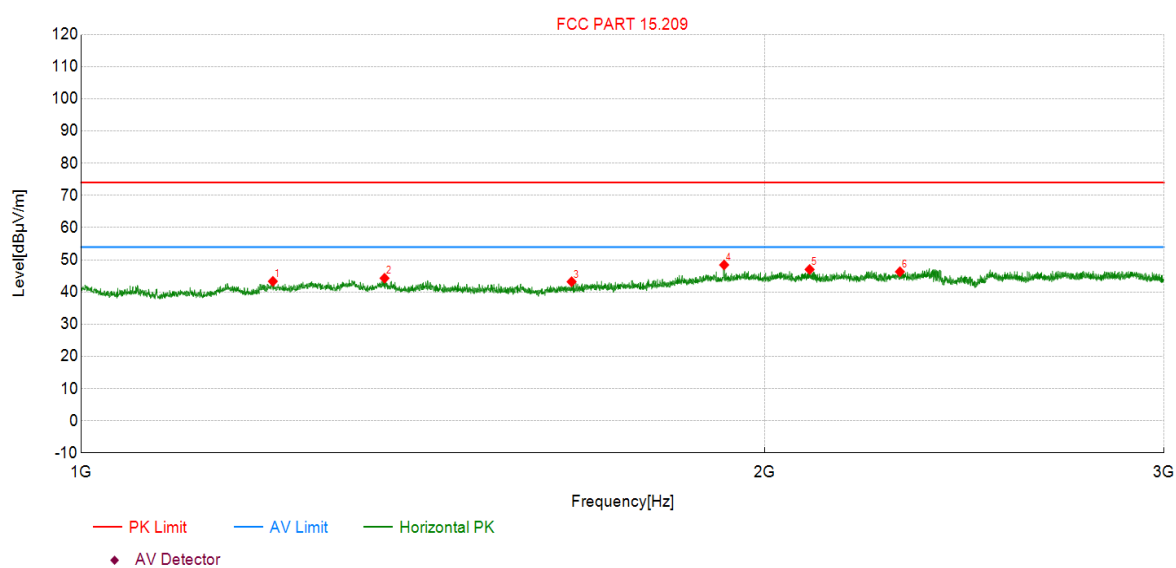


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	1214.75	59.31	43.34	-15.97	74.00	30.66	PK	Hori	PASS
2	1360.50	59.50	44.31	-15.19	74.00	29.69	PK	Hori	PASS
3	1644.75	59.16	43.21	-15.95	74.00	30.79	PK	Hori	PASS
4	1920.00	60.74	48.43	-12.31	74.00	25.57	PK	Hori	PASS
5	2094.00	58.72	47.01	-11.71	74.00	26.99	PK	Hori	PASS
6	2294.75	57.48	46.31	-11.17	74.00	27.69	PK	Hori	PASS

Right 2DH5 2480MHz

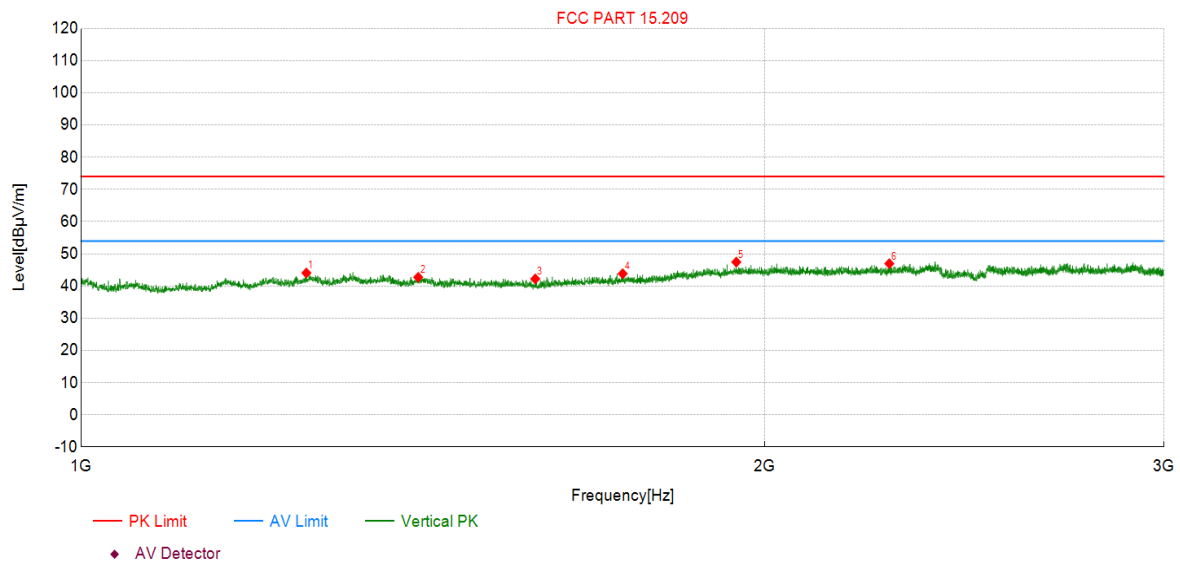


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	1256.75	59.07	44.07	-15.00	74.00	29.93	PK	Vert	PASS
2	1407.75	58.28	42.74	-15.54	74.00	31.26	PK	Vert	PASS
3	1585.25	58.80	42.23	-16.57	74.00	31.77	PK	Vert	PASS
4	1732.25	58.94	43.84	-15.10	74.00	30.16	PK	Vert	PASS
5	1943.75	59.58	47.45	-12.13	74.00	26.55	PK	Vert	PASS
6	2270.25	58.24	46.97	-11.27	74.00	27.03	PK	Vert	PASS

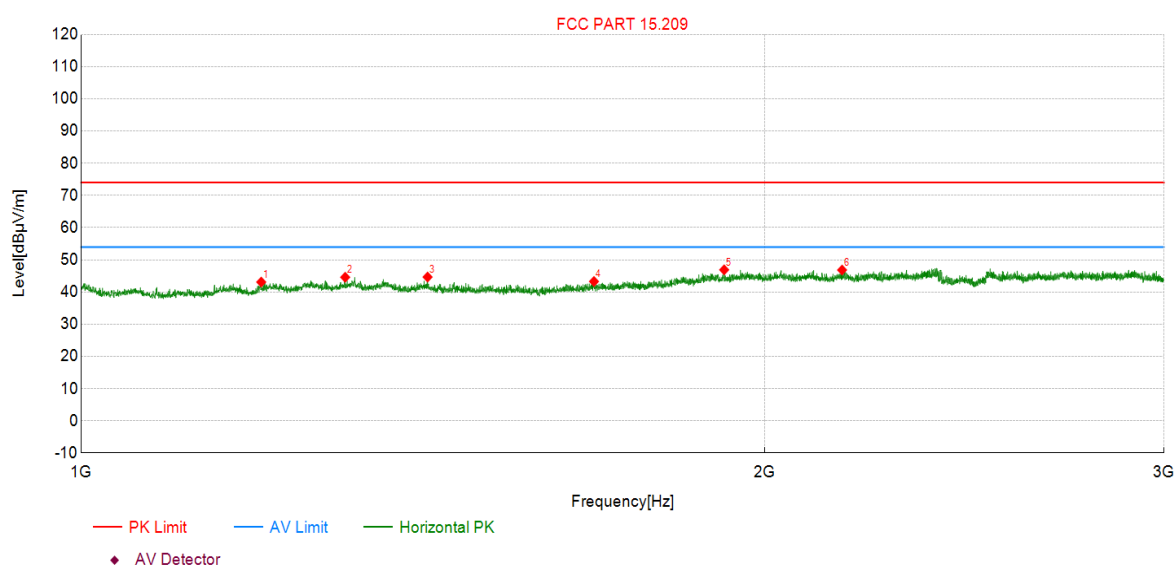


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	1200.50	59.45	43.10	-16.35	74.00	30.90	PK	Hori	PASS
2	1307.25	59.44	44.61	-14.83	74.00	29.39	PK	Hori	PASS
3	1421.25	60.35	44.67	-15.68	74.00	29.33	PK	Hori	PASS
4	1682.50	58.81	43.30	-15.51	74.00	30.70	PK	Hori	PASS
5	1920.00	59.22	46.91	-12.31	74.00	27.09	PK	Hori	PASS
6	2164.00	58.54	46.85	-11.69	74.00	27.15	PK	Hori	PASS

Right 3DH5 2402MHz

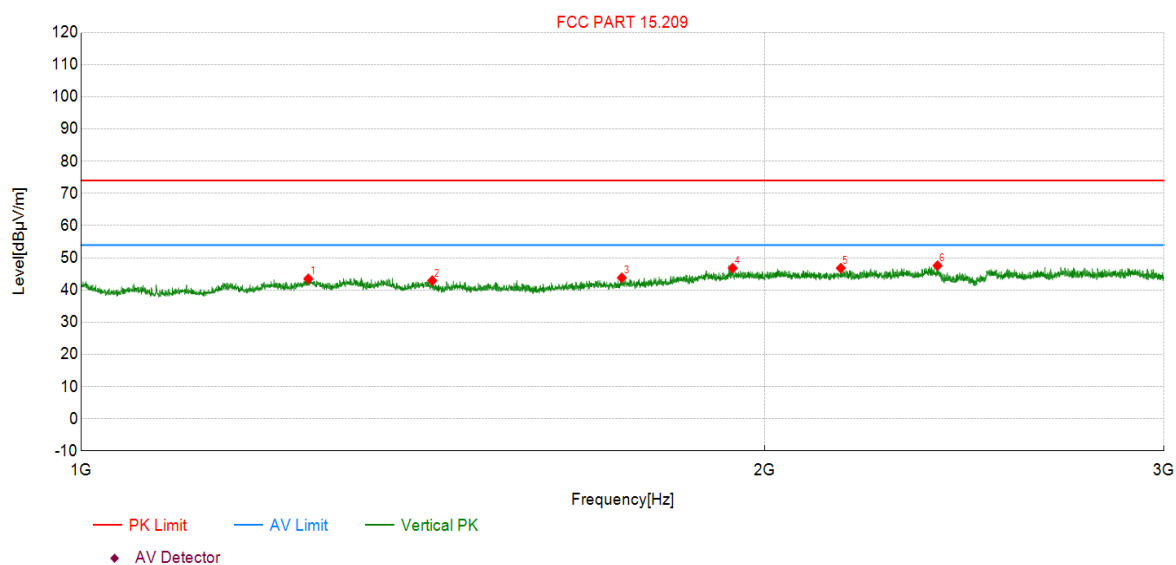


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	1259.25	58.48	43.49	-14.99	74.00	30.51	PK	Vert	PASS
2	1428.00	58.67	42.92	-15.75	74.00	31.08	PK	Vert	PASS
3	1730.75	58.92	43.81	-15.11	74.00	30.19	PK	Vert	PASS
4	1936.75	58.99	46.80	-12.19	74.00	27.20	PK	Vert	PASS
5	2161.25	58.48	46.80	-11.68	74.00	27.20	PK	Vert	PASS
6	2384.00	58.13	47.58	-10.55	74.00	26.42	PK	Vert	PASS

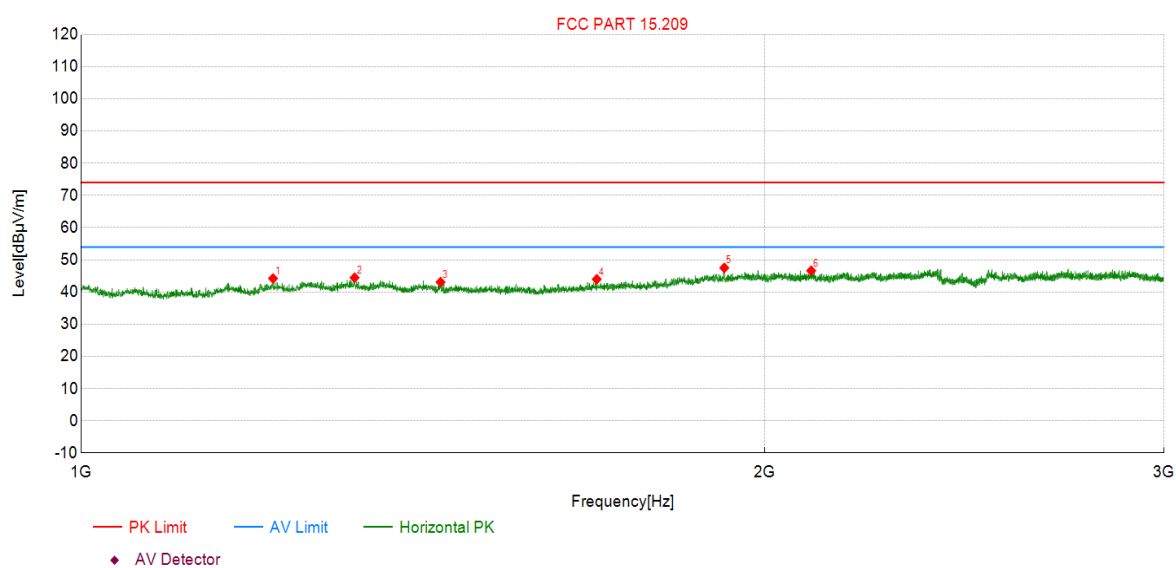


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	1215.00	60.18	44.22	-15.96	74.00	29.78	PK	Hori	PASS
2	1319.75	59.38	44.46	-14.92	74.00	29.54	PK	Hori	PASS
3	1440.00	58.98	43.10	-15.88	74.00	30.90	PK	Hori	PASS
4	1687.25	59.44	43.99	-15.45	74.00	30.01	PK	Hori	PASS
5	1920.25	59.83	47.52	-12.31	74.00	26.48	PK	Hori	PASS
6	2097.25	58.34	46.63	-11.71	74.00	27.37	PK	Hori	PASS

Right 3DH5 2441MHz

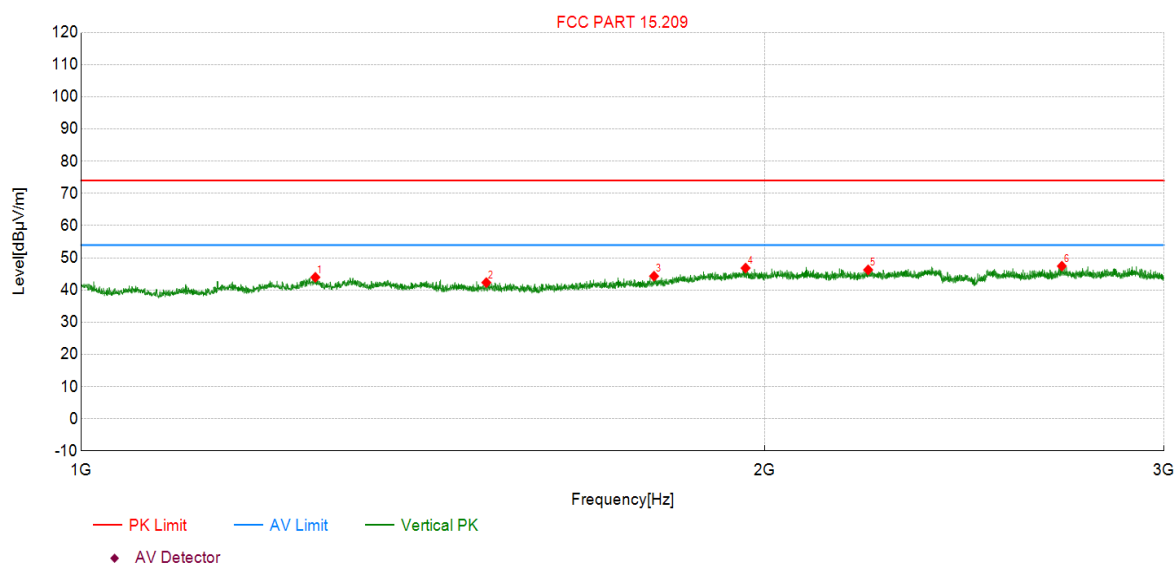


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	1268.25	58.90	43.96	-14.94	74.00	30.04	PK	Vert	PASS
2	1508.50	58.55	42.33	-16.22	74.00	31.67	PK	Vert	PASS
3	1788.25	58.84	44.32	-14.52	74.00	29.68	PK	Vert	PASS
4	1962.25	58.85	46.84	-12.01	74.00	27.16	PK	Vert	PASS
5	2222.00	57.78	46.28	-11.50	74.00	27.72	PK	Vert	PASS
6	2704.50	57.86	47.43	-10.43	74.00	26.57	PK	Vert	PASS

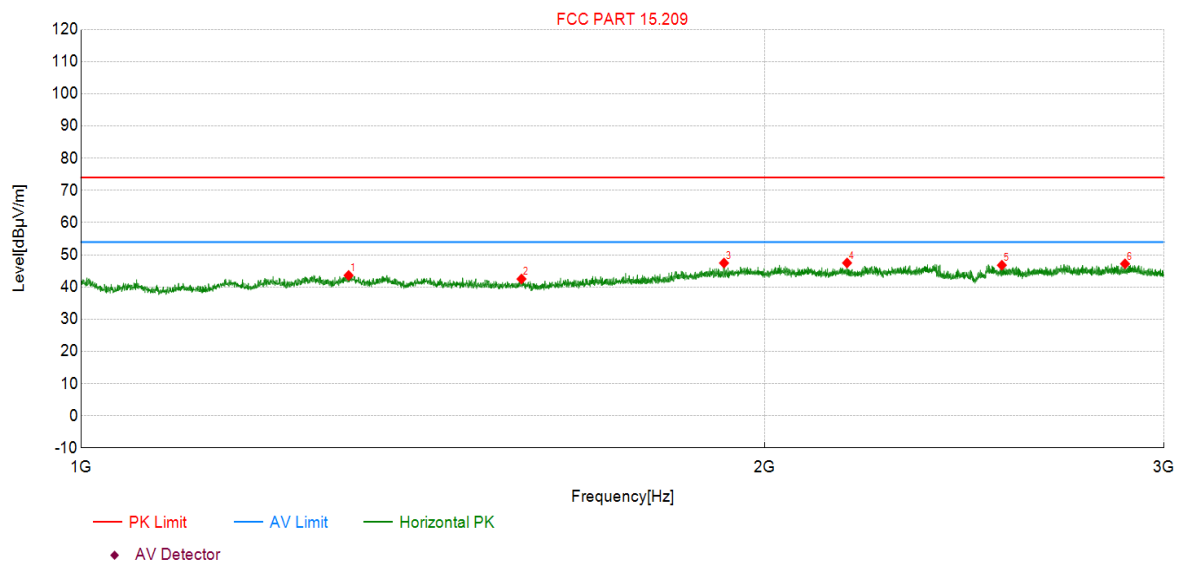


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	1311.75	58.48	43.62	-14.86	74.00	30.38	PK	Hori	PASS
2	1563.25	59.03	42.51	-16.52	74.00	31.49	PK	Hori	PASS
3	1919.75	59.78	47.47	-12.31	74.00	26.53	PK	Hori	PASS
4	2175.00	59.15	47.49	-11.66	74.00	26.51	PK	Hori	PASS
5	2544.75	57.74	46.78	-10.96	74.00	27.22	PK	Hori	PASS
6	2883.50	57.19	47.22	-9.97	74.00	26.78	PK	Hori	PASS

Right 3DH5 2480MHz

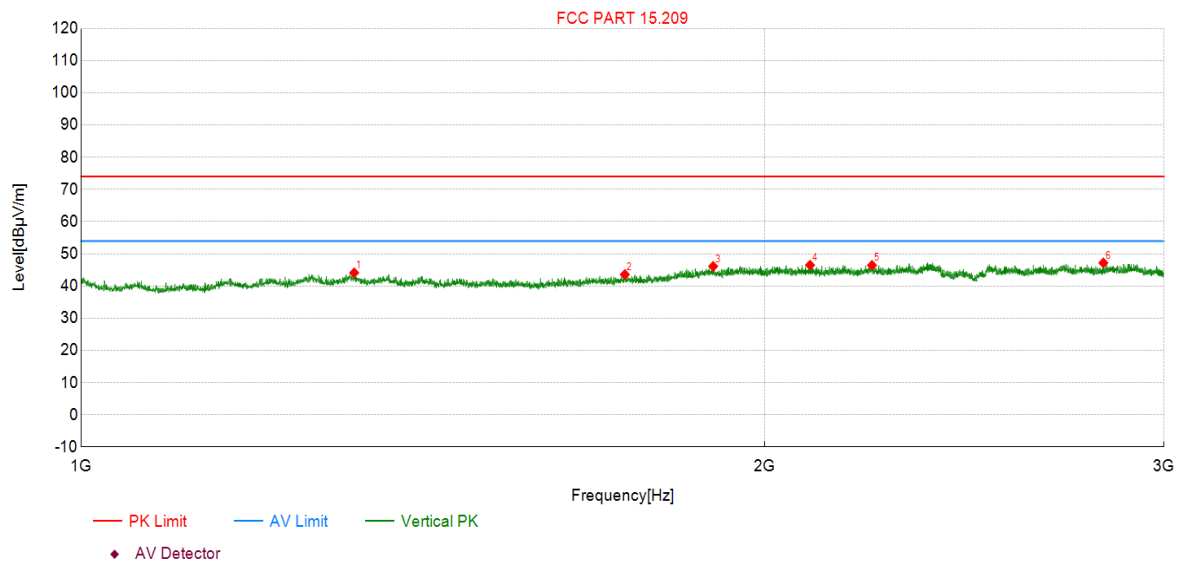


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	1319.25	59.05	44.14	-14.91	74.00	29.86	PK	Vert	PASS
2	1736.00	58.67	43.60	-15.07	74.00	30.40	PK	Vert	PASS
3	1898.75	58.61	46.13	-12.48	74.00	27.87	PK	Vert	PASS
4	2094.75	58.22	46.51	-11.71	74.00	27.49	PK	Vert	PASS
5	2230.75	57.91	46.46	-11.45	74.00	27.54	PK	Vert	PASS
6	2820.75	57.65	47.19	-10.46	74.00	26.81	PK	Vert	PASS

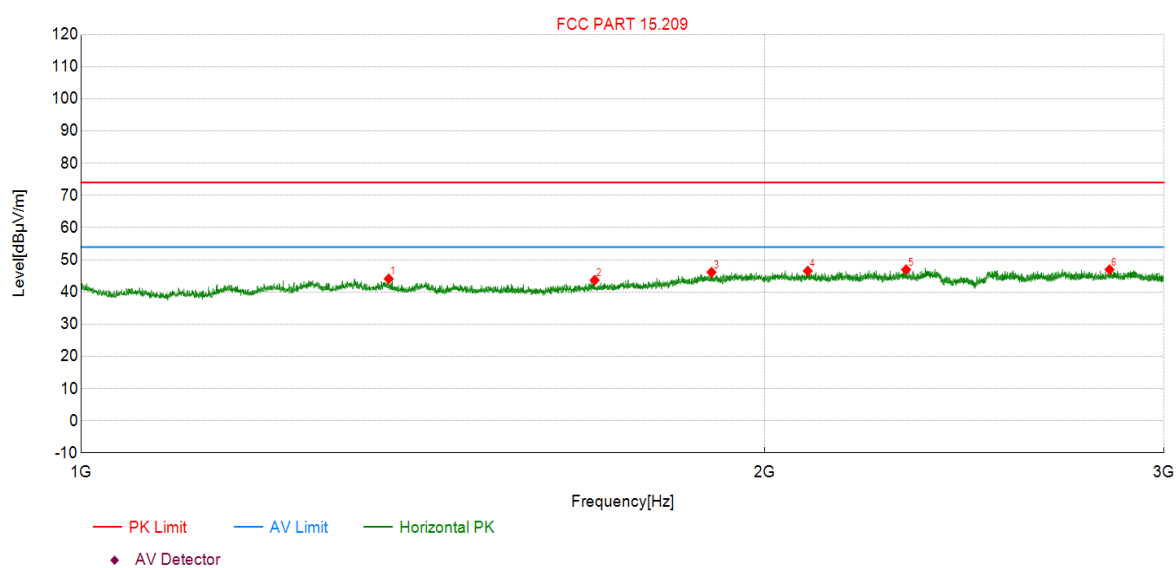

NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	1366.25	59.34	44.11	-15.23	74.00	29.89	PK	Hori	PASS
2	1683.75	59.19	43.70	-15.49	74.00	30.30	PK	Hori	PASS
3	1895.50	58.68	46.15	-12.53	74.00	27.85	PK	Hori	PASS
4	2090.00	58.27	46.55	-11.72	74.00	27.45	PK	Hori	PASS
5	2309.25	58.06	46.96	-11.10	74.00	27.04	PK	Hori	PASS
6	2838.50	57.31	46.96	-10.35	74.00	27.04	PK	Hori	PASS

Radiated Emission test (3GHz - 18GHz)


Left DH5 2402MHz

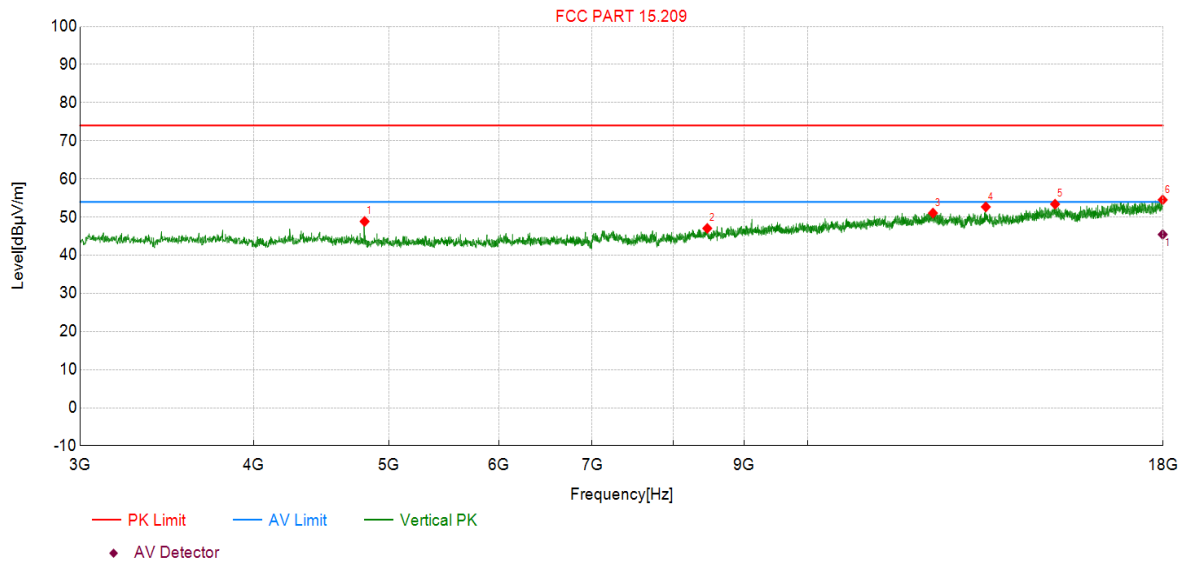

NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	4803.75	57.52	48.86	-8.66	74.00	25.14	PK	Vert	PASS
2	8467.50	51.35	47.05	-4.30	74.00	26.95	PK	Vert	PASS
3	12300.00	49.24	51.06	1.82	74.00	22.94	PK	Vert	PASS
4	13425.00	50.42	52.68	2.26	74.00	21.32	PK	Vert	PASS
5	15054.38	48.57	53.40	4.83	74.00	20.60	PK	Vert	PASS
6	17988.75	46.45	54.53	8.08	74.00	19.47	PK	Vert	PASS

Final Data List


NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Pol	Verdict
1	17988.75	8.08	37.37	45.45	54.00	8.55	Vertical	PASS

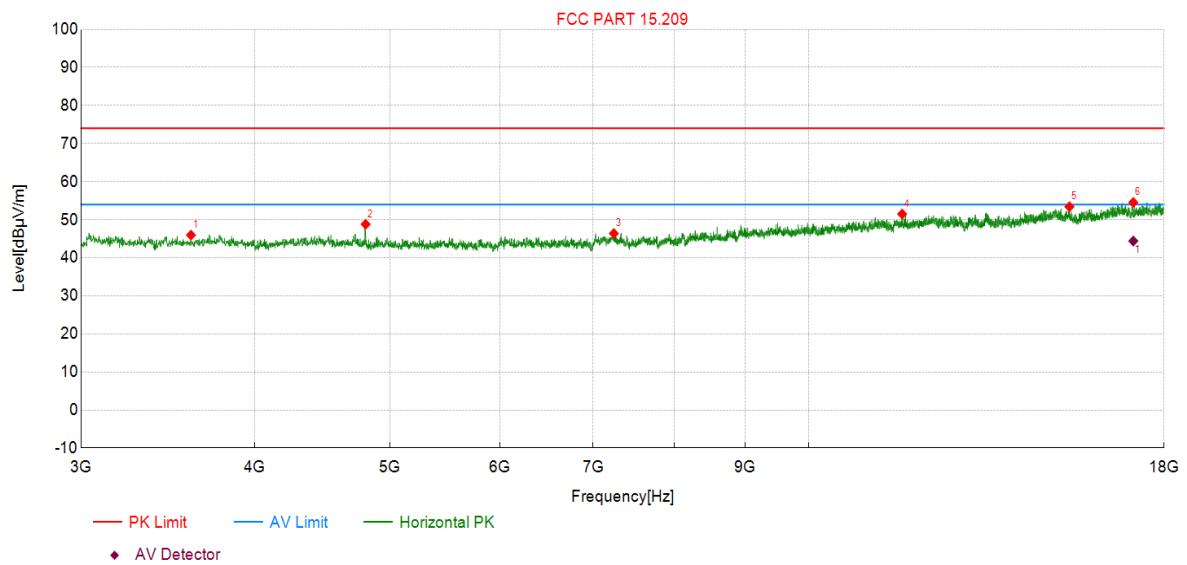

NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	3598.13	55.71	45.97	-9.74	74.00	28.03	PK	Hori	PASS
2	4803.75	57.47	48.81	-8.66	74.00	25.19	PK	Hori	PASS
3	7243.13	51.96	46.38	-5.58	74.00	27.62	PK	Hori	PASS
4	11670.00	50.79	51.50	0.71	74.00	22.50	PK	Hori	PASS
5	15390.00	48.46	53.41	4.95	74.00	20.59	PK	Hori	PASS
6	17105.63	47.16	54.55	7.39	74.00	19.45	PK	Hori	PASS


Final Data List								
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Pol	Verdict
1	17105.63	7.39	37.02	44.41	54.00	9.59	Horizontal	PASS

Left DH5 2441MHz

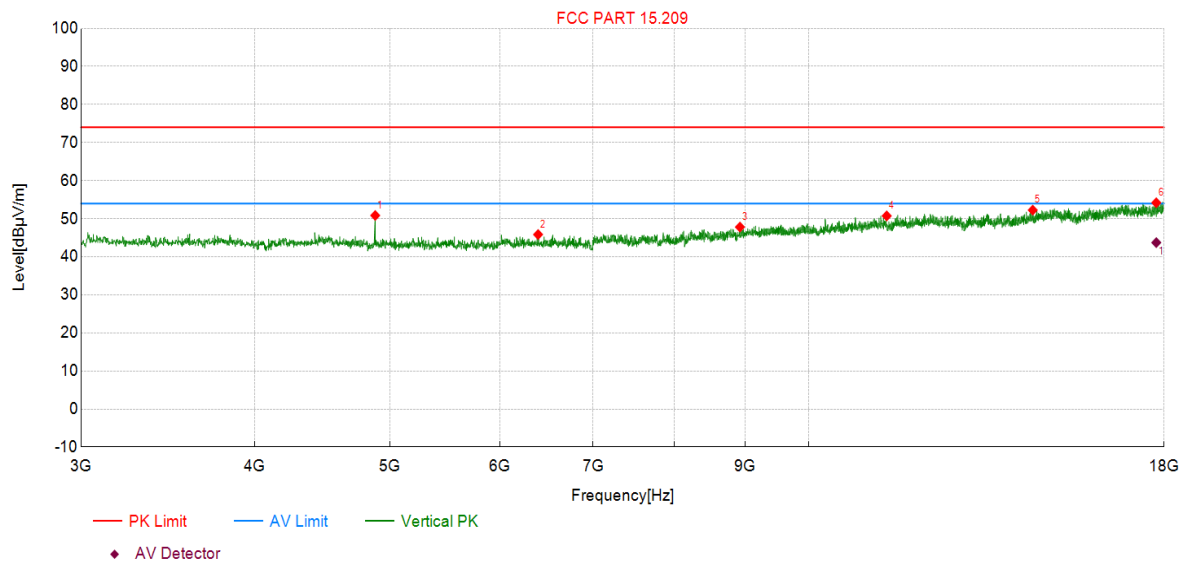

NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	4880.63	59.20	50.86	-8.34	74.00	23.14	PK	Vert	PASS
2	6390.00	52.33	45.85	-6.48	74.00	28.15	PK	Vert	PASS
3	8923.13	51.62	47.81	-3.81	74.00	26.19	PK	Vert	PASS
4	11375.63	50.09	50.74	0.65	74.00	23.26	PK	Vert	PASS
5	14484.38	48.49	52.26	3.77	74.00	21.74	PK	Vert	PASS
6	17769.38	46.40	54.19	7.79	74.00	19.81	PK	Vert	PASS


Final Data List								
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Pol	Verdict
1	17769.38	7.79	35.94	43.73	54.00	10.27	Vertical	PASS

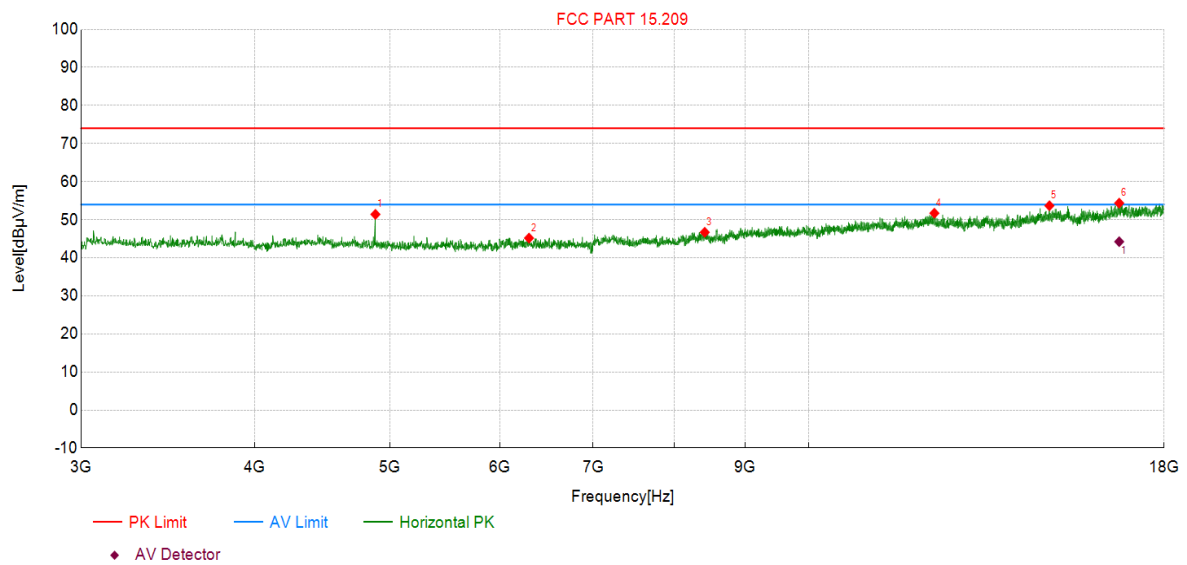

NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	4882.50	59.73	51.41	-8.32	74.00	22.59	PK	Hori	PASS
2	6294.38	51.78	45.17	-6.61	74.00	28.83	PK	Hori	PASS
3	8418.75	51.16	46.70	-4.46	74.00	27.30	PK	Hori	PASS
4	12309.38	49.96	51.72	1.76	74.00	22.28	PK	Hori	PASS
5	14889.38	49.23	53.68	4.45	74.00	20.32	PK	Hori	PASS
6	16711.88	47.20	54.36	7.16	74.00	19.64	PK	Hori	PASS


Final Data List								
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Pol	Verdict
1	16711.88	7.16	37.07	44.23	54.00	9.77	Horizontal	PASS

Left DH5 2480MHz

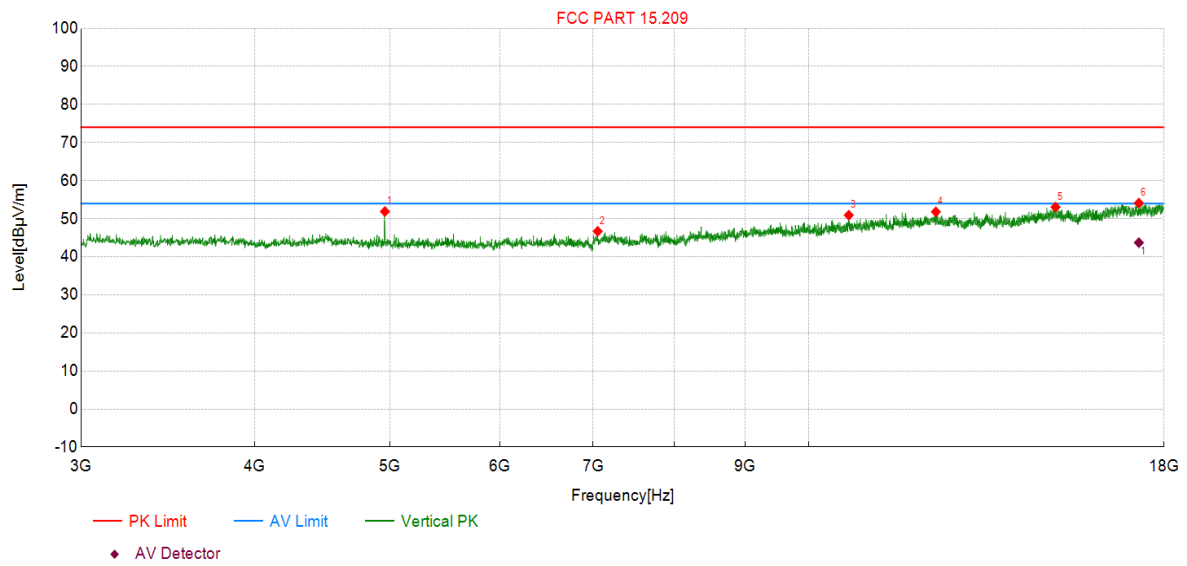

NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	4959.38	59.84	51.89	-7.95	74.00	22.11	PK	Vert	PASS
2	7051.88	52.65	46.69	-5.96	74.00	27.31	PK	Vert	PASS
3	10683.75	51.35	50.92	-0.43	74.00	23.08	PK	Vert	PASS
4	12339.38	50.20	51.81	1.61	74.00	22.19	PK	Vert	PASS
5	15041.25	48.22	53.05	4.83	74.00	20.95	PK	Vert	PASS
6	17265.00	46.55	54.10	7.55	74.00	19.90	PK	Vert	PASS


Final Data List								
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Pol	Verdict
1	17265.00	7.55	36.16	43.71	54.00	10.29	Vertical	PASS

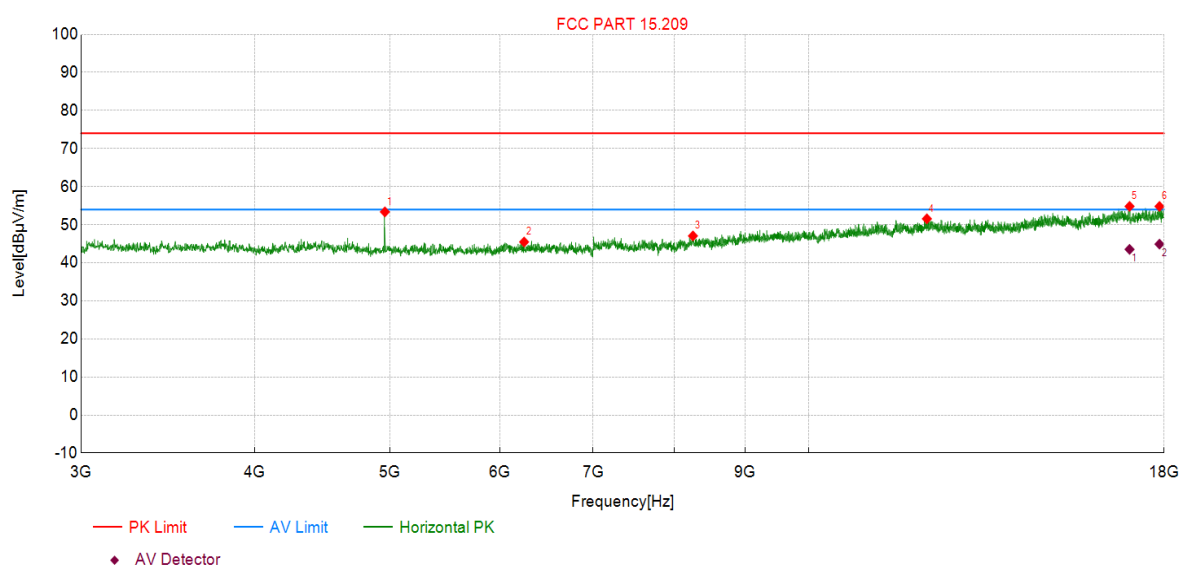

NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	4959.38	61.32	53.37	-7.95	74.00	20.63	PK	Hori	PASS
2	6243.75	51.97	45.47	-6.50	74.00	28.53	PK	Hori	PASS
3	8255.63	51.93	47.06	-4.87	74.00	26.94	PK	Hori	PASS
4	12157.50	50.27	51.55	1.28	74.00	22.45	PK	Hori	PASS
5	17000.63	47.52	54.82	7.30	74.00	19.18	PK	Hori	PASS
6	17863.13	46.69	54.81	8.12	74.00	19.19	PK	Hori	PASS


Final Data List								
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Pol	Verdict
1	17000.63	7.30	36.23	43.53	54.00	10.47	Horizontal	PASS
2	17863.13	8.12	36.79	44.91	54.00	9.09	Horizontal	PASS

Left 2DH5 2402MHz

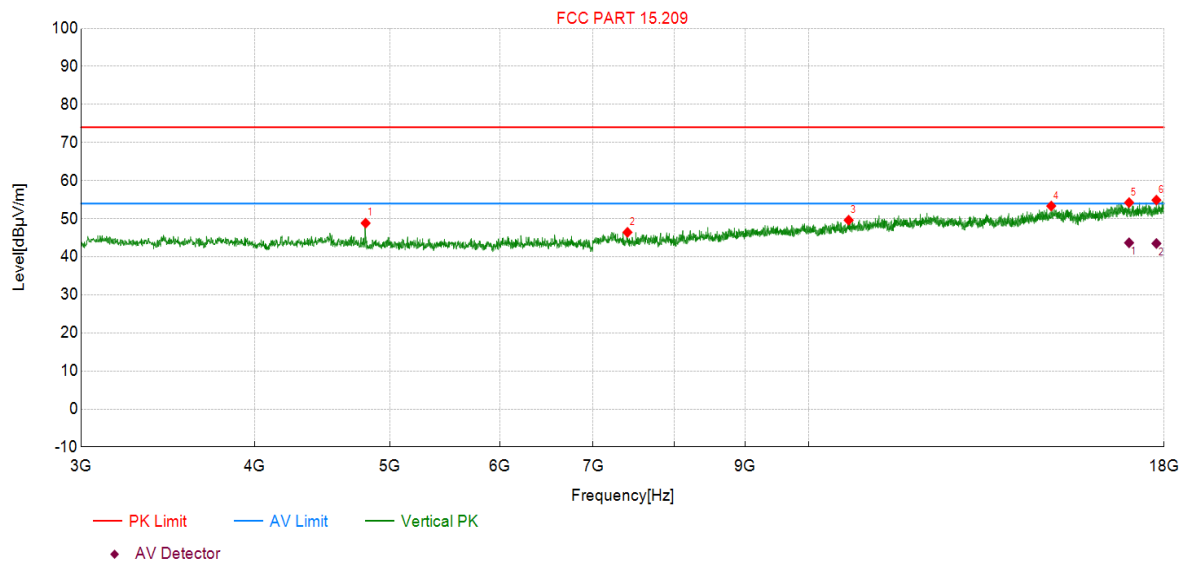

NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	4803.75	57.50	48.84	-8.66	74.00	25.16	PK	Vert	PASS
2	7408.13	52.30	46.43	-5.87	74.00	27.57	PK	Vert	PASS
3	10681.88	50.04	49.61	-0.43	74.00	24.39	PK	Vert	PASS
4	14934.38	48.75	53.34	4.59	74.00	20.66	PK	Vert	PASS
5	16987.50	46.95	54.24	7.29	74.00	19.76	PK	Vert	PASS
6	17773.13	47.09	54.90	7.81	74.00	19.10	PK	Vert	PASS


Final Data List								
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Pol	Verdict
1	16987.50	7.29	36.39	43.68	54.00	10.32	Vertical	PASS
2	17773.13	7.81	35.69	43.50	54.00	10.50	Vertical	PASS

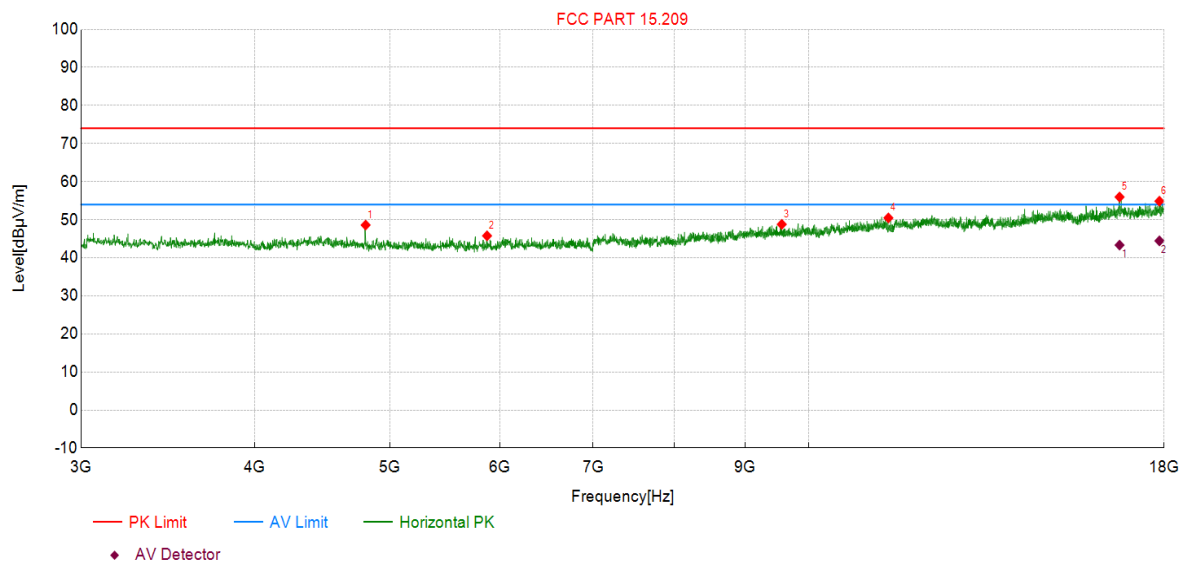

NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	4803.75	57.26	48.60	-8.66	74.00	25.40	PK	Hori	PASS
2	5872.50	53.00	45.77	-7.23	74.00	28.23	PK	Hori	PASS
3	9562.50	51.37	48.79	-2.58	74.00	25.21	PK	Hori	PASS
4	11407.50	49.81	50.48	0.67	74.00	23.52	PK	Hori	PASS
5	16721.25	48.73	55.97	7.24	74.00	18.03	PK	Hori	PASS
6	17861.25	46.76	54.88	8.12	74.00	19.12	PK	Hori	PASS


Final Data List								
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Pol	Verdict
1	16721.25	7.24	36.10	43.34	54.00	10.66	Horizontal	PASS
2	17861.25	8.12	36.33	44.45	54.00	9.55	Horizontal	PASS

Left 2DH5 2441MHz

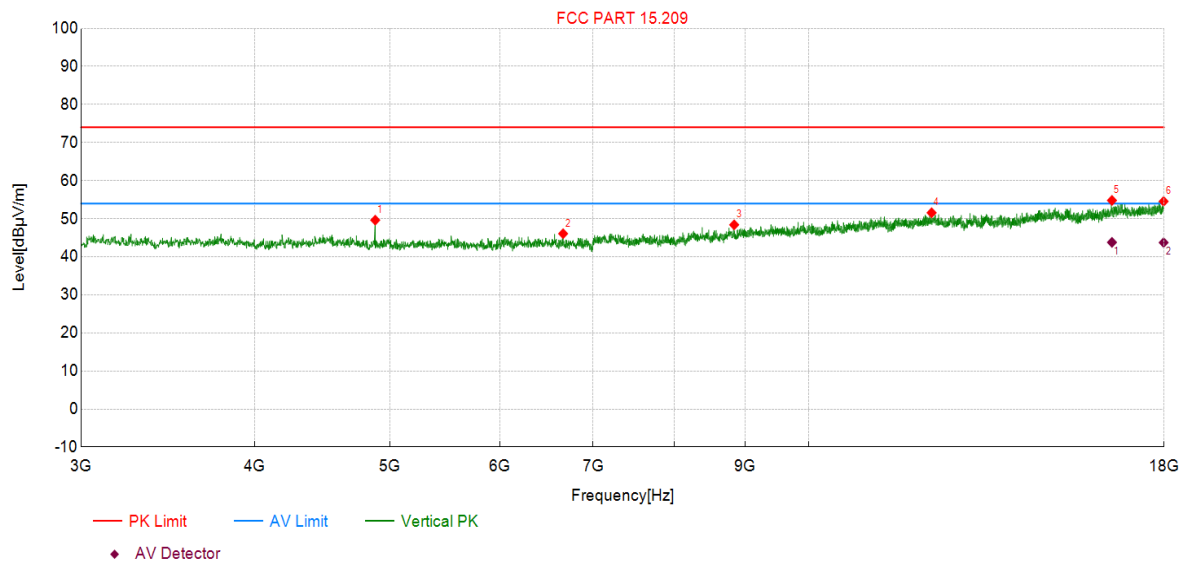

NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	4880.63	57.97	49.63	-8.34	74.00	24.37	PK	Vert	PASS
2	6660.00	52.21	46.07	-6.14	74.00	27.93	PK	Vert	PASS
3	8838.75	52.30	48.40	-3.90	74.00	25.60	PK	Vert	PASS
4	12253.13	50.14	51.57	1.43	74.00	22.43	PK	Vert	PASS
5	16513.13	47.74	54.81	7.07	74.00	19.19	PK	Vert	PASS
6	17986.88	46.48	54.56	8.08	74.00	19.44	PK	Vert	PASS


Final Data List								
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Pol	Verdict
1	16513.13	7.07	36.72	43.79	54.00	10.21	Vertical	PASS
2	17986.88	8.08	35.66	43.74	54.00	10.26	Vertical	PASS

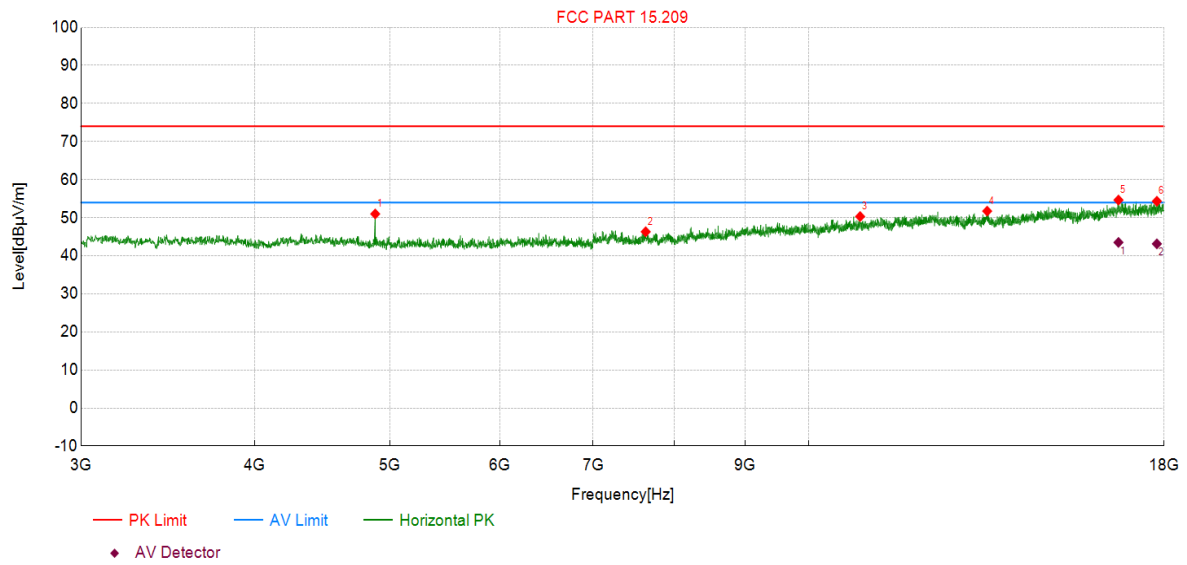

NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	4880.63	59.34	51.00	-8.34	74.00	23.00	PK	Hori	PASS
2	7635.00	51.80	46.31	-5.49	74.00	27.69	PK	Hori	PASS
3	10886.25	50.36	50.32	-0.04	74.00	23.68	PK	Hori	PASS
4	13432.50	49.50	51.74	2.24	74.00	22.26	PK	Hori	PASS
5	16691.25	47.58	54.64	7.06	74.00	19.36	PK	Hori	PASS
6	17786.25	46.46	54.33	7.87	74.00	19.67	PK	Hori	PASS


Final Data List								
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Pol	Verdict
1	16691.25	7.06	36.45	43.51	54.00	10.49	Horizontal	PASS
2	17786.25	7.87	35.27	43.14	54.00	10.86	Horizontal	PASS

Left 2DH5 2480MHz

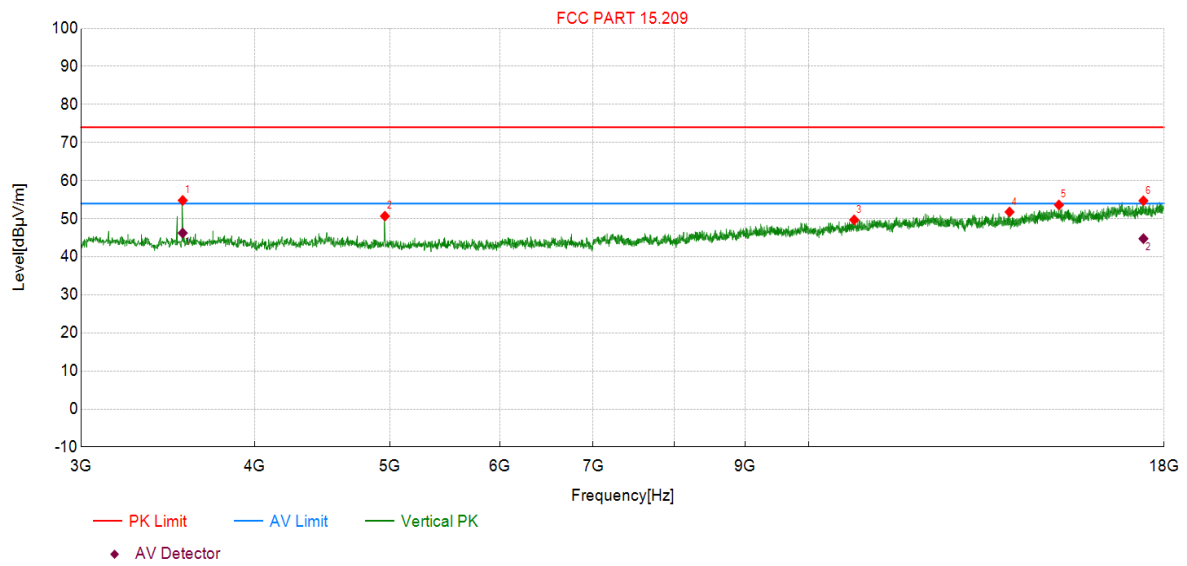

NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	3549.38	64.66	54.81	-9.85	74.00	19.19	PK	Vert	PASS
2	4959.38	58.63	50.68	-7.95	74.00	23.32	PK	Vert	PASS
3	10779.38	49.90	49.70	-0.20	74.00	24.30	PK	Vert	PASS
4	13938.75	49.44	51.77	2.33	74.00	22.23	PK	Vert	PASS
5	15125.63	48.64	53.62	4.98	74.00	20.38	PK	Vert	PASS
6	17394.38	47.10	54.72	7.62	74.00	19.28	PK	Vert	PASS


Final Data List								
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Pol	Verdict
1	3549.38	-9.85	56.09	46.24	54.00	7.76	Vertical	PASS
2	17394.38	7.62	37.14	44.76	54.00	9.24	Vertical	PASS

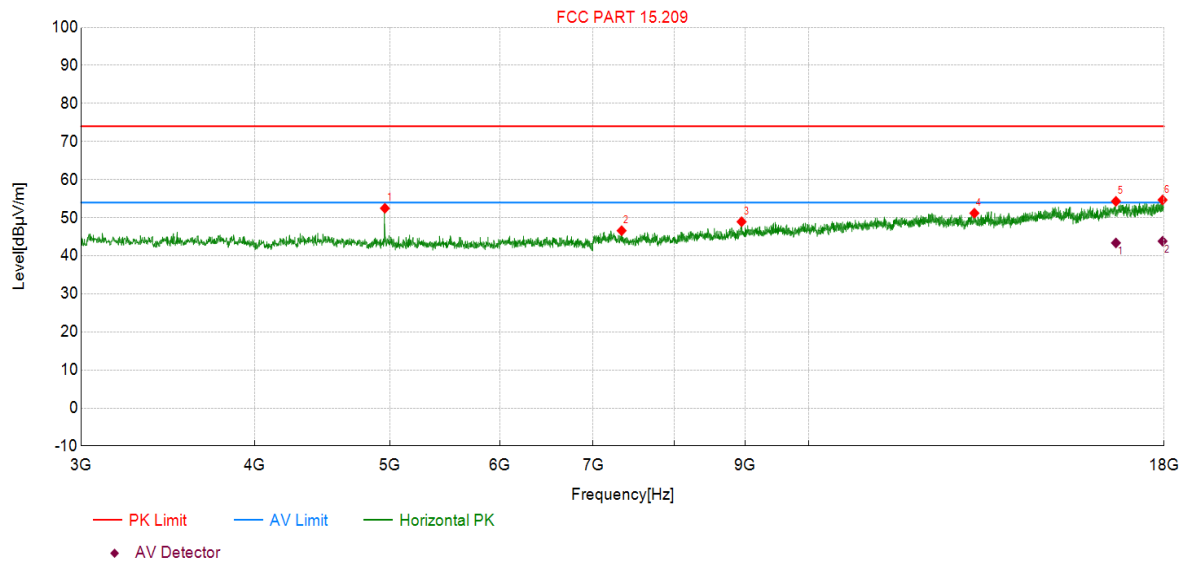

NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	4959.38	60.43	52.48	-7.95	74.00	21.52	PK	Hori	PASS
2	7336.88	52.44	46.60	-5.84	74.00	27.40	PK	Hori	PASS
3	8947.50	52.60	48.95	-3.65	74.00	25.05	PK	Hori	PASS
4	13151.25	48.75	51.19	2.44	74.00	22.81	PK	Hori	PASS
5	16621.88	47.30	54.31	7.01	74.00	19.69	PK	Hori	PASS
6	17955.00	46.67	54.67	8.00	74.00	19.33	PK	Hori	PASS


Final Data List								
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Pol	Verdict
1	16621.88	7.01	36.37	43.38	54.00	10.62	Horizontal	PASS
2	17955.00	8.00	35.83	43.83	54.00	10.17	Horizontal	PASS

Left 3DH5 2402MHz

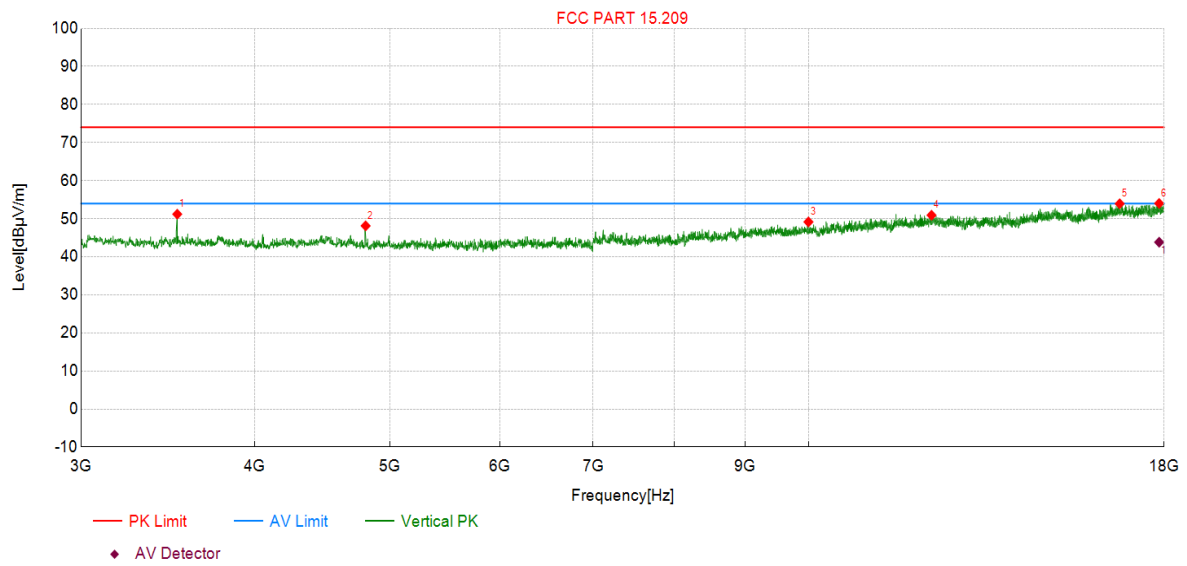

NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	3517.50	61.22	51.20	-10.02	74.00	22.80	PK	Vert	PASS
2	4803.75	56.79	48.13	-8.66	74.00	25.87	PK	Vert	PASS
3	9993.75	51.22	49.16	-2.06	74.00	24.84	PK	Vert	PASS
4	12251.25	49.50	50.92	1.42	74.00	23.08	PK	Vert	PASS
5	16725.00	46.68	53.94	7.26	74.00	20.06	PK	Vert	PASS
6	17853.75	45.92	54.02	8.10	74.00	19.98	PK	Vert	PASS

Final Data List								
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Pol	Verdict
1	17853.75	8.10	35.73	43.83	54.00	10.17	Vertical	PASS

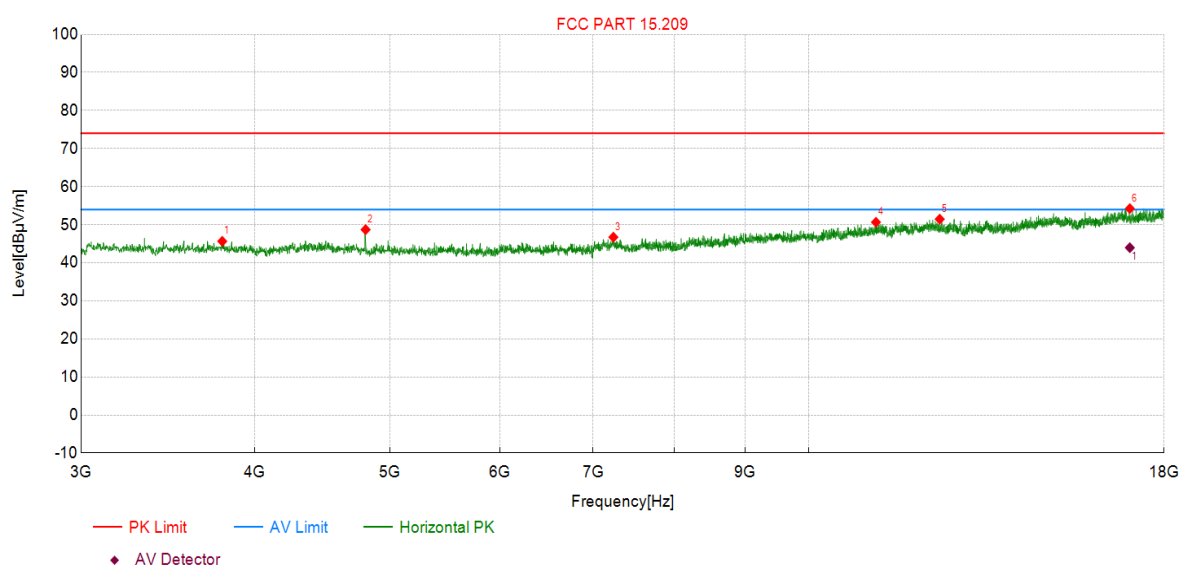

NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	3789.38	54.86	45.65	-9.21	74.00	28.35	PK	Hori	PASS
2	4803.75	57.38	48.72	-8.66	74.00	25.28	PK	Hori	PASS
3	7237.50	52.34	46.72	-5.62	74.00	27.28	PK	Hori	PASS
4	11175.00	50.25	50.66	0.41	74.00	23.34	PK	Hori	PASS
5	12418.13	49.97	51.47	1.50	74.00	22.53	PK	Hori	PASS
6	17008.13	46.96	54.24	7.28	74.00	19.76	PK	Hori	PASS

Final Data List								
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Pol	Verdict
1	17008.13	7.28	36.69	43.97	54.00	10.03	Horizontal	PASS