


1. Product Specifications

2. Ant

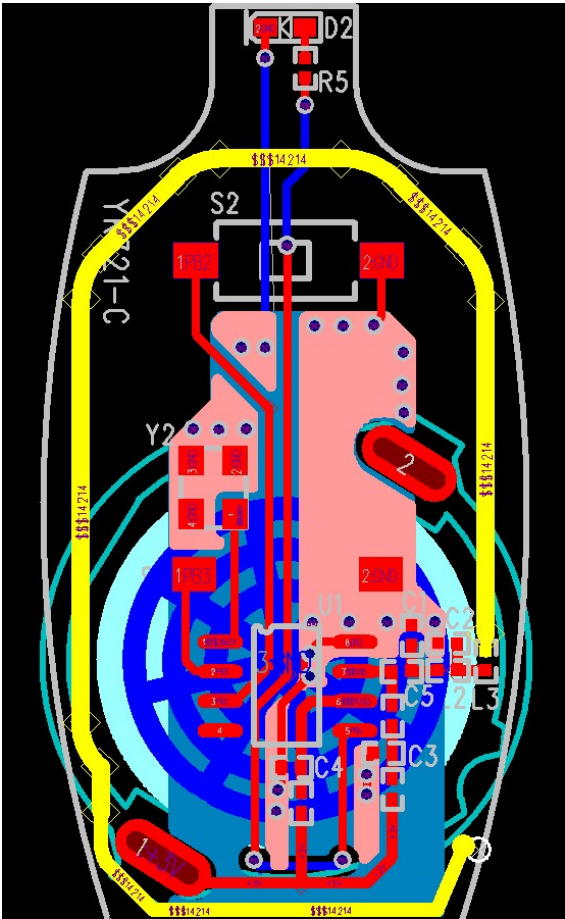


二、Performance Specifications


Parameters	
Frequency Range	433.94
Input Impedance	50 欧姆
VSWR (Voltage Standing Wave Ratio)	1.54
Polarization Type	H/V
Radiation Direction	
Efficiency	30%

Efficiency and Gain

frequency 频率(MHz)	gain 增益(dBi)	mingain 最小增益 (dBi)	efficiency 效率(dBi)	efficiency 效率(%)
430	-2.35	-12.66	-5.49	28.22
431	-2.35	-12.54	-5.43	28.66
432	-2.29	-12.42	-5.25	29.84
433	-2.27	-12.65	-5.1	30.90
434	-2.22	-12.54	-5	31.63
435	-2.07	-12.41	-4.9	32.38
436	-2.57	-13.12	-5.45	28.53
437	-2.86	-13.72	-5.87	25.90
438	-3.02	-14.08	-6.11	24.50
439	-3.1	-14.25	-6.2	24.00
440	-3.03	-14.26	-6.14	24.30

三、S11

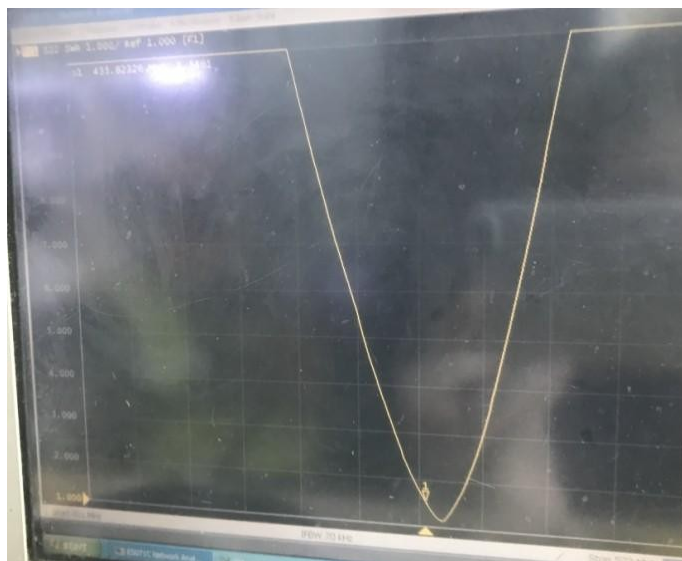

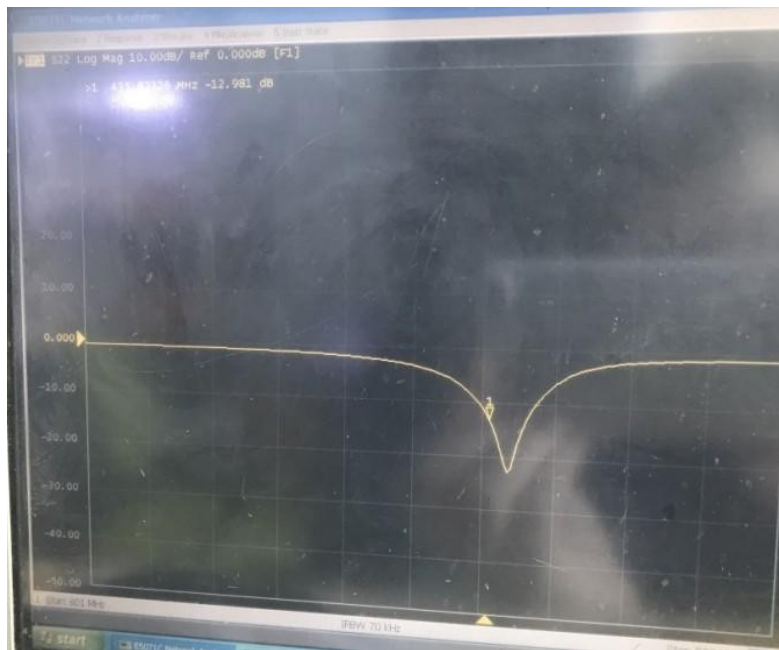

2. Pattern

