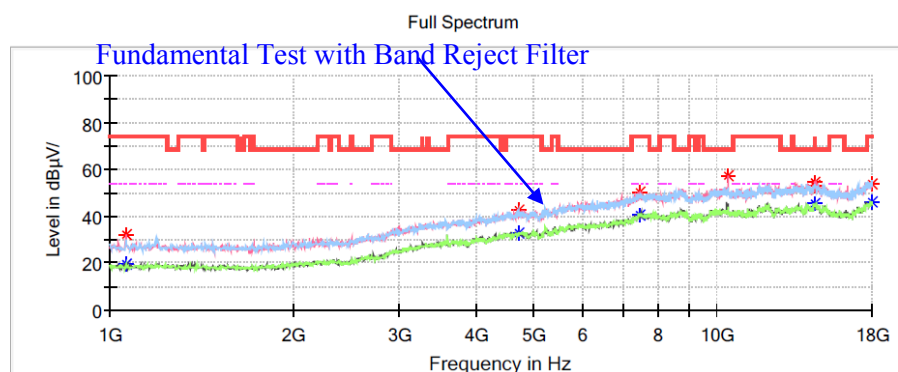


802.11ac80 Mode:**Channel: 5210MHz****Common Information**

Project No.: RBJ260416001
EUT Model: ZSXG02
Test Mode: 5G WIFI 802.11ac80
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.6°C
Humidity: 51%
Atmospheric Pressure: 101.2kPa
Test Engineer: Destine Hu
Check by: Jason Lu
Test Date: 2026/5/22

**Critical_Freqs**

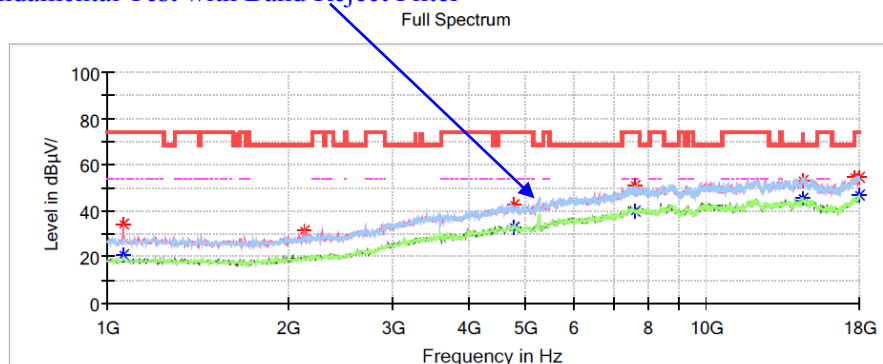
Frequency (MHz)	MaxPeak (dB µV/m)	Average (dB µV/m)	Limit (dB µV/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	32.42	---	74.00	41.58	H	-15.9
1061.200000	---	19.84	54.00	34.16	H	-15.9
4702.600000	42.96	---	74.00	31.04	H	-3.7
4702.600000	---	32.63	54.00	21.37	H	-3.7
7439.600000	---	40.89	54.00	13.11	V	3.1
7439.600000	50.16	---	74.00	23.84	V	3.1
10418.000000	57.60	---	68.20	10.60	V	6.6
14498.000000	---	45.72	54.00	8.28	V	11.1
14498.000000	52.87	---	74.00	21.13	V	11.1
14532.000000	54.84	---	68.20	13.36	V	11.0
17983.000000	54.11	---	74.00	19.89	H	13.7
17983.000000	---	46.41	54.00	7.59	H	13.7

1GHz-18GHz(5250-5350MHz Band):

Chain 0:

802.11a Mode:**Low Channel: 5260MHz****Common Information**

Project No.: RBJ260416001
EUT Model: ZSXG02
Test Mode: 5G WIFI 802.11a mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 25.8℃
Humidity: 49%
Atmospheric Pressure: 100.8kPa
Test Engineer: Destine Hu
Check by: Jason Lu
Test Date: 2026/5/23

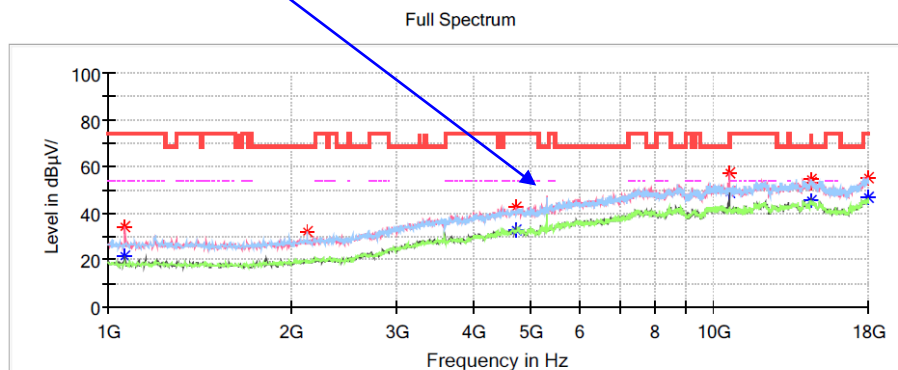
Fundamental Test with Band Reject Filter**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	33.97	---	74.00	40.03	V	-15.9
1061.200000	---	21.27	54.00	32.73	V	-15.9
2128.800000	31.71	---	68.20	36.49	V	-11.3
4777.400000	---	32.68	54.00	21.32	V	-3.5
4777.400000	42.46	---	74.00	31.54	V	-3.5
7592.600000	50.90	---	74.00	23.10	H	3.3
7592.600000	---	39.84	54.00	14.16	H	3.3
14491.200000	53.24	---	74.00	20.76	V	11.1
14491.200000	---	45.61	54.00	8.39	V	11.1
17619.200000	54.81	---	68.20	13.39	V	11.5
17996.600000	---	46.82	54.00	7.18	V	13.8
17996.600000	54.85	---	74.00	19.15	V	13.8

Middle Channel: 5300MHz**Common Information**

Project No.: RBJ260416001
EUT Model: ZSXG02
Test Mode: 5G WIFI 802.11a mode Middle Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 25.8℃
Humidity: 49%
Atmospheric Pressure: 100.8kPa
Test Engineer: Destine Hu
Check by: Jason Lu
Test Date: 2026/5/23

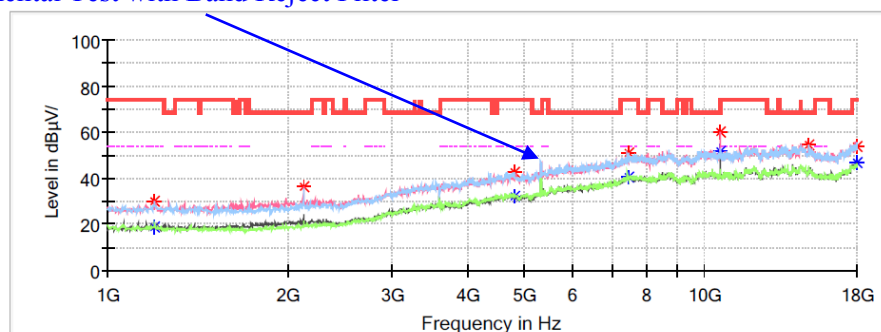
Fundamental Test with Band Reject Filter

**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1064.600000	34.36	---	74.00	39.64	H	-15.9
1064.600000	---	21.53	54.00	32.47	H	-15.9
2128.800000	32.26	---	68.20	35.94	H	-11.3
4723.000000	---	32.54	54.00	21.46	H	-3.7
4723.000000	42.78	---	74.00	31.22	H	-3.7
10601.600000	57.55	---	74.00	16.45	V	6.7
10601.600000	---	49.17	54.00	4.83	V	6.7
14460.600000	54.77	---	68.20	13.43	V	11.1
14491.200000	53.49	---	74.00	20.51	V	11.1
14491.200000	---	45.28	54.00	8.72	V	11.1
17996.600000	54.93	---	74.00	19.07	V	13.8
17996.600000	---	46.83	54.00	7.17	V	13.8

High Channel: 5320MHz**Common Information**

Project No.: RBJ260416001
EUT Model: ZSXG02
Test Mode: 5G WIFI 802.11a mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 25.8℃
Humidity: 49%
Atmospheric Pressure: 100.8kPa
Test Engineer: Destine Hu
Check by: Jason Lu
Test Date: 2026/5/23

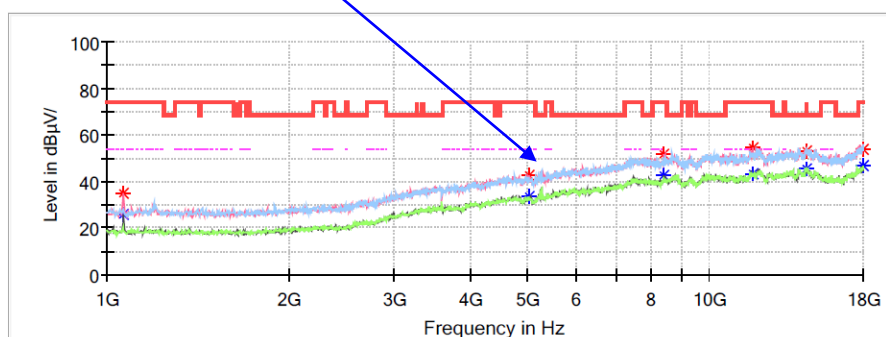
Fundamental Test with Band Reject Filter Full Spectrum**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1197.200000	30.41	---	74.00	43.59	H	-15.3
1197.200000	---	19.15	54.00	34.85	H	-15.3
2128.800000	36.31	---	68.20	31.89	H	-11.3
4794.400000	42.52	---	74.00	31.48	H	-3.5
4794.400000	---	32.47	54.00	21.53	H	-3.5
7449.800000	50.93	---	74.00	23.07	H	3.1
7449.800000	---	40.41	54.00	13.59	V	3.1
10639.000000	60.01	---	74.00	13.99	V	6.7
10639.000000	---	52.08	54.00	1.92	V	6.7
14926.400000	54.79	---	68.20	13.41	V	9.6
17986.400000	54.00	---	74.00	20.00	V	13.7
17986.400000	---	46.88	54.00	7.12	V	13.7

Chain 1:

802.11a Mode:**Low Channel: 5260MHz****Common Information**

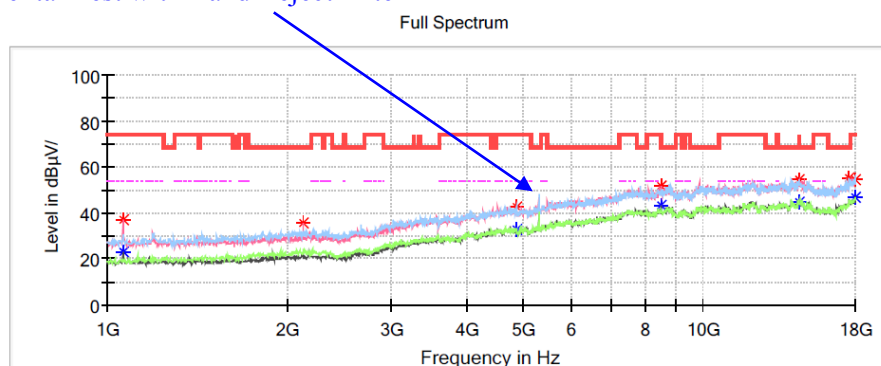
Project No.: RBJ260416001
EUT Model: ZSXG02
Test Mode: 5G WIFI 802.11a mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 25.8°C
Humidity: 49%
Atmospheric Pressure: 100.8kPa
Test Engineer: Destine Hu
Check by: Jason Lu
Test Date: 2026/5/23

Fundamental Test with Band Reject Filter**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1064.600000	---	25.58	54.00	28.42	V	-15.9
1064.600000	34.76	---	74.00	39.24	V	-15.9
5022.200000	---	33.24	54.00	20.76	V	-2.7
5022.200000	42.89	---	74.00	31.11	V	-2.7
8415.400000	---	42.61	54.00	11.39	V	4.5
8415.400000	51.70	---	74.00	22.30	V	4.5
11774.600000	---	43.51	54.00	10.49	V	8.6
11774.600000	54.24	---	74.00	19.76	V	8.6
14494.600000	53.40	---	74.00	20.60	H	11.1
14494.600000	---	45.32	54.00	8.68	H	11.1
17966.000000	---	46.62	54.00	7.38	V	13.6
17966.000000	54.06	---	74.00	19.94	V	13.6

Middle Channel: 5300MHz**Common Information**

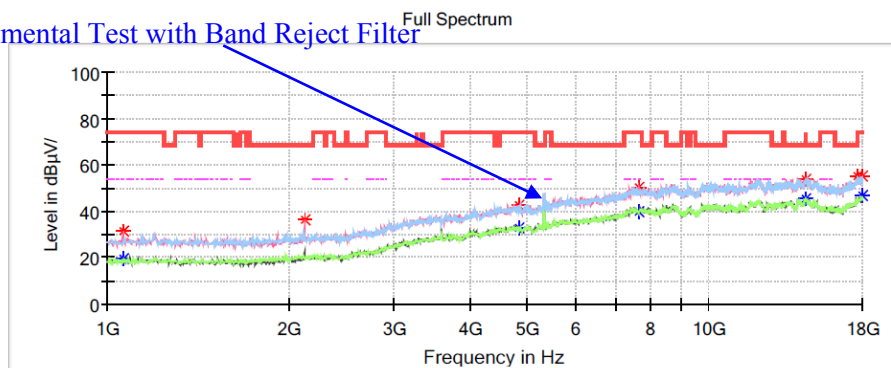
Project No.: RBJ260416001
EUT Model: ZSXG02
Test Mode: 5G WIFI 802.11a mode Middle Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 25.8℃
Humidity: 49%
Atmospheric Pressure: 100.8kPa
Test Engineer: Destine Hu
Check by: Jason Lu
Test Date: 2026/5/23

Fundamental Test with Band Reject Filter**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	---	23.13	54.00	30.87	V	-15.9
1061.200000	37.15	---	74.00	36.85	V	-15.9
2128.800000	35.58	---	68.20	32.62	V	-11.3
4848.800000	---	32.97	54.00	21.03	V	-3.3
4848.800000	42.59	---	74.00	31.41	V	-3.3
8480.000000	---	43.15	54.00	10.85	V	4.7
8480.000000	52.04	---	74.00	21.96	V	4.7
14494.600000	54.61	---	74.00	19.39	H	11.1
14494.600000	---	45.02	54.00	8.98	H	11.1
17609.000000	55.26	---	68.20	12.94	H	11.4
17976.200000	---	46.57	54.00	7.43	H	13.7
17976.200000	54.22	---	74.00	19.78	H	13.7

High Channel: 5320MHz**Common Information**

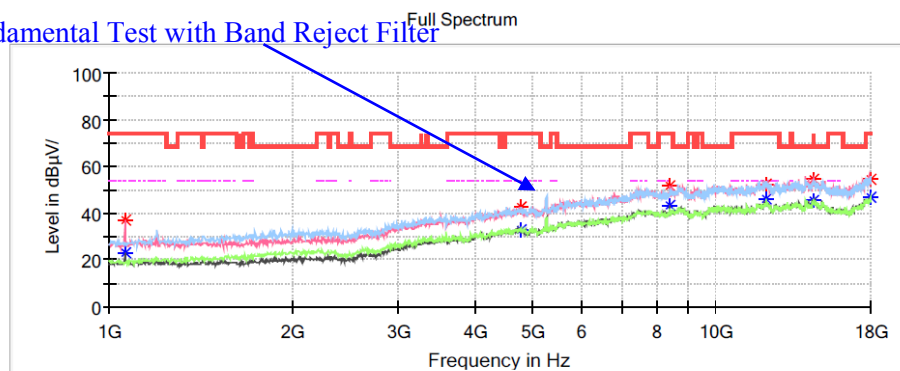
Project No.: RBJ260416001
EUT Model: ZSXG02
Test Mode: 5G WIFI 802.11a mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 25.8℃
Humidity: 49%
Atmospheric Pressure: 100.8kPa
Test Engineer: Destine Hu
Check by: Jason Lu
Test Date: 2026/5/23

Fundamental Test with Band Reject Filter**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	31.46	---	74.00	42.54	V	-15.9
1061.200000	---	19.90	54.00	34.10	V	-15.9
2132.200000	36.17	---	68.20	32.03	V	-11.3
4821.600000	---	32.73	54.00	21.27	V	-3.4
4821.600000	42.65	---	74.00	31.35	V	-3.4
7670.800000	---	40.13	54.00	13.87	H	3.4
7670.800000	50.40	---	74.00	23.60	H	3.4
14491.200000	53.93	---	74.00	20.07	H	11.1
14491.200000	---	45.42	54.00	8.58	H	11.1
17653.200000	55.29	---	68.20	12.91	H	11.7
17962.600000	---	46.58	54.00	7.42	H	13.6
17962.600000	55.11	---	74.00	18.89	H	13.6

**MIMO(Chain 0+Chain 1):
802.11ac 20 Mode:****Low Channel: 5260MHz****Common Information**

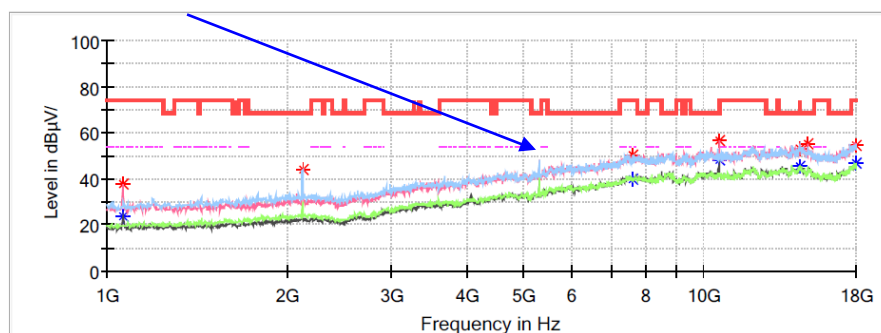
Project No.: RBJ260416001
EUT Model: ZSXG02
Test Mode: 5G WIFI 802.11ac20 mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 25.8℃
Humidity: 49%
Atmospheric Pressure: 100.8kPa
Test Engineer: Destine Hu
Check by: Jason Lu
Test Date: 2026/5/23

Fundamental Test with Band Reject Filter**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	37.11	---	74.00	36.89	V	-15.9
1061.200000	---	23.13	54.00	30.87	V	-15.9
4770.600000	42.87	---	74.00	31.13	H	-3.5
4770.600000	---	32.81	54.00	21.19	H	-3.5
8415.400000	52.03	---	74.00	21.97	V	4.5
8415.400000	---	43.09	54.00	10.91	V	4.5
12128.200000	---	46.10	54.00	7.90	V	9.0
12128.200000	52.33	---	74.00	21.67	V	9.0
14477.600000	---	45.13	54.00	8.87	V	11.1
14477.600000	54.31	---	74.00	19.69	V	11.1
17966.000000	54.65	---	74.00	19.35	V	13.6
17966.000000	---	46.67	54.00	7.33	V	13.6

Middle Channel: 5300MHz**Common Information**

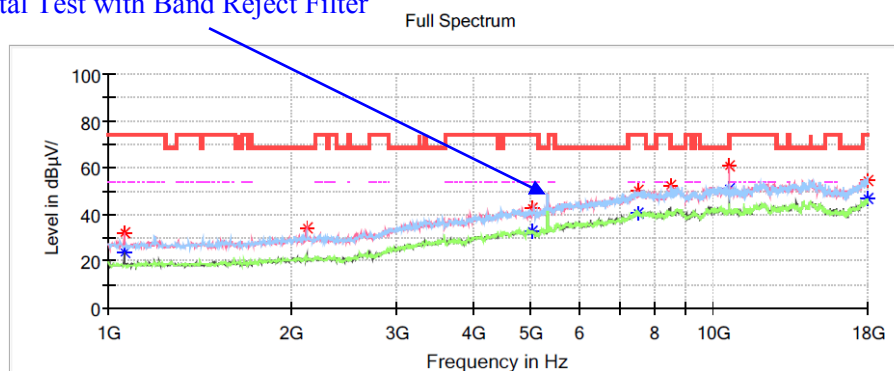
Project No.: RBJ260416001
 EUT Model: ZSXG02
 Test Mode: 5G WIFI 802.11ac20 mode Middle Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 25.8℃
 Humidity: 49%
 Atmospheric Pressure: 100.8kPa
 Test Engineer: Destine Hu
 Check by: Jason Lu
 Test Date: 2026/5/23

Fundamental Test with Band Reject Filter Full Spectrum**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	---	24.06	54.00	29.94	H	-15.9
1061.200000	37.56	---	74.00	36.44	H	-15.9
2125.400000	44.13	---	68.20	24.07	H	-11.3
7602.800000	50.29	---	74.00	23.71	H	3.3
7602.800000	---	39.90	54.00	14.10	H	3.3
10601.600000	56.49	---	74.00	17.51	V	6.7
10601.600000	---	48.55	54.00	5.45	V	6.7
14474.200000	53.37	---	74.00	20.63	V	11.1
14474.200000	---	45.45	54.00	8.55	V	11.1
14933.200000	55.16	---	68.20	13.04	V	9.6
17996.600000	---	46.96	54.00	7.04	V	13.8
17996.600000	54.61	---	74.00	19.39	V	13.8

High Channel: 5320MHz**Common Information**

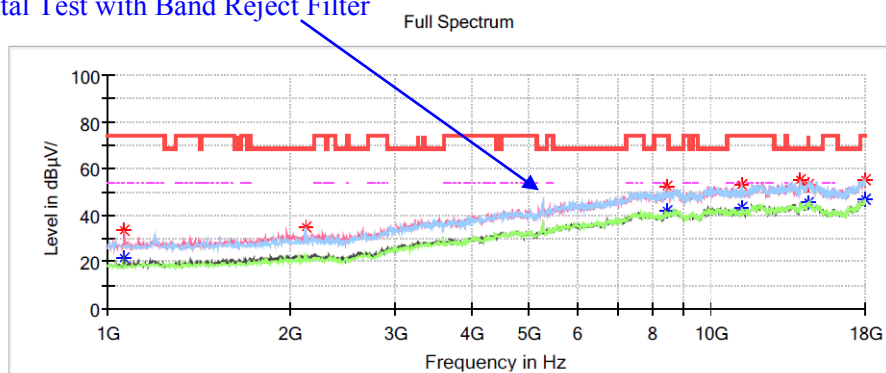
Project No.: RBJ260416001
EUT Model: ZSXG02
Test Mode: 5G WIFI 802.11ac20 mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 25.8°C
Humidity: 49%
Atmospheric Pressure: 100.8kPa
Test Engineer: Destine Hu
Check by: Jason Lu
Test Date: 2026/5/23

Fundamental Test with Band Reject Filter**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	32.28	---	74.00	41.72	V	-15.9
1061.200000	---	23.99	54.00	30.01	V	-15.9
2125.400000	34.21	---	68.20	33.99	V	-11.3
5022.200000	---	33.07	54.00	20.93	V	-2.7
5022.200000	42.54	---	74.00	31.46	V	-2.7
7511.000000	---	40.58	54.00	13.42	V	3.3
7511.000000	50.63	---	74.00	23.37	V	3.3
8510.600000	52.79	---	68.20	15.41	V	4.7
10642.400000	---	51.02	54.00	2.98	V	6.7
10642.400000	60.93	---	74.00	13.07	V	6.7
17996.600000	---	46.65	54.00	7.35	H	13.8
17996.600000	54.33	---	74.00	19.67	H	13.8

802.11ac40 Mode:**Low Channel: 5270MHz****Common Information**

Project No.: RBJ260416001
EUT Model: ZSXG02
Test Mode: 5G WIFI 802.11ac40 mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 25.8°C
Humidity: 49%
Atmospheric Pressure: 100.8kPa
Test Engineer: Destine Hu
Check by: Jason Lu
Test Date: 2026/5/23

Fundamental Test with Band Reject Filter**Critical_Freqs**

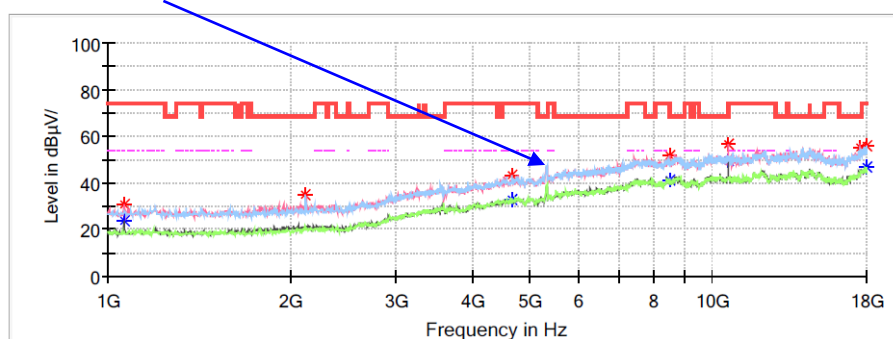
Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1064.600000	---	21.38	54.00	32.62	V	-15.9
1064.600000	33.51	---	74.00	40.49	V	-15.9
2128.800000	34.72	---	68.20	33.48	V	-11.3
8432.400000	52.22	---	74.00	21.78	V	4.5
8432.400000	---	41.72	54.00	12.28	V	4.5
11206.800000	53.01	---	74.00	20.99	H	7.3
11206.800000	---	43.20	54.00	10.80	H	7.3
14062.800000	55.39	---	68.20	12.81	H	10.7
14494.600000	52.93	---	74.00	21.07	H	11.1
14494.600000	---	45.25	54.00	8.75	H	11.1
17996.600000	---	47.15	54.00	6.85	H	13.8
17996.600000	54.95	---	74.00	19.05	H	13.8

High Channel: 5310MHz**Common Information**

Project No.: RBJ260416001
 EUT Model: ZSXG02
 Test Mode: 5G WIFI 802.11ac40 mode High Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 25.8°C
 Humidity: 49%
 Atmospheric Pressure: 100.8kPa
 Test Engineer: Destine Hu
 Check by: Jason Lu
 Test Date: 2026/5/23

Fundamental Test with Band Reject Filter

Full Spectrum

**Critical Freqs**

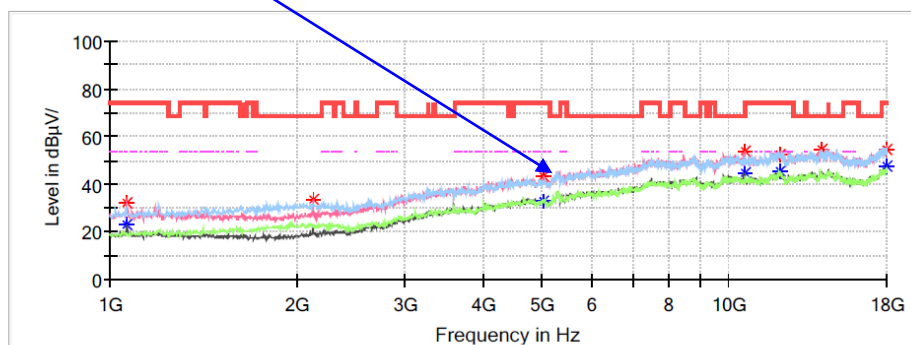
Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	30.48	---	74.00	43.52	H	-15.9
1061.200000	---	23.72	54.00	30.28	H	-15.9
2122.000000	35.29	---	68.20	32.91	H	-11.3
4651.600000	43.25	---	74.00	30.75	H	-3.9
4651.600000	---	33.00	54.00	21.00	H	-3.9
8493.600000	51.93	---	74.00	22.07	V	4.7
8493.600000	---	41.53	54.00	12.47	V	4.7
10628.800000	56.45	---	74.00	17.55	V	6.7
10628.800000	---	49.82	54.00	4.18	V	6.7
17612.400000	55.25	---	68.20	12.95	V	11.5
17959.200000	---	46.56	54.00	7.44	V	13.6
17959.200000	55.66	---	74.00	18.34	V	13.6

802.11ac80 Mode:**Channel: 5290MHz****Common Information**

Project No.: RBJ260416001
EUT Model: ZSXG02
Test Mode: 5G WIFI 802.11ac80
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 25.8℃
Humidity: 49%
Atmospheric Pressure: 100.8kPa
Test Engineer: Destine Hu
Check by: Jason Lu
Test Date: 2026/5/23

Fundamental Test with Band Reject Filter

Full Spectrum

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1064.600000	---	23.03	54.00	30.97	V	-15.9
1064.600000	32.34	---	74.00	41.66	V	-15.9
2128.800000	33.69	---	68.20	34.51	V	-11.3
5012.000000	---	33.04	54.00	20.96	V	-2.8
5012.000000	43.29	---	74.00	30.71	V	-2.8
10632.200000	---	44.59	54.00	9.41	V	6.7
10632.200000	53.79	---	74.00	20.21	V	6.7
12087.400000	52.26	---	74.00	21.74	H	9.0
12087.400000	---	45.61	54.00	8.39	H	9.0
14120.600000	54.83	---	68.20	13.37	H	10.8
17966.000000	54.25	---	74.00	19.75	H	13.6
17966.000000	---	47.37	54.00	6.63	H	13.6

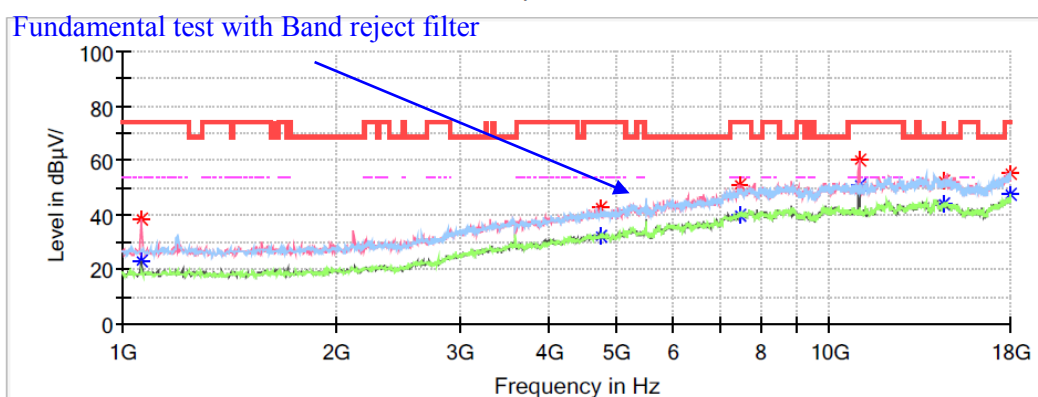
1GHz-18GHz(5470-5725MHz Band):

Chain 0

802.11a Mode:**Low Channel: 5500MHz****Common Information**

Project No.: RBJ260416001
EUT Model: ZSXG02
Test Mode: 5G WIFI 802.11a mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 25.6°C
Humidity: 51%
Atmospheric Pressure: 100.3kPa
Test Engineer: Destine Hu
Check by: Jason Lu
Test Date: 2026/5/24

Full Spectrum

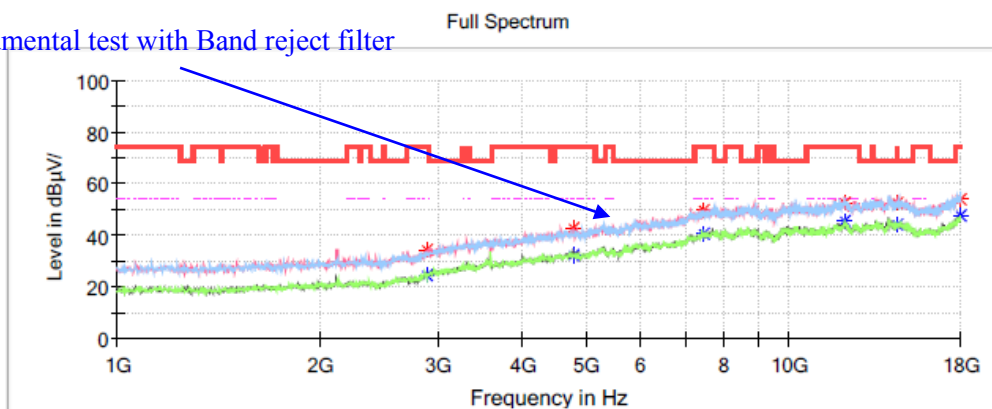
**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	---	23.38	54.00	30.62	V	-15.9
1061.200000	38.44	---	74.00	35.56	V	-15.9
4740.000000	---	31.91	54.00	22.09	H	-3.6
4740.000000	42.34	---	74.00	31.66	H	-3.6
7456.600000	---	40.06	54.00	13.94	V	3.2
7456.600000	50.85	---	74.00	23.15	V	3.2
10996.000000	59.81	---	74.00	14.19	V	6.7
11002.800000	---	51.05	54.00	2.95	V	6.7
14481.000000	52.47	---	74.00	21.53	V	11.1
14481.000000	---	44.14	54.00	9.86	V	11.1
17993.200000	55.02	---	74.00	18.98	H	13.8
17993.200000	---	47.69	54.00	6.31	H	13.8

Middle Channel: 5600MHz**Common Information**

Project No.: RBJ260416001
EUT Model: ZSXG02
Test Mode: 5G WIFI 802.11a mode Middle Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 25.6℃
Humidity: 51%
Atmospheric Pressure: 100.3kPa
Test Engineer: Destine Hu
Check by: Jason Lu
Test Date: 2026/5/24

Fundamental test with Band reject filter

**Critical Freqs**

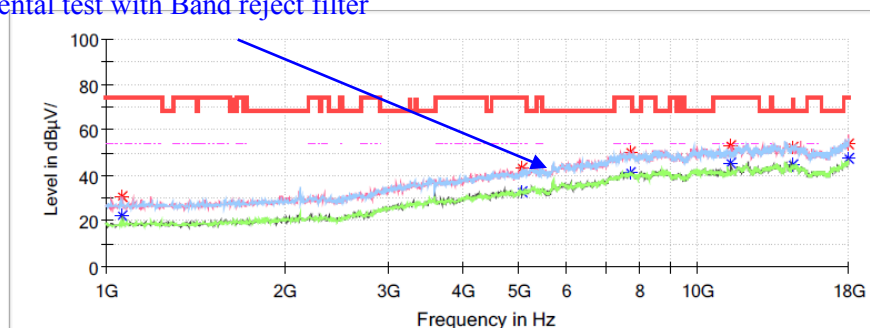
Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2887.000000	---	24.29	54.00	29.71	V	-8.8
2887.000000	34.23	---	74.00	39.77	V	-8.8
4774.000000	---	32.14	54.00	21.86	H	-3.5
4774.000000	42.39	---	74.00	31.61	H	-3.5
7460.000000	---	40.61	54.00	13.39	V	3.2
7460.000000	49.40	---	74.00	24.60	V	3.2
12128.200000	52.55	---	74.00	21.45	V	9.0
12128.200000	---	45.54	54.00	8.46	V	9.0
14481.000000	52.68	---	74.00	21.32	V	11.1
14481.000000	---	44.23	54.00	9.77	V	11.1
17993.200000	54.16	---	74.00	19.84	H	13.8
17993.200000	---	47.55	54.00	6.45	H	13.8

High Channel: 5700MHz**Common Information**

Project No.: RBJ260416001
 EUT Model: ZSXG02
 Test Mode: 5G WIFI 802.11a mode Middle Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 25.6℃
 Humidity: 51%
 Atmospheric Pressure: 100.3kPa
 Test Engineer: Destine Hu
 Check by: Jason Lu
 Test Date: 2026/5/24

Fundamental test with Band reject filter

Full Spectrum

**Critical Freqs**

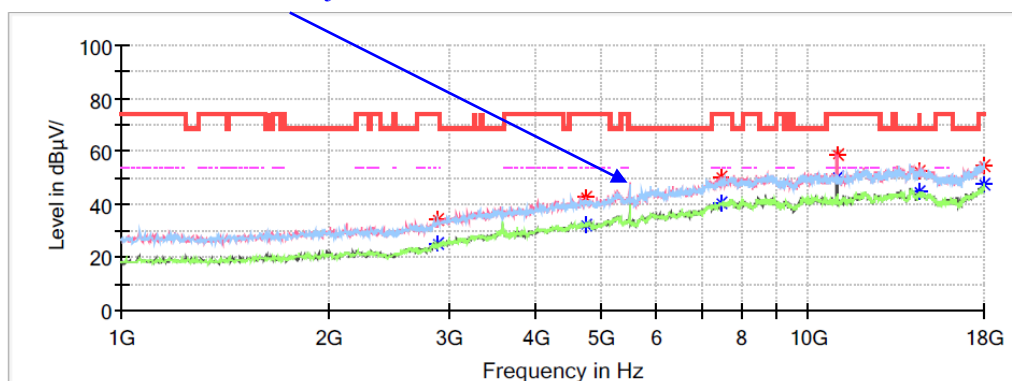
Frequency (MHz)	MaxPeak (dB μV/m)	Average (dB μV/m)	Limit (dB μV/m)	Margin (dB)	Pol	Corr. (dB/m)
1064.600000	---	22.56	54.00	31.44	V	-15.9
1064.600000	30.86	---	74.00	43.14	V	-15.9
5039.200000	43.33	---	74.00	30.67	H	-2.7
5039.200000	---	32.95	54.00	21.05	H	-2.7
7687.800000	---	41.18	54.00	12.82	V	3.4
7687.800000	50.33	---	74.00	23.67	V	3.4
11400.600000	52.99	---	74.00	21.01	V	7.9
11400.600000	---	45.36	54.00	8.64	V	7.9
14484.400000	52.63	---	74.00	21.37	H	11.1
14484.400000	---	44.49	54.00	9.51	H	11.1
17989.800000	53.88	---	74.00	20.12	V	13.8
17989.800000	---	47.60	54.00	6.40	V	13.8

Chain 1

802.11a Mode:**Low Channel: 5500MHz****Common Information**

Project No.: RBJ260416001
EUT Model: ZSXG02
Test Mode: 5G WIFI 802.11a mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 25.6°C
Humidity: 51%
Atmospheric Pressure: 100.3kPa
Test Engineer: Destine Hu
Check by: Jason Lu
Test Date: 2026/5/24

Fundamental test with Band reject filter Full Spectrum

**Critical_Freqs**

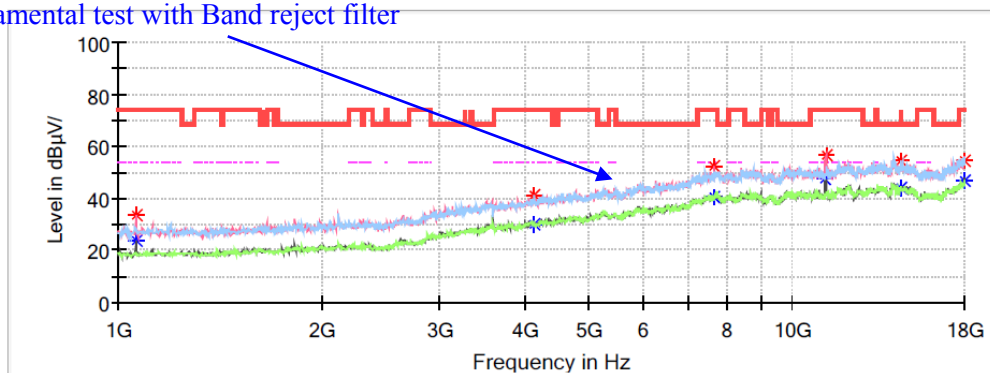
Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2893.800000	33.92	---	74.00	40.08	H	-8.8
2893.800000	---	25.07	54.00	28.93	H	-8.8
4746.800000	---	31.96	54.00	22.04	V	-3.6
4746.800000	42.40	---	74.00	31.60	V	-3.6
7473.600000	---	40.57	54.00	13.43	V	3.2
7473.600000	50.42	---	74.00	23.58	V	3.2
11002.800000	---	50.05	54.00	3.95	V	6.7
11002.800000	58.61	---	74.00	15.39	V	6.7
14491.200000	---	44.69	54.00	9.31	H	11.1
14491.200000	52.24	---	74.00	21.76	H	11.1
17983.000000	54.86	---	74.00	19.14	H	13.7
17983.000000	---	47.38	54.00	6.62	H	13.7

Middle Channel: 5600MHz**Common Information**

Project No.: RBJ260416001
EUT Model: ZSXG02
Test Mode: 5G WIFI 802.11a mode Middle Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 25.6℃
Humidity: 51%
Atmospheric Pressure: 100.3kPa
Test Engineer: Destine Hu
Check by: Jason Lu
Test Date: 2026/5/24

Full Spectrum

Fundamental test with Band reject filter

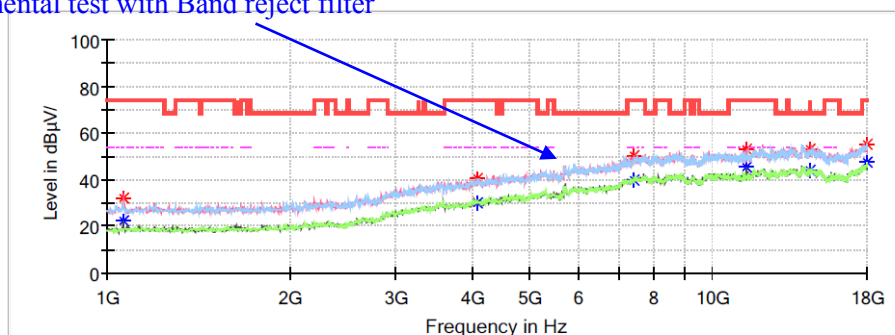
**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	---	23.51	54.00	30.49	V	-15.9
1061.200000	33.25	---	74.00	40.75	V	-15.9
4138.200000	---	30.19	54.00	23.81	H	-4.8
4138.200000	41.31	---	74.00	32.69	H	-4.8
7660.600000	---	40.64	54.00	13.36	H	3.4
7660.600000	52.30	---	74.00	21.70	H	3.4
11196.600000	---	47.67	54.00	6.33	V	7.3
11200.000000	56.68	---	74.00	17.32	V	7.3
14470.800000	---	43.72	54.00	10.28	H	11.1
14470.800000	54.61	---	74.00	19.39	H	11.1
17979.600000	54.66	---	74.00	19.34	V	13.7
17979.600000	---	46.77	54.00	7.23	V	13.7

High Channel: 5700MHz**Common Information**

Project No.: RBJ260416001
 EUT Model: ZSXG02
 Test Mode: 5G WIFI 802.11a mode High Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 25.6℃
 Humidity: 51%
 Atmospheric Pressure: 100.3kPa
 Test Engineer: Destine Hu
 Check by: Jason Lu
 Test Date: 2026/5/24

Fundamental test with Band reject filter Full Spectrum

**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μV/m)	Average (dB μV/m)	Limit (dB μV/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	32.34	---	74.00	41.66	V	-15.9
1061.200000	---	22.63	54.00	31.37	V	-15.9
4087.200000	---	30.14	54.00	23.86	H	-4.8
4087.200000	40.45	---	74.00	33.55	H	-4.8
7429.400000	---	40.11	54.00	13.89	V	3.1
7429.400000	50.02	---	74.00	23.98	V	3.1
11404.000000	52.96	---	74.00	21.04	V	7.9
11404.000000	---	45.59	54.00	8.41	V	7.9
14481.000000	---	43.72	54.00	10.28	V	11.1
14481.000000	52.91	---	74.00	21.09	V	11.1
17996.600000	55.11	---	74.00	18.89	H	13.8
17996.600000	---	47.28	54.00	6.72	H	13.8

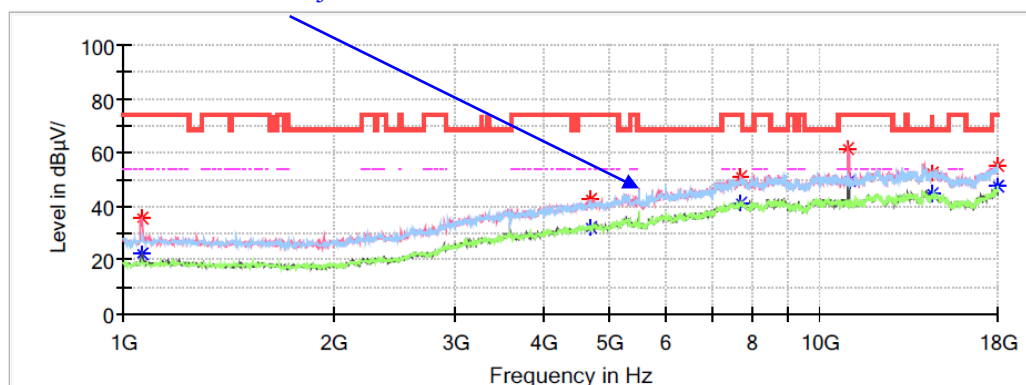
MIMO(Chain 0+Chain 1):
802.11ac20 Mode:

Low Channel: 5500MHz

Common Information

Project No.:	RBJ260416001
EUT Model:	ZSXG02
Test Mode:	5G WIFI 802.11ac20 mode Low Channel
Standard:	FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	25.6°C
Humidity:	51%
Atmospheric Pressure:	100.3kPa
Test Engineer:	Destine Hu
Check by:	Jason Lu
Test Date:	2026/5/24

Fundamental test with Band reject filter Full Spectrum



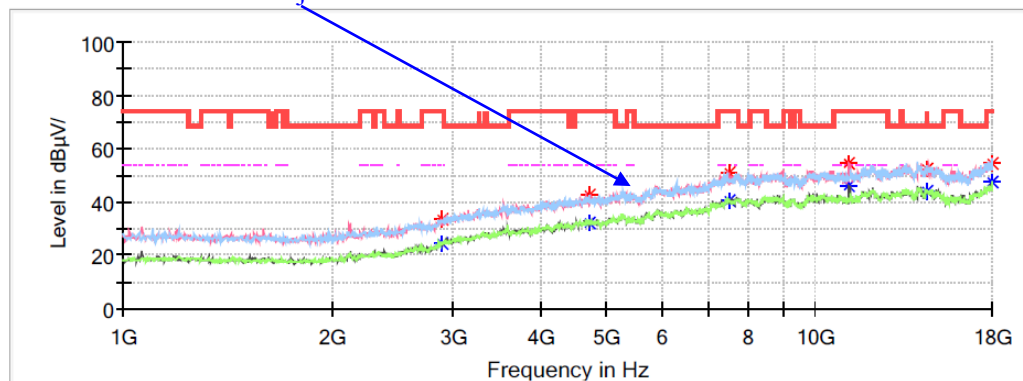
Critical_Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	---	22.56	54.00	31.44	V	-15.9
1061.200000	35.77	---	74.00	38.23	V	-15.9
4685.600000	---	32.12	54.00	21.88	H	-3.8
4685.600000	42.77	---	74.00	31.23	H	-3.8
7687.800000	---	40.99	54.00	13.01	V	3.4
7687.800000	51.15	---	74.00	22.85	V	3.4
10992.600000	61.77	---	74.00	12.23	V	6.7
10996.000000	---	49.89	54.00	4.11	V	6.7
14491.200000	52.24	---	74.00	21.76	V	11.1
14491.200000	---	44.49	54.00	9.51	V	11.1
17976.200000	55.58	---	74.00	18.42	H	13.7
17976.200000	---	47.44	54.00	6.56	H	13.7

Middle Channel: 5600MHz**Common Information**

Project No.: RBJ260416001
 EUT Model: ZSXG02
 Test Mode: 5G WIFI 802.11ac20 mode Middle Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 25.6℃
 Humidity: 51%
 Atmospheric Pressure: 100.3kPa
 Test Engineer: Destine Hu
 Check by: Jason Lu
 Test Date: 2026/5/24

Fundamental test with Band reject filter Full Spectrum

**Critical_Freqs**

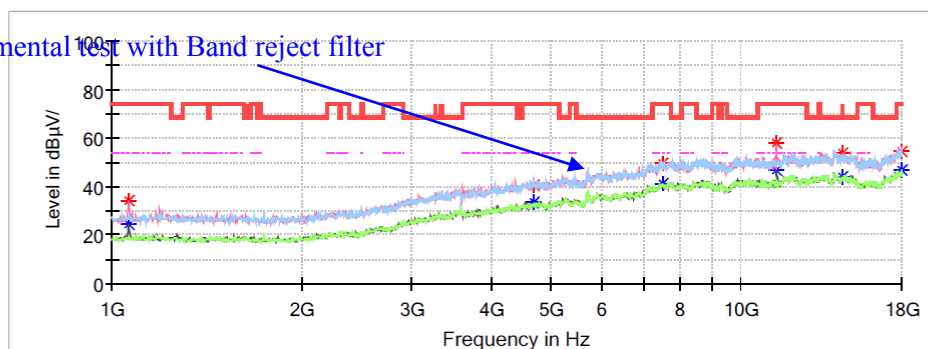
Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	PoI	Corr. (dB/m)
2890.400000	---	24.57	54.00	29.43	H	-8.8
2890.400000	33.62	---	74.00	40.38	H	-8.8
4709.400000	---	31.88	54.00	22.12	H	-3.7
4709.400000	42.40	---	74.00	31.60	H	-3.7
7500.800000	50.92	---	74.00	23.08	V	3.3
7500.800000	---	40.78	54.00	13.22	V	3.3
11196.600000	---	46.17	54.00	7.83	V	7.3
11196.600000	54.76	---	74.00	19.24	V	7.3
14474.200000	52.59	---	74.00	21.41	V	11.1
14474.200000	---	44.24	54.00	9.76	V	11.1
17979.600000	---	47.43	54.00	6.57	V	13.7
17979.600000	54.81	---	74.00	19.19	V	13.7

High Channel: 5700MHz**Common Information**

Project No.: RBJ260416001
 EUT Model: ZSXG02
 Test Mode: 5G WIFI 802.11ac20 mode High Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 25.6℃
 Humidity: 51%
 Atmospheric Pressure: 100.3kPa
 Test Engineer: Destine Hu
 Check by: Jason Lu
 Test Date: 2026/5/24

Full Spectrum

Fundamental test with Band reject filter

**Critical_Freqs**

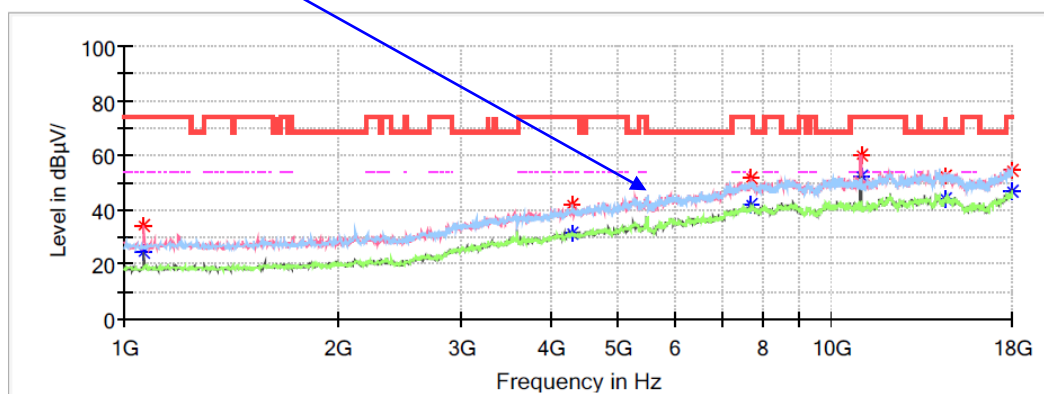
Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	---	24.82	54.00	29.18	V	-15.9
1061.200000	34.00	---	74.00	40.00	V	-15.9
4682.200000	40.75	---	74.00	33.25	H	-3.8
4682.200000	---	33.70	54.00	20.30	H	-3.8
7497.400000	49.50	---	74.00	24.50	H	3.3
7497.400000	---	41.51	54.00	12.49	H	3.3
11393.800000	58.08	---	74.00	15.92	V	7.9
11393.800000	---	47.18	54.00	6.82	V	7.9
14491.200000	---	43.86	54.00	10.14	V	11.1
14491.200000	54.13	---	74.00	19.87	V	11.1
17986.400000	54.58	---	74.00	19.42	H	13.7
17986.400000	---	46.81	54.00	7.19	H	13.7

802.11ac40 Mode:**Low Channel: 5510MHz****Common Information**

Project No.: RBJ260416001
EUT Model: ZSXG02
Test Mode: 5G WIFI 802.11ac40 mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 25.6℃
Humidity: 51%
Atmospheric Pressure: 100.3kPa
Test Engineer: Destine Hu
Check by: Jason Lu
Test Date: 2026/5/24

Fundamental test with Band reject filter

Full Spectrum

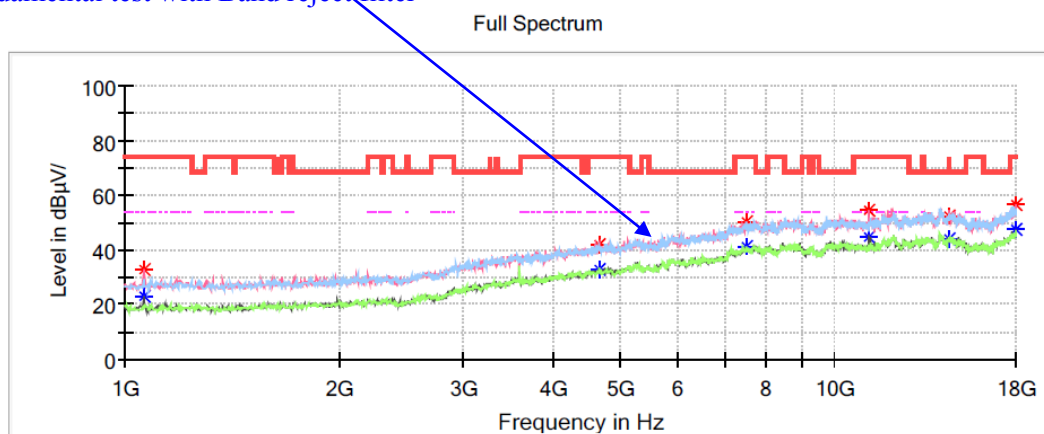
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1064.600000	34.06	---	74.00	39.94	V	-15.9
1064.600000	---	24.16	54.00	29.84	V	-15.9
4294.600000	41.63	---	74.00	32.37	H	-4.6
4294.600000	---	31.67	54.00	22.33	H	-4.6
7701.400000	51.57	---	74.00	22.43	V	3.4
7701.400000	---	41.83	54.00	12.17	V	3.4
11009.600000	60.15	---	74.00	13.85	V	6.7
11009.600000	---	52.19	54.00	1.81	V	6.7
14474.200000	52.14	---	74.00	21.86	H	11.1
14474.200000	---	44.00	54.00	10.00	H	11.1
17983.000000	54.83	---	74.00	19.17	V	13.7
17983.000000	---	46.81	54.00	7.19	V	13.7

Middle Channel: 5590MHz**Common Information**

Project No.: RBJ260416001
EUT Model: ZSXG02
Test Mode: 5G WIFI 802.11ac40 mode Middle Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 25.6°C
Humidity: 51%
Atmospheric Pressure: 100.3kPa
Test Engineer: Destine Hu
Check by: Jason Lu
Test Date: 2026/5/24

Fundamental test with Band reject filter

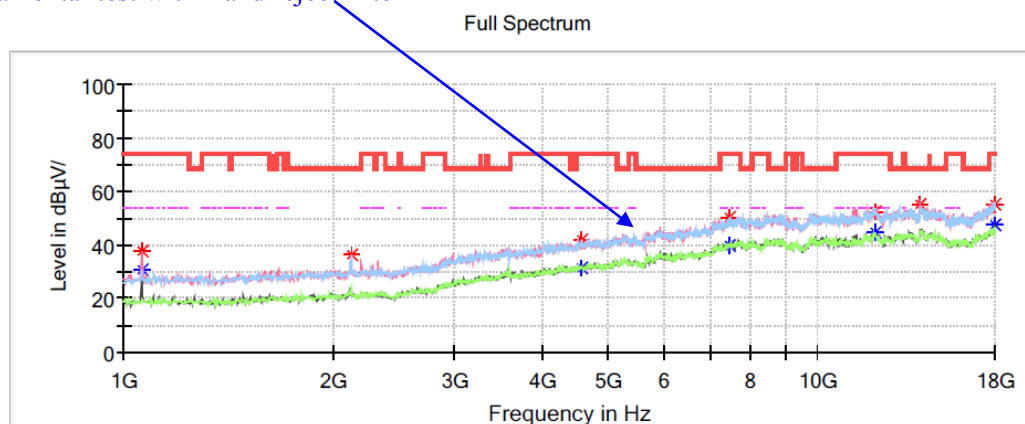
**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	---	22.80	54.00	31.20	V	-15.9
1061.200000	32.82	---	74.00	41.18	V	-15.9
4648.200000	---	32.92	54.00	21.08	V	-3.9
4648.200000	42.24	---	74.00	31.76	V	-3.9
7500.800000	---	40.92	54.00	13.08	H	3.3
7500.800000	50.57	---	74.00	23.43	H	3.3
11176.200000	---	44.74	54.00	9.26	V	7.2
11176.200000	54.45	---	74.00	19.55	V	7.2
14477.600000	52.42	---	74.00	21.58	H	11.1
14477.600000	---	44.28	54.00	9.72	H	11.1
17966.000000	---	47.80	54.00	6.20	V	13.6
17966.000000	56.34	---	74.00	17.66	V	13.6

High Channel: 5670MHz**Common Information**

Project No.: RBJ260416001
EUT Model: ZSXG02
Test Mode: 5G WIFI 802.11ac40 mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 25.6℃
Humidity: 51%
Atmospheric Pressure: 100.3kPa
Test Engineer: Destine Hu
Check by: Jason Lu
Test Date: 2026/5/24

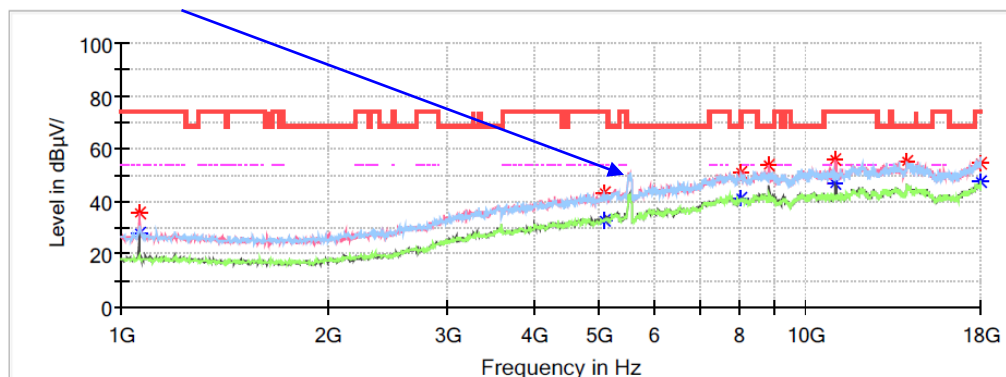
Fundamental test with Band reject filter

**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	37.46	---	74.00	36.54	H	-15.9
1061.200000	---	30.69	54.00	23.31	H	-15.9
2128.800000	36.41	---	68.20	31.79	H	-11.3
4580.200000	---	31.78	54.00	22.22	H	-4.1
4580.200000	41.77	---	74.00	32.23	H	-4.1
7470.200000	---	40.00	54.00	14.00	V	3.2
7470.200000	50.30	---	74.00	23.70	V	3.2
12111.200000	52.39	---	74.00	21.61	V	9.0
12111.200000	---	45.06	54.00	8.94	V	9.0
14086.600000	54.98	---	68.20	13.22	V	10.7
17993.200000	55.45	---	74.00	18.55	V	13.8
17993.200000	---	47.39	54.00	6.61	V	13.8

802.11ac80 Mode:**Low Channel: 5530MHz****Common Information**

Project No.: RBJ260416001
 EUT Model: ZSXG02
 Test Mode: 5G WIFI 802.11ac80 mode Low Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 25.6°C
 Humidity: 51%
 Atmospheric Pressure: 100.3kPa
 Test Engineer: Destine Hu
 Check by: Jason Lu
 Test Date: 2026/5/24

Fundamental test with Band reject filter Full Spectrum**Critical_Freqs**

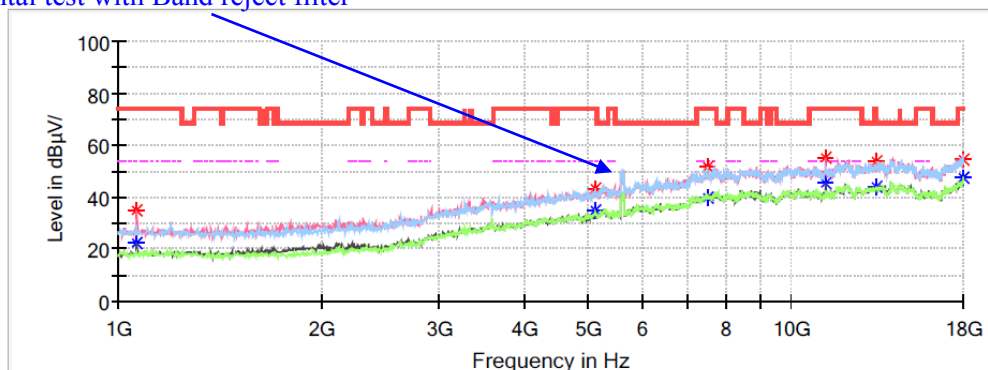
Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	---	27.97	54.00	26.03	H	-15.9
1061.200000	35.63	---	74.00	38.37	H	-15.9
5066.400000	43.66	---	74.00	30.34	H	-2.6
5066.400000	---	33.21	54.00	20.79	H	-2.6
8044.800000	51.35	---	74.00	22.65	V	3.6
8044.800000	---	41.24	54.00	12.76	V	3.6
8847.200000	53.70	---	68.20	14.50	V	4.8
11047.000000	55.73	---	74.00	18.27	V	6.9
11047.000000	---	47.08	54.00	6.92	V	6.9
14052.600000	55.59	---	68.20	12.61	V	10.7
17993.200000	54.76	---	74.00	19.24	V	13.8
17993.200000	---	47.60	54.00	6.40	V	13.8

High Channel: 5610MHz**Common Information**

Project No.: RBJ260416001
 EUT Model: ZSXG02
 Test Mode: 5G WIFI 802.11ac80 mode High Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 25.6℃
 Humidity: 51%
 Atmospheric Pressure: 100.3kPa
 Test Engineer: Destine Hu
 Check by: Jason Lu
 Test Date: 2026/5/24

Fundamental test with Band reject filter

Full Spectrum

**Critical Freqs**

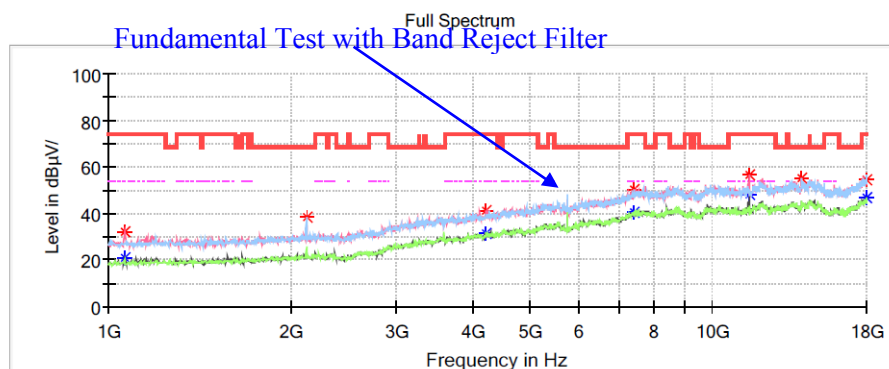
Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1064.600000	35.23	---	74.00	38.77	V	-15.9
1064.600000	---	22.05	54.00	31.95	V	-15.9
5103.800000	43.35	---	74.00	30.65	V	-2.5
5103.800000	---	34.71	54.00	19.29	V	-2.5
7497.400000	51.73	---	74.00	22.27	H	3.3
7497.400000	---	40.21	54.00	13.79	H	3.3
11220.400000	---	45.13	54.00	8.87	V	7.4
11220.400000	55.08	---	74.00	18.92	V	7.4
13359.000000	---	44.34	54.00	9.66	V	9.4
13359.000000	53.87	---	74.00	20.13	V	9.4
17979.600000	---	47.48	54.00	6.52	H	13.7
17979.600000	54.33	---	74.00	19.67	H	13.7

1GHz-18GHz(5725-5850MHz Band):

Chain 0

802.11a Mode:**Low Channel: 5745MHz****Common Information**

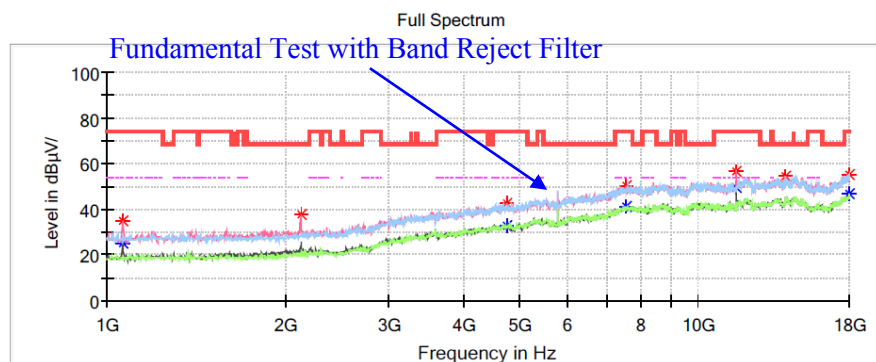
Project No.: RBJ260416001
EUT Model: ZSXG02
Test Mode: 5G WIFI 802.11a mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.9°C
Humidity: 53%
Atmospheric Pressure: 100.5kPa
Test Engineer: Destine Hu
Check by: Jason Lu
Test Date: 2026/5/25

**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1064.600000	---	20.89	54.00	33.11	V	-15.9
1064.600000	32.17	---	74.00	41.83	V	-15.9
2125.400000	38.55	---	68.20	29.65	V	-11.3
4223.200000	---	31.59	54.00	22.41	V	-4.7
4223.200000	41.02	---	74.00	32.98	V	-4.7
7422.600000	---	40.84	54.00	13.16	H	3.0
7422.600000	50.16	---	74.00	23.84	H	3.0
11485.600000	---	48.19	54.00	5.81	H	8.1
11485.600000	56.98	---	74.00	17.02	H	8.1
14018.600000	55.07	---	68.20	13.13	H	10.7
17966.000000	54.52	---	74.00	19.48	H	13.6
17966.000000	---	46.56	54.00	7.44	H	13.6

Middle Channel: 5785MHz**Common Information**

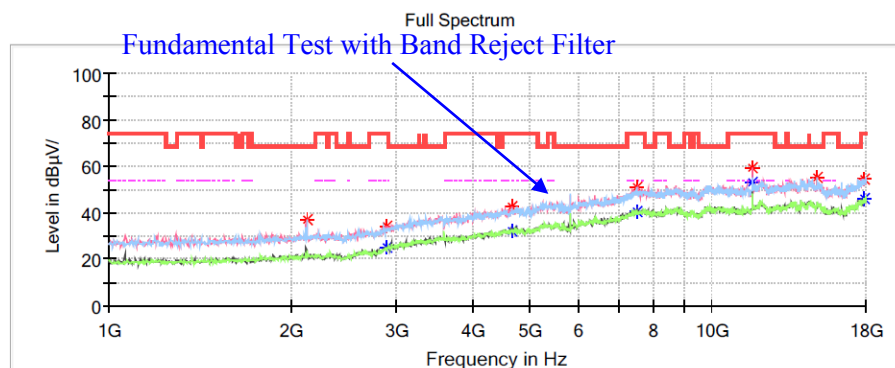
Project No.: RBJ260416001
 EUT Model: ZSXG02
 Test Mode: 5G WIFI 802.11a mode Middle Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 24.9°C
 Humidity: 53%
 Atmospheric Pressure: 100.5kPa
 Test Engineer: Destine Hu
 Check by: Jason Lu
 Test Date: 2026/5/25

**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	35.25	---	74.00	38.75	V	-15.9
1061.200000	---	25.44	54.00	28.56	V	-15.9
2128.800000	37.42	---	68.20	30.78	V	-11.3
4750.200000	---	32.73	54.00	21.27	V	-3.6
4750.200000	42.86	---	74.00	31.14	V	-3.6
7565.400000	---	41.14	54.00	12.86	H	3.3
7565.400000	50.55	---	74.00	23.45	H	3.3
11574.000000	---	49.50	54.00	4.50	H	8.3
11574.000000	56.30	---	74.00	17.70	H	8.3
14076.400000	54.47	---	68.20	13.73	H	10.7
17989.800000	55.53	---	74.00	18.47	H	13.8
17989.800000	---	46.88	54.00	7.12	H	13.8

High Channel: 5825MHz**Common Information**

Project No.: RBJ260416001
EUT Model: ZSXG02
Test Mode: 5G WIFI 802.11a mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.9℃
Humidity: 53%
Atmospheric Pressure: 100.5kPa
Test Engineer: Destine Hu
Check by: Jason Lu
Test Date: 2026/5/25

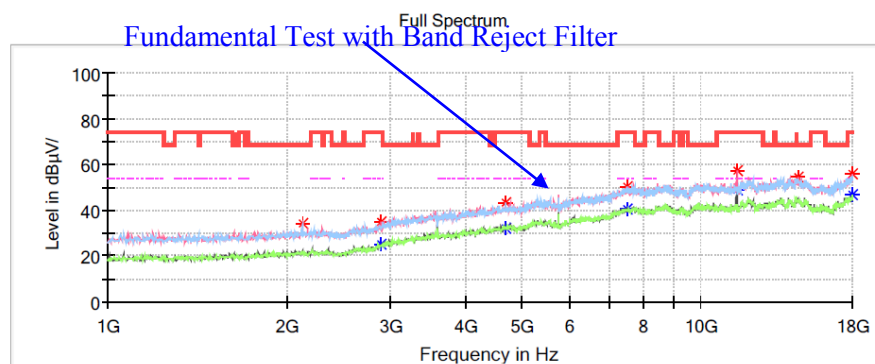
**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2132.200000	37.24	---	68.20	30.96	H	-11.3
2890.400000	---	25.09	54.00	28.91	H	-8.8
2890.400000	33.99	---	74.00	40.01	H	-8.8
4648.200000	---	32.28	54.00	21.72	H	-3.9
4648.200000	42.43	---	74.00	31.57	H	-3.9
7524.600000	---	40.53	54.00	13.47	H	3.3
7524.600000	50.81	---	74.00	23.19	H	3.3
11648.800000	---	52.87	54.00	1.13	V	8.4
11652.200000	59.67	---	74.00	14.33	V	8.4
14940.000000	54.99	---	68.20	13.21	V	9.6
17921.800000	54.24	---	74.00	19.76	V	13.4
17921.800000	---	46.29	54.00	7.71	V	13.4

Chain 1

802.11a Mode:**Low Channel: 5745MHz****Common Information**

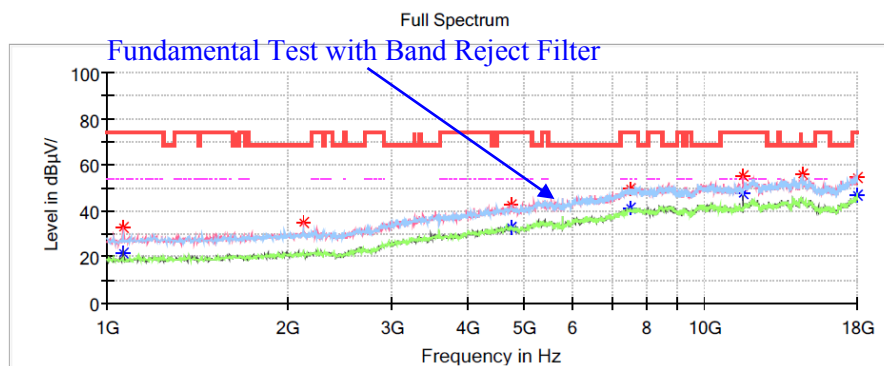
Project No.: RBJ260416001
EUT Model: ZSXG02
Test Mode: 5G WIFI 802.11a mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.9℃
Humidity: 53%
Atmospheric Pressure: 100.5kPa
Test Engineer: Destine Hu
Check by: Jason Lu
Test Date: 2026/5/25

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2125.400000	34.08	---	68.20	34.12	V	-11.3
2883.600000	---	24.88	54.00	29.12	V	-8.8
2883.600000	34.97	---	74.00	39.03	V	-8.8
4689.000000	---	31.94	54.00	22.06	V	-3.8
4689.000000	43.46	---	74.00	30.54	V	-3.8
7504.200000	---	40.68	54.00	13.32	H	3.3
7504.200000	50.34	---	74.00	23.66	H	3.3
11489.000000	---	48.81	54.00	5.19	H	8.1
11489.000000	57.24	---	74.00	16.76	H	8.1
14572.800000	54.61	---	68.20	13.59	H	10.8
17989.800000	55.82	---	74.00	18.18	H	13.8
17989.800000	---	46.61	54.00	7.39	H	13.8

Middle Channel: 5785MHz**Common Information**

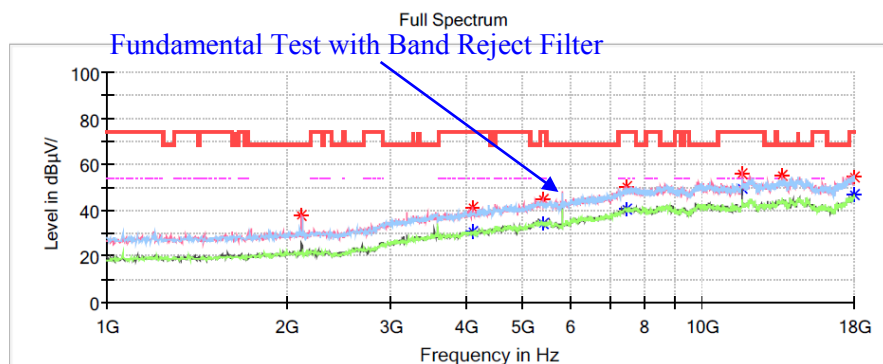
Project No.: RBJ260416001
EUT Model: ZSXG02
Test Mode: 5G WIFI 802.11a mode Middle Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.9℃
Humidity: 53%
Atmospheric Pressure: 100.5kPa
Test Engineer: Destine Hu
Check by: Jason Lu
Test Date: 2026/5/25

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	---	21.70	54.00	32.30	H	-15.9
1061.200000	32.69	---	74.00	41.31	H	-15.9
2132.200000	34.96	---	68.20	33.24	H	-11.3
4746.800000	---	32.81	54.00	21.19	H	-3.6
4746.800000	42.33	---	74.00	31.67	H	-3.6
7497.400000	---	40.91	54.00	13.09	V	3.3
7497.400000	49.81	---	74.00	24.19	V	3.3
11567.200000	---	47.49	54.00	6.51	V	8.3
11567.200000	55.01	---	74.00	18.99	V	8.3
14596.600000	55.65	---	68.20	12.55	V	10.8
17993.200000	54.43	---	74.00	19.57	V	13.8
17993.200000	---	46.95	54.00	7.05	V	13.8

High Channel: 5825MHz**Common Information**

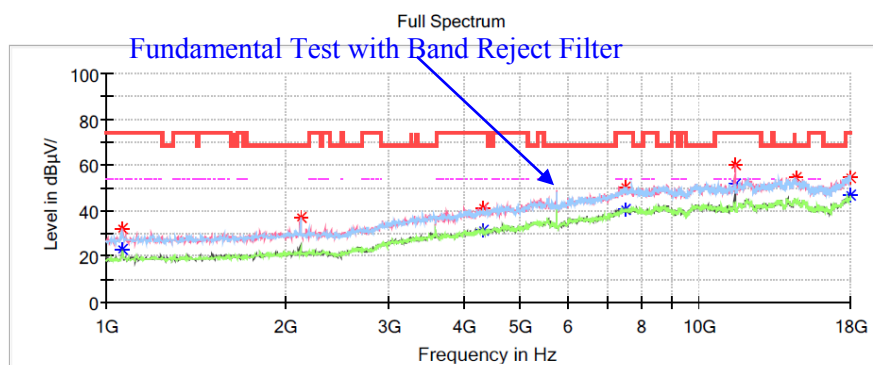
Project No.: RBJ260416001
EUT Model: ZSXG02
Test Mode: 5G WIFI 802.11a mode Middle Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.9℃
Humidity: 53%
Atmospheric Pressure: 100.5kPa
Test Engineer: Destine Hu
Check by: Jason Lu
Test Date: 2026/5/25

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µV/m)	Average (dB µV/m)	Limit (dB µV/m)	Margin (dB)	Pol	Corr. (dB/m)
2122.000000	37.52	---	68.20	30.68	V	-11.3
4111.000000	---	30.94	54.00	23.06	V	-4.8
4111.000000	41.25	---	74.00	32.75	V	-4.8
5389.400000	---	34.30	54.00	19.70	V	-1.8
5389.400000	44.56	---	74.00	29.44	V	-1.8
7473.600000	---	40.37	54.00	13.63	V	3.2
7473.600000	50.04	---	74.00	23.96	V	3.2
11652.200000	---	49.84	54.00	4.16	H	8.4
11652.200000	56.06	---	74.00	17.94	H	8.4
13620.800000	55.00	---	68.20	13.20	H	9.9
17996.600000	54.80	---	74.00	19.20	H	13.8
17996.600000	---	47.17	54.00	6.83	H	13.8

**MIMO(Chain 0+Chain 1):
802.11ac20 Mode:****Low Channel: 5745MHz****Common Information**

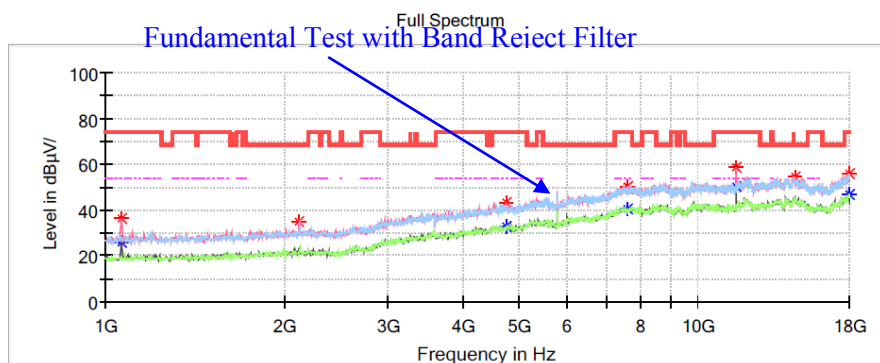
Project No.: RBJ260416001
EUT Model: ZSXG02
Test Mode: 5G WIFI 802.11ac20 mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.9°C
Humidity: 53%
Atmospheric Pressure: 100.5kPa
Test Engineer: Destine Hu
Check by: Jason Lu
Test Date: 2026/5/25

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µV/m)	Average (dB µV/m)	Limit (dB µV/m)	Margin (dB)	Pol	Corr. (dB/m)
1064.600000	32.43	---	74.00	41.57	H	-15.9
1064.600000	---	23.40	54.00	30.60	H	-15.9
2125.400000	37.34	---	68.20	30.86	H	-11.3
4315.000000	---	31.23	54.00	22.77	H	-4.6
4315.000000	41.25	---	74.00	32.75	H	-4.6
7521.200000	---	40.74	54.00	13.26	V	3.3
7521.200000	50.02	---	74.00	23.98	V	3.3
11489.000000	60.18	---	74.00	13.82	V	8.1
11489.000000	---	52.05	54.00	1.95	V	8.1
14542.200000	54.83	---	68.20	13.37	V	11.0
17979.600000	54.27	---	74.00	19.73	V	13.7
17979.600000	---	46.96	54.00	7.04	V	13.7

Middle Channel: 5785MHz**Common Information**

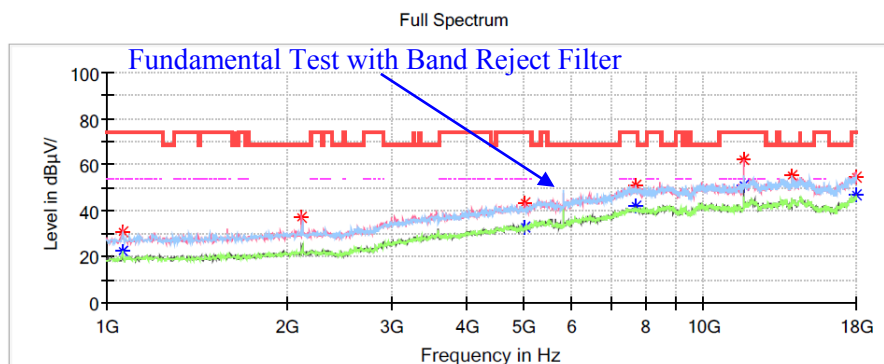
Project No.: RBJ260416001
EUT Model: ZSXG02
Test Mode: 5G WIFI 802.11ac20 mode Middle Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.9℃
Humidity: 53%
Atmospheric Pressure: 100.5kPa
Test Engineer: Destine Hu
Check by: Jason Lu
Test Date: 2026/5/25

**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	---	26.14	54.00	27.86	V	-15.9
1061.200000	36.09	---	74.00	37.91	V	-15.9
2122.000000	34.71	---	68.20	33.49	V	-11.3
4736.600000	---	33.22	54.00	20.78	V	-3.6
4736.600000	43.49	---	74.00	30.51	V	-3.6
7606.200000	---	40.67	54.00	13.33	V	3.3
7606.200000	50.61	---	74.00	23.39	V	3.3
11567.200000	---	50.17	54.00	3.83	H	8.3
11570.600000	58.90	---	74.00	15.10	H	8.3
14538.800000	54.50	---	68.20	13.70	H	11.0
17996.600000	55.66	---	74.00	18.34	H	13.8
17996.600000	---	47.20	54.00	6.80	H	13.8

High Channel: 5825MHz**Common Information**

Project No.: RBJ260416001
EUT Model: ZSXG02
Test Mode: 5G WIFI 802.11ac20 mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.9℃
Humidity: 53%
Atmospheric Pressure: 100.5kPa
Test Engineer: Destine Hu
Check by: Jason Lu
Test Date: 2026/5/25

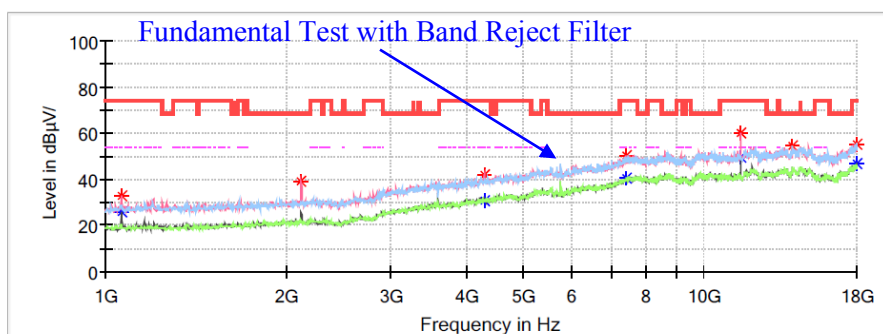
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	---	22.05	54.00	31.95	H	-15.9
1061.200000	30.81	---	74.00	43.19	H	-15.9
2122.000000	37.30	---	68.20	30.90	H	-11.3
5015.400000	---	33.06	54.00	20.94	H	-2.7
5015.400000	43.69	---	74.00	30.31	H	-2.7
7677.600000	---	41.63	54.00	12.37	V	3.4
7677.600000	51.01	---	74.00	22.99	V	3.4
11655.600000	---	50.81	54.00	3.19	V	8.4
11659.000000	61.92	---	74.00	12.08	V	8.4
14079.800000	55.31	---	68.20	12.89	V	10.7
17976.200000	54.47	---	74.00	19.53	V	13.7
17976.200000	---	46.88	54.00	7.12	V	13.7

802.11ac40 Mode:**Channel: 5755MHz****Common Information**

Project No.: RBJ260416001
EUT Model: ZSXG02
Test Mode: 5G WIFI 802.11ac40 mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.9℃
Humidity: 53%
Atmospheric Pressure: 100.5kPa
Test Engineer: Destine Hu
Check by: Jason Lu
Test Date: 2026/5/25

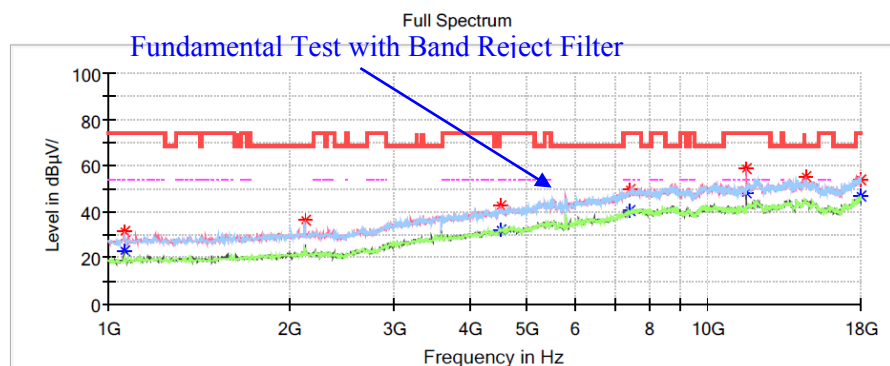
Full Spectrum

**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	---	26.10	54.00	27.90	V	-15.9
1061.200000	32.90	---	74.00	41.10	V	-15.9
2122.000000	38.82	---	68.20	29.38	V	-11.3
4284.400000	41.93	---	74.00	32.07	V	-4.6
4284.400000	---	30.50	54.00	23.50	V	-4.6
7415.800000	50.35	---	74.00	23.65	V	3.0
7415.800000	---	40.35	54.00	13.65	V	3.0
11509.400000	---	49.61	54.00	4.39	H	8.2
11509.400000	60.16	---	74.00	13.84	H	8.2
14045.800000	54.28	---	68.20	13.92	H	10.7
17993.200000	---	46.50	54.00	7.50	H	13.8
17993.200000	55.20	---	74.00	18.80	H	13.8

Channel: 5795MHz**Common Information**

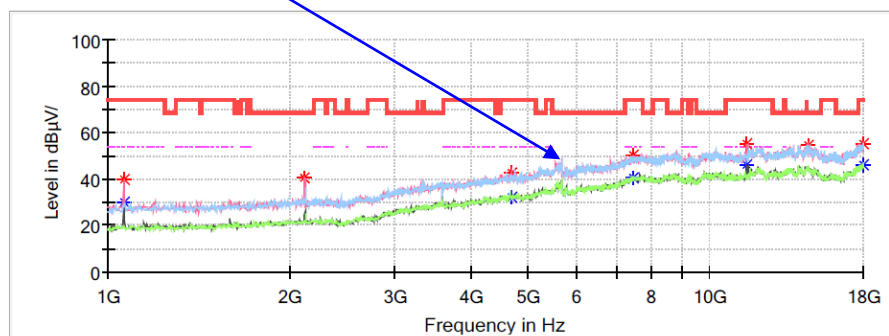
Project No.: RBJ260416001
EUT Model: ZSXG02
Test Mode: 5G WIFI 802.11ac40 mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.9℃
Humidity: 53%
Atmospheric Pressure: 100.5kPa
Test Engineer: Destine Hu
Check by: Jason Lu
Test Date: 2026/5/25

**Critical Freqs**

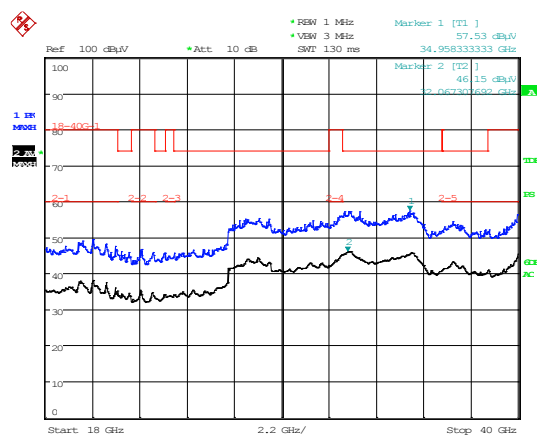
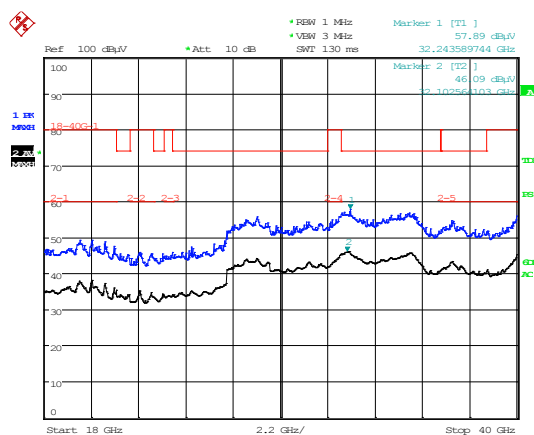
Frequency (MHz)	MaxPeak (dB µV/m)	Average (dB µV/m)	Limit (dB µV/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	31.23	---	74.00	42.77	V	-15.9
1061.200000	---	23.29	54.00	30.71	V	-15.9
2128.800000	36.22	---	68.20	31.98	V	-11.3
4512.200000	---	32.11	54.00	21.89	V	-4.4
4512.200000	42.57	---	74.00	31.43	V	-4.4
7409.000000	---	40.88	54.00	13.12	H	3.0
7409.000000	49.94	---	74.00	24.06	H	3.0
11594.400000	---	48.22	54.00	5.78	H	8.3
11594.400000	58.66	---	74.00	15.34	H	8.3
14576.200000	54.96	---	68.20	13.24	H	10.8
17996.600000	54.15	---	74.00	19.85	H	13.8
17996.600000	---	46.95	54.00	7.05	H	13.8

802.11ac80 Mode:**Channel: 5775MHz****Common Information**

Project No.: RBJ260416001
EUT Model: ZSXG02
Test Mode: 5G WIFI 802.11ac80
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.9°C
Humidity: 53%
Atmospheric Pressure: 100.5kPa
Test Engineer: Destine Hu
Check by: Jason Lu
Test Date: 2026/5/25

Fundamental Test with Band Reject Filter Full Spectrum**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	---	30.22	54.00	23.78	V	-15.9
1061.200000	39.99	---	74.00	34.01	V	-15.9
2122.000000	40.36	---	68.20	27.84	V	-11.3
4672.000000	42.88	---	74.00	31.12	V	-3.8
4672.000000	---	32.36	54.00	21.64	V	-3.8
7463.400000	50.38	---	74.00	23.62	H	3.2
7463.400000	---	40.45	54.00	13.55	H	3.2
11543.400000	---	45.89	54.00	8.11	H	8.2
11543.400000	55.56	---	74.00	18.44	H	8.2
14535.400000	54.82	---	68.20	13.38	H	11.0
17989.800000	---	46.40	54.00	7.60	H	13.8
17989.800000	55.44	---	74.00	18.56	H	13.8

18GHz-40GHz: Transmitting in 802.11ac40 mode 5795MHz (maximum output power)**Horizontal****Vertical**

Project No :RBJ260416001 Tester :Hugh Wu
Date: 26.MAY.2026 13:00:29

Project No :RBJ260416001 Tester :Hugh Wu
Date: 26.MAY.2026 13:31:55

Note: The test distance is 1.5m.

Extrapolation factor of 20dB/decade from 3m to 1.5m

Distance extrapolation factor = $20 \log (\text{specific distance [3m]}/\text{test distance [1.5m]})$ dB

Limit = Specific limits(dBμV/m) + distance extrapolation factor (6 dB)

Frequency (GHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Pol	Corr. (dB/m)
32.24	57.89	74.2	16.31	V	23.38
34.96	57.53	74.2	16.67	H	22.76

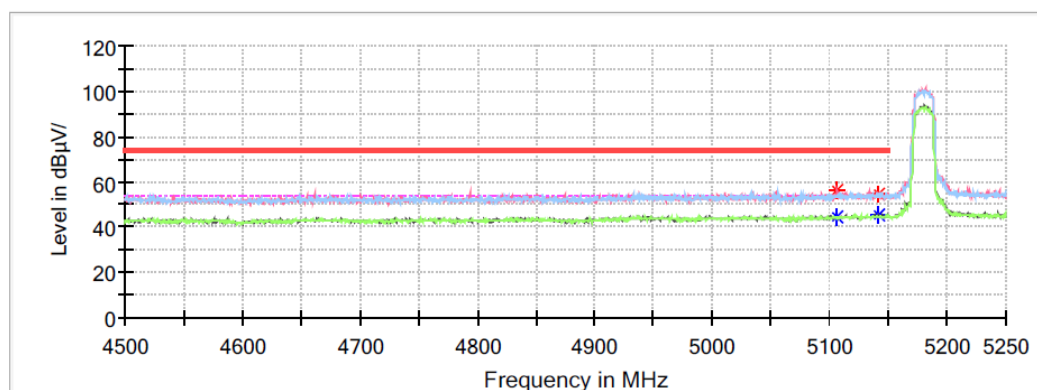
Restricted Bands Emissions Test (5150-5250MHz Band):

Chain 0

802.11a Mode:**Common Information**

Project No.:	RBJ260416001
EUT Model:	ZSXG02
Test Mode:	5G WIFI 802.11a mode Low Channel
Standard:	FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	24.6°C
Humidity:	51%
Atmospheric Pressure:	101.2kPa
Test Engineer:	Destine Hu
Check by:	Jason Lu
Test Date:	2026/5/22

Full Spectrum

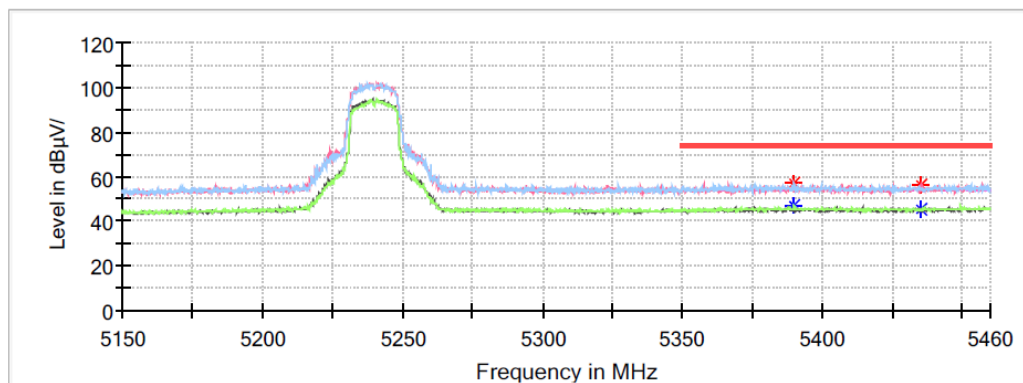
**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5105.700000	56.08	---	74.00	17.92	V	7.5
5105.700000	---	44.66	54.00	9.34	V	7.5
5142.300000	54.51	---	74.00	19.49	V	7.6
5142.300000	---	45.44	54.00	8.56	V	7.6

Common Information

Project No.: RBJ260416001
EUT Model: ZSXG02
Test Mode: 5G WIFI 802.11a mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.6℃
Humidity: 51%
Atmospheric Pressure: 101.2kPa
Test Engineer: Destine Hu
Check by: Jason Lu
Test Date: 2026/5/22

Full Spectrum



Critical_Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5390.064000	---	46.74	54.00	7.26	H	8.2
5390.064000	57.12	---	74.00	16.88	H	8.2
5434.952000	---	45.41	54.00	8.59	V	8.4
5434.952000	56.33	---	74.00	17.67	V	8.4

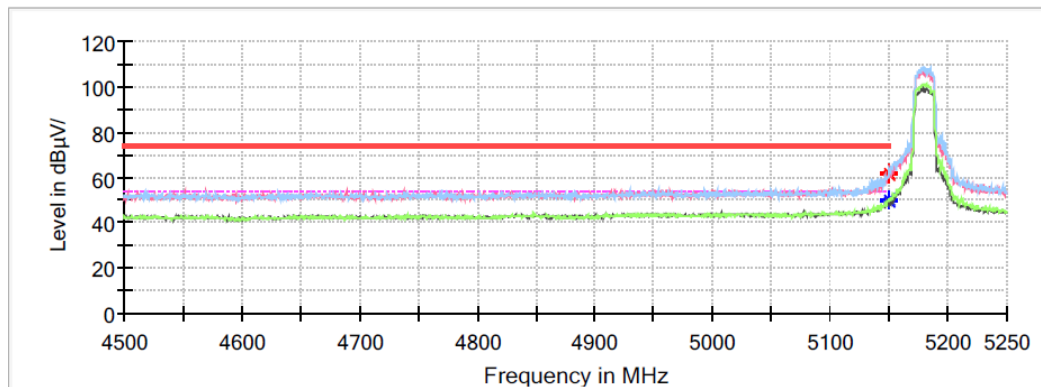
Chain 1

802.11a Mode:

Common Information

Project No.:	RBJ260416001
EUT Model:	ZSXG02
Test Mode:	5G WIFI 802.11a mode Low Channel
Standard:	FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	24.6°C
Humidity:	51%
Atmospheric Pressure:	101.2kPa
Test Engineer:	Destine Hu
Check by:	Jason Lu
Test Date:	2026/5/22

Full Spectrum



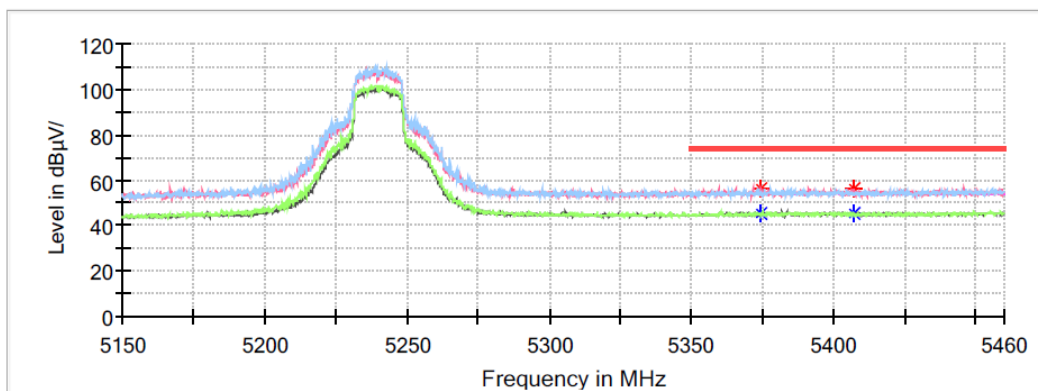
Critical_Freqs

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5149.200000	---	49.83	54.00	4.17	H	7.6
5149.200000	60.91	---	74.00	13.09	H	7.6
5149.800000	---	50.57	54.00	3.43	H	7.6
5149.800000	61.70	---	74.00	12.30	H	7.6

Common Information

Project No.: RBJ260416001
 EUT Model: ZSXG02
 Test Mode: 5G WIFI 802.11a mode High Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 24.6℃
 Humidity: 51%
 Atmospheric Pressure: 101.2kPa
 Test Engineer: Destine Hu
 Check by: Jason Lu
 Test Date: 2026/5/22

Full Spectrum



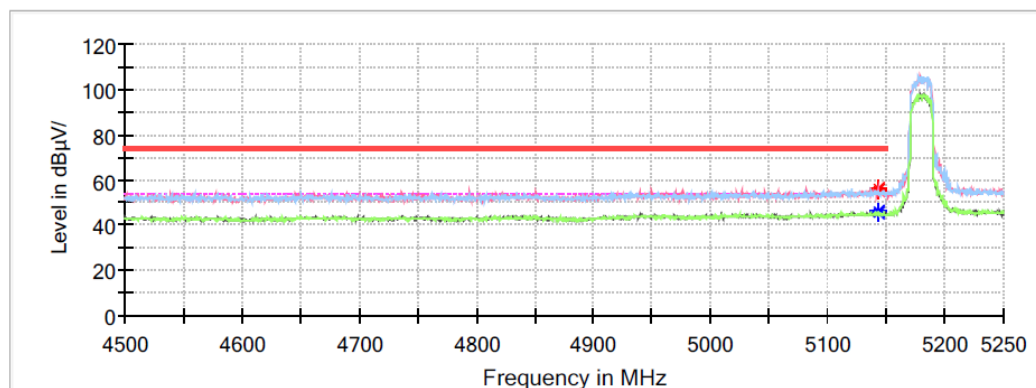
Critical_Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5374.812000	56.34	---	74.00	17.66	V	8.2
5374.812000	---	45.15	54.00	8.85	V	8.2
5407.300000	---	45.18	54.00	8.82	V	8.3
5407.300000	56.06	---	74.00	17.94	V	8.3

MIMO(Chain 0+Chain 1):**802.11ac20 Mode:****Common Information**

Project No.:	RBJ260416001
EUT Model:	ZSXG02
Test Mode:	5G WIFI 802.11ac20 mode Low Channel
Standard:	FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	24.6℃
Humidity:	51%
Atmospheric Pressure:	101.2kPa
Test Engineer:	Destine Hu
Check by:	Jason Lu
Test Date:	2026/5/22

Full Spectrum

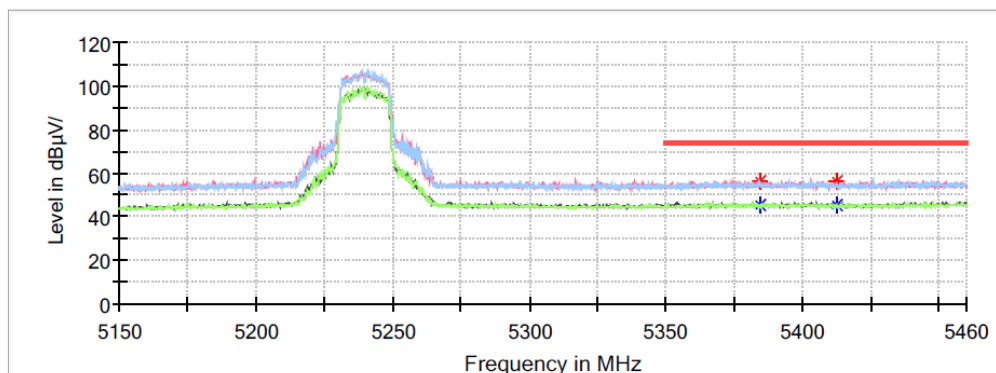
**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5142.600000	---	45.12	54.00	8.88	V	7.6
5142.600000	55.90	---	74.00	18.10	V	7.6
5142.900000	55.66	---	74.00	18.34	H	7.6
5142.900000	---	45.76	54.00	8.24	H	7.6

Common Information

Project No.: RBJ260416001
EUT Model: ZSXG02
Test Mode: 5G WIFI 802.11ac20 mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.6℃
Humidity: 51%
Atmospheric Pressure: 101.2kPa
Test Engineer: Destine Hu
Check by: Jason Lu
Test Date: 2026/5/22

Full Spectrum



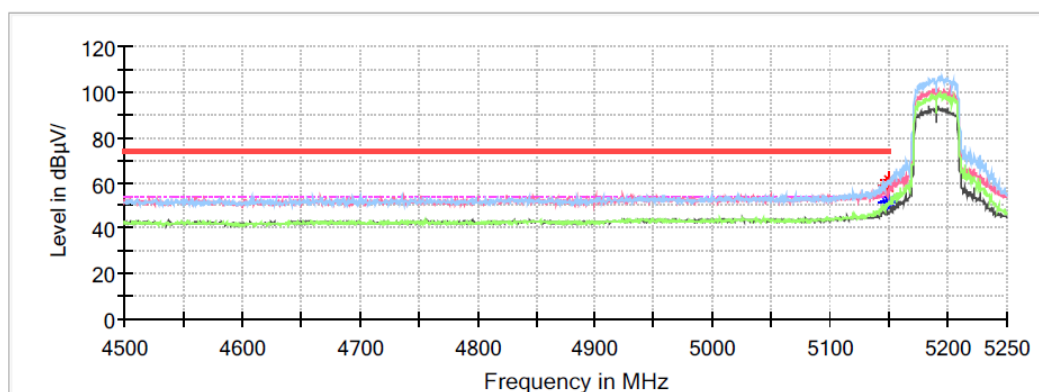
Critical_Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5384.484000	---	45.30	54.00	8.70	V	8.2
5384.484000	56.55	---	74.00	17.45	V	8.2
5412.632000	---	45.24	54.00	8.76	V	8.3
5412.632000	56.45	---	74.00	17.55	V	8.3

802.11ac40 Mode:**Common Information**

Project No.: RBJ260416001
EUT Model: ZSXG02
Test Mode: 5G WIFI 802.11ac40 mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.6℃
Humidity: 51%
Atmospheric Pressure: 101.2kPa
Test Engineer: Destine Hu
Check by: Jason Lu
Test Date: 2026/5/22

Full Spectrum

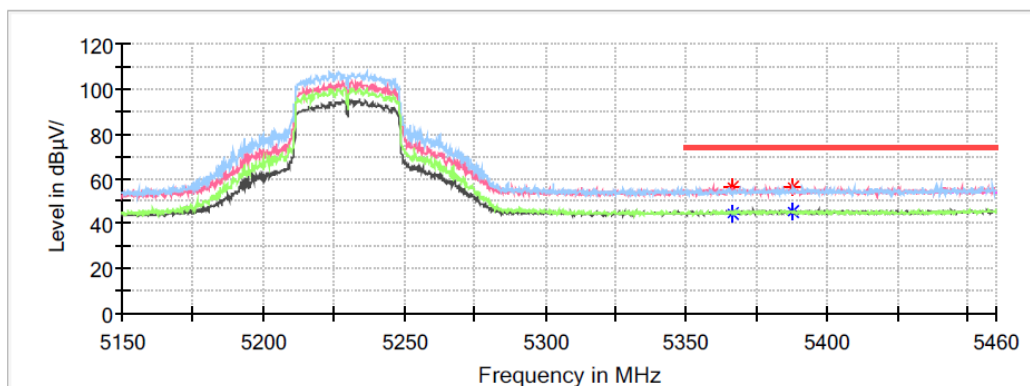
**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5147.700000	58.62	---	74.00	15.38	H	7.6
5147.700000	---	50.89	54.00	3.11	H	7.6
5149.500000	---	52.17	54.00	1.83	H	7.6
5149.500000	61.05	---	74.00	12.95	H	7.6

Common Information

Project No.: RBJ260416001
EUT Model: ZSXG02
Test Mode: 5G WIFI 802.11ac40 mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.6°C
Humidity: 51%
Atmospheric Pressure: 101.2kPa
Test Engineer: Destine Hu
Check by: Jason Lu
Test Date: 2026/5/22

Full Spectrum



Critical Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5366.256000	56.17	---	74.00	17.83	V	8.2
5366.256000	---	44.71	54.00	9.29	V	8.2
5388.080000	---	45.18	54.00	8.82	V	8.2
5388.080000	56.59	---	74.00	17.41	V	8.2