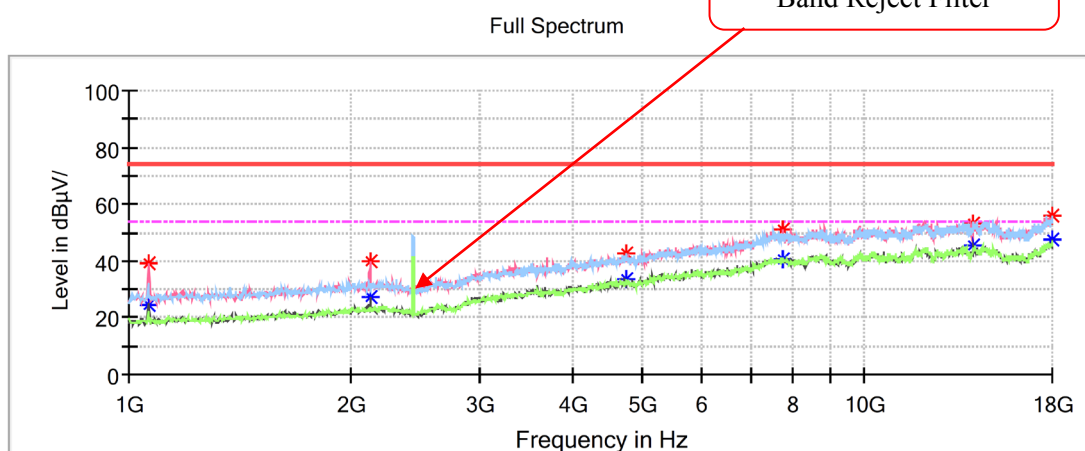


Middle Channel: 2437MHz**Common Information**

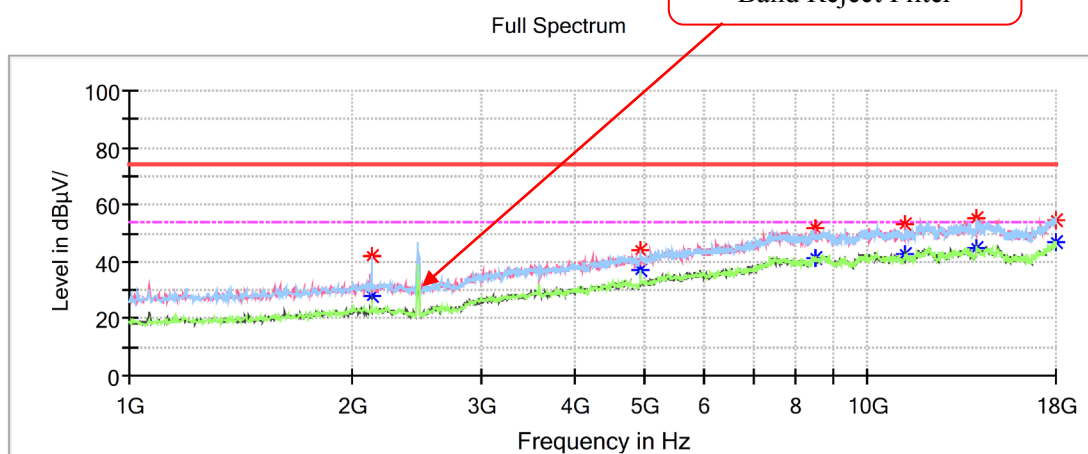
Project No.: RBJ260416001
EUT Model: ZSXG02
Test Mode: 2.4G WIFI 802.11g mode Middle Channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.5°C
Humidity: 52%
Atmospheric Pressure: 100.7kPa
Test Engineer: Destine Hu
Check by: Jason Lu
Test Date: 2026/5/20

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1064.600000	39.26	---	74.00	34.74	V	-15.9
1064.600000	---	24.61	54.00	29.39	V	-15.9
2128.800000	40.16	---	74.00	33.84	V	-11.3
2128.800000	---	27.61	54.00	26.39	V	-11.3
4740.000000	---	33.65	54.00	20.35	H	-3.6
4740.000000	42.49	---	74.00	31.51	H	-3.6
7755.800000	---	40.76	54.00	13.24	V	3.4
7755.800000	51.30	---	74.00	22.70	V	3.4
14042.400000	53.14	---	74.00	20.86	V	10.7
14042.400000	---	45.55	54.00	8.45	V	10.7
17993.200000	55.64	---	74.00	18.36	V	13.8
17993.200000	---	47.22	54.00	6.78	V	13.8

High Channel: 2462MHz**Common Information**

Project No.: RBJ260416001
EUT Model: ZSXG02
Test Mode: 2.4G WIFI 802.11g mode High Channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.5°C
Humidity: 52%
Atmospheric Pressure: 100.7kPa
Test Engineer: Destine Hu
Check by: Jason Lu
Test Date: 2026/5/20

**Critical_Freqs**

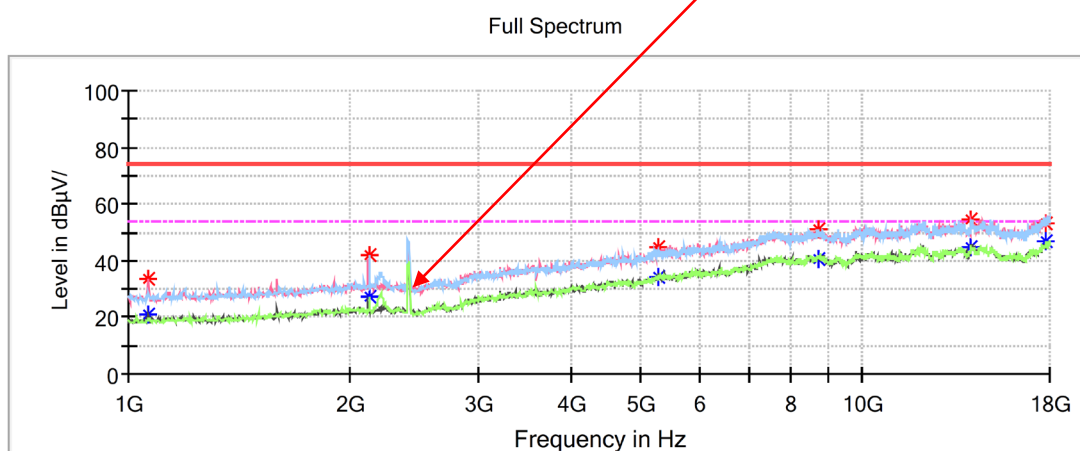
Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2128.800000	---	27.79	54.00	26.21	H	-11.3
2128.800000	41.94	---	74.00	32.06	H	-11.3
4923.600000	---	37.15	54.00	16.85	H	-3.0
4923.600000	43.98	---	74.00	30.02	H	-3.0
8507.200000	---	41.29	54.00	12.71	V	4.7
8507.200000	51.76	---	74.00	22.24	V	4.7
11217.000000	---	42.40	54.00	11.60	V	7.3
11217.000000	53.18	---	74.00	20.82	V	7.3
14032.200000	---	44.66	54.00	9.34	H	10.7
14032.200000	55.06	---	74.00	18.94	H	10.7
17983.000000	54.75	---	74.00	19.25	H	13.7
17983.000000	---	46.72	54.00	7.28	H	13.7

1GHz-18GHz:
802.11n-HT20 Mode :
Chain 0 + Chain 1

Low Channel: 2412MHz

Common Information

Project No.: RBJ260416001
EUT Model: ZSXG02
Test Mode: 2.4G WIFI 802.11n20 mode Low Channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.5°C
Humidity: 52%
Atmospheric Pressure: 100.7kPa
Test Engineer: Destine Hu
Check by: Jason Lu
Test Date: 2026/5/20

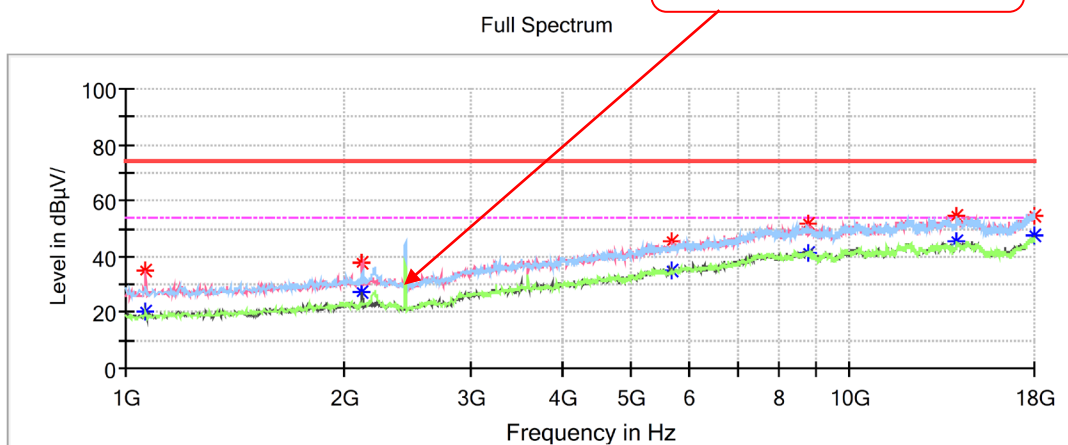


Critical Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1064.600000	33.47	---	74.00	40.53	V	-15.9
1064.600000	---	21.12	54.00	32.88	V	-15.9
2128.800000	42.25	---	74.00	31.75	H	-11.3
2128.800000	---	27.18	54.00	26.82	H	-11.3
5277.200000	---	34.45	54.00	19.55	V	-2.1
5277.200000	44.42	---	74.00	29.58	V	-2.1
8694.200000	---	40.77	54.00	13.23	H	4.8
8694.200000	50.95	---	74.00	23.05	H	4.8
14052.600000	---	44.70	54.00	9.30	V	10.7
14052.600000	54.67	---	74.00	19.33	V	10.7
17775.600000	53.44	---	74.00	20.56	V	12.5
17775.600000	---	47.10	54.00	6.90	V	12.5

Middle Channel: 2437MHz**Common Information**

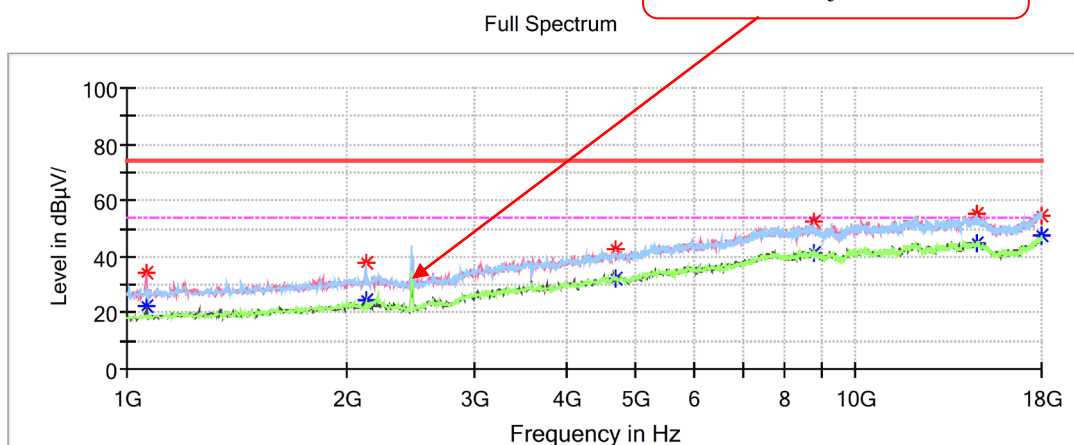
Project No.: RBJ260416001
EUT Model: ZSXG02
Test Mode: 2.4G WIFI 802.11n20 mode Middle Channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.5°C
Humidity: 52%
Atmospheric Pressure: 100.7kPa
Test Engineer: Destine Hu
Check by: Jason Lu
Test Date: 2026/5/20

**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1064.600000	---	20.40	54.00	33.60	V	-15.9
1064.600000	34.79	---	74.00	39.21	V	-15.9
2122.000000	---	27.58	54.00	26.42	V	-11.3
2122.000000	37.79	---	74.00	36.21	V	-11.3
5678.400000	---	35.17	54.00	18.83	H	-1.3
5678.400000	45.39	---	74.00	28.61	H	-1.3
8772.400000	---	41.45	54.00	12.55	H	4.8
8772.400000	52.05	---	74.00	21.95	H	4.8
14059.400000	---	45.14	54.00	8.86	V	10.7
14059.400000	54.20	---	74.00	19.80	V	10.7
17972.800000	---	47.56	54.00	6.44	V	13.7
17972.800000	54.28	---	74.00	19.72	V	13.7

High Channel: 2462MHz**Common Information**

Project No.: RBJ260416001
EUT Model: ZSXG02
Test Mode: 2.4G WIFI 802.11n20 mode High Channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.5°C
Humidity: 52%
Atmospheric Pressure: 100.7kPa
Test Engineer: Destine Hu
Check by: Jason Lu
Test Date: 2026/5/20

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	34.01	---	74.00	39.99	V	-15.9
1061.200000	---	22.70	54.00	31.30	V	-15.9
2125.400000	---	24.52	54.00	29.48	V	-11.3
2125.400000	37.99	---	74.00	36.01	V	-11.3
4695.800000	---	31.99	54.00	22.01	H	-3.8
4695.800000	42.75	---	74.00	31.25	H	-3.8
8755.400000	---	41.28	54.00	12.72	H	4.8
8755.400000	52.61	---	74.00	21.39	H	4.8
14644.200000	---	44.90	54.00	9.10	H	10.6
14644.200000	55.47	---	74.00	18.53	H	10.6
17989.800000	54.71	---	74.00	19.29	V	13.8
17989.800000	---	47.31	54.00	6.69	V	13.8

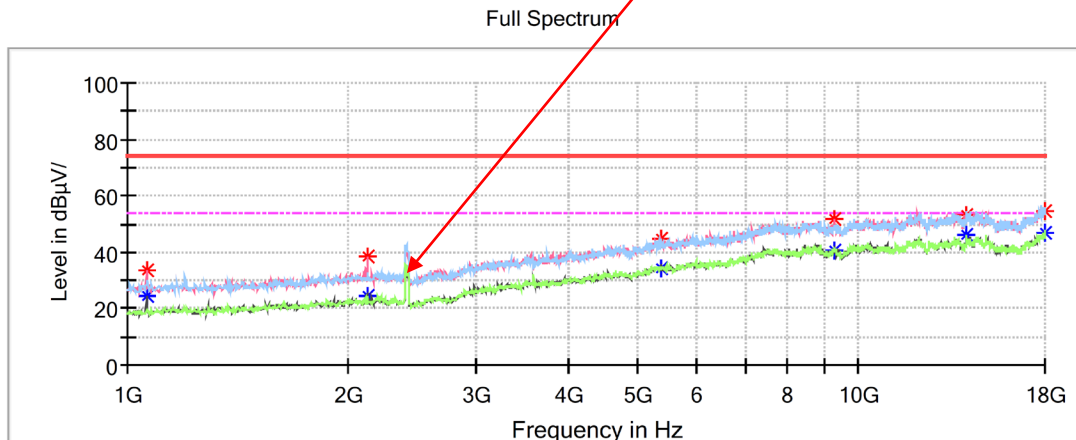
1GHz-18GHz:
802.11n-HT40 Mode :
Chain 0 + Chain 1

Low Channel: 2422MHz

Common Information

Project No.:	RBJ260416001
EUT Model:	ZSXG02
Test Mode:	2.4G WIFI 802.11n40 mode Low Channel
Standard:	FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	24.5°C
Humidity:	52%
Atmospheric Pressure:	100.7kPa
Test Engineer:	Destine Hu
Check by:	Jason Lu
Test Date:	2026/5/20

Fundamental Test with
Band Reject Filter

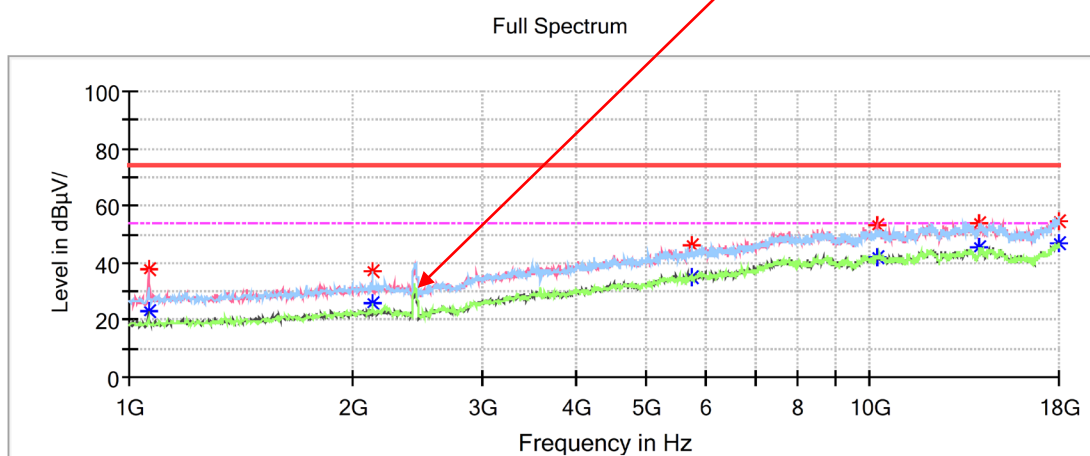


Critical_Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	---	24.77	54.00	29.23	V	-15.9
1061.200000	33.87	---	74.00	40.13	V	-15.9
2128.800000	---	24.14	54.00	29.86	H	-11.3
2128.800000	38.39	---	74.00	35.61	H	-11.3
5379.200000	---	34.50	54.00	19.50	H	-1.9
5379.200000	44.79	---	74.00	29.21	H	-1.9
9258.600000	---	40.89	54.00	13.11	V	4.8
9258.600000	51.73	---	74.00	22.27	V	4.8
14042.400000	52.99	---	74.00	21.01	V	10.7
14042.400000	---	46.26	54.00	7.74	V	10.7
17993.200000	54.82	---	74.00	19.18	V	13.8
17993.200000	---	46.71	54.00	7.29	V	13.8

Middle Channel: 2437MHz**Common Information**

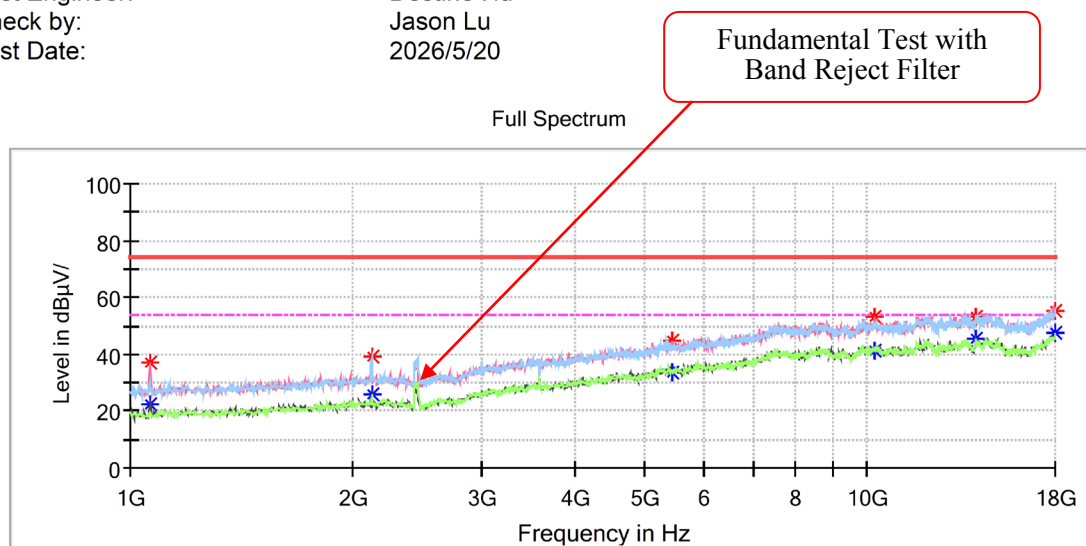
Project No.: RBJ260416001
EUT Model: ZSXG02
Test Mode: 2.4G WIFI 802.11n40 mode Middle Channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.5°C
Humidity: 52%
Atmospheric Pressure: 100.7kPa
Test Engineer: Destine Hu
Check by: Jason Lu
Test Date: 2026/5/20

**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	---	23.10	54.00	30.90	V	-15.9
1061.200000	37.90	---	74.00	36.10	V	-15.9
2128.800000	---	25.58	54.00	28.42	H	-11.3
2128.800000	37.36	---	74.00	36.64	H	-11.3
5736.200000	46.39	---	74.00	27.61	H	-1.1
5736.200000	---	34.77	54.00	19.23	H	-1.1
10207.200000	52.80	---	74.00	21.20	V	6.5
10207.200000	---	42.17	54.00	11.83	V	6.5
14049.200000	53.92	---	74.00	20.08	H	10.7
14049.200000	---	45.74	54.00	8.26	H	10.7
17955.800000	---	47.15	54.00	6.85	V	13.6
17955.800000	54.46	---	74.00	19.54	V	13.6

High Channel: 2452MHz**Common Information**

Project No.: RBJ260416001
EUT Model: ZSXG02
Test Mode: 2.4G WIFI 802.11n40 mode High Channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.5°C
Humidity: 52%
Atmospheric Pressure: 100.7kPa
Test Engineer: Destine Hu
Check by: Jason Lu
Test Date: 2026/5/20

**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	36.80	---	74.00	37.20	V	-15.9
1061.200000	---	22.33	54.00	31.67	V	-15.9
2125.400000	39.29	---	74.00	34.71	V	-11.3
2125.400000	---	26.00	54.00	28.00	V	-11.3
5450.600000	---	33.83	54.00	20.17	H	-1.7
5450.600000	45.01	---	74.00	28.99	H	-1.7
10261.600000	---	41.47	54.00	12.53	V	6.5
10261.600000	52.86	---	74.00	21.14	V	6.5
14005.000000	---	45.80	54.00	8.20	V	10.6
14005.000000	53.25	---	74.00	20.75	V	10.6
17993.200000	55.08	---	74.00	18.92	H	13.8
17993.200000	---	47.38	54.00	6.62	H	13.8