

FCC PART 15.407

TEST REPORT

For

Zhishen Xinchuang (Suzhou) Intelligent Technology Co., Ltd.

Floor 5, Building 3, No. 58 Nanhu Road, Chengnan Street, Wuzhong District, Suzhou City,
Jiangsu Province, China

FCC ID: 2BVPE-ZSM1

Report Type: Original Report	Product Name: Bionic Quadruped Robot
Report Number: RBJ260414001-00D	
Report Date: 2026-07-08	
Reviewed By: Jenny Yang	<i>Jenny Yang</i>
Approved By: Kyle Xu	<i>Kyle Xu</i>
Test Laboratory: Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu Province, China Tel: +86-512-86175000 Fax: +86-512-88934268 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Kunshan). This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, or any agency of the U.S. Government.

TABLE OF CONTENTS

REPORT REVISION HISTORY.....	3
GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	5
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	8
EQUIPMENT MODIFICATIONS	30
SUPPORT EQUIPMENT LIST AND DETAILS	30
EXTERNAL I/O CABLE.....	30
BLOCK DIAGRAM OF TEST SETUP	30
SUMMARY OF TEST RESULTS	32
TEST EQUIPMENT LIST	33
FCC §1.1310 & §2.1091 - MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	34
FCC §15.203 – ANTENNA REQUIREMENT	36
APPLICABLE STANDARD	36
ANTENNA CONNECTOR CONSTRUCTION	36
§15.205 & §15.209 & §15.407(B) – UNDESIRABLE EMISSION & RESTRICTED BANDS	37
APPLICABLE STANDARD	37
TEST SYSTEM SETUP.....	37
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	40
TEST PROCEDURE	40
FCC §15.407(a) & §15.407(e)–EMISSION BANDWIDTH	41
APPLICABLE STANDARD	41
TEST PROCEDURE	41
FCC §15.407(a) – CONDUCTED TRANSMITTER OUTPUT POWER.....	42
APPLICABLE STANDARD	42
TEST PROCEDURE	42
FCC §15.407(a) - POWER SPECTRAL DENSITY	43
APPLICABLE STANDARD	43
TEST PROCEDURE	43
APPENDIX - TEST DATA.....	44
TRANSMITTER UNWANTED EMISSIONS & RESTRICTED FREQUENCY BANDS	44
EMISSION BANDWIDTH.....	192
CONDUCTED TRANSMITTER OUTPUT POWER	252
POWER SPECTRAL DENSITY	256
EUT PHOTOGRAPHS	288
TEST SETUP PHOTOGRAPHS	289

REPORT REVISION HISTORY

Number of Revisions	Report No.	Version	Issue Date	Description
0	RBJ260414001-00D	R1V1	2026-07-08	Initial Release

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant:	Zhishen Xinchuang (Suzhou) Intelligent Technology Co., Ltd.				
Tested Model:	ZSM-1				
Product Name:	Bionic Quadruped Robot				
Power Supply:	DC 54V from battery				
Operating Frequency:	B1: 5150-5250 MHz, B2: 5250-5350 MHz, B3: 5470-5725 MHz, B4: 5725-5850 MHz				
Maximum Output Power:	Mode:	5G Wi-Fi Band 1:	Band 2:	Band 3:	Band 4:
	802.11a:	17.68 dBm	17.11 dBm	14.93 dBm	18.87 dBm
	802.11ac20:	19.61 dBm	18.14 dBm	14.93 dBm	20.87 dBm
	802.11ac40:	16.27 dBm	14.96 dBm	13.70 dBm	19.77 dBm
	802.11ac80:	12.94 dBm	11.83 dBm	11.53 dBm	18.34 dBm
	802.11ax20:	18.17 dBm	18.24 dBm	14.90 dBm	20.67 dBm
	802.11ax40:	14.93 dBm	14.91 dBm	13.74 dBm	19.84 dBm
	802.11ax80:	12.84 dBm	11.93 dBm	11.66 dBm	18.49 dBm
Channel Number:	B1:7; B2: 7; B3: 21; B4: 8				
Channel Separation	802.11a/n20/ac20/ax20: 20 MHz, 802.11n40/ac40/ax40: 40 MHz, 802.11ac80/ax80: 80 MHz				
Modulation Type:	OFDM, OFDMA				
Antenna Type:	FPC Antenna				
★Maximum Antenna Gain:	Chain 0 Band 1: 3.8 dBi; Band 2: 4.0 dBi; Band 3: 5.0 dBi; Band 4: 5.5 dBi Chain 1 Band 1: 3.6 dBi; Band 2: 3.2 dBi; Band 3: 4.0 dBi; Band 4: 3.7 dBi				
Sample/EUT Status	Good condition				

Battery Charging Stand Information:

Model: ZSM-1-C01

Input: AC 100 - 240V, 50/60Hz, 15A

Output: DC 63.0V 20A

Note: The differences between tested model and series model are explained in the attached declaration letter.

All measurement and test data in this report-was gathered from production samples serial number:
RBJ260414001-1 (Assigned by the BACL (Kunshan). The EUT was received on 2026-04-14.)

Objective

This type approval report is prepared for *Zhishen Xinchuang (Suzhou) Intelligent Technology Co., Ltd.* in accordance with Part 2-Subpart J, Part 15-Subparts A and E of the Federal Communication Commissions' rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart E, section 15.203, 15.205, 15.209 and 15.407 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2020, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19 dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	9 kHz~150 kHz	3.8dB
	150 kHz~30 MHz	3.4dB
	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth		0.5kHz
Temperature		1.0°C
Humidity		6%

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu Province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) is accredited in accordance with ISO/IEC 17025:2017 by NVLAP (Lab code: 600338-0), and the lab has been recognized as the FCC accredited lab under the KDB 974614 D01, the FCC Designation No.: CN5055.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The EUT was configured for testing in an engineering mode which was provided by the manufacturer.

The system support 802.11a/n20/n40/ac20/ac40/ac80/ax20/ax40/ax80 the 802.11 n20/n40 were reduced since the identical parameters with 802.11ac20 and ac40.

For **5150~5250 MHz** band, test channel list is as below,

802.11a/ac20/ax20 mode Channel 36, 40, 48 were tested.

802.11ac40/ax40 mode Channel 38, 46 were tested.

802.11ac80/ax80 mode Channel 42 was tested.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220
38	5190	46	5230
40	5200	48	5240
42	5210	/	/

For **5250~5350 MHz** band, test channel list is as below,

802.11a/ac20/ax20 mode Channel 52, 60, 64 were tested.

802.11ac40/ax40 mode Channel 54, 62 were tested.

802.11ac80/ax80 mode Channel 58 was tested.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	60	5300
54	5270	62	5310
56	5280	64	5320
58	5290	/	/

For **5470~5725 MHz** band, test channel list is as below,

802.11a/ac20/ax20 mode Channel 100, 120, 140, 144 were tested.

802.11ac40/ax40 mode Channel 102, 118, 134, 142 were tested.

802.11ac80/ax80 mode Channel 106, 122, 138 was tested.

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	118	5590	136	5680
102	5510	120	5600	138	5690
104	5520	122	5610	140	5700
106	5530	124	5620	142	5710
108	5540	126	5630	144	5720
110	5550	128	5640	/	/
112	5560	132	5660	/	/
116	5580	134	5670	/	/

For **5725~5850 MHz** band,

802.11a/ac20/ax20 mode Channel 149, 157, 165 were tested.

802.11ac40/ax40 mode Channel 151, 159 were tested.

802.11ac80/ax80 mode Channel 155 was tested.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	159	5795
151	5755	161	5805
153	5765	165	5825
155	5775	/	/
157	5785	/	/

EUT Exercise Software

The system was configured for testing in an engineering mode, which was provided by manufacturer

Test software: adb

Pre-scan with all the data rates, and the worst case was performed as below:

U-NII	Mode	Data Rate	Channel	★Power Level	
				Chain 0	Chain 1
5150-5250MHz:	802.11a	6 Mbps	5180	19	19
			5200	19	19
			5240	19	19
	802.11ac20	MCS0	5180	18	18
			5200	18	18
			5240	18	18
	802.11ac40	MCS0	5190	15	15
			5230	15	15
	802.11ac80	MCS0	5210	12	12
	802.11ax20	MCS0	5180	17	17
			5200	17	17
			5240	17	17
	802.11ax40	MCS0	5190	14	14
			5230	14	14
	802.11ax80	MCS0	5210	12	12

U-NII	Mode	Data Rate	Channel	★Power Level	
				Chain 0	Chain 1
5250~5350MHz	802.11a	6 Mbps	5260	19	18
			5300	19	18
			5320	19	18
	802.11ac20	MCS0	5260	17	17
			5300	17	17
			5320	17	17
	802.11ac40	MCS0	5270	14	14
			5310	14	14
	802.11ac80	MCS0	5290	11	11
	802.11ax20	MCS0	5260	17	17
			5300	17	17
			5320	17	17
	802.11ax40	MCS0	5270	14	14
			5310	14	14
	802.11ax80	MCS0	5290	11	11

U-NII	Mode	Data Rate	Channel	★Power Level	
				Chain 0	Chain 1
5470~5725MHz	802.11a	6 Mbps	5500	17	16
			5600	17	16
			5700	17	16
			5720	17	16
	802.11ac20	MCS0	5500	14	14
			5600	14	14
			5700	14	14
			5720	14	14
	802.11ac40	MCS0	5510	13	13
			5590	13	13
			5670	13	13
			5710	13	13
	802.11ac80	MCS0	5530	11	11
			5610	11	11
			5690	11	11
	802.11ax20	MCS0	5500	14	14
			5600	14	14
			5700	14	14
			5720	14	14
	802.11ax40	MCS0	5510	13	13
			5590	13	13
			5670	13	13
			5710	13	13
	802.11ax80	MCS0	5530	11	11
			5610	11	11
			5690	11	11

U-NII	Mode	Data Rate	Channel	★Power Level	
				Chain 0	Chain 1
5725~5850MHz	802.11a	6 Mbps	5745	19	19
			5785	19	19
			5825	19	19
	802.11ac20	MCS0	5745	19	19
			5785	19	19
			5825	19	19
	802.11ac40	MCS0	5755	18	18
			5795	18	18
	802.11ac80	MCS0	5775	17	17
	802.11ax20	MCS0	5745	19	19
			5785	19	19
			5825	19	19
	802.11ax40	MCS0	5755	18	18
			5795	18	18
	802.11ax80	MCS0	5775	17	17

Note:

1. The power level was declared by the applicant.

2. 802.11a supports SISO mode, 802.11 ac20/ac40/ ac80 supports SISO and MIMO mode.

For Radiated Emission, according to pretest, the worst case for 802.11 ac20/ac40/ ac80/ax20/ax40/ax80 is MIMO mode.

So 802.11 ac20/ac40/ ac80/ax20/ax40/ax80 MIMO mode test data were recorded in the report.

For RF Conducted Test:

802.11 a/ac20/ac40/ ac80/ax20/ax40/ax80 each transmit chains were tested.

For Radiated Test:

802.11a, SISO for each transmit chain

802.11 ac20/ac40/ ac80/ax20/ax40/ax80: MIMO for two transmit chains

3. 802.11ax only support full RU.

Duty Cycle:

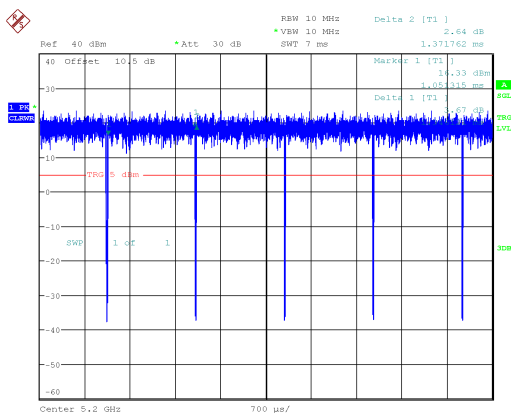
Environmental Conditions & Test Information

Test Date:	2026-05-22 to 2026-05-26
Temperature:	20-23 °C
Relative Humidity:	49-51 %
ATM Pressure:	99.9-102.5kPa
Test Engineer:	Neil Zhou

Chain 0

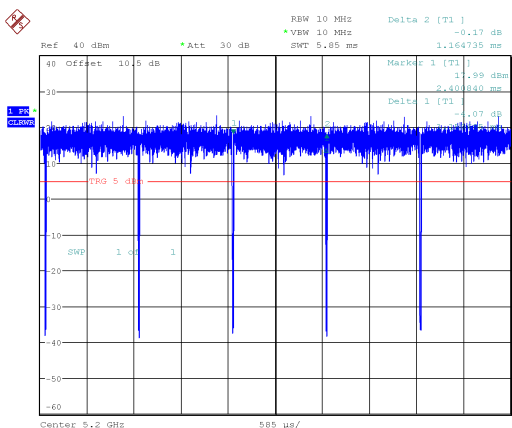
5150MHz-5250MHz Band:

802.11a mode



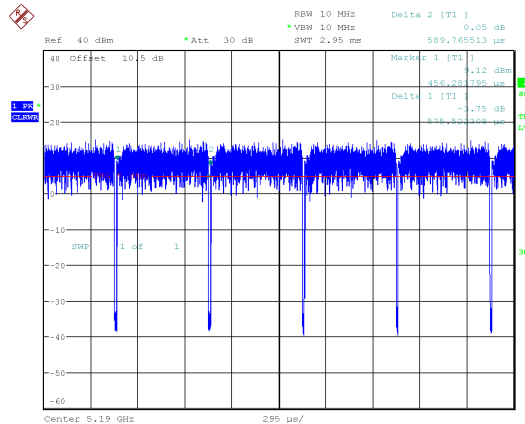
ProjectNo.:RBJ260414001 Tester:Neil Zhou
Date: 22.MAY.2026 16:20:22

802.11ac20 mode



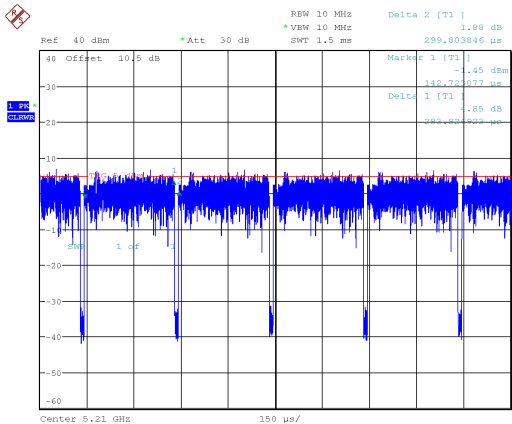
ProjectNo.:RBJ260414001 Tester:Neil Zhou
Date: 22.MAY.2026 16:40:22

802.11ac40 mode



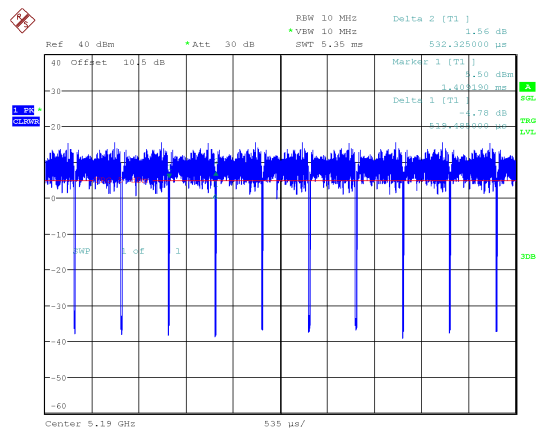
ProjectNo.:RBJ260414001 Tester:Neil Zhou
Date: 22.MAY.2026 16:50:08

802.11ac80 mode



ProjectNo.:RBJ260414001 Tester:Neil Zhou
Date: 22.MAY.2026 17:53:33

802.11ax40 mode



ProjectNo.:RBJ260414001 Tester:Neil Zhou
Date: 23.MAY.2026 10:27:00

BSW 10 MHz Delta 2 [T] 0.05 dB
 VSW 10 MHz 292.928205 us
 Ref 40 dBm Att 30 dB SWT 2 ms

40 Offset 10.5 dB
 30
 20
 10
 0
 -10
 -20
 -30
 -40
 -50
 -60

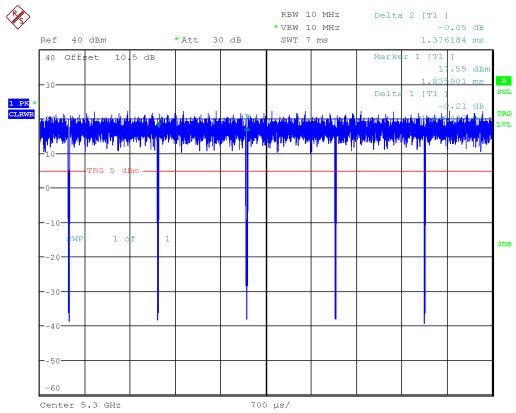
Marker 1 [T] 0.03 dB
 516.173487 us
 Delta 1 [T] 1.59 dB
 278.063000 us

1.98
 CLIPPER

Center 5.21 GHz 200 us/

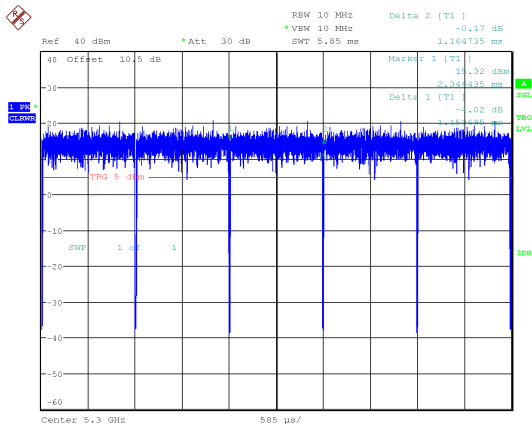
Page 13 of 290

5250MHz-5350MHz Band:
802.11a mode



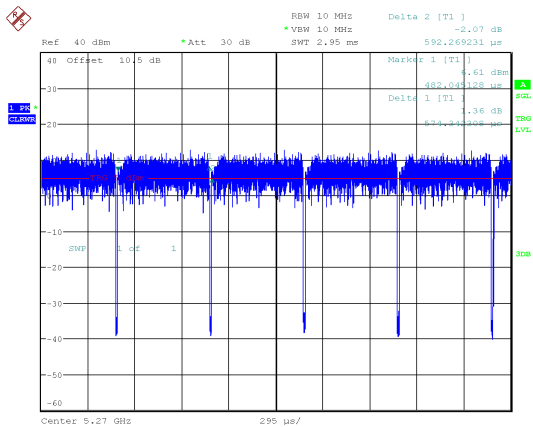
ProjectNo.:RBJ260414001 Tester:Neil Zhou
Date: 23.MAY.2026 11:07:40

802.11ac20 mode



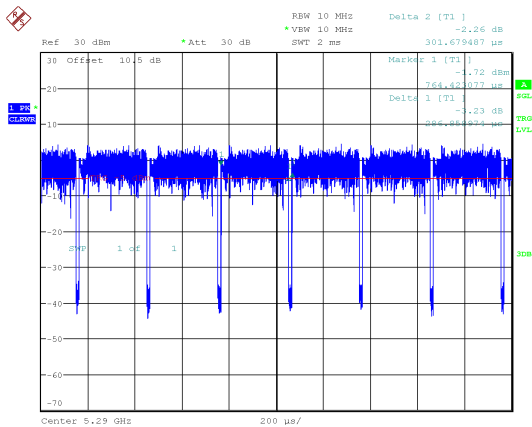
ProjectNo.:RBJ260414001 Tester:Neil Zhou
Date: 23.MAY.2026 11:25:17

802.11ac40 mode



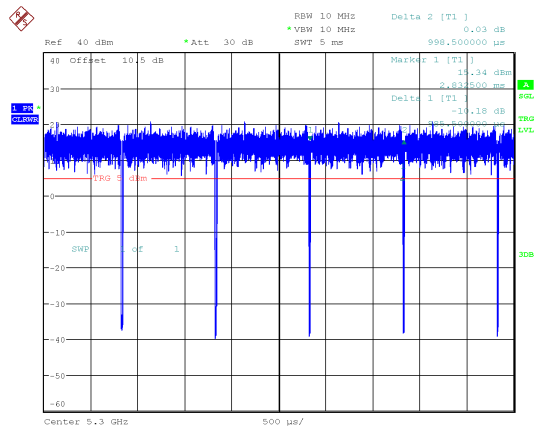
ProjectNo.:RBJ260414001 Tester:Neil Zhou
Date: 23.MAY.2026 11:41:22

802.11ac80 mode



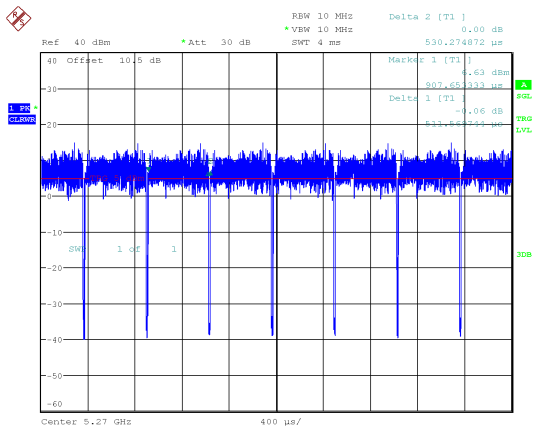
ProjectNo.:RBJ260414001 Tester:Neil Zhou
Date: 23.MAY.2026 11:58:34

802.11ax20 mode



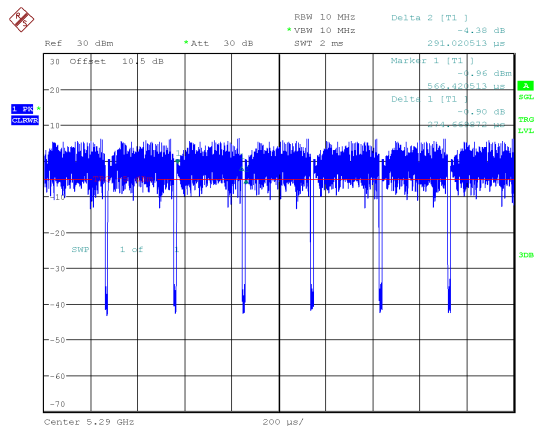
ProjectNo.:RBJ260414001 Tester:Neil Zhou
Date: 23.MAY.2026 13:29:52

802.11ax40 mode



ProjectNo.:RBJ260414001 Tester:Neil Zhou
Date: 23.MAY.2026 13:44:21

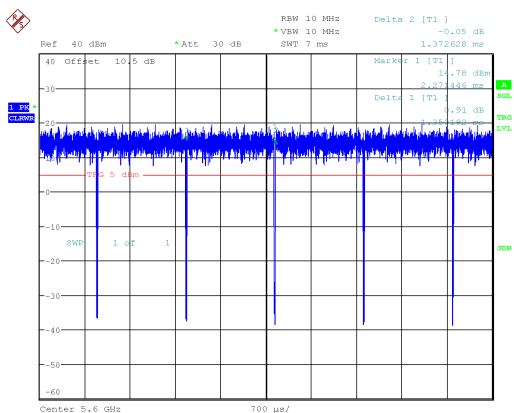
802.11ax80 mode



ProjectNo.:RBJ260414001 Tester:Neil Zhou
Date: 23.MAY.2026 13:55:20

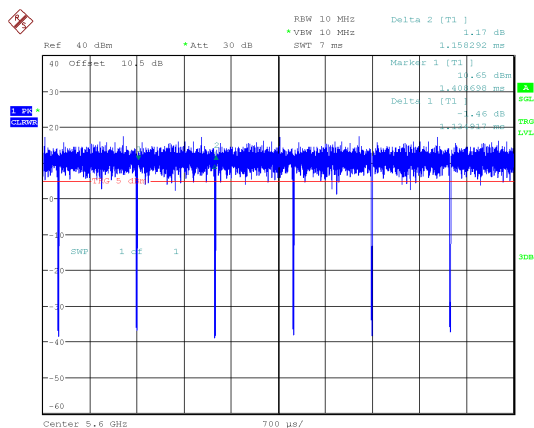
5470MHz-5725MHz Band:

802.11a mode



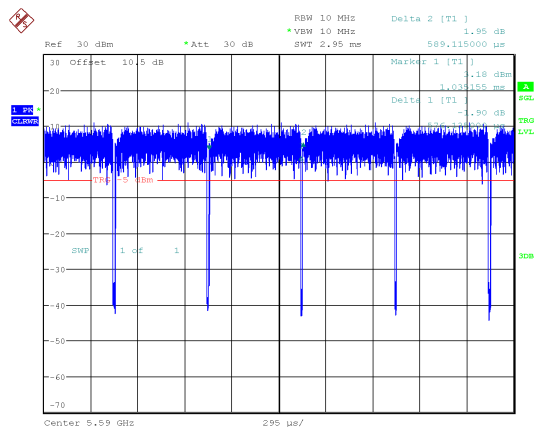
ProjectNo.:RBJ260414001 Tester:Neil Zhou
 Date: 23.MAY.2026 14:08:11

802.11ac20 mode



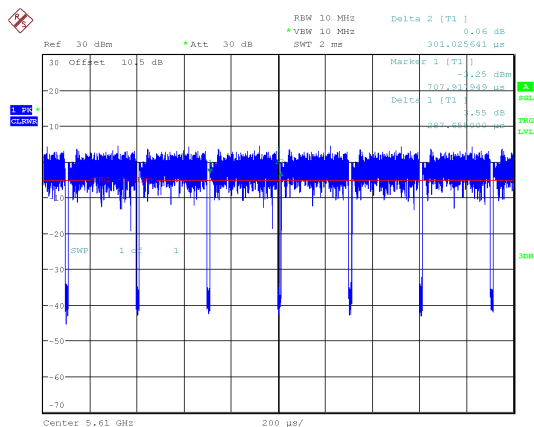
ProjectNo.:RBJ260414001 Tester:Neil Zhou
 Date: 23.MAY.2026 14:26:35

802.11ac40 mode



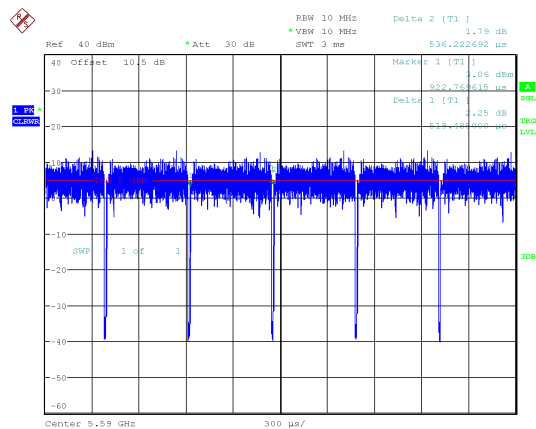
ProjectNo.:RBJ260414001 Tester:Neil Zhou
 Date: 23.MAY.2026 14:52:35

802.11ac80 mode



ProjectNo.:RBJ260414001 Tester:Neil Zhou
 Date: 23.MAY.2026 15:23:35

802.11ax40 mode



ProjectNo.:RBJ260414001 Tester:Neil Zhou
Date: 23.MAY.2026 16:04:58

BSW 10 MHz Delta 2 [T1] 1.95 dB
 Ref 30 dBm Att 30 dB VSW 10 MHz SWT 2 ms 292.640000 μs

30 Offset 10.5 dB

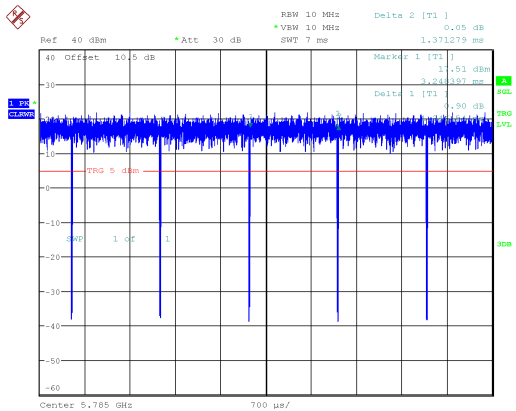
Marker 1 [T1] -4.14 dBm
 Delta 1 [T1] 1.79 dB

1.95 CLIPPER

Center 5.61 GHz 200 μs/

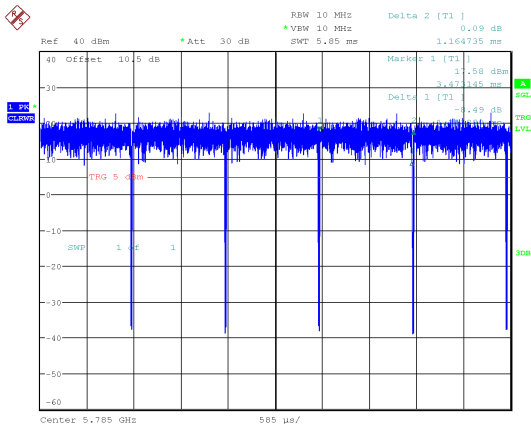
ProjectNo.:RBJ260414001 Tester:Neil Zhou
Date: 23.MAY.2026 16:30:59

5725MHz-5850MHz Band:
802.11a mode



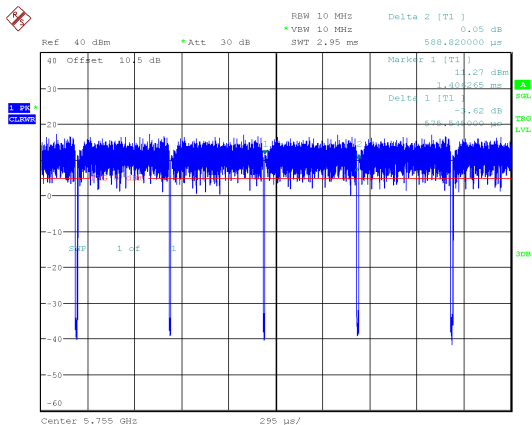
ProjectNo.:RBJ260414001 Tester:Neil Zhou
Date: 23.MAY.2026 16:50:25

802.11ac20 mode



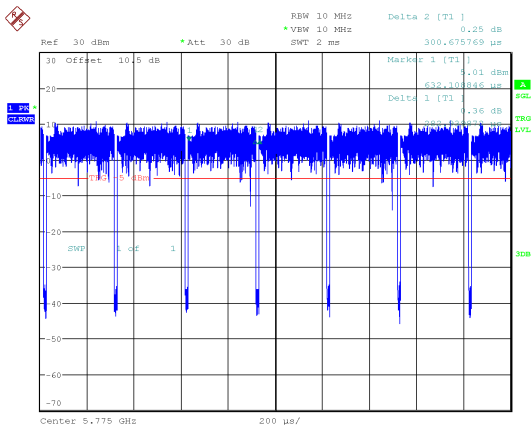
ProjectNo.:RBJ260414001 Tester:Neil Zhou
Date: 23.MAY.2026 17:15:54

802.11ac40 mode



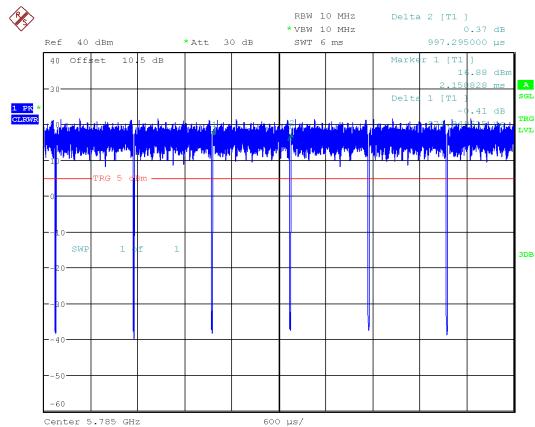
ProjectNo.:RBJ260414001 Tester:Neil Zhou
Date: 23.MAY.2026 17:25:58

802.11ac80 mode



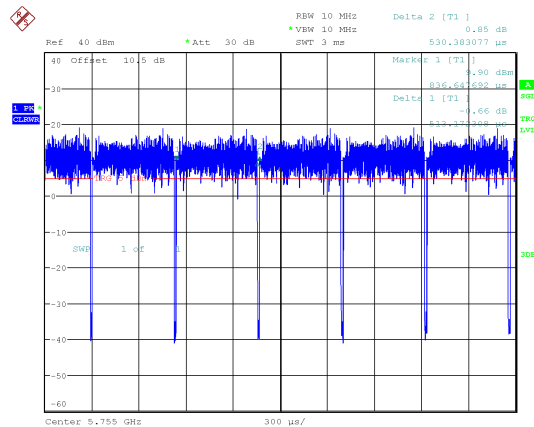
ProjectNo.:RBJ260414001 Tester:Neil Zhou
Date: 23.MAY.2026 17:37:09

802.11ax20 mode



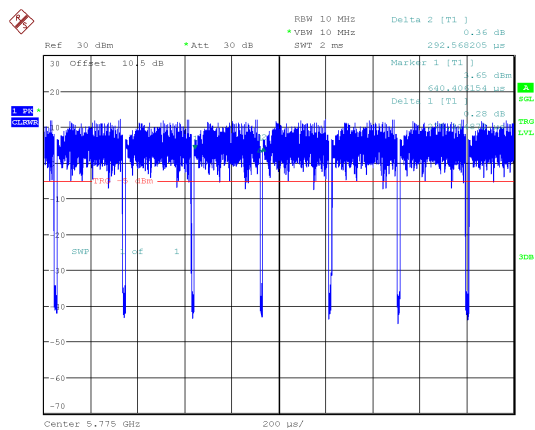
ProjectNo.:RBJ260414001 Tester:Neil Zhou
Date: 23.MAY.2026 17:47:40

802.11ax40 mode



ProjectNo.:RBJ260414001 Tester:Neil Zhou
Date: 23.MAY.2026 17:55:52

802.11ax80 mode

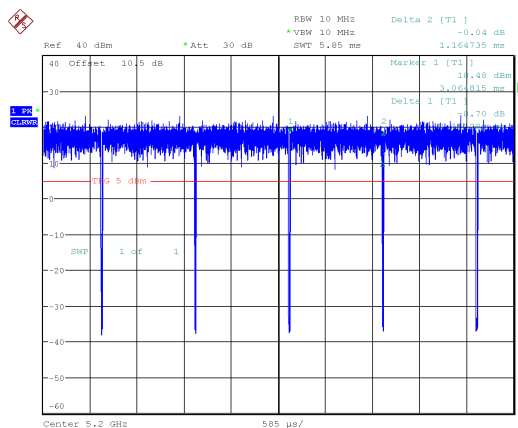


ProjectNo.:RBJ260414001 Tester:Neil Zhou
Date: 23.MAY.2026 18:06:13

Note: Offset (10.5dB) = Attenuator (10dB) + Cable Loss (0.5dB)

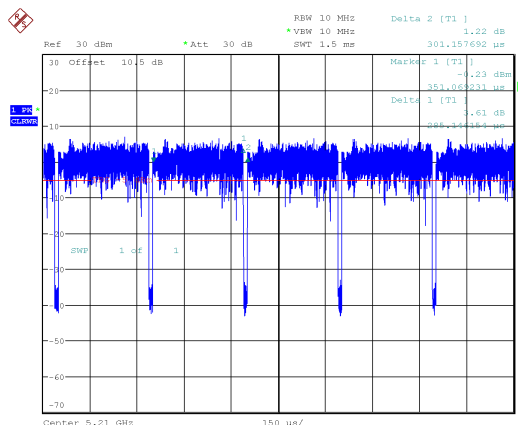
5150MHz-5250MHz Band:

802.11ac20 mode



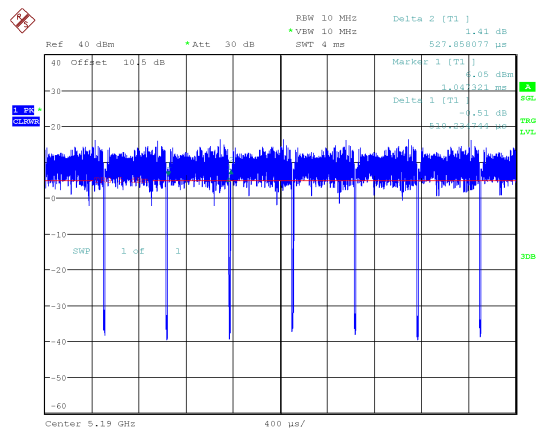
ProjectNo.:RBJ260414001 Tester:Neil Zhou
Date: 25.MAY.2026 10:23:08

802.11ac80 mode



ProjectNo.:RBJ260414001 Tester:Neil Zhou
Date: 25.MAY.2026 10:48:27

802.11ax40 mode



ProjectNo.:RBJ260414001 Tester:Neil Zhou
Date: 25.MAY.2026 11:30:07

BSW 10 MHz
VSW 10 MHz
Ref 30 dBm
Att 30 dB
SWT 2 ms

Delta 2 [T1]
-1.66 dB
292.822949 us

Marker 1 [T1]
2.80 dBm
516.353410 us
Delta 1 [T1]
-1.71 dB
336.163000 us

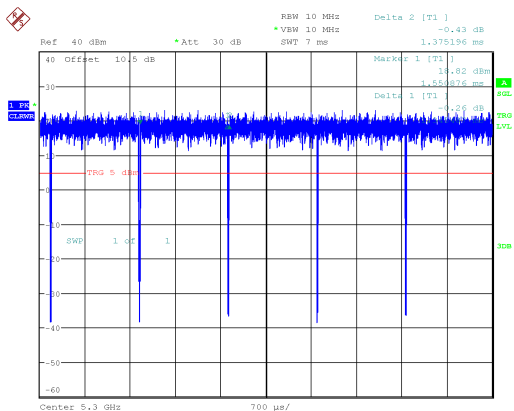
1 PR
CALN

SMP 1.0 CF 1

Center 5.21 GHz
200 us/

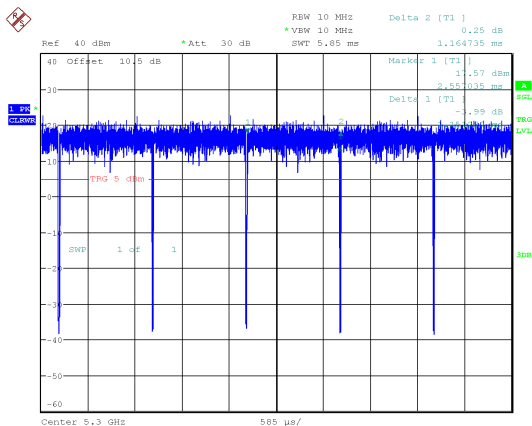
Page 21 of 290

5250MHz-5350MHz Band:
802.11a mode



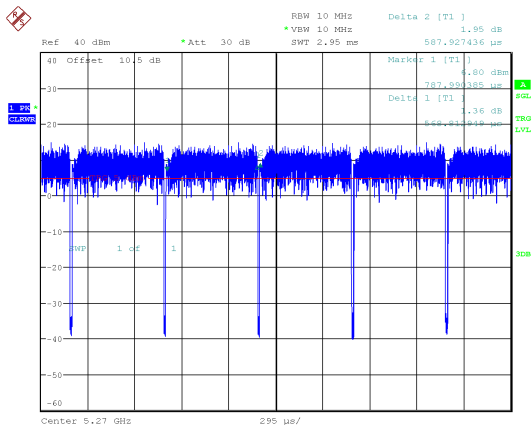
ProjectNo.:RBJ260414001 Tester:Neil Zhou
Date: 25.MAY.2026 11:59:21

802.11ac20 mode



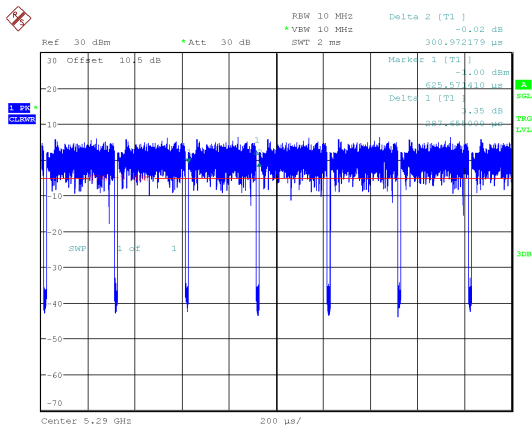
ProjectNo.:RBJ260414001 Tester:Neil Zhou
Date: 25.MAY.2026 13:23:16

802.11ac40 mode



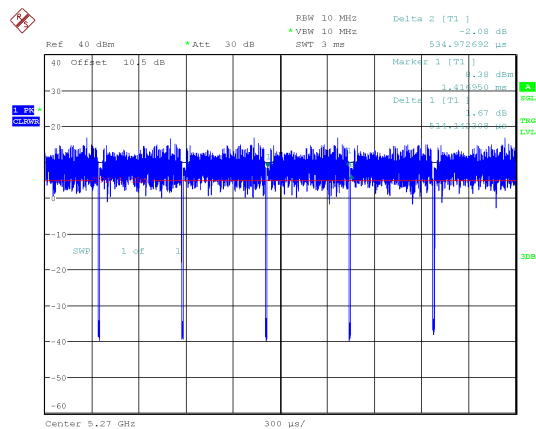
ProjectNo.:RBJ260414001 Tester:Neil Zhou
Date: 25.MAY.2026 13:31:15

802.11ac80 mode



ProjectNo.:RBJ260414001 Tester:Neil Zhou
Date: 25.MAY.2026 13:42:14

802.11ax40 mode

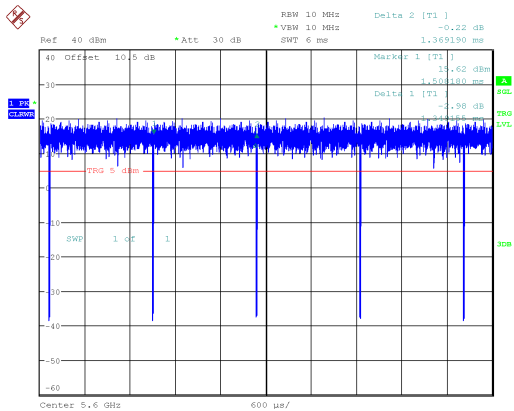


ProjectNo.:RBJ260414001 Tester:Neil Zhou
Date: 25.MAY.2026 14:12:09

ProjectNo.:RBJ260414001 Tester:Neil Zhou
Date: 25.MAY.2026 14:26:55

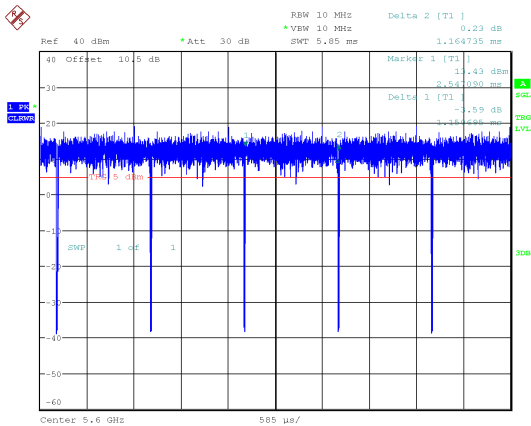
5470MHz-5725MHz Band:

802.11a mode



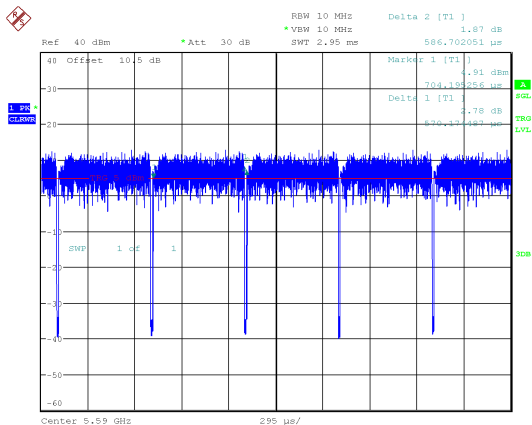
ProjectNo.:RBJ260414001 Tester:Neil Zhou
Date: 25.MAY.2026 17:17:34

802.11ac20 mode



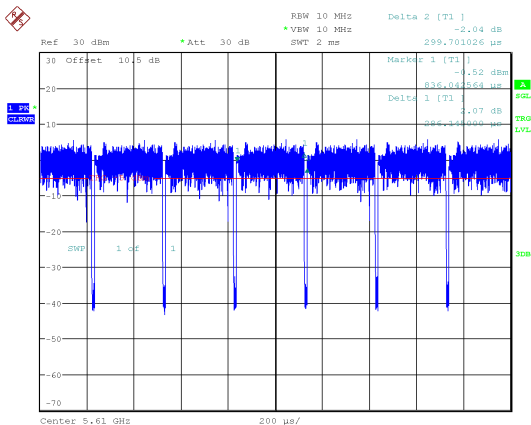
ProjectNo.:RBJ260414001 Tester:Neil Zhou
Date: 25.MAY.2026 17:37:09

802.11ac40 mode



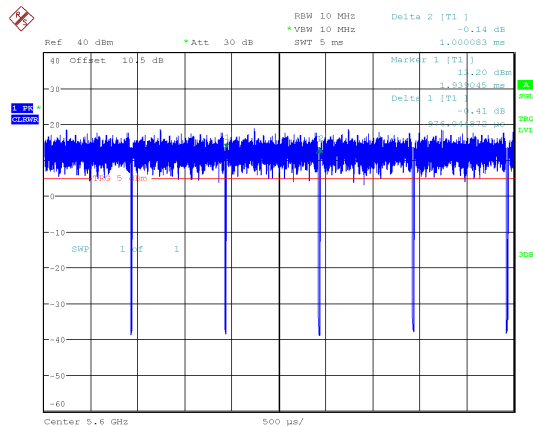
ProjectNo.:RBJ260414001 Tester:Neil Zhou
Date: 25.MAY.2026 17:58:18

802.11ac80 mode



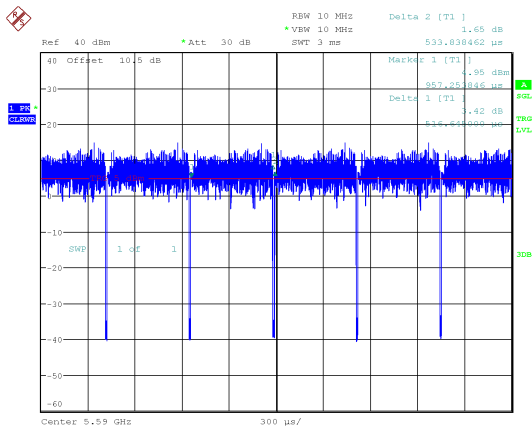
ProjectNo.:RBJ260414001 Tester:Neil Zhou
Date: 25.MAY.2026 18:52:40

802.11ax20 mode



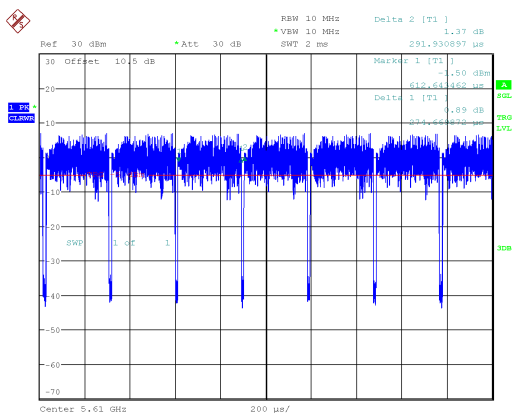
ProjectNo.:RBJ260414001 Tester:Neil Zhou
Date: 25.MAY.2026 19:12:23

802.11ax40 mode



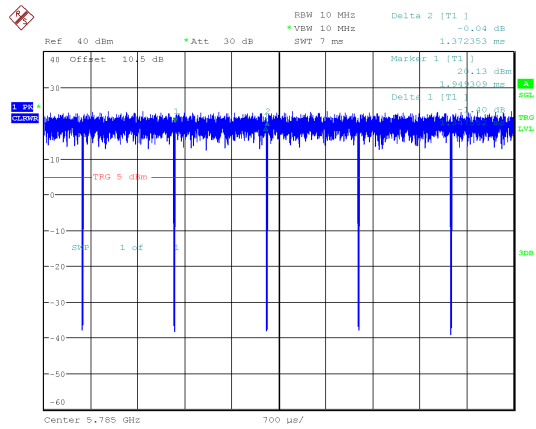
ProjectNo.:RBJ260414001 Tester:Neil Zhou
Date: 25.MAY.2026 19:34:14

802.11ax80 mode



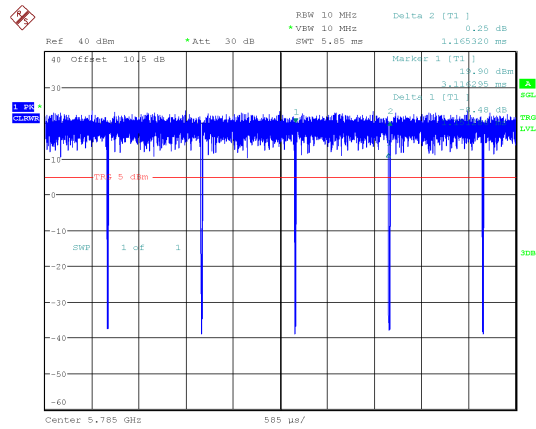
ProjectNo.:RBJ260414001 Tester:Neil Zhou
Date: 25.MAY.2026 19:56:43

5725MHz-5850MHz Band:
802.11a mode



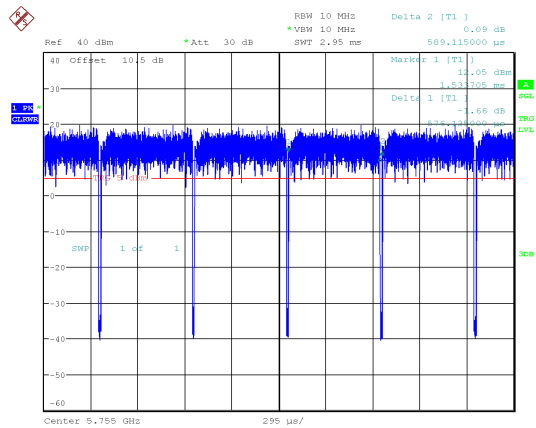
ProjectNo.:RBJ260414001 Tester:Neil Zhou
Date: 26.MAY.2026 11:33:54

802.11ac20 mode



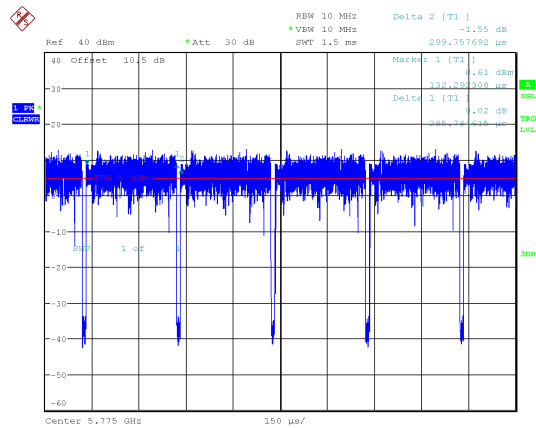
ProjectNo.:RBJ260414001 Tester:Neil Zhou
Date: 26.MAY.2026 11:45:50

802.11ac40 mode



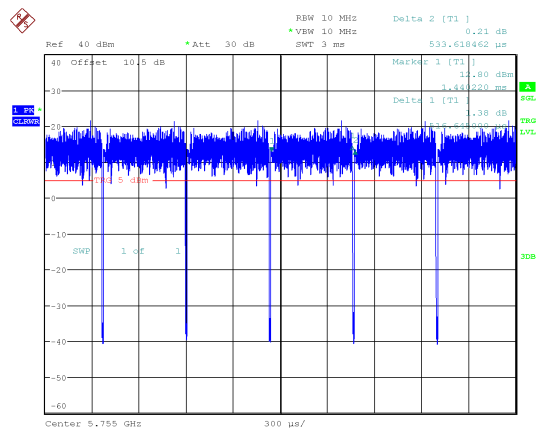
ProjectNo.:RBJ260414001 Tester:Neil Zhou
Date: 26.MAY.2026 11:53:05

802.11ac80 mode



ProjectNo.:RBJ260414001 Tester:Neil Zhou
Date: 26.MAY.2026 12:03:55

802.11ax40 mode



ProjectNo.:RBJ260414001 Tester:Neil Zhou
Date: 26.MAY.2026 13:39:30

Ref 40 dBm Att 30 dB BW 10 MHz SWT 2 ms Delta 2 [T1] -1.82 dB

Marker 1 [T1] 4.79 dBm

Delta 1 [T1] 566.241205 uS

Delta 2 [T1] 9.63 dB

Delta 3 [T1] 224.664870 uS

Center 5.775 GHz 200 uS/

Note: Offset (10.5dB) = Attenuator (10dB) + Cable Loss (0.5dB)

5150MHz-5250MHz:

Mode	Frequency (MHz)	Chain 0				Chain1			
		Ton (ms)	Ton+Toff (ms)	Duty Cycle (%)	Duty Cycle Factor (dB)	Ton (ms)	Ton+Toff (ms)	Duty Cycle (%)	Duty Cycle Factor (dB)
802.11a	5200	1.346	1.372	98.1	/	1.357	1.38	98.33	/
802.11ac20	5200	1.151	1.165	98.8	/	1.151	1.165	98.8	/
802.11ac40	5190	0.576	0.59	97.63	0.1	0.571	0.591	96.62	0.15
802.11ac80	5210	0.284	0.3	94.67	0.24	0.285	0.301	94.68	0.24
802.11ax20	5200	0.984	1.001	98.3	/	0.972	0.993	97.89	0.09
802.11ax40	5190	0.519	0.532	97.56	0.11	0.51	0.528	96.59	0.15
802.11ax80	5210	0.278	0.293	94.88	0.23	0.278	0.293	94.88	0.23

5250MHz-5350MHz:

Mode	Frequency (MHz)	Chain 0				Chain1			
		Ton (ms)	Ton+Toff (ms)	Duty Cycle (%)	Duty Cycle Factor (dB)	Ton (ms)	Ton+Toff (ms)	Duty Cycle (%)	Duty Cycle Factor (dB)
802.11a	5300	1.345	1.376	97.75	0.1	1.345	1.375	97.82	0.1
802.11ac20	5300	1.151	1.165	98.8	/	1.151	1.165	98.8	/
802.11ac40	5270	0.574	0.592	96.96	0.13	0.569	0.588	96.77	0.14
802.11ac80	5290	0.287	0.302	95.03	0.22	0.288	0.301	95.68	0.19
802.11ax20	5300	0.986	0.999	98.7	/	0.976	1.004	97.21	0.12
802.11ax40	5270	0.512	0.53	96.6	0.15	0.514	0.535	96.07	0.17
802.11ax80	5290	0.275	0.291	94.5	0.25	0.278	0.293	94.88	0.23

5470MHz-5725MHz:

Mode	Frequency (MHz)	Chain 0				Chain1			
		Ton (ms)	Ton+Toff (ms)	Duty Cycle (%)	Duty Cycle Factor (dB)	Ton (ms)	Ton+Toff (ms)	Duty Cycle (%)	Duty Cycle Factor (dB)
802.11a	5600	1.35	1.373	98.32	/	1.349	1.369	98.54	/
802.11ac20	5600	1.135	1.158	98.01	/	1.151	1.165	98.8	/
802.11ac40	5590	0.576	0.589	97.79	0.1	0.57	0.587	97.1	0.13
802.11ac80	5610	0.288	0.301	95.68	0.19	0.286	0.3	95.33	0.21
802.11ax20	5600	0.986	0.999	98.7	/	0.976	1	97.6	0.11
802.11ax40	5590	0.519	0.536	96.83	0.14	0.517	0.534	96.82	0.14
802.11ax80	5610	0.278	0.293	94.88	0.23	0.275	0.292	94.18	0.26

5725MHz-5850MHz:

Mode	Frequency (MHz)	Chain 0				Chain1			
		Ton (ms)	Ton+Toff (ms)	Duty Cycle (%)	Duty Cycle Factor (dB)	Ton (ms)	Ton+Toff (ms)	Duty Cycle (%)	Duty Cycle Factor (dB)
802.11a	5785	1.346	1.371	98.18	/	1.348	1.372	98.25	/
802.11ac20	5785	1.151	1.165	98.8	/	1.151	1.165	98.8	/
802.11ac40	5755	0.576	0.589	97.79	0.1	0.576	0.589	97.79	0.1
802.11ac80	5775	0.283	0.301	94.02	0.27	0.286	0.3	95.33	0.21
802.11ax20	5785	0.975	0.997	97.79	0.1	0.984	1.001	98.3	/
802.11ax40	5755	0.513	0.53	96.79	0.14	0.517	0.534	96.82	0.14
802.11ax80	5775	0.275	0.293	93.86	0.28	0.275	0.291	94.5	0.25

Equipment Modifications

No modification was made to the EUT.

Support Equipment List and Details

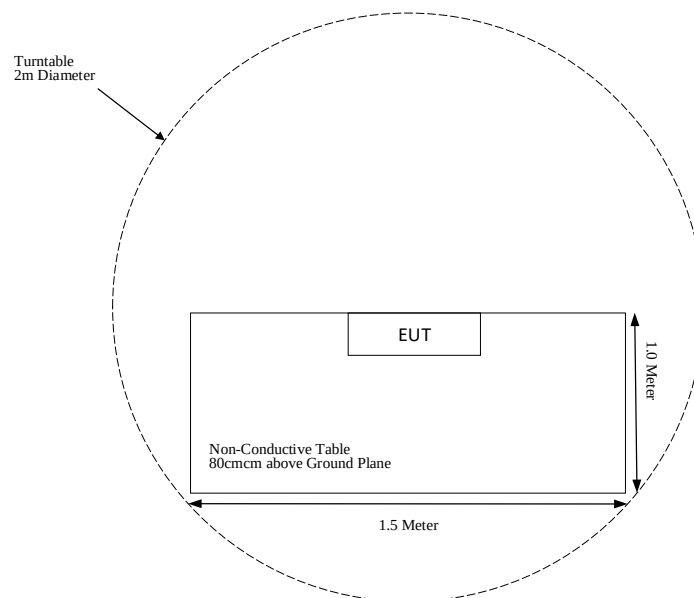
Manufacturer	Description	Model	Serial Number
/	/	/	/

External I/O Cable

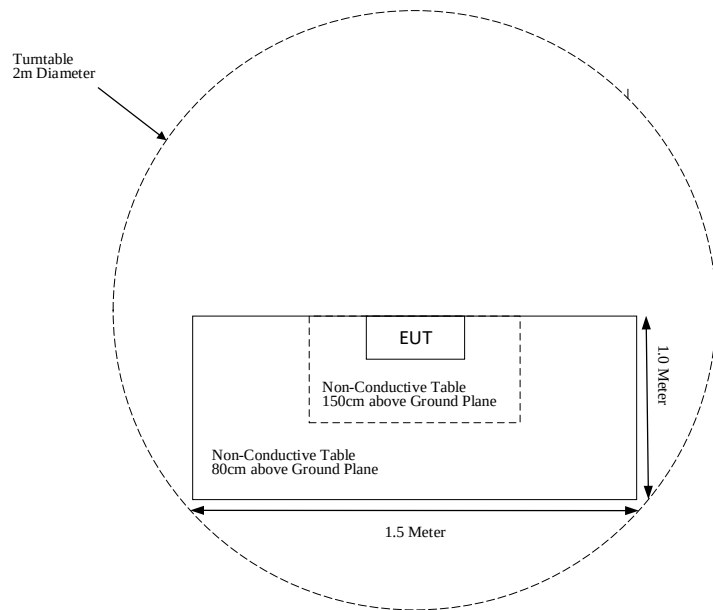
Cable Description	Length (m)	From Port	To Port
/	/	/	/

Block Diagram of Test Setup

For Radiated Emissions (Below 1GHz):



For Radiated Emissions (Above 1 GHz):



SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliant
§15.207 & §15.407(b) (9)	AC Power Line Conducted Emissions	Not Applicable (See Note)
§ 15.205 & §15.209 & §15.407(b)	Undesirable Emission & Restricted Bands	Compliant
§§15.407(a) & §15.407(e)	Emission Bandwidth	Compliant
§15.407(a)	Conducted Transmitter Output Power	Compliant
§15.407(a)	Power Spectral Density	Compliant
§1.1310 & §2.1091	MAXIMUM PERMISSIBLE EXPOSURE (MPE)	Compliant

Note: The EUT is powered by battery.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber #1)					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2026-03-13	2027-03-12
Sunol Sciences	Hybrid Antenna	JB3	A090314-2	2024-10-29	2027-10-28
BACL	Active Loop Antenna	1313-1A	4041511	2025-08-10	2028-08-09
Narda	6 dB Attenuator	771-6	10690812-2-1	2024-10-29	2027-10-28
Sonoma Instrument	Amplifier	310N	171205	2026-03-13	2027-03-12
Rohde & Schwarz	Auto Test Software	EMC32	100361	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-7	007	2026-03-16	2027-03-15
MICRO-COAX	Coaxial Cable	Cable-8	008	2026-03-13	2027-03-12
MICRO-COAX	Coaxial Cable	Cable-9	009	2026-03-13	2027-03-12
MICRO-COAX	Coaxial Cable	Cable-10	010	2026-03-13	2027-03-12
Radiated Emission Test (Chamber #2)					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207/040	2026-03-16	2027-03-15
EMCO	Horn Antenna	3115	9207-3900	2024-11-03	2027-11-02
ETS-LINDGREN	Horn Antenna	3116	2516	2024-12-12	2027-12-11
A.H.Systems,inc	Amplifier	PAM-0118P	512	2026-03-16	2027-03-15
MICRO-TRONICS	Band Reject Filter	BRM50702	G024	2026-03-16	2027-03-15
Narda	Attenuator	10dB	010	2026-03-16	2027-03-15
SELECTOR	Amplifier	EM18G40G	60726	2026-03-16	2027-03-15
Rohde & Schwarz	Auto test Software	EMC32	100361	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-25	025	2026-03-12	2027-03-11
MICRO-COAX	Coaxial Cable	Cable-11	011	2026-03-16	2027-03-15
MICRO-COAX	Coaxial Cable	Cable-12	012	2026-03-16	2027-03-15
MICRO-COAX	Coaxial Cable	Cable-13	013	2026-03-16	2027-03-15
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSU26	200103	2026-03-16	2027-03-15
Narda	Attenuator	10dB	010	2026-03-16	2027-03-15
XHFDZ	RG316 Coaxial Cable	SMA-316	XHF-1175	Each time	N/A

Statement of Traceability: Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1310 & §2.1091 - MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart §2.1091 and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm²)	Averaging Time (minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

For simultaneously transmit system, the calculated power density should comply with:

$$\sum_i \frac{S_i}{S_{Limit,i}} \leq 1$$

Calculated Data:

Mode	Frequency Range (MHz)	Antenna Gain		★Tune-up Output Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)	MPE ratio
		(dBi)	(numeric)	(dBm)	(mW)				
2.4G WiFi	2412-2462	4.4	2.75	24	251.19	20	0.1374	1.0	0.1374
5G WiFi	5150-5250	3.8	2.40	20	100.00	20	0.0477	1.0	0.0477
	5250-5350	4.0	2.51	18.5	70.79	20	0.0353	1.0	0.0353
	5470-5725	5.0	3.16	15	31.62	20	0.0199	1.0	0.0199
	5725-5850	5.5	3.55	21	125.89	20	0.0889	1.0	0.0889
2.4G SRD	2411-2466	3.6	2.29	22	158.49	20	0.0722	1.0	0.0722
5.8G SRD	5730-5840	5.2	3.31	8.5	7.08	20	0.0047	1.0	0.0047
Classic BT	2402-2480	4.4	2.75	8	6.31	20	0.0035	1.0	0.0035

Note:

1. For the above tune up power were declared by the manufacturer.
3. The WiFi, SRD and Classic BT can be transmitting simultaneously, So

$$\sum_i \frac{S_i}{S_{Limit,i}} = 0.1374 + 0.0722 + 0.0035 = 0.2131 < 1.0$$

Result: The device meet FCC MPE at 20 cm distance.

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.407, if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

Antenna permanently attached to the unit. fulfill the requirement of this section. Please refer to the EUT photos.

Antenna Type	Frequency Range	Chain 0 Antenna Gain	Chain 1 Antenna Gain	Input impedance
FPC	5150~5250 MHz	3.8 dBi	3.6 dBi	50Ω
	5250~5350 MHz	4.0 dBi	3.2 dBi	50Ω
	5470~5725 MHz	5.0 dBi	4.0 dBi	50Ω
	5725~5850 MHz	5.5 dBi	3.7 dBi	50Ω

Result: Compliant.

§15.205 & §15.209 & §15.407(B) – UNDESIRABLE EMISSION & RESTRICTED BANDS

Applicable Standard

FCC §15.407 (b); §15.209; §15.205;

(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

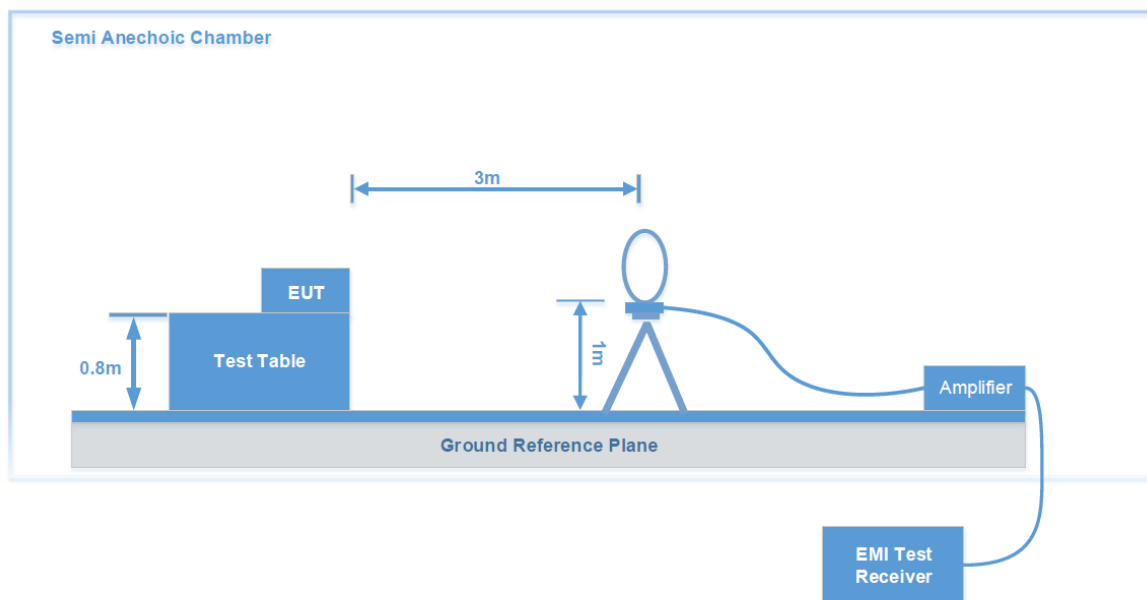
(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

As per FCC §15.35(d): Unless otherwise specified, on any frequency or frequencies above 1000MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000MHz shall be performed using a minimum resolution bandwidth of 1MHz.

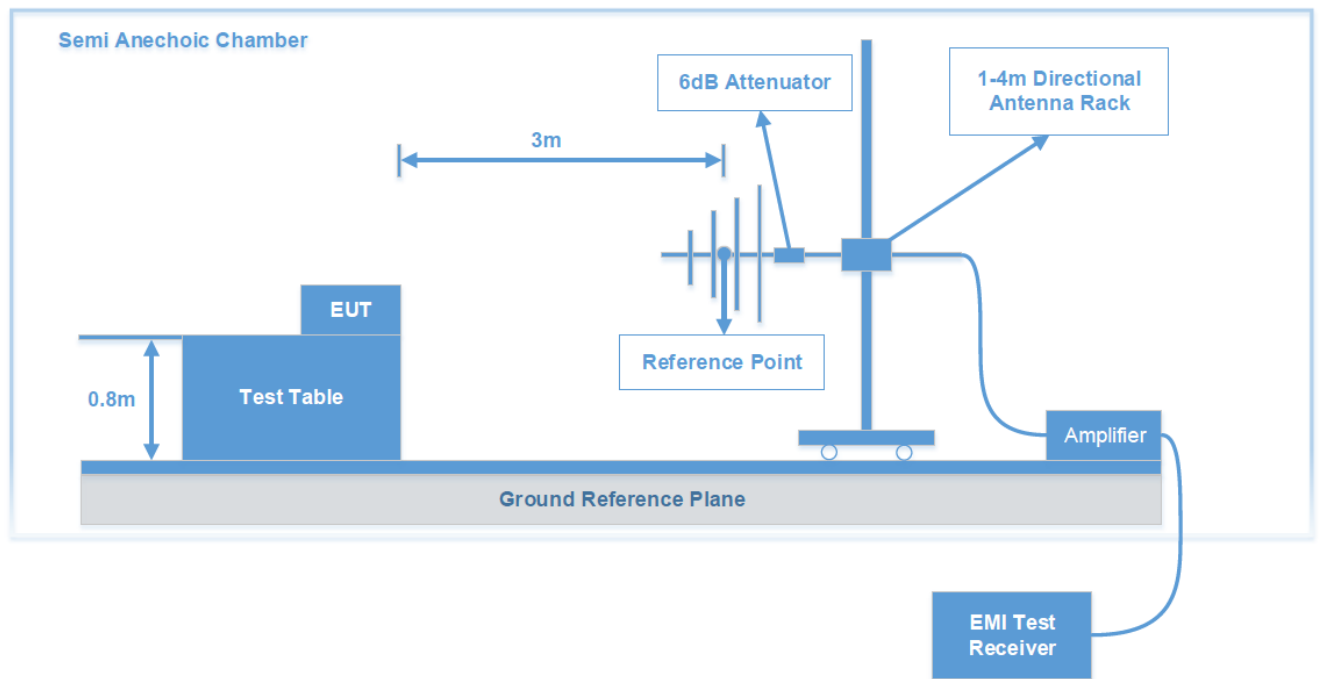
According to 789033 D02 General UNII Test Procedures New Rules v02r01, emission shall be computed as: $E \text{ [dB}\mu\text{V/m]} = \text{EIRP [dBm]} + 95.2$, for $d = 3$ meters.

Test System Setup

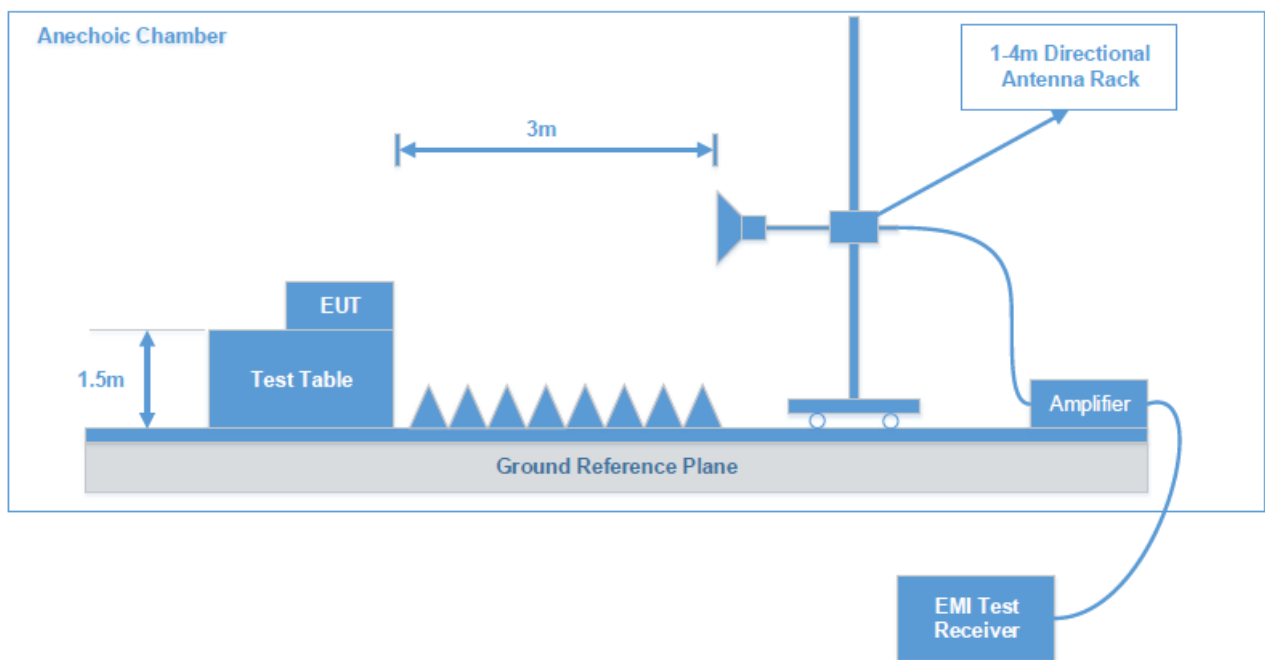
9kHz-30 MHz:



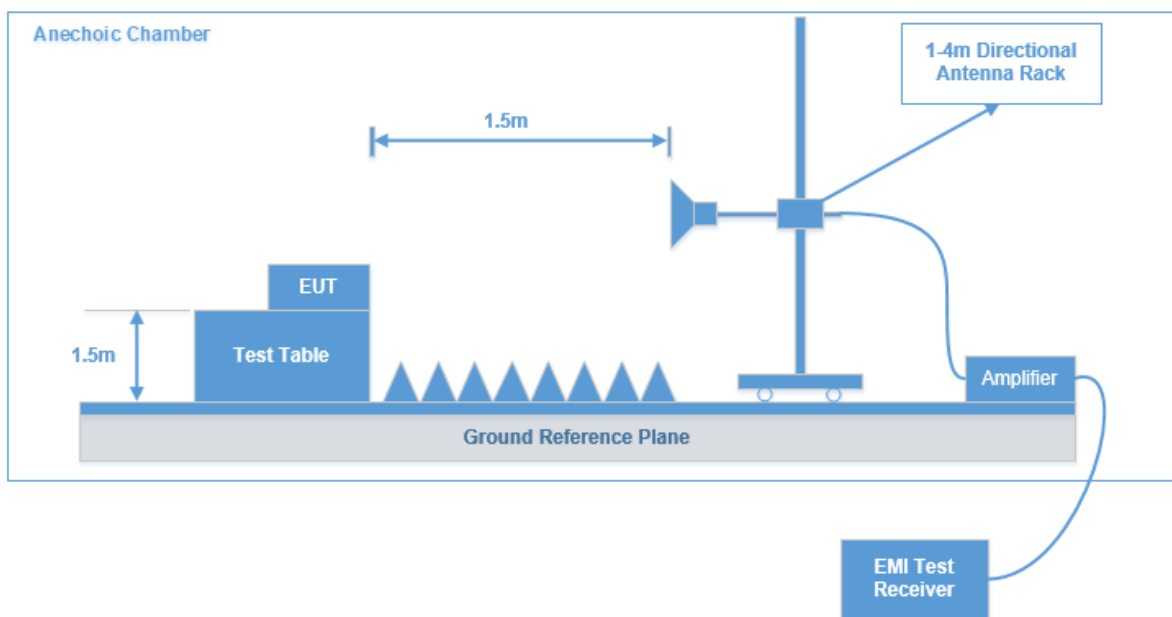
30MHz-1GHz:



1 GHz-18GHz:



18-40GHz:



The radiated emission tests were performed in the 3 meters test site for below 18GHz and 1.5m for 18-40 GHz, using the setup accordance with the ANSI C63.10-2020. The specification used was the FCC 15.209 and FCC 15.407 limits. According to ANSI C63.10 - 2020,9.2.1: For field strength measurements made at other than the distance specified by the limit, extrapolate the measured field strength to the field strength at the distance specified by the limit using an inverse distance correction factor (20 dB/decade of

$$E_{SpecLimit} = E_{Meas} + 20 \log \left(\frac{D_{Meas}}{D_{SpecLimit}} \right)$$

distance)

Where

- $E_{SpecLimit}$ is the field strength of the emission at the distance specified by the limit, in dBuV/m
- E_{Meas} is the field strength of the emission at the measurement distance, in dBuV/m
- D_{Meas} is the measurement distance, in m
- $D_{SpecLimit}$ is the distance specified by the limit, in m

So the extrapolation factor of 1m is $20 \cdot \log(1.5/3) = -6.0$ dB, for 18 - 40GHz range, the limit of 1.5m distance was added by 6.0dB from limit of 3m to compared with the result measurement at 1.5m distance.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

During the radiated emission test, the EMI test receiver Setup was set with the following configurations:

Frequency Range	RBW	VBW	IF B/W	Measurement	Detector
9 kHz - 150 kHz	200 Hz	1 kHz	200 Hz	Peak/QP	Peak/QP
150 kHz - 30 MHz	9 kHz	30 kHz	9 kHz	Peak/QP	Peak/QP
30 MHz - 1000 MHz	100 kHz	300 kHz	/	Peak	Peak
	/	/	120 kHz	QP	QP
Above 1GHz	1MHz	3 MHz	/	Peak	Peak
	1MHz	3 MHz	/	Average	Average

For 9 kHz-30MHz test, the lowest height of the magnetic antenna shall be 1 m above the ground and three antenna orientations (parallel, perpendicular, and ground-parallel) shall be measured.

Test Procedure

During the radiated emission test, the adapter was connected to AC floor outlet. Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

If the measured peak level of the emissions that the measuring receiver reading level plus corrected factor is at least 6 dB below the QP emission limit, there's no need to record the measured QP level of the emissions in the report.

Data was recorded in Quasi-peak detection mode for frequency range of 9 kHz -1 GHz, except 9-90 kHz, 110-490 kHz, employing an average detector, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude (dB}\mu\text{V/m)} = \text{Meter Reading (dB}\mu\text{V)} + \text{Corrected factor (dB/m)}$$

$$\text{Corrected factor (dB/m)} = \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V/m)} - \text{Corrected Amplitude (dB}\mu\text{V/m)}$$

Note: The QuasiPeak (dB μ V/m), MaxPeak (dB μ V/m), Average (dB μ V/m) which shown in the data table are all Corrected Amplitude.

Test Data: See Appendix

FCC §15.407(a) & §15.407(e)–EMISSION BANDWIDTH

Applicable Standard

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Procedure


1. Emission Bandwidth (EBW)

- Set RBW = shall be in the range of 1% to 5% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = peak.
- Trace mode = max-hold.
- Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is in the range of 1% to 5%.

2. Minimum Emission Bandwidth for the band 5.725-5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.725-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Note: Offset (10.5dB) = Attenuator (10dB) + Cable Loss (0.5dB)

Test Data: See Appendix

FCC §15.407(a) – CONDUCTED TRANSMITTER OUTPUT POWER

Applicable Standard


For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

Method PM-G is measurement using a gated RF average power meter. Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.



Note: Offset (10.5dB) = Attenuator(10dB) + Cable loss(0.5dB)

Test Data: See Appendix

FCC §15.407(a) - POWER SPECTRAL DENSITY

Applicable Standard

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.


Test Procedure

The measurements are base on C63.10:2020

Duty cycle $\geq 98\%$,Method SA-1 should be applied.

Duty cycle $< 98\%$, duty cycle variations are less than $\pm 2\%$,Method SA-2 should be applied.

Duty cycle $< 98\%$, duty cycle variations exceed $\pm 2\%$,Method SA-3 should be applied.



Note: Offset (10.5dB) = Attenuator (10dB) + Cable Loss (0.5dB)

Test Data: See Appendix

APPENDIX - TEST DATA**TRANSMITTER UNWANTED EMISSIONS & RESTRICTED FREQUENCY BANDS****Environmental Conditions & Test Information**

Test Item:	SPURIOUS EMISSIONS			
	9kHz – 30MHz	30MHz - 1GHz	1 GHz - 18 GHz	18 GHz - 40 GHz
Test Date:	2026-04-30	2026-04-29	2026-05-12 to 2026-05-15	2026-05-21
Temperature:	23.3 °C	24.2 °C	24.1-24.5°C	21.5°C
Relative Humidity:	54 %	53 %	48-50%	49%
ATM Pressure:	102.2 kPa	102.4 kPa	101.1-101.9kPa	100.8kPa
Test Result:	Pass	Pass	Pass	Pass
Test Engineer:	Scarf Yang	Scarf Yang	Destine Hu	Hugh Wu

EUT operation mode: Transmitting

5150-5250MHz Band

9 kHz-30 MHz:

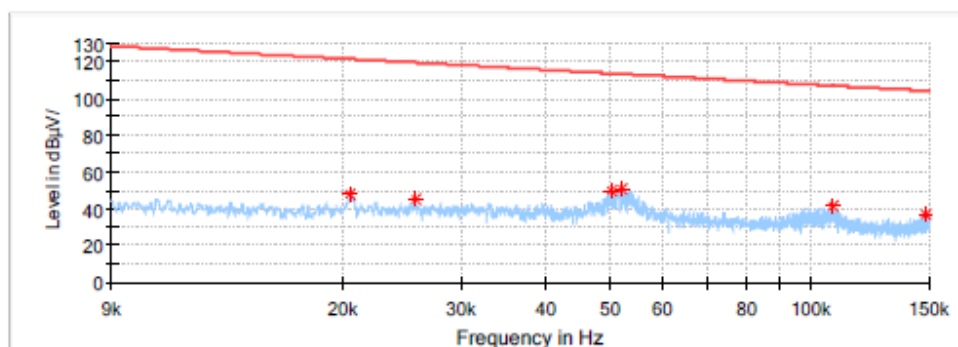
Transmitting in Chain 0 + Chain 1 802.11ac20 mode 5200MHz (maximum output power)

Parallel(worst case)

9kHz -150kHz

Common Information

Project No:	RBJ260414001
EUT Model:	ZSM-1
Test Mode:	Transmitting in 802.11ac20 mode middle channel
Standard:	FCC Part 15.205 & FCC Part 15.209 & FCC Part 15.407
Test Equipment:	ESCI, 1313-1A, 310N
Receiver Setting:	RBW:200 Hz, VBW:1 kHz, Sweep Time: Auto
Temperature:	23.3°C
Humidity:	54%
Barometric Pressure:	102.2kPa
Test Engineer:	Scarf Yang
Check by:	Jenny Yang
Test Date:	2026/4/30

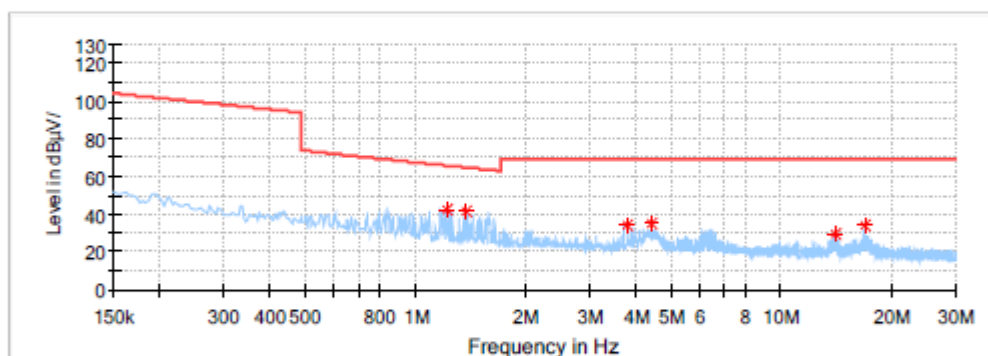


Critical_Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
0.020456	47.74	121.38	73.64	Parallel	-0.1
0.025568	45.47	119.44	73.97	Parallel	-0.1
0.050190	49.51	113.59	64.08	Parallel	-3.3
0.052181	50.90	113.25	62.35	Parallel	-3.5
0.107541	41.09	106.98	65.89	Parallel	-8.8
0.148061	37.01	104.19	67.18	Parallel	-10.6

150kHz-30MHz**Common Information**

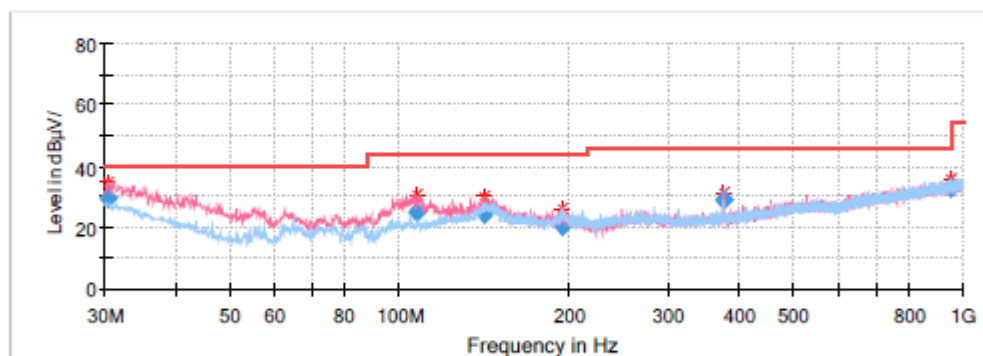
Project No: RBJ260414001
EUT Model: ZSM-1
Test Mode: Transmitting in 802.11ac20 mode middle channel
Standard: FCC Part 15.205 & FCC Part 15.209 & FCC Part 15.407
Test Equipment: ESCI, 1313-1A, 310N
Receiver Setting: RBW: 9 kHz, VBW: 30 kHz, Sweep Time: Auto
Temperature: 23.3°C
Humidity: 54%
Barometric Pressure: 102.2 kPa
Test Engineer: Scarf Yang
Check by: Jenny Yang
Test Date: 2026/4/30

**Critical_Freqs**

Frequency (MHz)	MaxPeak (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1.220869	42.49	65.70	23.21	Parallel	-27.8
1.385044	41.21	64.66	23.45	Parallel	-28.4
3.806625	34.51	69.54	35.03	Parallel	-31.2
4.433475	35.40	69.54	34.14	Parallel	-31.3
14.179500	29.23	69.54	40.31	Parallel	-32.2
16.933162	34.03	69.54	35.51	Parallel	-32.6

30MHz-1GHz:**Transmitting in Chain 0 + Chain 1 802.11ac20 mode 5200MHz (maximum output power)****Middle Channel: 5200MHz****Common Information**

Project No:	RBJ260414001
EUT Model:	ZSM-1
Test Mode:	Transmitting in 802.11ac20 mode middle channel
Standard:	FCC Part 15.205 & FCC Part 15.209 & FCC Part 15.407
Test Equipment:	ESCI, JB3, 310N
Receiver Setting:	RBW: 100 kHz, VBW: 300 kHz, Sweep Time: Auto
Temperature:	24.2°C
Humidity:	53%
Barometric Pressure:	102.4kPa
Test Engineer:	Scarf Yang
Check by:	Jenny Yang
Test Date:	2026/4/29

**Final_Result**

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
30.485000	29.71	40.00	10.29	V	-4.8
107.478750	25.18	43.50	18.32	V	-12.8
141.792500	24.34	43.50	19.16	V	-11.1
194.051250	20.52	43.50	22.98	H	-12.1
374.956250	29.19	46.00	16.81	V	-8.5
951.257500	32.87	46.00	13.13	H	2.2

EUT operation mode: Transmitting

5250-5350MHz Band

9 kHz-30 MHz:

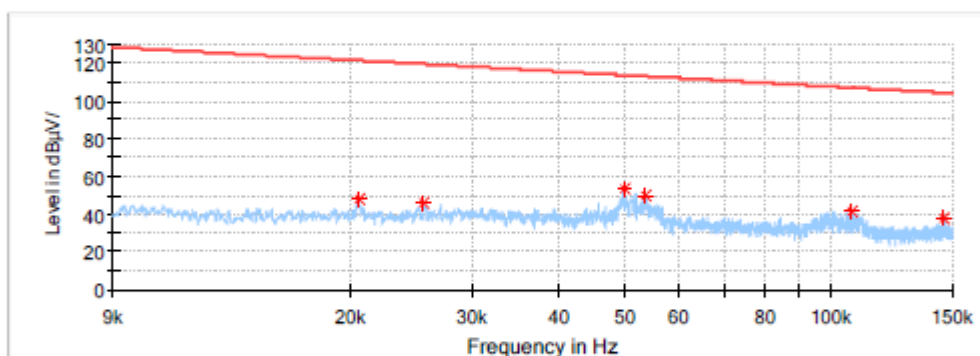
Transmitting in Chain 0 + Chain 1 802.11ax20 mode 5300MHz (maximum output power)

Parallel(worst case)

9kHz -150kHz

Common Information

Project No:	RBJ260414001
EUT Model:	ZSM-1
Test Mode:	Transmitting in 802.11ax20_Full RU mode middle channel
Standard:	FCC Part 15.205 & FCC Part 15.209 & FCC Part 15.407
Test Equipment:	ESCI, 1313-1A, 310N
Receiver Setting:	RBW:200 Hz, VBW:1 kHz, Sweep Time: Auto
Temperature:	23.3°C
Humidity:	54%
Barometric Pressure:	102.2kPa
Test Engineer:	Scarf Yang
Check by:	Jenny Yang
Test Date:	2026/4/30

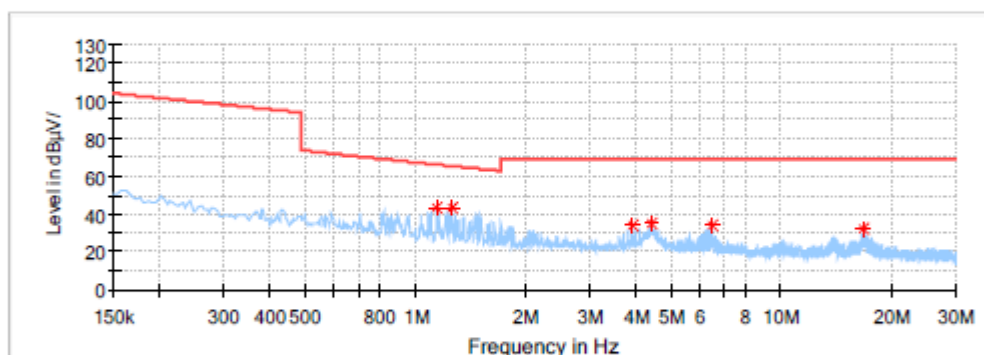


Critical_Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
0.020509	48.15	121.36	73.21	Parallel	-0.1
0.025515	45.83	119.46	73.63	Parallel	-0.1
0.049855	53.18	113.65	60.47	Parallel	-3.2
0.053486	50.23	113.04	62.81	Parallel	-3.7
0.107242	41.87	107.00	65.14	Parallel	-8.8
0.146122	37.98	104.31	66.32	Parallel	-10.5

150kHz-30MHz**Common Information**

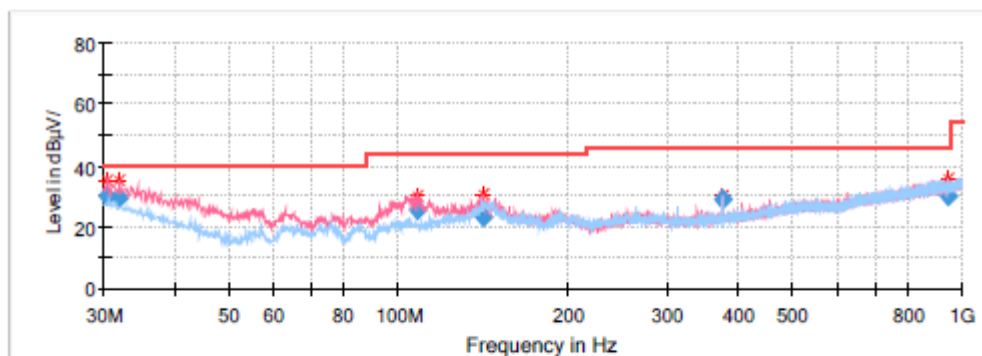
Project No: RBJ260414001
EUT Model: ZSM-1
Test Mode: Transmitting in 802.11ax20_Full RU mode middle channel
Standard: FCC Part 15.205 & FCC Part 15.209 & FCC Part 15.407
Test Equipment: ESCI, 1313-1A, 310N
Receiver Setting: RBW: 9 kHz, VBW: 30 kHz, Sweep Time: Auto
Temperature: 23.3°C
Humidity: 54%
Barometric Pressure: 102.2 kPa
Test Engineer: Scarf Yang
Check by: Jenny Yang
Test Date: 2026/4/30

**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1.146244	43.10	66.23	23.13	Parallel	-27.6
1.258181	43.09	65.45	22.36	Parallel	-28.0
3.918562	34.16	69.54	35.38	Parallel	-31.3
4.429744	34.95	69.54	34.59	Parallel	-31.3
6.508050	34.17	69.54	35.37	Parallel	-31.7
16.869731	32.40	69.54	37.14	Parallel	-32.6

30MHz-1GHz:**Transmitting in Chain 0 + Chain 1 802.11ax20 mode 5300MHz (maximum output power)****Middle Channel: 5300MHz****Common Information**

Project No:	RBJ260414001
EUT Model:	ZSM-1
Test Mode:	Transmitting in 802.11ax20_Full RU mode middle channel
Standard:	FCC Part 15.205 & FCC Part 15.209 & FCC Part 15.407
Test Equipment:	ESCI, JB3, 310N
Receiver Setting:	RBW: 100 kHz, VBW: 300 kHz, Sweep Time: Auto
Temperature:	24.2°C
Humidity:	53%
Barometric Pressure:	102.4kPa
Test Engineer:	Scar Yang
Check by:	Jenny Yang
Test Date:	2026/4/29

**Final_Result**

Frequency (MHz)	QuasiPeak (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Pol	Corr. (dB/m)
30.485000	30.08	40.00	9.92	V	-4.9
32.061250	29.45	40.00	10.55	V	-5.4
108.085000	25.63	43.50	17.87	V	-12.8
141.671250	23.50	43.50	20.00	V	-11.1
374.956250	28.67	46.00	17.33	H	-8.5
947.013750	29.94	46.00	16.06	H	2.1

EUT operation mode: Transmitting

5470-5725MHz Band

9 kHz-30 MHz:

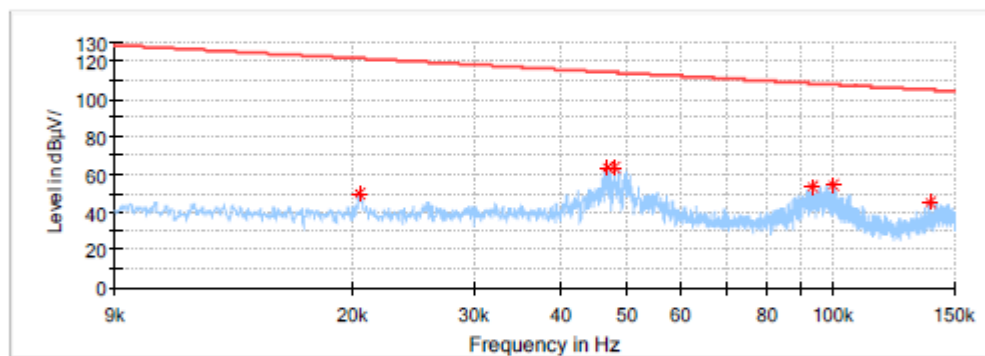
Transmitting in Chain 0 + Chain 1 802.11ac20 mode 5700MHz (maximum output power)

Parallel(worst case)

9kHz -150kHz

Common Information

Project No:	RBJ260414001
EUT Model:	ZSM-1
Test Mode:	Transmitting in 802.11ac20 mode 5700 channel
Standard:	FCC Part 15.205 & FCC Part 15.209 & FCC Part 15.407
Test Equipment:	ESCI, 1313-1A, 310N
Receiver Setting:	RBW:200 Hz, VBW:1 kHz, Sweep Time: Auto
Temperature:	23.3°C
Humidity:	54%
Barometric Pressure:	102.2kPa
Test Engineer:	Scar Yang
Check by:	Jenny Yang
Test Date:	2026/4/30

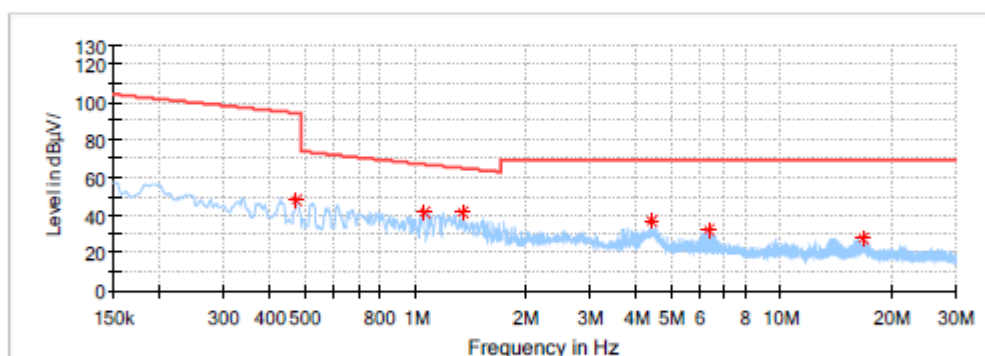


Critical_Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
0.020368	49.35	121.42	72.06	Parallel	-0.1
0.046823	63.75	114.19	50.45	Parallel	-2.7
0.047951	63.28	113.99	50.70	Parallel	-2.9
0.093283	53.80	108.21	54.40	Parallel	-7.9
0.100086	54.67	107.60	52.94	Parallel	-8.5
0.138068	44.74	104.80	60.06	Parallel	-10.1

150kHz-30MHz**Common Information**

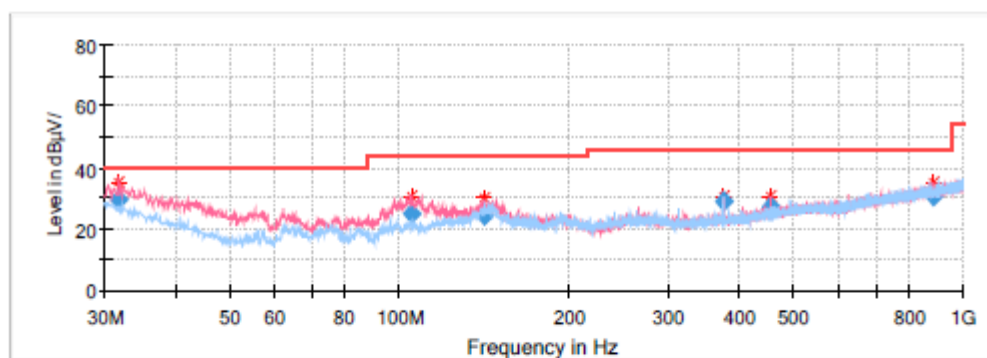
Project No: RBJ260414001
EUT Model: ZSM-1
Test Mode: Transmitting in 802.11ac20 mode 5700 channel
Standard: FCC Part 15.205 & FCC Part 15.209 & FCC Part 15.407
Test Equipment: ESCI, 1313-1A, 310N
Receiver Setting: RBW: 9 kHz, VBW: 30 kHz, Sweep Time: Auto
Temperature: 23.3°C
Humidity: 54%
Barometric Pressure: 102.2 kPa
Test Engineer: Scarf Yang
Check by: Jenny Yang
Test Date: 2026/4/30

**Critical_Freqs**

Frequency (MHz)	MaxPeak (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Pol	Corr. (dB/m)
0.474619	48.34	94.06	45.73	Parallel	-21.2
1.056694	41.77	66.92	25.16	Parallel	-27.3
1.347731	41.79	64.88	23.09	Parallel	-28.3
4.429744	36.70	69.54	32.84	Parallel	-31.3
6.325219	32.68	69.54	36.86	Parallel	-31.6
16.854806	27.99	69.54	41.55	Parallel	-32.6

30MHz-1GHz:**Transmitting in Chain 0 + Chain 1 802.11ac20 mode 5700MHz (maximum output power)****Channel: 5700MHz****Common Information**

Project No:	RBJ260414001
EUT Model:	ZSM-1
Test Mode:	Transmitting in 802.11ac20 mode 5700 channel
Standard:	FCC Part 15.205 & FCC Part 15.209 & FCC Part 15.407
Test Equipment:	ESCI, JB3, 310N
Receiver Setting:	RBW: 100 kHz, VBW: 300 kHz, Sweep Time: Auto
Temperature:	24.2°C
Humidity:	53%
Barometric Pressure:	102.4kPa
Test Engineer:	Scar Yang
Check by:	Jenny Yang
Test Date:	2026/4/29

**Final Result**

Frequency (MHz)	QuasiPeak (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Pol	Corr. (dB/m)
31.818750	29.72	40.00	10.28	V	-5.4
104.787450	25.02	43.50	18.48	V	-13.3
141.171950	24.15	43.50	19.35	V	-11.1
375.077500	28.79	46.00	17.21	H	-8.5
455.995650	27.18	46.00	18.82	V	-6.2
888.086250	30.68	46.00	15.32	H	1.7

EUT operation mode: Transmitting

5725-5850MHz Band

9 kHz-30 MHz:

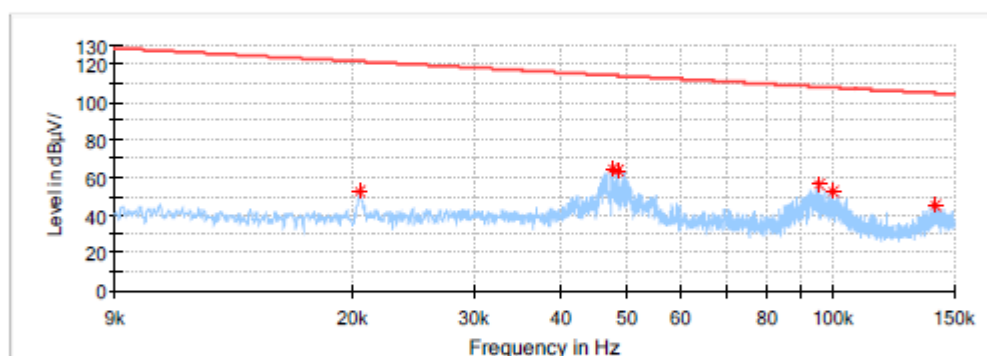
Transmitting in Chain 0 + Chain 1 802.11ac20 mode 5745MHz (maximum output power)

Parallel(worst case)

9kHz -150kHz

Common Information

Project No:	RBJ260414001
EUT Model:	ZSM-1
Test Mode:	Transmitting in 802.11ac20 mode low channel
Standard:	FCC Part 15.205 & FCC Part 15.209 & FCC Part 15.407
Test Equipment:	ESCI, 1313-1A, 310N
Receiver Setting:	RBW: 200 Hz, VBW: 1 kHz, Sweep Time: Auto
Temperature:	23.3°C
Humidity:	54%
Barometric Pressure:	102.2kPa
Test Engineer:	Scar Yang
Check by:	Jenny Yang
Test Date:	2026/4/30

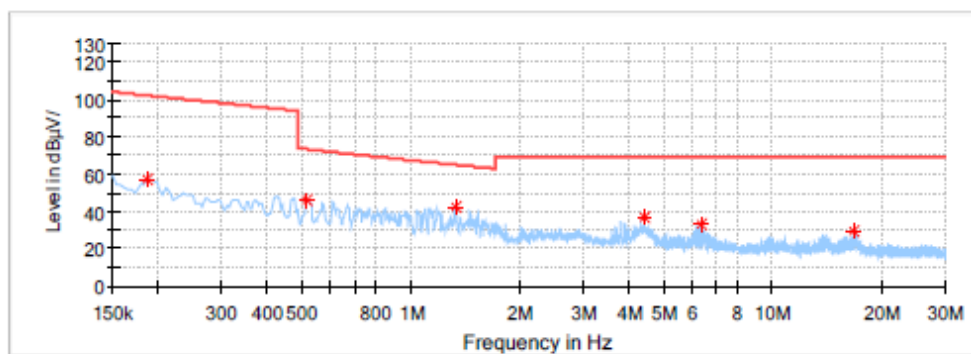


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Pol	Corr. (dB/m)
0.020421	52.82	121.40	68.58	Parallel	-0.1
0.047687	64.23	114.03	49.80	Parallel	-2.9
0.048427	63.94	113.90	49.96	Parallel	-3.0
0.095239	56.32	108.03	51.72	Parallel	-8.1
0.099681	52.24	107.64	55.40	Parallel	-8.5
0.140500	45.32	104.65	59.33	Parallel	-10.2

150 kHz-30MHz**Common Information**

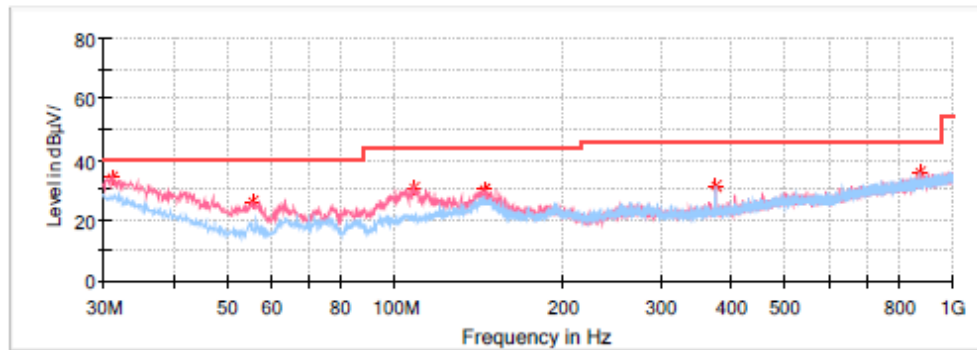
Project No: RBJ260414001
EUT Model: ZSM-1
Test Mode: Transmitting in 802.11ac20 mode low channel
Standard: FCC Part 15.205 & FCC Part 15.209 & FCC Part 15.407
Test Equipment: ESCI, 1313-1A, 310N
Receiver Setting: RBW:9 kHz, VBW:30 kHz, Sweep Time: Auto
Temperature: 23.3°C
Humidity: 54%
Barometric Pressure: 102.2kPa
Test Engineer: Scarf Yang
Check by: Jenny Yang
Test Date: 2026/4/30

**Critical_Freqs**

Frequency (MHz)	MaxPeak (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Pol	Corr. (dB/m)
0.187312	57.56	102.07	44.51	Parallel	-12.2
0.515662	46.44	73.32	26.88	Parallel	-22.0
1.329075	42.04	65.00	22.96	Parallel	-28.2
4.433475	36.79	69.54	32.75	Parallel	-31.3
6.332681	33.15	69.54	36.39	Parallel	-31.6
16.776450	29.60	69.54	39.94	Parallel	-32.6

30MHz-1GHz:**Transmitting in Chain 0 + Chain 1 802.11ac20 mode 5745MHz (maximum output power)****Low Channel: 5745MHz****Common Information**

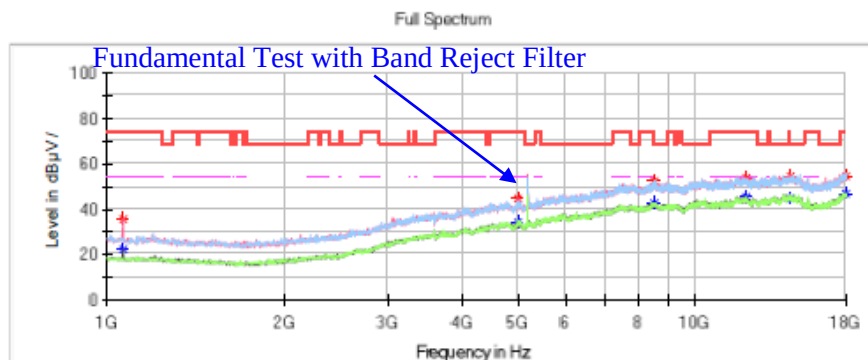
Project No: RBJ260414001
 EUT Model: ZSM-1
 Test Mode: Transmitting in 802.11ac20 mode low channel
 Standard: FCC Part 15.205 & FCC Part 15.209 & FCC Part 15.407
 Test Equipment: ESCI, JB3, 310N
 Receiver Setting: RBW: 100 kHz, VBW: 300 kHz, Sweep Time: Auto
 Temperature: 24.2°C
 Humidity: 53%
 Barometric Pressure: 102.4kPa
 Test Engineer: Scarf Yang
 Check by: Jenny Yang
 Test Date: 2026/4/29

**Critical_Freqs**

Frequency (MHz)	MaxPeak (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Pol	Corr. (dB/m)
31.091250	34.00	40.00	6.00	V	-5.3
55.583750	25.88	40.00	14.12	V	-16.9
107.842500	30.36	43.50	13.14	V	-12.8
144.217500	29.98	43.50	13.52	V	-11.2
374.956250	31.29	46.00	14.71	H	-8.5
875.112500	36.02	46.00	9.98	H	1.0

1GHz-18GHz (5150-5250MHz Band):*Chain 0***802.11a Mode:****Low Channel: 5180MHz****Common Information**

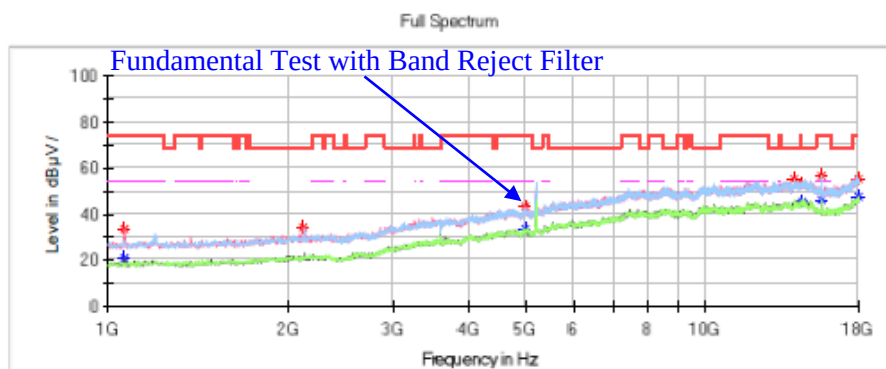
Project No.: RBJ260414001
EUT Model: ZSM-1
Test Mode: 5G WIFI 802.11a mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.2℃
Humidity: 48%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/5/12

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	—	22.29	54.00	31.71	V	-15.9
1061.200000	35.80	—	74.00	38.20	V	-15.9
4998.400000	—	34.52	54.00	19.48	V	-2.8
4998.400000	44.88	—	74.00	29.12	V	-2.8
8476.600000	—	42.40	54.00	11.60	H	4.7
8476.600000	52.16	—	74.00	21.84	H	4.7
12155.400000	—	45.63	54.00	8.37	H	8.9
12155.400000	53.78	—	74.00	20.22	H	8.9
14498.000000	—	44.84	54.00	9.16	V	11.1
14498.000000	54.47	—	74.00	19.53	V	11.1
17972.800000	54.33	—	74.00	19.67	V	13.7
17972.800000	—	47.05	54.00	6.95	V	13.7

Middle Channel: 5200MHz**Common Information**

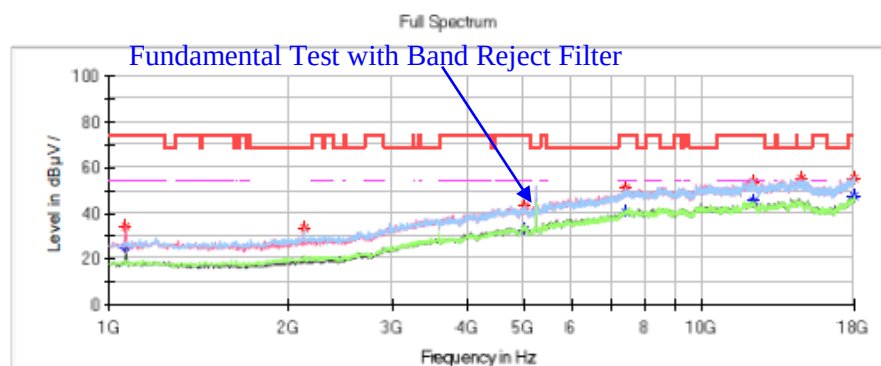
Project No.: RBJ260414001
 EUT Model: ZSM-1
 Test Mode: 5G WIFI 802.11a mode Middle Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 24.2°C
 Humidity: 48%
 Atmospheric Pressure: 101.1kPa
 Test Engineer: Destine Hu
 Check by: Jenny Yang
 Test Date: 2026/5/12

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1064.600000	—	21.22	54.00	32.78	V	-15.9
1064.600000	33.44	—	74.00	40.56	V	-15.9
2122.000000	34.20	—	68.20	34.00	V	-11.3
4998.400000	—	33.77	54.00	20.23	V	-2.8
4998.400000	43.19	—	74.00	30.81	V	-2.8
14052.600000	55.22	—	68.20	12.98	V	10.7
14494.600000	—	45.47	54.00	8.53	V	11.1
14494.600000	53.01	—	74.00	20.99	V	11.1
15606.400000	—	46.21	54.00	7.79	H	7.7
15606.400000	56.76	—	74.00	17.24	H	7.7
17989.800000	—	47.87	54.00	6.13	H	13.8
17989.800000	55.34	—	74.00	18.66	H	13.8

High Channel: 5240MHz**Common Information**

Project No.: RBJ260414001
 EUT Model: ZSM-1
 Test Mode: 5G WIFI 802.11a mode High Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 24.2°C
 Humidity: 48%
 Atmospheric Pressure: 101.1kPa
 Test Engineer: Destine Hu
 Check by: Jenny Yang
 Test Date: 2026/5/12

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1064.600000	34.01	—	74.00	39.99	H	-15.9
1064.600000	—	24.90	54.00	29.10	H	-15.9
2128.800000	33.43	—	68.20	34.77	H	-11.3
5005.200000	43.46	—	74.00	30.54	H	-2.8
5005.200000	—	32.87	54.00	21.13	H	-2.8
7409.000000	51.37	—	74.00	22.63	H	3.0
7409.000000	—	40.61	54.00	13.39	H	3.0
12189.400000	—	45.23	54.00	8.77	V	8.9
12189.400000	53.67	—	74.00	20.33	V	8.9
14640.800000	55.37	—	68.20	12.83	V	10.6
17989.800000	—	47.47	54.00	6.53	V	13.8
17989.800000	55.51	—	74.00	18.49	V	13.8

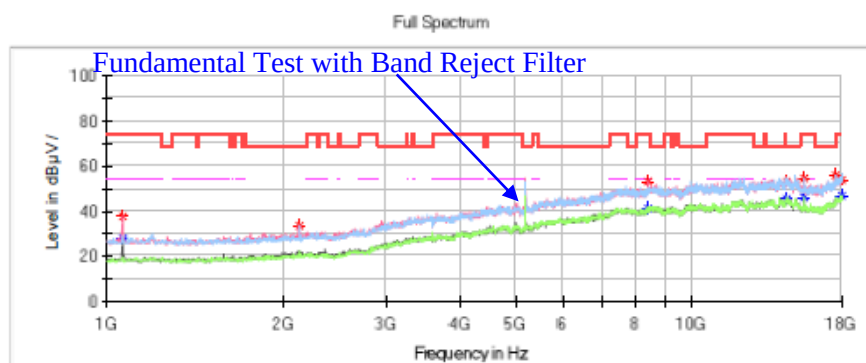
Chain 1

802.11a Mode:

Low Channel: 5180MHz

Common Information

Project No.: RBJ260414001
 EUT Model: ZSM-1
 Test Mode: 5G WIFI 802.11a mode Low Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 24.2°C
 Humidity: 48%
 Atmospheric Pressure: 101.1kPa
 Test Engineer: Destine Hu
 Check by: Jenny Yang
 Test Date: 2026/5/12

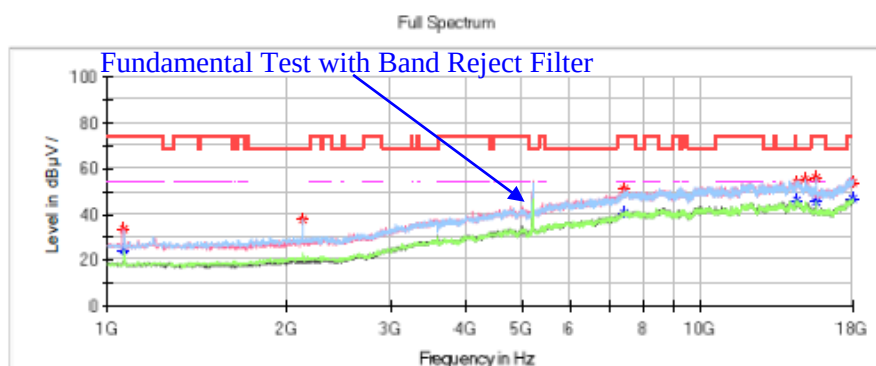


Critical Freqs

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	—	28.04	54.00	25.96	V	-15.9
1061.200000	37.88	—	74.00	36.12	V	-15.9
2128.800000	33.66	—	68.20	34.54	V	-11.3
8415.400000	53.22	—	74.00	20.78	V	4.5
8415.400000	—	41.33	54.00	12.67	V	4.5
14481.000000	53.34	—	74.00	20.66	H	11.1
14481.000000	—	45.29	54.00	8.71	H	11.1
15538.400000	—	46.05	54.00	7.95	H	7.8
15538.400000	54.22	—	74.00	19.78	H	7.8
17602.200000	55.89	—	68.20	12.31	H	11.4
17966.000000	—	46.79	54.00	7.21	H	13.6
17966.000000	54.18	—	74.00	19.82	H	13.6

Middle Channel: 5200MHz**Common Information**

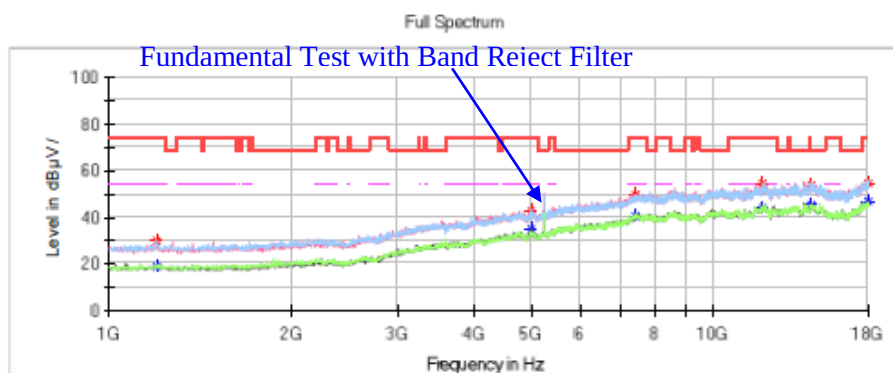
Project No.: RBJ260414001
EUT Model: ZSM-1
Test Mode: 5G WIFI 802.11a mode Middle Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.2°C
Humidity: 48%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/5/12

**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1064.600000	33.87	—	74.00	40.13	H	-15.9
1064.600000	—	24.22	54.00	29.78	H	-15.9
2132.200000	37.73	—	68.20	30.47	H	-11.3
7415.800000	51.08	—	74.00	22.92	H	3.0
7415.800000	—	40.73	54.00	13.27	H	3.0
14494.600000	—	45.95	54.00	8.05	V	11.1
14494.600000	53.86	—	74.00	20.14	V	11.1
14929.800000	54.92	—	68.20	13.28	V	9.6
15603.000000	55.84	—	74.00	18.16	V	7.7
15603.000000	—	45.34	54.00	8.66	V	7.7
17993.200000	—	46.96	54.00	7.04	V	13.8
17993.200000	54.20	—	74.00	19.80	V	13.8

High Channel: 5240MHz**Common Information**

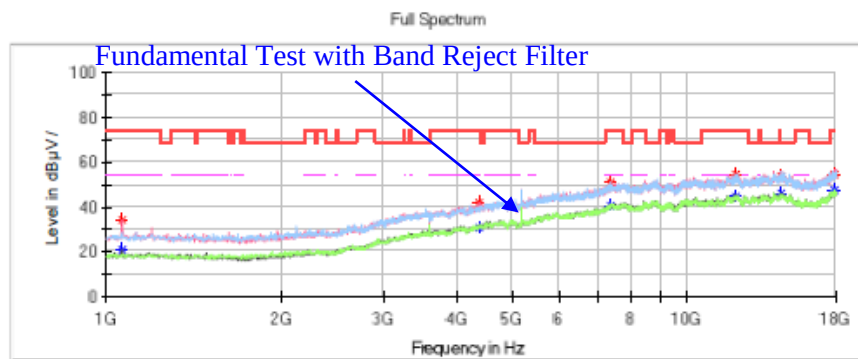
Project No.: RBJ260414001
EUT Model: ZSM-1
Test Mode: 5G WIFI 802.11a mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.2℃
Humidity: 48%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/5/12

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1193.800000	30.42	—	74.00	43.58	V	-15.3
1193.800000	—	18.66	54.00	35.34	V	-15.3
4998.400000	42.80	—	74.00	31.20	V	-2.8
4998.400000	—	35.15	54.00	18.85	V	-2.8
7422.600000	—	40.56	54.00	13.44	H	3.0
7422.600000	49.85	—	74.00	24.15	H	3.0
12056.800000	—	43.72	54.00	10.28	H	9.0
12056.800000	54.62	—	74.00	19.38	H	9.0
14498.000000	—	45.75	54.00	8.25	V	11.1
14498.000000	54.05	—	74.00	19.95	V	11.1
17993.200000	54.43	—	74.00	19.57	V	13.8
17993.200000	—	46.57	54.00	7.43	V	13.8

MIMO (Chain 0+Chain 1):**802.11ac20 Mode:****Low Channel: 5180MHz****Common Information**

Project No.:	RBJ260414001
EUT Model:	ZSM-1
Test Mode:	5G WIFI 802.11ac20 mode Low Channel
Standard:	FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	24.2℃
Humidity:	48%
Atmospheric Pressure:	101.1kPa
Test Engineer:	Destine Hu
Check by:	Jenny Yang
Test Date:	2026/5/12

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µV/m)	Average (dB µV/m)	Limit (dB µV/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	33.95	—	74.00	40.05	V	-15.9
1061.200000	—	20.83	54.00	33.17	V	-15.9
4376.200000	41.99	—	74.00	32.01	V	-4.5
4376.200000	—	30.75	54.00	23.25	V	-4.5
7354.600000	50.85	—	74.00	23.15	H	2.8
7354.600000	—	40.45	54.00	13.55	H	2.8
12128.200000	—	45.03	54.00	8.97	H	9.0
12128.200000	54.58	—	74.00	19.42	H	9.0
14477.600000	—	46.16	54.00	7.84	V	11.1
14477.600000	53.89	—	74.00	20.11	V	11.1
17935.400000	54.31	—	74.00	19.69	V	13.4
17935.400000	—	47.37	54.00	6.63	V	13.4

Middle Channel: 5200MHz**Common Information**

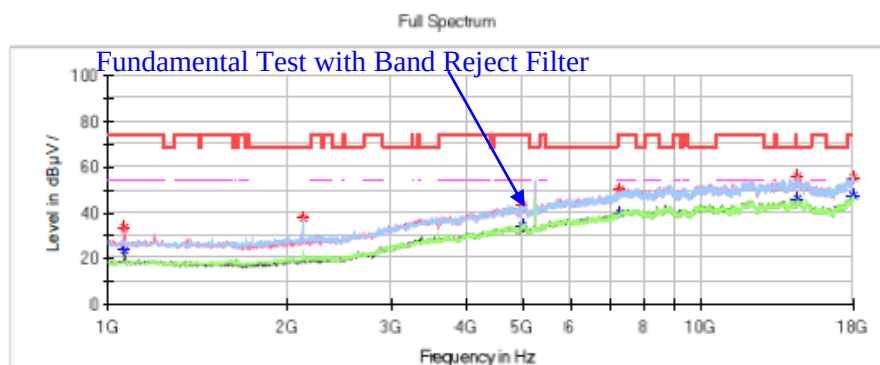
Project No.: RBJ260414001
EUT Model: ZSM-1
Test Mode: 5G WIFI 802.11ac20 mode Middle Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.2°C
Humidity: 48%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/5/12

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1064.600000	34.52	—	74.00	39.48	H	-15.9
1064.600000	—	24.73	54.00	29.27	H	-15.9
2128.800000	33.27	—	68.20	34.93	H	-11.3
4753.600000	43.26	—	74.00	30.74	H	-3.6
4753.600000	—	33.08	54.00	20.92	H	-3.6
7735.400000	51.31	—	74.00	22.69	V	3.4
7735.400000	—	40.42	54.00	13.58	V	3.4
14559.200000	56.17	—	68.20	12.03	V	10.9
15596.200000	59.23	—	74.00	14.77	V	7.7
15596.200000	—	48.24	54.00	5.76	V	7.7
17979.600000	54.66	—	74.00	19.34	V	13.7
17979.600000	—	46.79	54.00	7.21	V	13.7

High Channel: 5240MHz**Common Information**

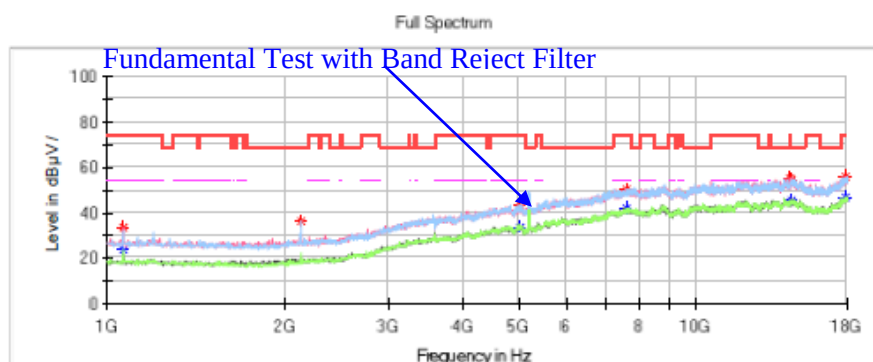
Project No.: RBJ260414001
EUT Model: ZSM-1
Test Mode: 5G WIFI 802.11ac20 mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.2°C
Humidity: 48%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/5/12

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1064.600000	—	23.85	54.00	30.15	V	-15.9
1064.600000	33.85	—	74.00	40.15	V	-15.9
2125.400000	38.04	—	68.20	30.16	V	-11.3
4998.400000	43.52	—	74.00	30.48	V	-2.8
4998.400000	—	34.28	54.00	19.72	V	-2.8
7283.200000	—	40.05	54.00	13.95	H	2.6
7283.200000	50.58	—	74.00	23.42	H	2.6
14460.600000	55.89	—	68.20	12.31	H	11.1
14491.200000	53.08	—	74.00	20.92	H	11.1
14491.200000	—	46.11	54.00	7.89	H	11.1
17996.600000	—	47.46	54.00	6.54	H	13.8
17996.600000	55.07	—	74.00	18.93	H	13.8

802.11ac40 Mode:**Low Channel: 5190MHz****Common Information**

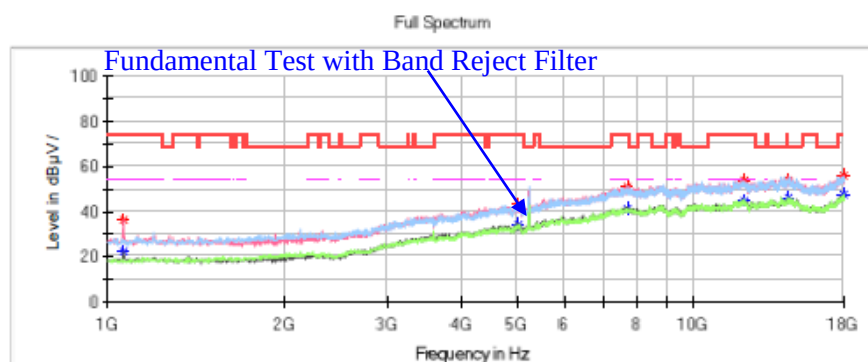
Project No.: RBJ260414001
EUT Model: ZSM-1
Test Mode: 5G WIFI 802.11ac40 mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.2℃
Humidity: 48%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/5/12

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	—	23.75	54.00	30.25	H	-15.9
1061.200000	33.75	—	74.00	40.25	H	-15.9
2128.800000	36.31	—	68.20	31.89	H	-11.3
5015.400000	43.66	—	74.00	30.34	H	-2.7
5015.400000	—	33.85	54.00	20.15	H	-2.7
7579.000000	—	41.68	54.00	12.32	V	3.3
7579.000000	50.54	—	74.00	23.46	V	3.3
14355.200000	55.39	—	68.20	12.81	V	11.0
14498.000000	54.56	—	74.00	19.44	V	11.1
14498.000000	—	45.51	54.00	8.49	V	11.1
17918.400000	55.97	—	74.00	18.03	V	13.3
17918.400000	—	47.18	54.00	6.82	V	13.3

High Channel: 5230MHz**Common Information**

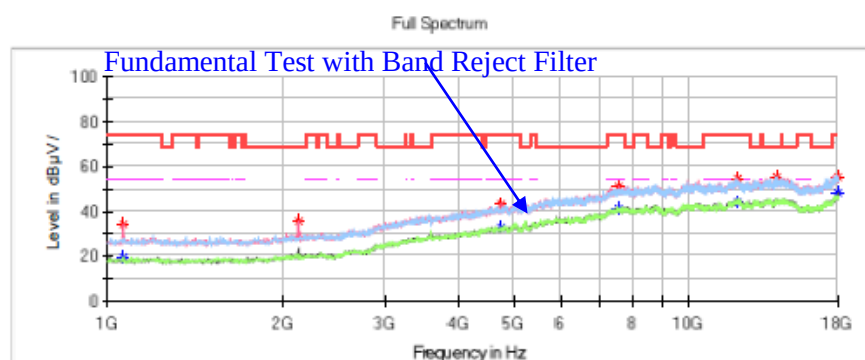
Project No.: RBJ260414001
 EUT Model: ZSM-1
 Test Mode: 5G WIFI 802.11ac40 mode High Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 24.2°C
 Humidity: 48%
 Atmospheric Pressure: 101.1kPa
 Test Engineer: Destine Hu
 Check by: Jenny Yang
 Test Date: 2026/5/12

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	—	22.04	54.00	31.96	V	-15.9
1061.200000	36.33	—	74.00	37.67	V	-15.9
5029.000000	43.17	—	74.00	30.83	H	-2.7
5029.000000	—	34.02	54.00	19.98	H	-2.7
7715.000000	51.39	—	74.00	22.61	H	3.4
7715.000000	—	41.05	54.00	12.95	H	3.4
12169.000000	—	44.68	54.00	9.32	V	8.9
12169.000000	53.57	—	74.00	20.43	V	8.9
14484.400000	—	46.10	54.00	7.90	V	11.1
14484.400000	53.82	—	74.00	20.18	V	11.1
17996.600000	55.64	—	74.00	18.36	H	13.8
17996.600000	—	47.61	54.00	6.39	H	13.8

802.11ac80 Mode:**Channel: 5210MHz****Common Information**

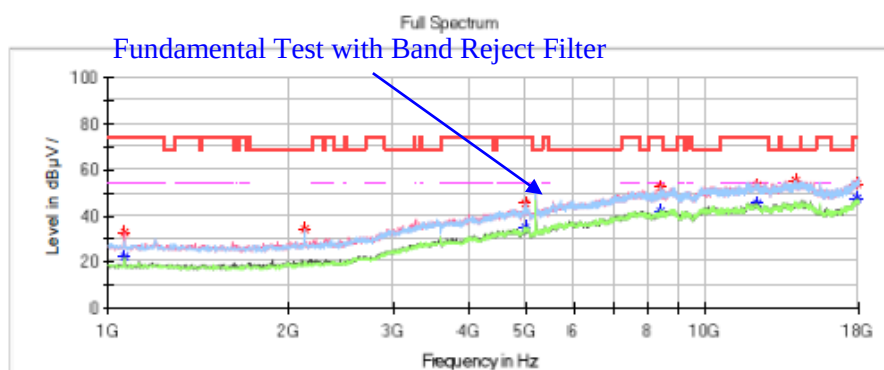
Project No.:	RBJ260414001
EUT Model:	ZSM-1
Test Mode:	5G WIFI 802.11ac80
Standard:	FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	24.2℃
Humidity:	48%
Atmospheric Pressure:	101.1kPa
Test Engineer:	Destine Hu
Check by:	Jenny Yang
Test Date:	2026/5/12

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μV/m)	Average (dB μV/m)	Limit (dB μV/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	—	19.45	54.00	34.55	V	-15.9
1061.200000	34.36	—	74.00	39.64	V	-15.9
2128.800000	35.60	—	68.20	32.60	V	-11.3
4757.000000	—	32.53	54.00	21.47	V	-3.6
4757.000000	43.39	—	74.00	30.61	V	-3.6
7558.600000	—	40.95	54.00	13.05	V	3.3
7558.600000	50.75	—	74.00	23.25	V	3.3
12073.800000	—	44.19	54.00	9.81	H	9.0
12073.800000	54.35	—	74.00	19.65	H	9.0
14161.400000	55.10	—	68.20	13.10	H	10.8
17949.000000	54.98	—	74.00	19.02	H	13.5
17949.000000	—	47.93	54.00	6.07	H	13.5

802.11ax20 Mode:**Low Channel: 5180MHz****Common Information**

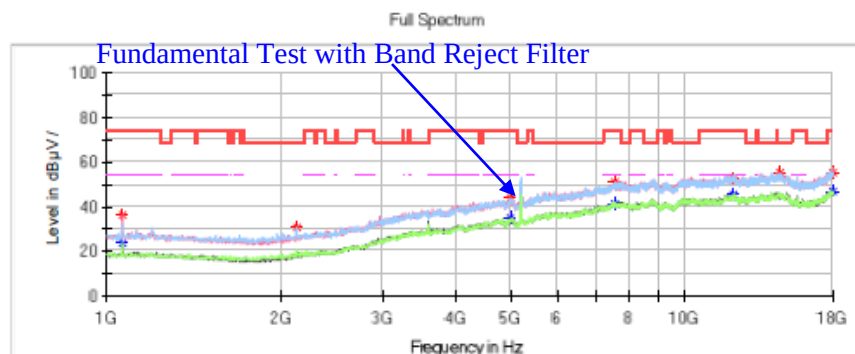
Project No.: RBJ260414001
EUT Model: ZSM-1
Test Mode: 5G WIFI 802.11ax20 mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.2℃
Humidity: 48%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/5/12

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	32.89	—	74.00	41.11	H	-15.9
1061.200000	—	22.58	54.00	31.42	H	-15.9
2125.400000	33.93	—	68.20	34.27	H	-11.3
4998.400000	45.16	—	74.00	28.84	H	-2.8
4998.400000	—	35.20	54.00	18.80	H	-2.8
8412.000000	—	42.25	54.00	11.75	H	4.5
8412.000000	52.16	—	74.00	21.84	H	4.5
12172.400000	—	45.35	54.00	8.65	V	8.9
12172.400000	53.13	—	74.00	20.87	V	8.9
14147.800000	55.52	—	68.20	12.68	V	10.8
17918.400000	—	47.62	54.00	6.38	V	13.3
17918.400000	53.73	—	74.00	20.27	V	13.3

Middle Channel: 5200MHz**Common Information**

Project No.: RBJ260414001
 EUT Model: ZSM-1
 Test Mode: 5G WIFI 802.11ax20 mode Middle Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 24.2℃
 Humidity: 48%
 Atmospheric Pressure: 101.1kPa
 Test Engineer: Destine Hu
 Check by: Jenny Yang
 Test Date: 2026/5/12

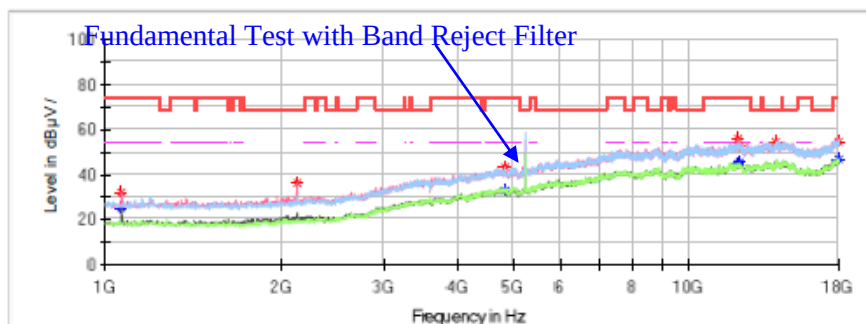
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	—	23.82	54.00	30.18	H	-15.9
1061.200000	36.63	—	74.00	37.37	H	-15.9
2125.400000	30.76	—	68.20	37.44	H	-11.3
4998.400000	—	34.98	54.00	19.02	H	-2.8
4998.400000	43.75	—	74.00	30.25	H	-2.8
7545.000000	—	40.97	54.00	13.03	V	3.3
7545.000000	51.35	—	74.00	22.65	V	3.3
12094.200000	52.73	—	74.00	21.27	V	9.0
12094.200000	—	45.47	54.00	8.53	V	9.0
14542.200000	55.42	—	68.20	12.78	V	11.0
17996.600000	—	46.85	54.00	7.15	V	13.8
17996.600000	55.14	—	74.00	18.86	V	13.8

High Channel: 5240MHz**Common Information**

Project No.: RBJ260414001
 EUT Model: ZSM-1
 Test Mode: 5G WIFI 802.11ax20 mode High Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 24.2℃
 Humidity: 48%
 Atmospheric Pressure: 101.1kPa
 Test Engineer: Destine Hu
 Check by: Jenny Yang
 Test Date: 2026/5/12

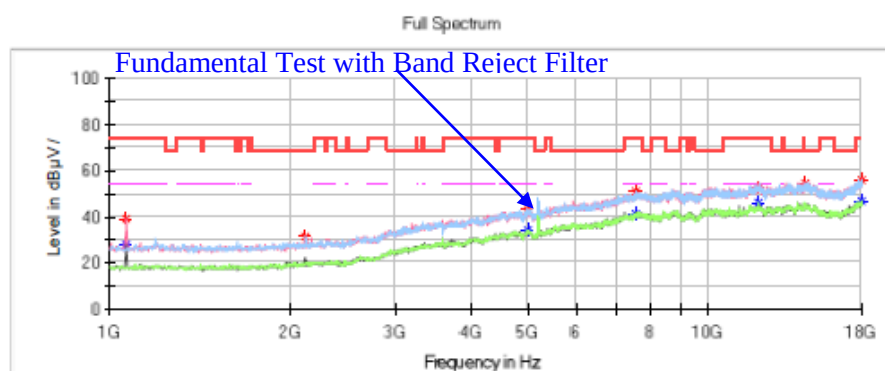
Full Spectrum

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1064.600000	—	25.06	54.00	28.94	V	-15.9
1064.600000	32.20	—	74.00	41.80	V	-15.9
2125.400000	36.57	—	68.20	31.63	V	-11.3
4821.600000	43.15	—	74.00	30.85	V	-3.4
4821.600000	—	32.79	54.00	21.21	V	-3.4
12128.200000	55.93	—	74.00	18.07	V	9.0
12128.200000	—	44.63	54.00	9.37	V	9.0
12155.400000	52.22	—	74.00	21.78	H	8.9
12155.400000	—	45.30	54.00	8.70	H	8.9
14056.000000	54.76	—	68.20	13.44	H	10.7
17969.400000	54.58	—	74.00	19.42	H	13.6
17969.400000	—	46.88	54.00	7.12	H	13.6

802.11ax40 Mode:**Low Channel: 5190MHz****Common Information**

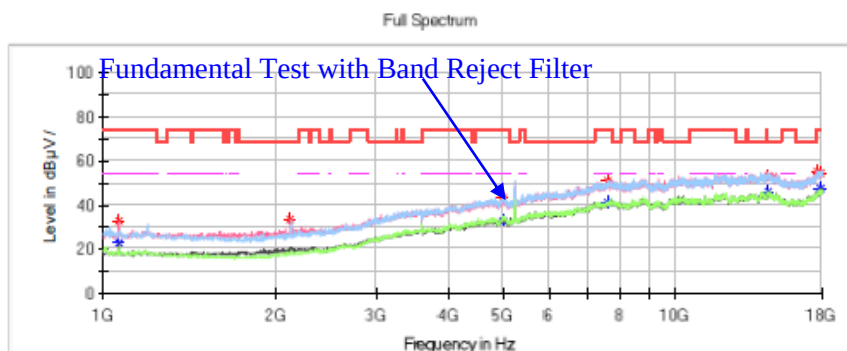
Project No.: RBJ260414001
 EUT Model: ZSM-1
 Test Mode: 5G WIFI 802.11ax40 mode Low Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 24.2°C
 Humidity: 48%
 Atmospheric Pressure: 101.1kPa
 Test Engineer: Destine Hu
 Check by: Jenny Yang
 Test Date: 2026/5/12

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1064.600000	—	27.84	54.00	26.16	V	-15.9
1064.600000	38.89	—	74.00	35.11	V	-15.9
2122.000000	31.70	—	68.20	36.50	V	-11.3
4998.400000	43.46	—	74.00	30.54	V	-2.8
4998.400000	—	34.57	54.00	19.43	V	-2.8
7575.600000	51.12	—	74.00	22.88	H	3.3
7575.600000	—	41.06	54.00	12.94	H	3.3
12084.000000	52.66	—	74.00	21.34	V	9.0
12084.000000	—	45.99	54.00	8.01	V	9.0
14453.800000	54.87	—	68.20	13.33	V	11.1
17966.000000	55.66	—	74.00	18.34	V	13.6
17966.000000	—	47.19	54.00	6.81	V	13.6

High Channel: 5230MHz**Common Information**

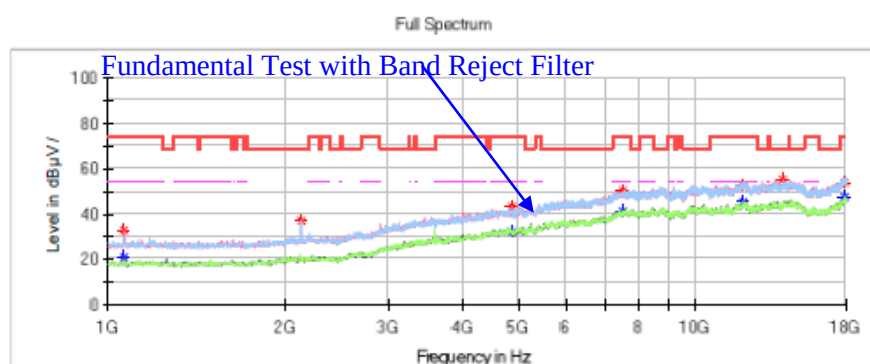
Project No.: RBJ260414001
 EUT Model: ZSM-1
 Test Mode: 5G WIFI 802.11ax40 mode High Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 24.2°C
 Humidity: 48%
 Atmospheric Pressure: 101.1kPa
 Test Engineer: Destine Hu
 Check by: Jenny Yang
 Test Date: 2026/5/12

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µV/m)	Average (dB µV/m)	Limit (dB µV/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	33.00	—	74.00	41.00	V	-15.9
1061.200000	—	23.22	54.00	30.78	V	-15.9
2122.000000	33.24	—	68.20	34.96	V	-11.3
4991.600000	—	32.96	54.00	21.04	V	-2.8
4991.600000	43.53	—	74.00	30.47	V	-2.8
7596.000000	—	41.19	54.00	12.81	H	3.3
7596.000000	51.29	—	74.00	22.71	H	3.3
14491.200000	—	46.33	54.00	7.67	V	11.1
14491.200000	53.34	—	74.00	20.66	V	11.1
17649.800000	55.30	—	68.20	12.90	V	11.7
17918.400000	54.48	—	74.00	19.52	V	13.3
17918.400000	—	47.22	54.00	6.78	V	13.3

802.11ax80 Mode:**Channel: 5210MHz****Common Information**

Project No.: RBJ260414001
 EUT Model: ZSM-1
 Test Mode: 5G WIFI 802.11ax80
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 24.2°C
 Humidity: 48%
 Atmospheric Pressure: 101.1kPa
 Test Engineer: Destine Hu
 Check by: Jenny Yang
 Test Date: 2026/5/12

**Critical Freqs**

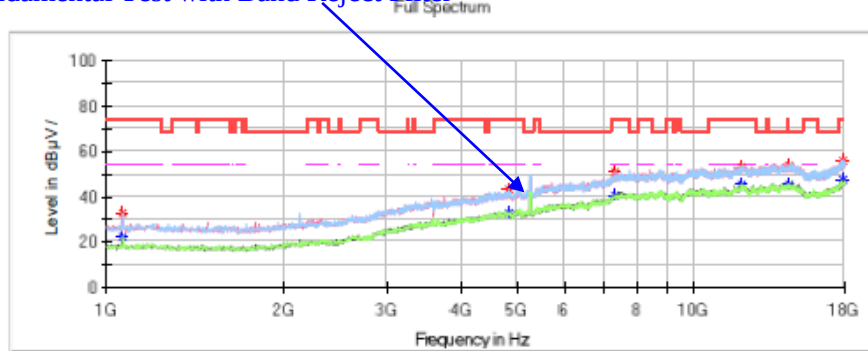
Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1064.600000	—	21.03	54.00	32.97	H	-15.9
1064.600000	32.78	—	74.00	41.22	H	-15.9
2125.400000	37.10	—	68.20	31.10	H	-11.3
4852.200000	—	32.41	54.00	21.59	H	-3.3
4852.200000	43.44	—	74.00	30.56	H	-3.3
7528.000000	—	41.01	54.00	12.99	V	3.3
7528.000000	50.43	—	74.00	23.57	V	3.3
12063.600000	52.37	—	74.00	21.63	V	9.0
12063.600000	—	45.20	54.00	8.80	V	9.0
14062.800000	55.16	—	68.20	13.04	V	10.7
17898.000000	53.73	—	74.00	20.27	V	13.2
17898.000000	—	47.35	54.00	6.65	V	13.2

1GHz-18GHz(5250-5350MHz Band):

Chain 0:

802.11a Mode:**Low Channel: 5260MHz****Common Information**

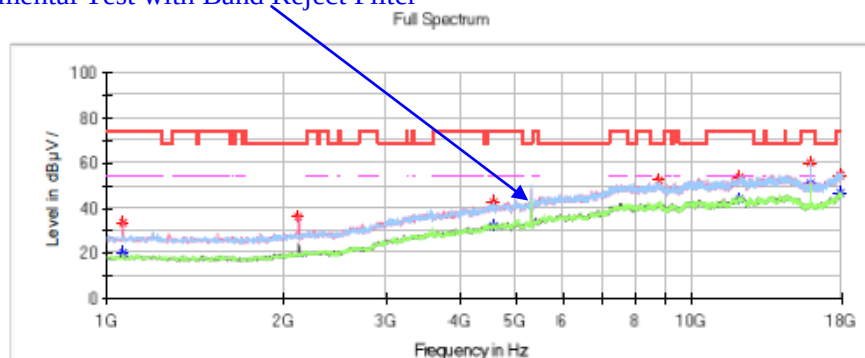
Project No.:	RBJ260414001
EUT Model:	ZSM-1
Test Mode:	5G WIFI 802.11a mode Low Channel
Standard:	FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	24.1℃
Humidity:	50%
Atmospheric Pressure:	101.1kPa
Test Engineer:	Destine Hu
Check by:	Jenny Yang
Test Date:	2026/5/13

Fundamental Test with Band Reject Filter**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µV/m)	Average (dB µV/m)	Limit (dB µV/m)	Margin (dB)	Pol	Corr. (dB/m)
1064.600000	—	22.54	54.00	31.46	H	-15.9
1064.600000	32.70	—	74.00	41.30	H	-15.9
4842.000000	—	32.78	54.00	21.22	H	-3.3
4842.000000	43.14	—	74.00	30.86	H	-3.3
7317.200000	—	40.30	54.00	13.70	H	2.7
7317.200000	50.81	—	74.00	23.19	H	2.7
12005.800000	—	45.25	54.00	8.75	H	9.0
12005.800000	53.20	—	74.00	20.80	H	9.0
14474.200000	54.19	—	74.00	19.81	V	11.1
14474.200000	—	45.24	54.00	8.76	V	11.1
17884.400000	55.90	—	74.00	18.10	V	13.1
17884.400000	—	47.43	54.00	6.57	V	13.1

Middle Channel: 5300MHz**Common Information**

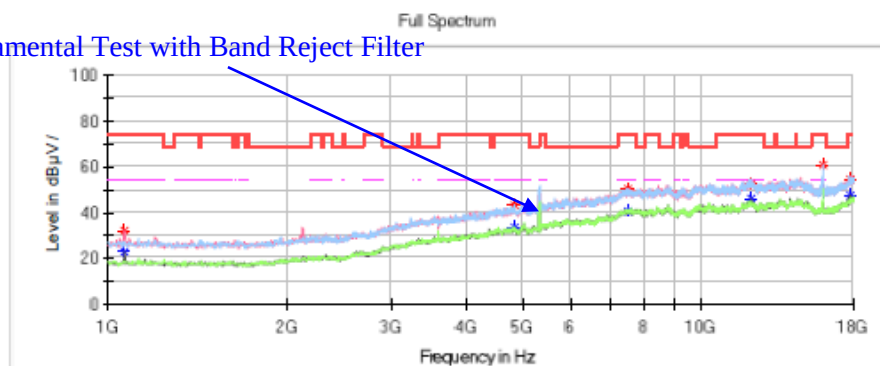
Project No.: RBJ260414001
 EUT Model: ZSM-1
 Test Mode: 5G WIFI 802.11a mode Middle Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 24.1°C
 Humidity: 50%
 Atmospheric Pressure: 101.1kPa
 Test Engineer: Destine Hu
 Check by: Jenny Yang
 Test Date: 2026/5/13

Fundamental Test with Band Reject Filter**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	33.42	—	74.00	40.58	V	-15.9
1061.200000	—	20.10	54.00	33.90	V	-15.9
2122.000000	36.15	—	68.20	32.05	V	-11.3
4556.400000	42.43	—	74.00	31.57	V	-4.2
4556.400000	—	32.34	54.00	21.66	V	-4.2
8752.000000	52.46	—	68.20	15.74	V	4.8
12029.600000	53.84	—	74.00	20.16	H	9.0
12029.600000	—	43.86	54.00	10.14	H	9.0
15902.200000	—	51.29	54.00	2.71	H	7.6
15902.200000	60.48	—	74.00	13.52	H	7.6
17925.200000	54.80	—	74.00	19.20	V	13.4
17925.200000	—	46.97	54.00	7.03	V	13.4

High Channel: 5320MHz**Common Information**

Project No.: RBJ260414001
 EUT Model: ZSM-1
 Test Mode: 5G WIFI 802.11a mode High Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 24.1°C
 Humidity: 50%
 Atmospheric Pressure: 101.1kPa
 Test Engineer: Destine Hu
 Check by: Jenny Yang
 Test Date: 2026/5/13

Fundamental Test with Band Reject Filter
**Critical_Freqs**

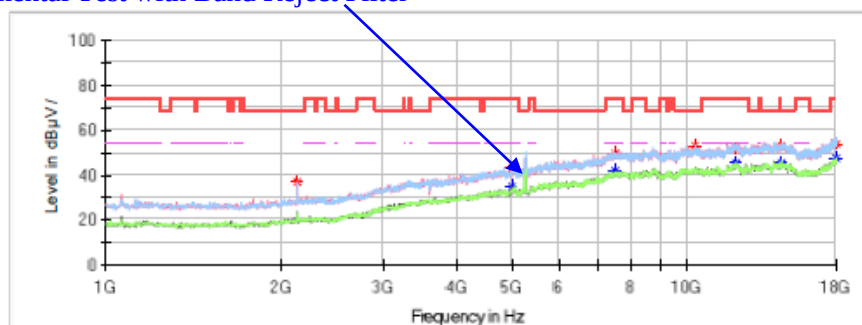
Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1064.600000	—	23.18	54.00	30.82	V	-15.9
1064.600000	31.91	—	74.00	42.09	V	-15.9
4831.800000	—	33.75	54.00	20.25	H	-3.3
4831.800000	43.10	—	74.00	30.90	H	-3.3
7514.400000	—	40.38	54.00	13.62	H	3.3
7514.400000	50.52	—	74.00	23.48	H	3.3
12084.000000	52.66	—	74.00	21.34	V	9.0
12084.000000	—	45.94	54.00	8.06	V	9.0
15963.400000	—	48.84	54.00	5.16	H	7.6
15963.400000	60.86	—	74.00	13.14	H	7.6
17816.400000	54.37	—	74.00	19.63	V	12.7
17816.400000	—	47.36	54.00	6.64	V	12.7

Chain 1:

802.11a Mode:**Low Channel: 5260MHz****Common Information**

Project No.:	RBJ260414001
EUT Model:	ZSM-1
Test Mode:	5G WIFI 802.11a mode Low Channel
Standard:	FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	24.1℃
Humidity:	50%
Atmospheric Pressure:	101.1kPa
Test Engineer:	Destine Hu
Check by:	Jenny Yang
Test Date:	2026/5/13

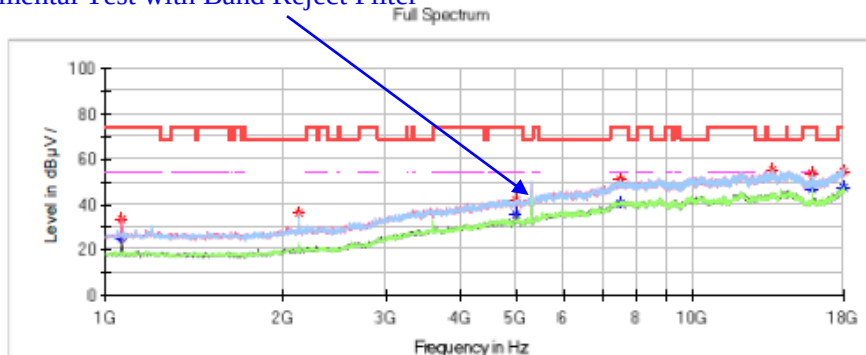
Fundamental Test with Band Reject Filter

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2132.200000	36.83	—	68.20	31.37	V	-11.3
4998.400000	43.42	—	74.00	30.58	V	-2.8
4998.400000	—	34.69	54.00	19.31	V	-2.8
7487.200000	—	42.01	54.00	11.99	V	3.3
7487.200000	49.34	—	74.00	24.66	V	3.3
10302.400000	53.32	—	68.20	14.88	V	6.5
12073.800000	—	45.56	54.00	8.44	V	9.0
12073.800000	51.75	—	74.00	22.25	V	9.0
14477.600000	53.15	—	74.00	20.85	H	11.1
14477.600000	—	45.39	54.00	8.61	H	11.1
17966.000000	—	47.50	54.00	6.50	H	13.6
17966.000000	53.83	—	74.00	20.17	H	13.6

Middle Channel: 5300MHz**Common Information**

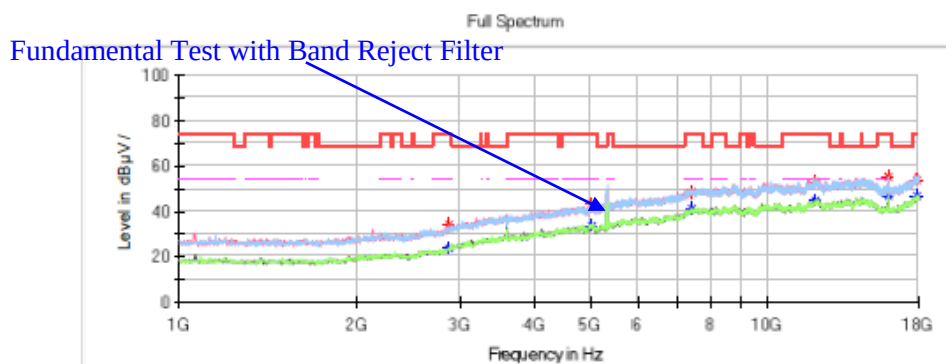
Project No.: RBJ260414001
EUT Model: ZSM-1
Test Mode: 5G WIFI 802.11a mode Middle Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.1°C
Humidity: 50%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/5/13

Fundamental Test with Band Reject Filter**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1064.600000	—	25.51	54.00	28.49	V	-15.9
1064.600000	33.81	—	74.00	40.19	V	-15.9
2128.800000	36.59	—	68.20	31.61	V	-11.3
4998.400000	—	35.63	54.00	18.37	V	-2.8
4998.400000	42.26	—	74.00	31.74	V	-2.8
7511.000000	—	40.79	54.00	13.21	H	3.3
7511.000000	50.89	—	74.00	23.11	H	3.3
13624.200000	55.20	—	68.20	13.00	H	9.9
15902.200000	53.92	—	74.00	20.08	H	7.6
15902.200000	—	47.12	54.00	6.88	H	7.6
17993.200000	54.58	—	74.00	19.42	H	13.8
17993.200000	—	47.77	54.00	6.23	H	13.8

High Channel: 5320MHz**Common Information**

Project No.: RBJ260414001
EUT Model: ZSM-1
Test Mode: 5G WIFI 802.11a mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.1℃
Humidity: 50%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/5/13

**Critical Freqs**

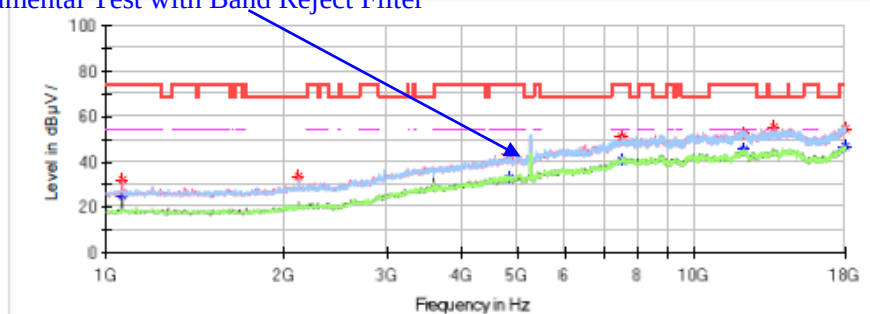
Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2870.000000	—	24.05	54.00	29.95	V	-8.9
2870.000000	34.01	—	74.00	39.99	V	-8.9
5015.400000	—	33.90	54.00	20.10	V	-2.7
5015.400000	43.34	—	74.00	30.66	V	-2.7
7419.200000	48.42	—	74.00	25.58	V	3.0
7419.200000	—	41.31	54.00	12.69	V	3.0
11999.000000	53.28	—	74.00	20.72	V	9.0
11999.000000	—	45.08	54.00	8.92	V	9.0
15956.600000	55.23	—	74.00	18.77	H	7.6
15956.600000	—	46.56	54.00	7.44	H	7.6
17932.000000	54.01	—	74.00	19.99	H	13.4
17932.000000	—	47.15	54.00	6.85	H	13.4

**MIMO(Chain 0+Chain 1):
802.11ac 20 Mode:****Low Channel: 5260MHz****Common Information**

Project No.:	RBJ260414001
EUT Model:	ZSM-1
Test Mode:	5G WIFI 802.11ac20 mode Low Channel
Standard:	FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	24.1°C
Humidity:	50%
Atmospheric Pressure:	101.1kPa
Test Engineer:	Destine Hu
Check by:	Jenny Yang
Test Date:	2026/5/13

Fundamental Test with Band Reject Filter

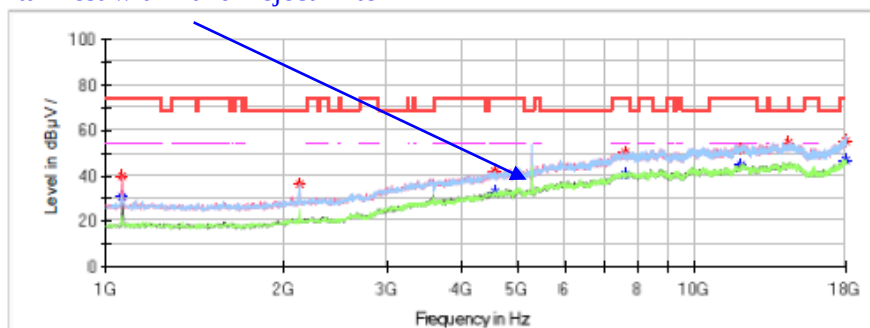
Full Spectrum

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	—	24.94	54.00	29.06	V	-15.9
1061.200000	31.88	—	74.00	42.12	V	-15.9
2122.000000	33.47	—	68.20	34.73	V	-11.3
4825.000000	—	32.57	54.00	21.43	V	-3.4
4825.000000	43.49	—	74.00	30.51	V	-3.4
7490.600000	—	40.70	54.00	13.30	H	3.3
7490.600000	50.98	—	74.00	23.02	H	3.3
12121.400000	52.23	—	74.00	21.77	H	9.0
12121.400000	—	45.42	54.00	8.58	H	9.0
13593.600000	55.42	—	68.20	12.78	H	9.8
17966.000000	54.54	—	74.00	19.46	H	13.6
17966.000000	—	46.96	54.00	7.04	H	13.6

Middle Channel: 5300MHz**Common Information**

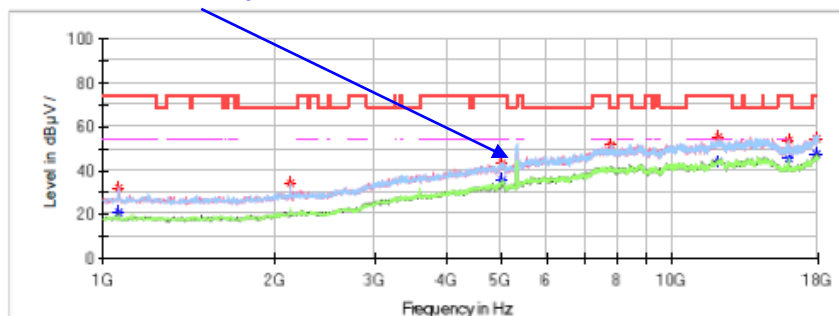
Project No.: RBJ260414001
 EUT Model: ZSM-1
 Test Mode: 5G WIFI 802.11ac20 mode Middle Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 24.1°C
 Humidity: 50%
 Atmospheric Pressure: 101.1kPa
 Test Engineer: Destine Hu
 Check by: Jenny Yang
 Test Date: 2026/5/13

Fundamental Test with Band Reject Filter Full Spectrum**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μV/m)	Average (dB μV/m)	Limit (dB μV/m)	Margin (dB)	Pol	Corr. (dB/m)
1064.600000	39.92	—	74.00	34.08	H	-15.9
1064.600000	—	30.88	54.00	23.12	H	-15.9
2128.800000	36.41	—	68.20	31.79	H	-11.3
4556.400000	—	32.61	54.00	21.39	H	-4.2
4556.400000	41.96	—	74.00	32.04	H	-4.2
7599.400000	—	40.70	54.00	13.30	H	3.3
7599.400000	50.43	—	74.00	23.57	H	3.3
11961.600000	51.73	—	74.00	22.27	V	9.0
11961.600000	—	44.95	54.00	9.05	V	9.0
14440.200000	54.77	—	68.20	13.43	V	11.0
17969.400000	54.97	—	74.00	19.03	V	13.6
17969.400000	—	47.00	54.00	7.00	V	13.6

High Channel: 5320MHz**Common Information**

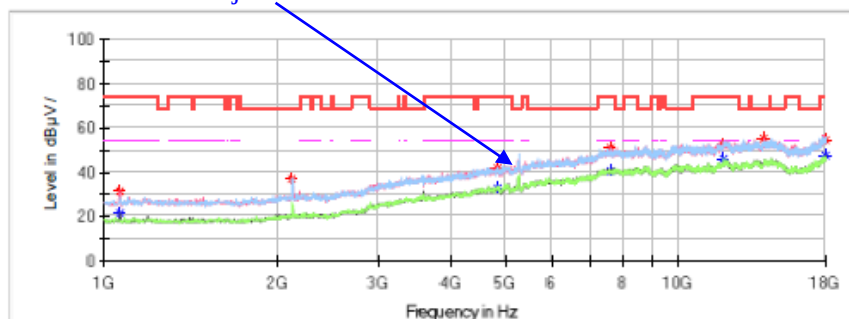
Project No.: RBJ260414001
 EUT Model: ZSM-1
 Test Mode: 5G WIFI 802.11ac20 mode High Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 24.1°C
 Humidity: 50%
 Atmospheric Pressure: 101.1kPa
 Test Engineer: Destine Hu
 Check by: Jenny Yang
 Test Date: 2026/5/13

Fundamental Test with Band Reject Filter Full Spectrum**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	—	21.05	54.00	32.95	H	-15.9
1061.200000	31.95	—	74.00	42.05	H	-15.9
2128.800000	33.95	—	68.20	34.25	H	-11.3
5005.200000	43.45	—	74.00	30.55	H	-2.8
5005.200000	—	35.49	54.00	18.51	H	-2.8
7789.800000	51.99	—	68.20	16.21	H	3.4
12026.200000	—	43.77	54.00	10.23	H	9.0
12026.200000	55.52	—	74.00	18.48	H	9.0
15956.600000	54.16	—	74.00	19.84	V	7.6
15956.600000	—	45.62	54.00	8.38	V	7.6
17925.200000	54.70	—	74.00	19.30	V	13.4
17925.200000	—	47.45	54.00	6.55	V	13.4

802.11ac40 Mode:**Low Channel: 5270MHz****Common Information**

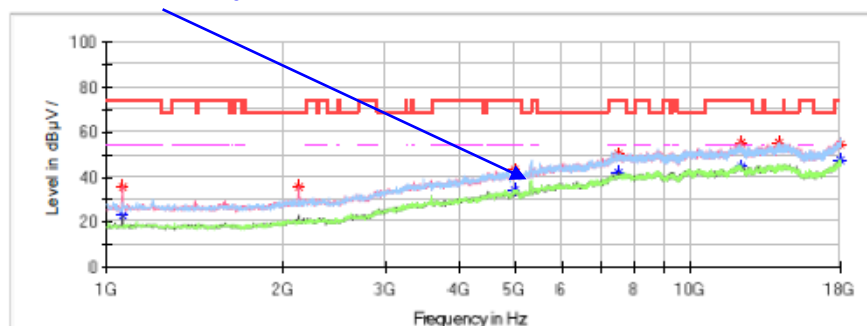
Project No.: RBJ260414001
EUT Model: ZSM-1
Test Mode: 5G WIFI 802.11ac40 mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.1°C
Humidity: 50%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/5/13

Fundamental Test with Band Reject Filter**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1064.600000	—	21.35	54.00	32.65	H	-15.9
1064.600000	31.40	—	74.00	42.60	H	-15.9
2122.000000	37.30	—	68.20	30.90	H	-11.3
4845.400000	42.30	—	74.00	31.70	H	-3.3
4845.400000	—	33.02	54.00	20.98	H	-3.3
7602.800000	—	40.79	54.00	13.21	V	3.3
7602.800000	50.76	—	74.00	23.24	V	3.3
11968.400000	52.60	—	74.00	21.40	V	9.0
11968.400000	—	45.83	54.00	8.17	V	9.0
14062.800000	55.49	—	68.20	12.71	V	10.7
17996.600000	54.85	—	74.00	19.15	V	13.8
17996.600000	—	47.52	54.00	6.48	V	13.8

High Channel: 5310MHz**Common Information**

Project No.: RBJ260414001
EUT Model: ZSM-1
Test Mode: 5G WIFI 802.11ac40 mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.1°C
Humidity: 50%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/5/13

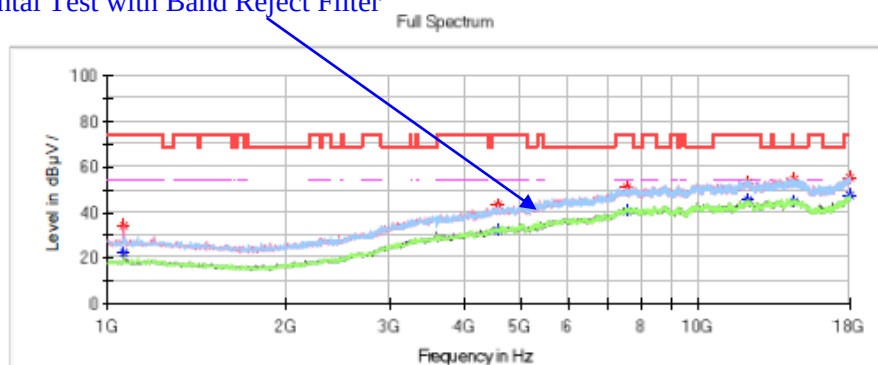
Fundamental Test with Band Reject Filter Full Spectrum**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	35.54	—	74.00	38.46	V	-15.9
1061.200000	—	23.23	54.00	30.77	V	-15.9
2125.400000	35.95	—	68.20	32.25	V	-11.3
4998.400000	—	34.29	54.00	19.71	V	-2.8
4998.400000	43.61	—	74.00	30.39	V	-2.8
7497.400000	—	41.78	54.00	12.22	V	3.3
7497.400000	50.47	—	74.00	23.53	V	3.3
12155.400000	—	44.53	54.00	9.47	H	8.9
12155.400000	55.22	—	74.00	18.78	H	8.9
14096.800000	55.47	—	68.20	12.73	H	10.7
17966.000000	54.57	—	74.00	19.43	H	13.6
17966.000000	—	47.42	54.00	6.58	H	13.6

802.11ac80 Mode:**Channel: 5290MHz****Common Information**

Project No.: RBJ260414001
EUT Model: ZSM-1
Test Mode: 5G WIFI 802.11ac80
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.1°C
Humidity: 50%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/5/13

Fundamental Test with Band Reject Filter

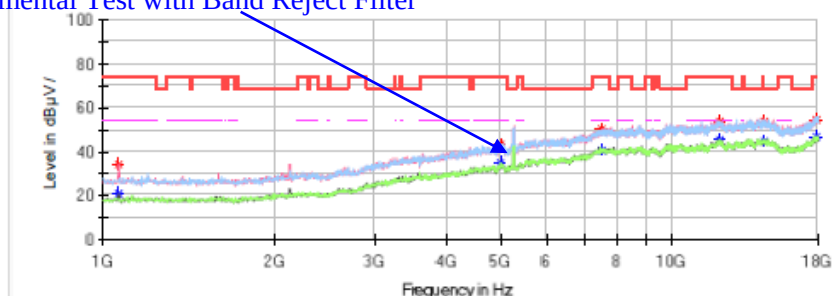
**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	34.59	—	74.00	39.41	V	-15.9
1061.200000	—	22.42	54.00	31.58	V	-15.9
4576.800000	—	32.32	54.00	21.68	V	-4.2
4576.800000	43.24	—	74.00	30.76	V	-4.2
7575.600000	—	40.42	54.00	13.58	V	3.3
7575.600000	51.02	—	74.00	22.98	V	3.3
12084.000000	53.08	—	74.00	20.92	H	9.0
12084.000000	—	45.62	54.00	8.38	H	9.0
14481.000000	—	44.98	54.00	9.02	H	11.1
14481.000000	54.37	—	74.00	19.63	H	11.1
17986.400000	55.32	—	74.00	18.68	H	13.7
17986.400000	—	47.85	54.00	6.15	H	13.7

802.11ax 20 Mode:**Low Channel: 5260MHz****Common Information**

Project No.: RBJ260414001
EUT Model: ZSM-1
Test Mode: 5G WIFI 802.11ax20 mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.1℃
Humidity: 50%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/5/13

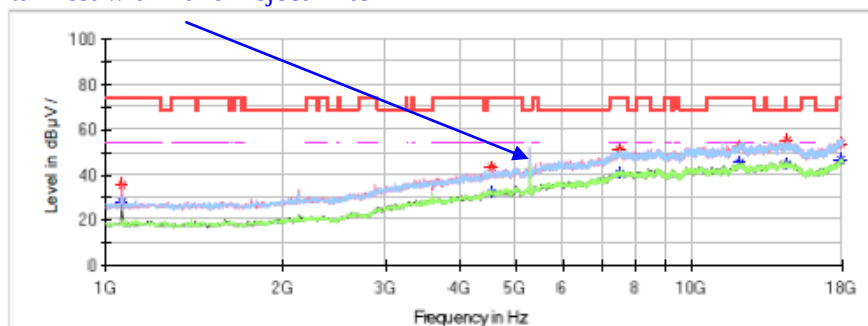
Full Spectrum

Fundamental Test with Band Reject Filter**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1064.600000	34.50	—	74.00	39.50	V	-15.9
1064.600000	—	21.08	54.00	32.92	V	-15.9
4998.400000	43.37	—	74.00	30.63	V	-2.8
4998.400000	—	34.69	54.00	19.31	V	-2.8
7511.000000	—	40.23	54.00	13.77	V	3.3
7511.000000	50.44	—	74.00	23.56	V	3.3
12097.600000	53.79	—	74.00	20.21	H	9.0
12097.600000	—	45.32	54.00	8.68	H	9.0
14477.600000	53.68	—	74.00	20.32	H	11.1
14477.600000	—	44.65	54.00	9.35	H	11.1
17925.200000	—	47.03	54.00	6.97	H	13.4
17925.200000	54.34	—	74.00	19.66	H	13.4

Middle Channel: 5300MHz**Common Information**

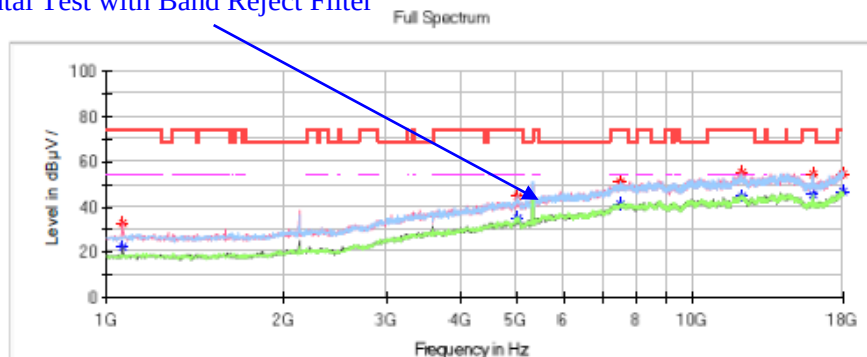
Project No.: RBJ260414001
 EUT Model: ZSM-1
 Test Mode: 5G WIFI 802.11ax20 mode Middle Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 24.1℃
 Humidity: 50%
 Atmospheric Pressure: 101.1kPa
 Test Engineer: Destine Hu
 Check by: Jenny Yang
 Test Date: 2026/5/13

Fundamental Test with Band Reject Filter Full Spectrum**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	35.89	—	74.00	38.11	V	-15.9
1061.200000	—	28.22	54.00	25.78	V	-15.9
4532.600000	43.50	—	74.00	30.50	V	-4.3
4532.600000	—	32.00	54.00	22.00	V	-4.3
7517.800000	51.14	—	74.00	22.86	H	3.3
7517.800000	—	40.80	54.00	13.20	H	3.3
11999.000000	52.56	—	74.00	21.44	V	9.0
11999.000000	—	45.19	54.00	8.81	V	9.0
14470.800000	—	44.78	54.00	9.22	V	11.1
14470.800000	55.22	—	74.00	18.78	V	11.1
17932.000000	53.94	—	74.00	20.06	H	13.4
17932.000000	—	46.91	54.00	7.09	H	13.4

High Channel: 5320MHz**Common Information**

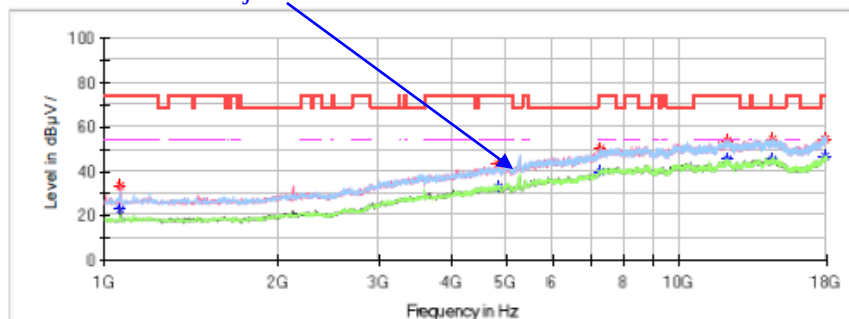
Project No.: RBJ260414001
 EUT Model: ZSM-1
 Test Mode: 5G WIFI 802.11ax20 mode High Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 24.1℃
 Humidity: 50%
 Atmospheric Pressure: 101.1kPa
 Test Engineer: Destine Hu
 Check by: Jenny Yang
 Test Date: 2026/5/13

Fundamental Test with Band Reject Filter**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	32.80	—	74.00	41.20	V	-15.9
1061.200000	—	22.08	54.00	31.92	V	-15.9
5008.600000	—	34.76	54.00	19.24	H	-2.8
5008.600000	44.58	—	74.00	29.42	H	-2.8
7494.000000	50.95	—	74.00	23.05	V	3.3
7494.000000	—	41.04	54.00	12.96	V	3.3
12121.400000	54.95	—	74.00	19.05	H	9.0
12121.400000	—	44.72	54.00	9.28	H	9.0
15949.800000	—	45.39	54.00	8.61	H	7.6
15956.600000	54.46	—	74.00	19.54	H	7.6
17976.200000	—	47.03	54.00	6.97	V	13.7
17976.200000	54.58	—	74.00	19.42	V	13.7

802.11ax40 Mode:**Low Channel: 5270MHz****Common Information**

Project No.: RBJ260414001
EUT Model: ZSM-1
Test Mode: 5G WIFI 802.11ax40 mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.1°C
Humidity: 50%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/5/13

Fundamental Test with Band Reject Filter**Critical Freqs**

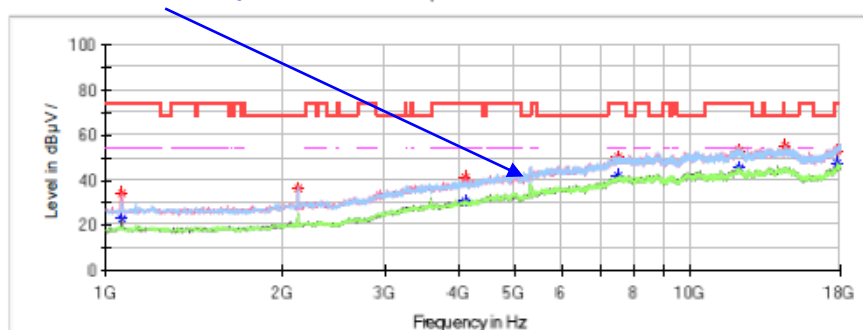
Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1064.600000	33.36	—	74.00	40.64	V	-15.9
1064.600000	—	23.10	54.00	30.90	V	-15.9
4838.600000	43.46	—	74.00	30.54	H	-3.3
4838.600000	—	32.80	54.00	21.20	H	-3.3
7259.400000	—	39.62	54.00	14.38	H	2.5
7259.400000	50.25	—	74.00	23.75	H	2.5
12094.200000	53.78	—	74.00	20.22	H	9.0
12094.200000	—	45.39	54.00	8.61	H	9.0
14477.600000	54.31	—	74.00	19.69	H	11.1
14477.600000	—	45.12	54.00	8.88	H	11.1
17938.800000	54.32	—	74.00	19.68	H	13.5
17938.800000	—	46.93	54.00	7.07	H	13.5

High Channel: 5310MHz**Common Information**

Project No.: RBJ260414001
 EUT Model: ZSM-1
 Test Mode: 5G WIFI 802.11ax40 mode High Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 24.1°C
 Humidity: 50%
 Atmospheric Pressure: 101.1kPa
 Test Engineer: Destine Hu
 Check by: Jenny Yang
 Test Date: 2026/5/13

Fundamental Test with Band Reject Filter

Full Spectrum

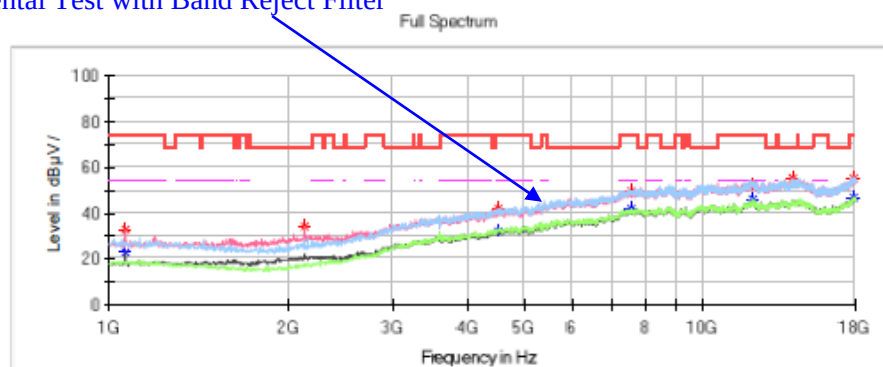
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	—	23.32	54.00	30.68	V	-15.9
1061.200000	34.06	—	74.00	39.94	V	-15.9
2128.800000	36.35	—	68.20	31.85	V	-11.3
4121.200000	—	31.05	54.00	22.95	V	-4.8
4121.200000	41.42	—	74.00	32.58	V	-4.8
7500.800000	—	41.67	54.00	12.33	H	3.3
7500.800000	50.54	—	74.00	23.46	H	3.3
12077.200000	53.10	—	74.00	20.90	H	9.0
12077.200000	—	45.54	54.00	8.46	H	9.0
14457.200000	55.01	—	68.20	13.19	H	11.1
17813.000000	53.29	—	74.00	20.71	H	12.7
17813.000000	—	47.22	54.00	6.78	H	12.7

802.11ax80 Mode:**Channel: 5290MHz****Common Information**

Project No.: RBJ260414001
EUT Model: ZSM-1
Test Mode: 5G WIFI 802.11ax80
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.1°C
Humidity: 50%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/5/13

Fundamental Test with Band Reject Filter

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µV/m)	Average (dB µV/m)	Limit (dB µV/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	—	23.22	54.00	30.78	V	-15.9
1061.200000	32.98	—	74.00	41.02	V	-15.9
2125.400000	34.08	—	68.20	34.12	V	-11.3
4505.400000	—	32.45	54.00	21.55	V	-4.4
4505.400000	41.95	—	74.00	32.05	V	-4.4
7541.600000	49.39	—	74.00	24.61	H	3.3
7541.600000	—	41.84	54.00	12.16	H	3.3
12121.400000	—	45.83	54.00	8.17	V	9.0
12121.400000	52.75	—	74.00	21.25	V	9.0
14161.400000	55.40	—	68.20	12.80	V	10.8
17928.600000	55.02	—	74.00	18.98	V	13.4
17928.600000	—	47.01	54.00	6.99	V	13.4

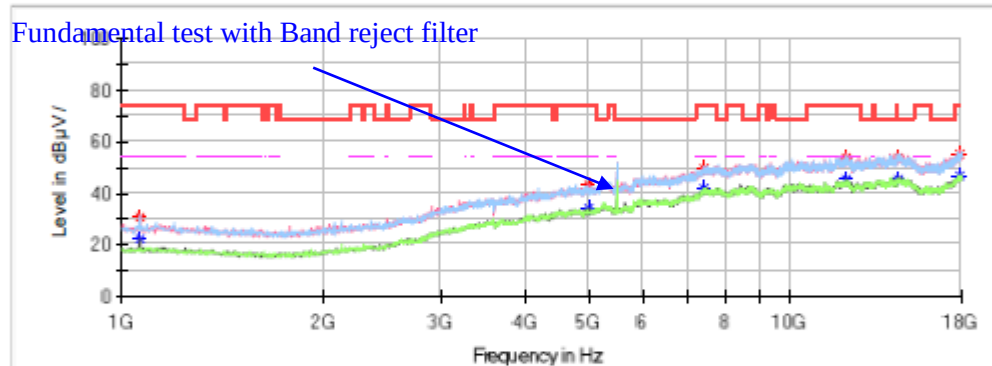
1GHz-18GHz(5470-5725MHz Band):

Chain 0

802.11a Mode:**Low Channel: 5500MHz****Common Information**

Project No.:	RBJ260414001
EUT Model:	ZSM-1
Test Mode:	5G WIFI 802.11a mode Low Channel
Standard:	FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	24.5°C
Humidity:	48%
Atmospheric Pressure:	101.9kPa
Test Engineer:	Destine Hu
Check by:	Jenny Yang
Test Date:	2026/5/15

Full Spectrum

**Critical_Freqs**

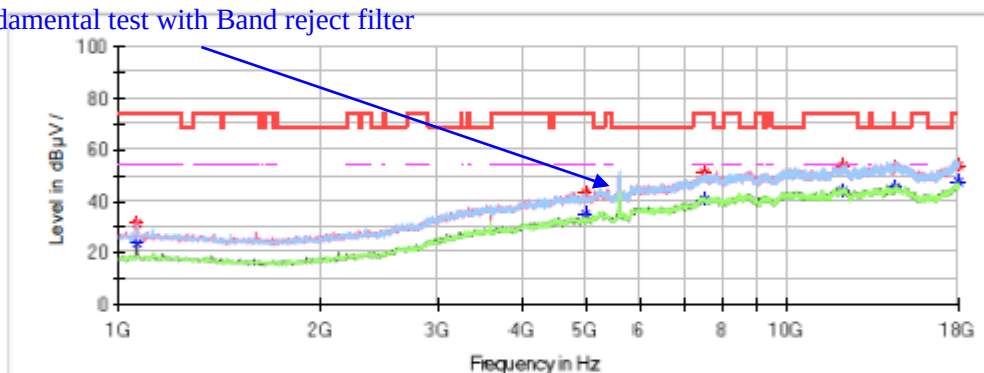
Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	—	22.70	54.00	31.30	V	-15.9
1061.200000	30.97	—	74.00	43.03	V	-15.9
4998.400000	—	34.23	54.00	19.77	V	-2.8
4998.400000	43.44	—	74.00	30.56	V	-2.8
7409.000000	49.64	—	74.00	24.36	H	3.0
7409.000000	—	41.98	54.00	12.02	H	3.0
12131.600000	54.00	—	74.00	20.00	H	9.0
12131.600000	—	45.67	54.00	8.33	H	9.0
14481.000000	54.00	—	74.00	20.00	V	11.1
14481.000000	—	45.72	54.00	8.28	V	11.1
17928.600000	55.44	—	74.00	18.56	H	13.4
17928.600000	—	46.80	54.00	7.20	H	13.4

Middle Channel: 5600MHz**Common Information**

Project No.: RBJ260414001
 EUT Model: ZSM-1
 Test Mode: 5G WIFI 802.11a mode Middle Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 24.5℃
 Humidity: 48%
 Atmospheric Pressure: 101.9kPa
 Test Engineer: Destine Hu
 Check by: Jenny Yang
 Test Date: 2026/5/15

Full Spectrum

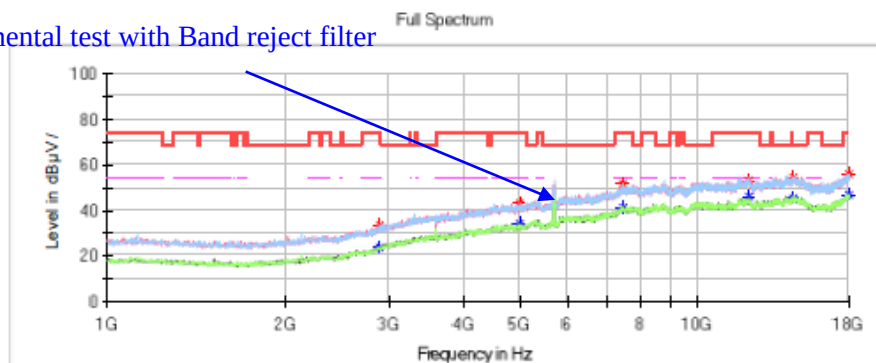
Fundamental test with Band reject filter

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	31.77	—	74.00	42.23	V	-15.9
1061.200000	—	23.50	54.00	30.50	V	-15.9
4998.400000	43.53	—	74.00	30.47	V	-2.8
4998.400000	—	35.28	54.00	18.72	V	-2.8
7507.600000	51.29	—	74.00	22.71	H	3.3
7507.600000	—	40.59	54.00	13.41	H	3.3
12114.600000	53.88	—	74.00	20.12	H	9.0
12114.600000	—	44.25	54.00	9.75	H	9.0
14491.200000	—	45.49	54.00	8.51	H	11.1
14491.200000	53.30	—	74.00	20.70	H	11.1
17972.800000	—	47.53	54.00	6.47	V	13.7
17972.800000	54.18	—	74.00	19.82	V	13.7

High Channel: 5700MHz**Common Information**

Project No.: RBJ260414001
 EUT Model: ZSM-1
 Test Mode: 5G WIFI 802.11a mode High Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 24.5℃
 Humidity: 48%
 Atmospheric Pressure: 101.9kPa
 Test Engineer: Destine Hu
 Check by: Jenny Yang
 Test Date: 2026/5/15

Fundamental test with Band reject filter**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2893.800000	33.24	—	74.00	40.76	V	-8.8
2893.800000	—	23.99	54.00	30.01	V	-8.8
4998.400000	43.34	—	74.00	30.66	V	-2.8
4998.400000	—	34.30	54.00	19.70	V	-2.8
7470.200000	51.69	—	74.00	22.31	V	3.2
7470.200000	—	40.96	54.00	13.04	V	3.2
12155.400000	53.21	—	74.00	20.79	V	8.9
12155.400000	—	45.96	54.00	8.04	V	8.9
14481.000000	—	45.15	54.00	8.85	V	11.1
14481.000000	54.80	—	74.00	19.20	V	11.1
17966.000000	55.66	—	74.00	18.34	H	13.6
17966.000000	—	47.18	54.00	6.82	H	13.6

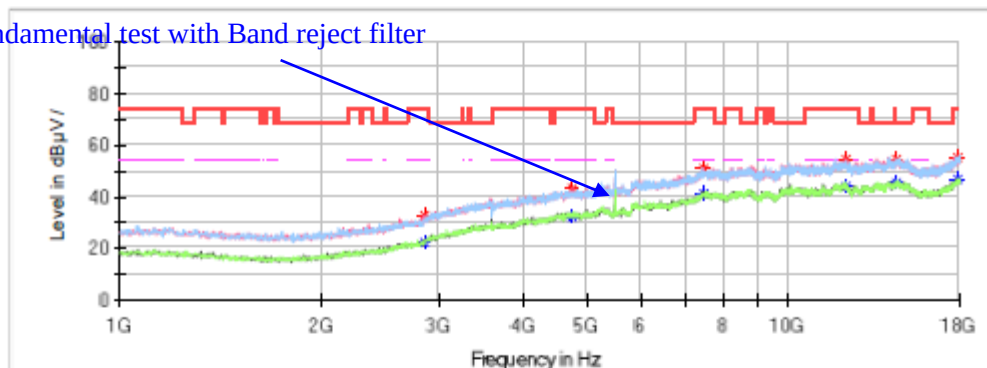
Chain 1

802.11a Mode:**Low Channel: 5500MHz****Common Information**

Project No.: RBJ260414001
EUT Model: ZSM-1
Test Mode: 5G WIFI 802.11a mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.5℃
Humidity: 48%
Atmospheric Pressure: 101.9kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/5/15

Full Spectrum

Fundamental test with Band reject filter

**Critical Freqs**

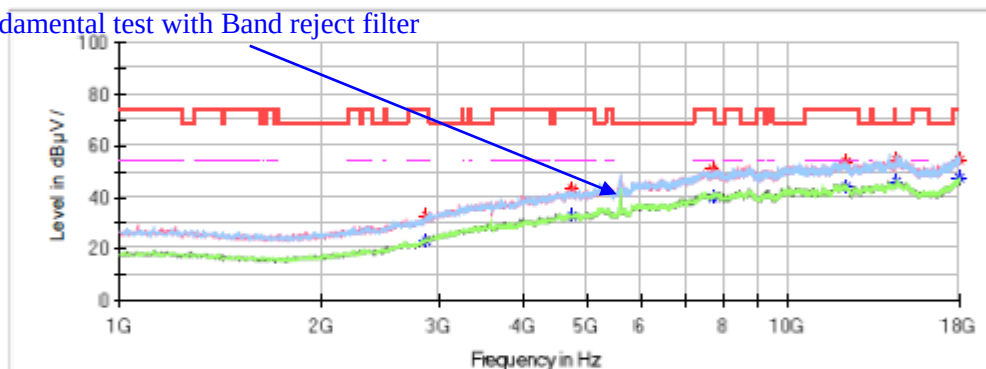
Frequency (MHz)	MaxPeak (dB µV/m)	Average (dB µV/m)	Limit (dB µV/m)	Margin (dB)	Pol	Corr. (dB/m)
2856.400000	—	22.69	54.00	31.31	V	-8.9
2856.400000	33.02	—	74.00	40.98	V	-8.9
4746.800000	—	32.51	54.00	21.49	V	-3.6
4746.800000	43.31	—	74.00	30.69	V	-3.6
7439.600000	—	41.37	54.00	12.63	V	3.1
7439.600000	51.29	—	74.00	22.71	V	3.1
12189.400000	—	43.85	54.00	10.15	V	8.9
12189.400000	54.34	—	74.00	19.66	V	8.9
14498.000000	—	45.77	54.00	8.23	H	11.1
14498.000000	54.83	—	74.00	19.17	H	11.1
17942.200000	54.95	—	74.00	19.05	H	13.5
17942.200000	—	46.84	54.00	7.16	H	13.5

Middle Channel: 5600MHz**Common Information**

Project No.: RBJ260414001
 EUT Model: ZSM-1
 Test Mode: 5G WIFI 802.11a mode Middle Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 24.5℃
 Humidity: 48%
 Atmospheric Pressure: 101.9kPa
 Test Engineer: Destine Hu
 Check by: Jenny Yang
 Test Date: 2026/5/15

Full Spectrum

Fundamental test with Band reject filter

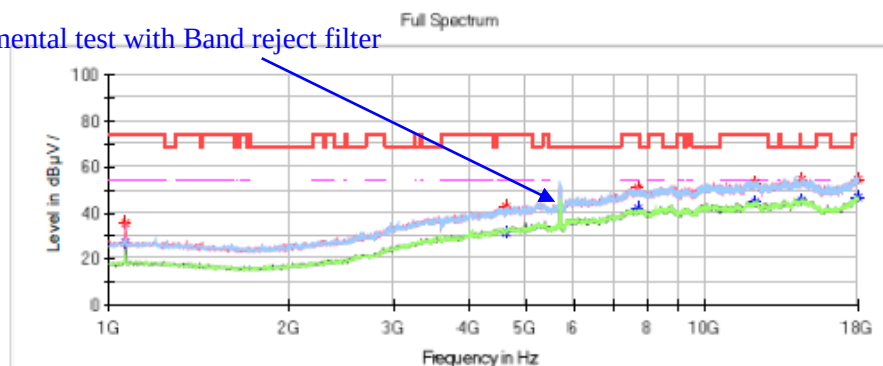
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2873.400000	—	23.22	54.00	30.78	V	-8.9
2873.400000	33.17	—	74.00	40.83	V	-8.9
4753.600000	—	33.19	54.00	20.81	V	-3.6
4753.600000	43.20	—	74.00	30.80	V	-3.6
7684.400000	—	40.11	54.00	13.89	V	3.4
7684.400000	50.94	—	74.00	23.06	V	3.4
12158.800000	—	44.37	54.00	9.63	H	8.9
12158.800000	54.18	—	74.00	19.82	H	8.9
14477.600000	—	45.93	54.00	8.07	H	11.1
14477.600000	54.28	—	74.00	19.72	H	11.1
17996.600000	54.67	—	74.00	19.33	H	13.8
17996.600000	—	47.34	54.00	6.66	H	13.8

High Channel: 5700MHz**Common Information**

Project No.: RBJ260414001
 EUT Model: ZSM-1
 Test Mode: 5G WIFI 802.11a mode High Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 24.5°C
 Humidity: 48%
 Atmospheric Pressure: 101.9kPa
 Test Engineer: Destine Hu
 Check by: Jenny Yang
 Test Date: 2026/5/15

Fundamental test with Band reject filter

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1064.600000	35.76	—	74.00	38.24	V	-15.9
1064.600000	—	27.15	54.00	26.85	V	-15.9
4631.200000	42.69	—	74.00	31.31	V	-4.0
4631.200000	—	31.33	54.00	22.67	V	-4.0
7711.600000	50.92	—	74.00	23.08	V	3.4
7711.600000	—	42.26	54.00	11.74	V	3.4
12124.800000	53.30	—	74.00	20.70	V	9.0
12124.800000	—	45.09	54.00	8.91	V	9.0
14481.000000	—	45.59	54.00	8.41	H	11.1
14481.000000	54.28	—	74.00	19.72	H	11.1
17955.800000	54.44	—	74.00	19.56	H	13.6
17955.800000	—	47.08	54.00	6.92	H	13.6

MIMO(Chain 0+Chain 1):
802.11ac20 Mode:

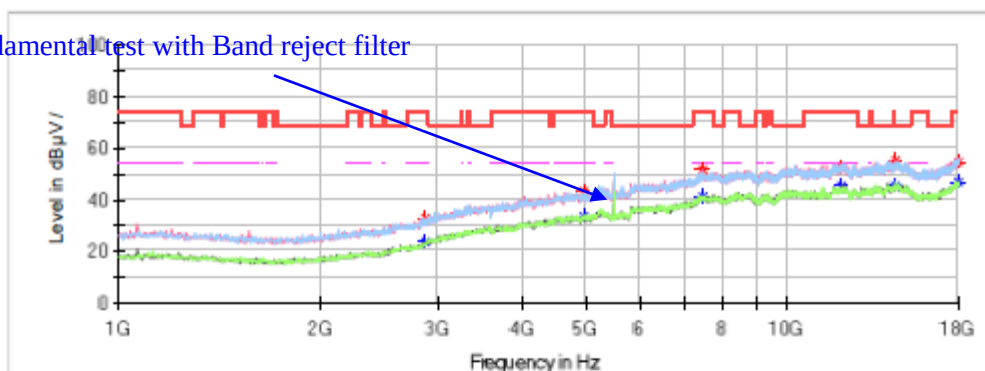
Low Channel: 5500MHz

Common Information

Project No.:	RBJ260414001
EUT Model:	ZSM-1
Test Mode:	5G WIFI 802.11ac20 mode Low Channel
Standard:	FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	24.5℃
Humidity:	48%
Atmospheric Pressure:	101.9kPa
Test Engineer:	Destine Hu
Check by:	Jenny Yang
Test Date:	2026/5/15

Full Spectrum

Fundamental test with Band reject filter

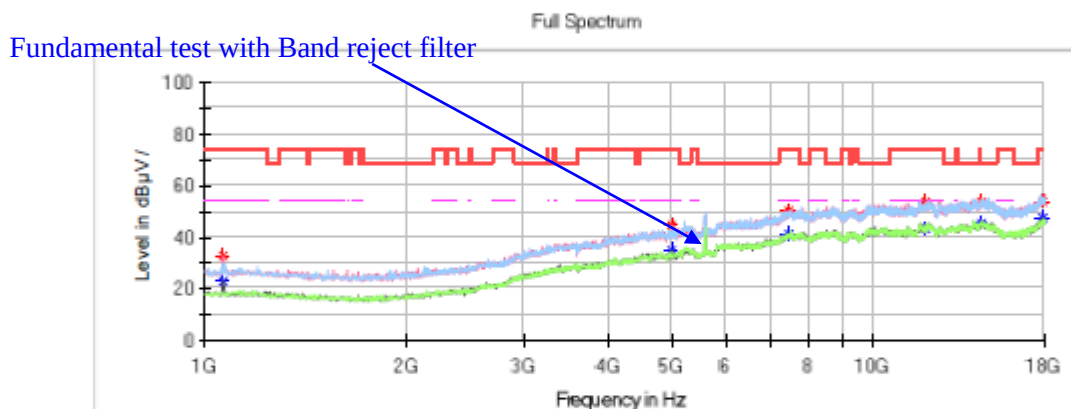


Critical Freqs

Frequency (MHz)	MaxPeak (dB μV/m)	Average (dB μV/m)	Limit (dB μV/m)	Margin (dB)	Pol	Corr. (dB/m)
2873.400000	—	23.58	54.00	30.42	V	-8.9
2873.400000	32.80	—	74.00	41.20	V	-8.9
4961.000000	—	33.77	54.00	20.23	V	-2.9
4961.000000	43.68	—	74.00	30.32	V	-2.9
7439.600000	—	41.55	54.00	12.45	V	3.1
7439.600000	51.56	—	74.00	22.44	V	3.1
11995.600000	52.37	—	74.00	21.63	H	9.0
11995.600000	—	45.58	54.00	8.42	H	9.0
14484.400000	—	45.23	54.00	8.77	V	11.1
14484.400000	55.55	—	74.00	18.45	V	11.1
17996.600000	54.85	—	74.00	19.15	H	13.8
17996.600000	—	47.06	54.00	6.94	H	13.8

Middle Channel: 5600MHz**Common Information**

Project No.: RBJ260414001
EUT Model: ZSM-1
Test Mode: 5G WIFI 802.11ac20 mode Middle Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.5℃
Humidity: 48%
Atmospheric Pressure: 101.9kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/5/15

**Critical Freqs**

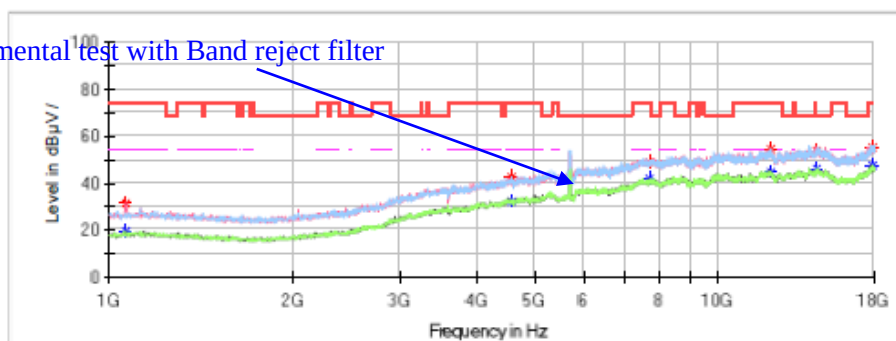
Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	—	22.88	54.00	31.12	V	-15.9
1061.200000	32.56	—	74.00	41.44	V	-15.9
4998.400000	—	34.80	54.00	19.20	V	-2.8
4998.400000	44.56	—	74.00	29.44	V	-2.8
7443.000000	—	41.48	54.00	12.52	V	3.1
7443.000000	50.69	—	74.00	23.31	V	3.1
11965.000000	—	43.14	54.00	10.86	V	9.0
11965.000000	54.00	—	74.00	20.00	V	9.0
14494.600000	54.19	—	74.00	19.81	H	11.1
14494.600000	—	45.59	54.00	8.41	H	11.1
17867.400000	—	47.21	54.00	6.79	V	13.0
17867.400000	53.97	—	74.00	20.03	V	13.0

High Channel: 5700MHz**Common Information**

Project No.: RBJ260414001
EUT Model: ZSM-1
Test Mode: 5G WIFI 802.11ac20 mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.5℃
Humidity: 48%
Atmospheric Pressure: 101.9kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/5/15

Full Spectrum

Fundamental test with Band reject filter

**Critical_Freqs**

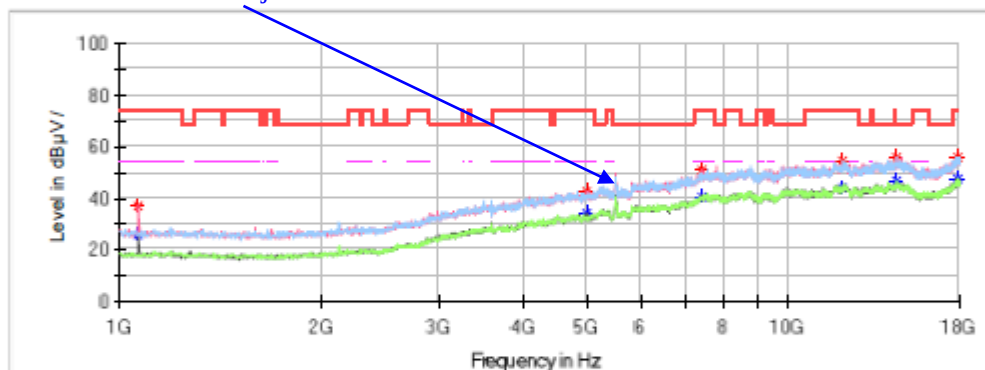
Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	—	19.79	54.00	34.21	V	-15.9
1061.200000	31.35	—	74.00	42.65	V	-15.9
4566.600000	—	32.44	54.00	21.56	V	-4.2
4566.600000	42.52	—	74.00	31.48	V	-4.2
7684.400000	49.21	—	74.00	24.79	V	3.4
7684.400000	—	42.00	54.00	12.00	V	3.4
12165.600000	—	44.95	54.00	9.05	H	8.9
12165.600000	54.70	—	74.00	19.30	H	8.9
14484.400000	54.16	—	74.00	19.84	H	11.1
14484.400000	—	46.00	54.00	8.00	H	11.1
17894.600000	55.12	—	74.00	18.88	H	13.2
17894.600000	—	47.33	54.00	6.67	H	13.2

802.11ac40 Mode:**Low Channel: 5510MHz****Common Information**

Project No.: RBJ260414001
EUT Model: ZSM-1
Test Mode: 5G WIFI 802.11ac40 mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.5℃
Humidity: 48%
Atmospheric Pressure: 101.9kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/5/15

Fundamental test with Band reject filter

Full Spectrum

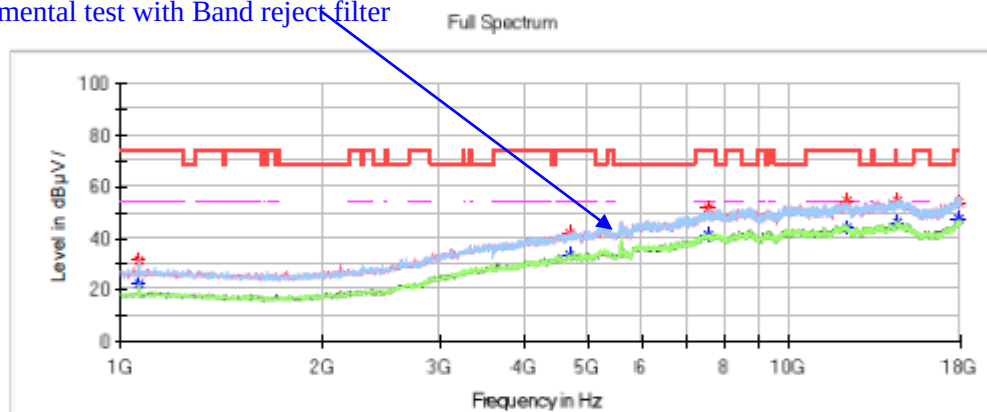
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μV/m)	Average (dB μV/m)	Limit (dB μV/m)	Margin (dB)	Pol	Corr. (dB/m)
1064.600000	37.33	—	74.00	36.67	V	-15.9
1064.600000	—	25.86	54.00	28.14	V	-15.9
4998.400000	42.80	—	74.00	31.20	V	-2.8
4998.400000	—	34.42	54.00	19.58	V	-2.8
7436.200000	—	40.38	54.00	13.62	V	3.1
7436.200000	50.71	—	74.00	23.29	V	3.1
12019.400000	—	44.28	54.00	9.72	H	9.0
12019.400000	54.20	—	74.00	19.80	H	9.0
14477.600000	—	46.59	54.00	7.41	H	11.1
14515.000000	56.28	—	68.20	11.92	H	11.0
17925.200000	55.71	—	74.00	18.29	H	13.4
17925.200000	—	47.21	54.00	6.79	H	13.4

Middle Channel: 5590MHz**Common Information**

Project No.: RBJ260414001
EUT Model: ZSM-1
Test Mode: 5G WIFI 802.11ax40 mode Middle Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.5℃
Humidity: 48%
Atmospheric Pressure: 101.9kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/5/15

Fundamental test with Band reject filter

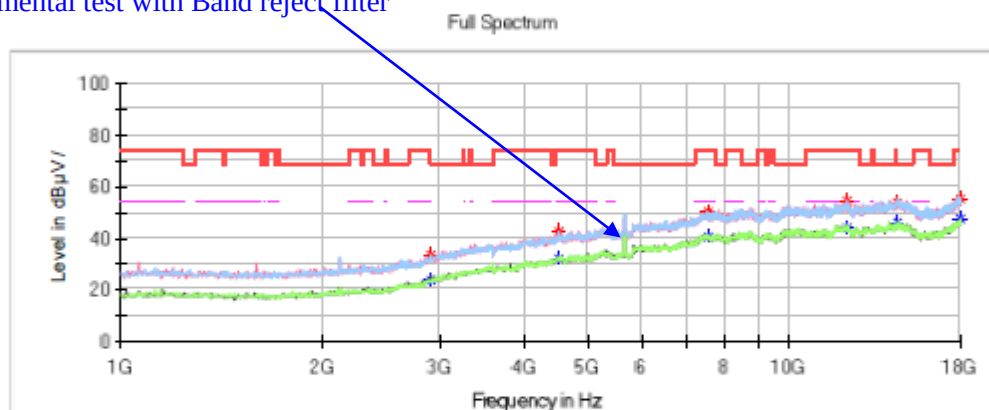
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µV/m)	Average (dB µV/m)	Limit (dB µV/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	31.50	—	74.00	42.50	H	-15.9
1061.200000	—	22.33	54.00	31.67	H	-15.9
4682.200000	42.29	—	74.00	31.71	V	-3.8
4682.200000	—	33.41	54.00	20.59	V	-3.8
7558.600000	51.64	—	74.00	22.36	V	3.3
7558.600000	—	41.17	54.00	12.83	V	3.3
12158.800000	—	44.39	54.00	9.61	V	8.9
12158.800000	54.26	—	74.00	19.74	V	8.9
14498.000000	54.71	—	74.00	19.29	H	11.1
14498.000000	—	45.85	54.00	8.15	H	11.1
17898.000000	—	47.58	54.00	6.42	V	13.2
17898.000000	53.83	—	74.00	20.17	V	13.2

High Channel: 5670MHz**Common Information**

Project No.: RBJ260414001
EUT Model: ZSM-1
Test Mode: 5G WIFI 802.11ax40 mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.5℃
Humidity: 48%
Atmospheric Pressure: 101.9kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/5/15

Fundamental test with Band reject filter

**Critical Freqs**

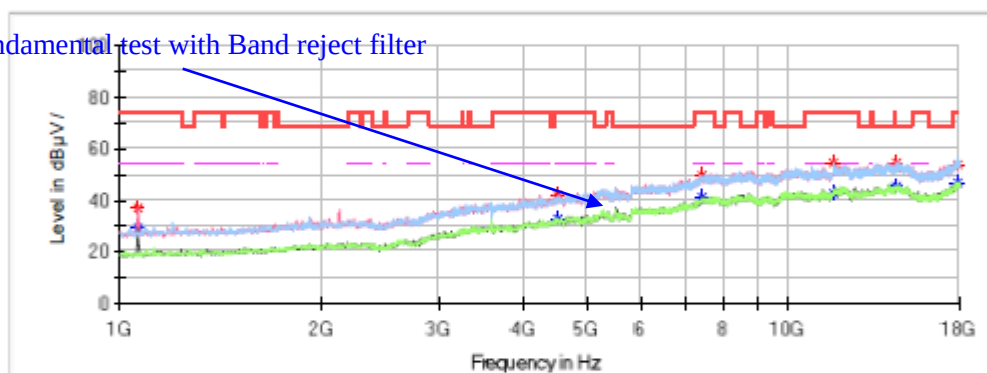
Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2897.200000	—	24.04	54.00	29.96	H	-8.8
2897.200000	33.24	—	74.00	40.76	H	-8.8
4502.000000	—	32.41	54.00	21.59	H	-4.4
4502.000000	42.67	—	74.00	31.33	H	-4.4
7572.200000	—	40.46	54.00	13.54	V	3.3
7572.200000	50.50	—	74.00	23.50	V	3.3
12203.000000	—	44.33	54.00	9.67	H	8.9
12203.000000	54.34	—	74.00	19.66	H	8.9
14477.600000	54.05	—	74.00	19.95	V	11.1
14477.600000	—	46.04	54.00	7.96	V	11.1
17966.000000	54.94	—	74.00	19.06	V	13.6
17966.000000	—	47.64	54.00	6.36	V	13.6

802.11ac80 Mode:**Low Channel: 5530MHz****Common Information**

Project No.: RBJ260414001
EUT Model: ZSM-1
Test Mode: 5G WIFI 802.11ax80 mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.5℃
Humidity: 48%
Atmospheric Pressure: 101.9kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/5/15

Full Spectrum

Fundamental test with Band-reject filter

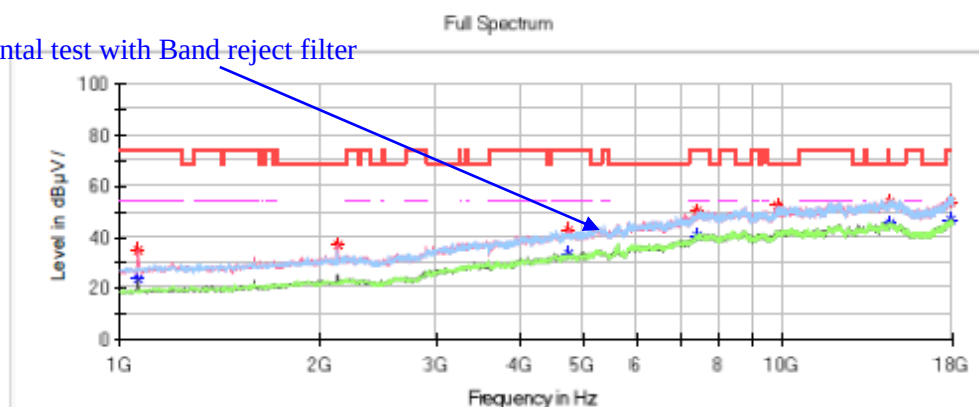
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μV/m)	Average (dB μV/m)	Limit (dB μV/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	37.27	—	74.00	36.73	V	-15.9
1061.200000	—	29.26	54.00	24.74	V	-15.9
4522.400000	42.26	—	74.00	31.74	V	-4.3
4522.400000	—	33.12	54.00	20.88	V	-4.3
7412.400000	49.36	—	74.00	24.64	V	3.0
7412.400000	—	41.15	54.00	12.85	V	3.0
11642.000000	—	42.93	54.00	11.07	H	8.4
11642.000000	54.35	—	74.00	19.65	H	8.4
14481.000000	54.32	—	74.00	19.68	H	11.1
14481.000000	—	45.54	54.00	8.46	H	11.1
17942.200000	53.74	—	74.00	20.26	V	13.5
17942.200000	—	47.13	54.00	6.87	V	13.5

High Channel: 5610MHz**Common Information**

Project No.: RBJ260414001
 EUT Model: ZSM-1
 Test Mode: 5G WIFI 802.11ax80 mode High Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 24.5℃
 Humidity: 48%
 Atmospheric Pressure: 101.9kPa
 Test Engineer: Destine Hu
 Check by: Jenny Yang
 Test Date: 2026/5/15

Fundamental test with Band reject filter

**Critical Freqs**

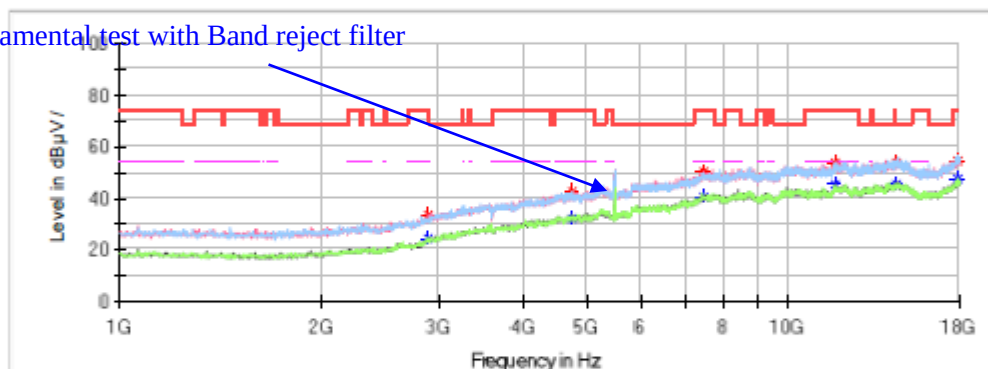
Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	34.96	—	74.00	39.04	V	-15.9
1061.200000	—	23.77	54.00	30.23	V	-15.9
2125.400000	36.86	—	68.20	31.34	V	-11.3
4750.200000	—	33.28	54.00	20.72	V	-3.6
4750.200000	42.58	—	74.00	31.42	V	-3.6
7432.800000	—	40.33	54.00	13.67	H	3.1
7432.800000	50.62	—	74.00	23.38	H	3.1
9829.800000	52.65	—	68.20	15.55	H	5.9
14494.600000	—	45.37	54.00	8.63	H	11.1
14494.600000	53.87	—	74.00	20.13	H	11.1
17904.800000	—	46.96	54.00	7.04	H	13.2
17904.800000	53.52	—	74.00	20.48	H	13.2

802.11ax20 Mode:**Low Channel: 5500MHz****Common Information**

Project No.: RBJ260414001
 EUT Model: ZSM-1
 Test Mode: 5G WIFI 802.11ax20 mode Low Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 24.5℃
 Humidity: 48%
 Atmospheric Pressure: 101.9kPa
 Test Engineer: Destine Hu
 Check by: Jenny Yang
 Test Date: 2026/5/15

Full Spectrum

Fundamental test with Band reject filter

**Critical Freqs**

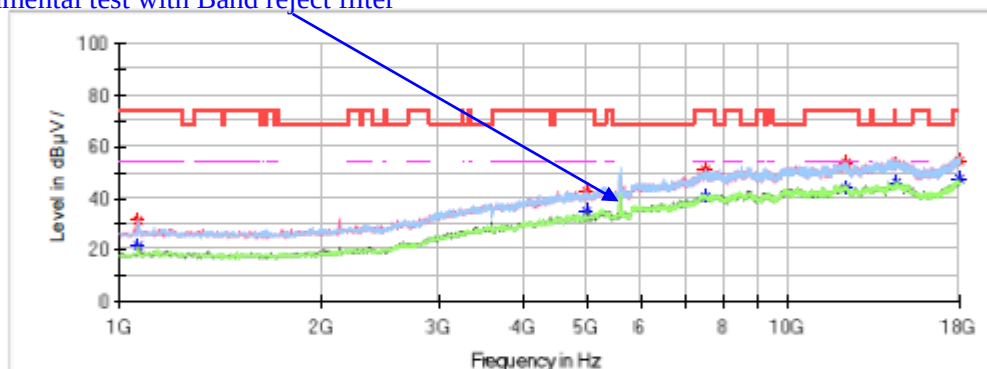
Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2893.800000	33.59	—	74.00	40.41	V	-8.8
2893.800000	—	24.52	54.00	29.48	V	-8.8
4729.800000	—	32.11	54.00	21.89	H	-3.7
4729.800000	42.82	—	74.00	31.18	H	-3.7
7449.800000	50.02	—	74.00	23.98	V	3.1
7449.800000	—	40.36	54.00	13.64	V	3.1
11740.600000	53.75	—	74.00	20.25	V	8.6
11740.600000	—	45.30	54.00	8.70	V	8.6
14491.200000	53.95	—	74.00	20.05	H	11.1
14491.200000	—	45.52	54.00	8.48	H	11.1
17911.600000	54.43	—	74.00	19.57	H	13.3
17911.600000	—	47.36	54.00	6.64	H	13.3

Middle Channel: 5600MHz**Common Information**

Project No.: RBJ260414001
EUT Model: ZSM-1
Test Mode: 5G WIFI 802.11ax20 mode Middle Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.5℃
Humidity: 48%
Atmospheric Pressure: 101.9kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/5/15

Fundamental test with Band reject filter

Full Spectrum

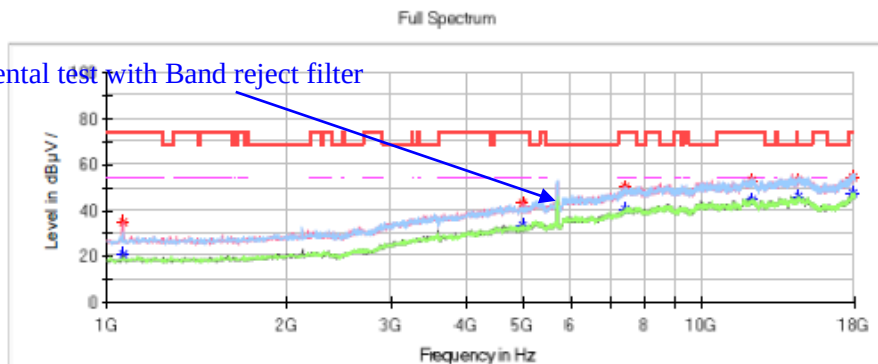
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1064.600000	—	21.34	54.00	32.66	V	-15.9
1064.600000	31.74	—	74.00	42.26	V	-15.9
4998.400000	42.81	—	74.00	31.19	V	-2.8
4998.400000	—	35.29	54.00	18.71	V	-2.8
7487.200000	—	40.68	54.00	13.32	V	3.3
7487.200000	51.05	—	74.00	22.95	V	3.3
12179.200000	—	44.27	54.00	9.73	V	8.9
12179.200000	54.17	—	74.00	19.83	V	8.9
14481.000000	53.37	—	74.00	20.63	H	11.1
14481.000000	—	46.12	54.00	7.88	H	11.1
17996.600000	54.58	—	74.00	19.42	H	13.8
17996.600000	—	47.37	54.00	6.63	H	13.8

High Channel: 5700MHz**Common Information**

Project No.: RBJ260414001
EUT Model: ZSM-1
Test Mode: 5G WIFI 802.11ax20 mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.5℃
Humidity: 48%
Atmospheric Pressure: 101.9kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/5/15

Fundamental test with Band reject filter

**Critical Freqs**

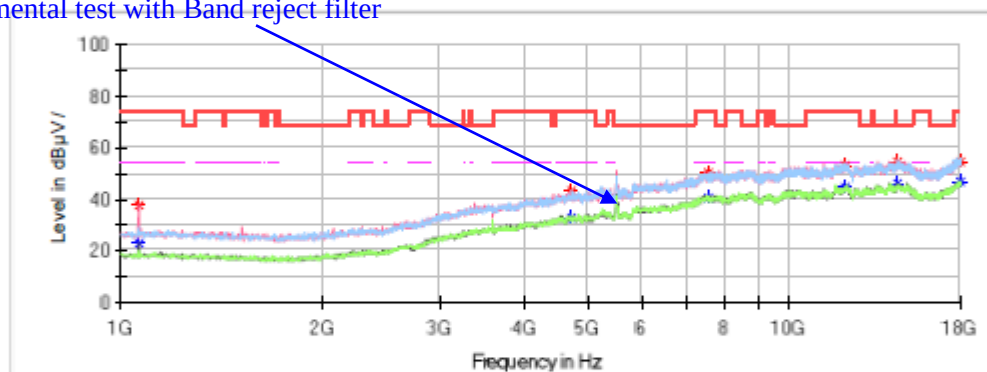
Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	—	21.25	54.00	32.75	V	-15.9
1061.200000	35.21	—	74.00	38.79	V	-15.9
4998.400000	—	33.82	54.00	20.18	V	-2.8
4998.400000	43.20	—	74.00	30.80	V	-2.8
7436.200000	—	40.59	54.00	13.41	V	3.1
7436.200000	50.60	—	74.00	23.40	V	3.1
12090.800000	53.29	—	74.00	20.71	V	9.0
12090.800000	—	44.80	54.00	9.20	V	9.0
14484.400000	53.39	—	74.00	20.61	V	11.1
14484.400000	—	45.81	54.00	8.19	V	11.1
17921.800000	54.83	—	74.00	19.17	H	13.4
17921.800000	—	47.37	54.00	6.63	H	13.4

802.11ax40 Mode:**Low Channel: 5510MHz****Common Information**

Project No.: RBJ260414001
 EUT Model: ZSM-1
 Test Mode: 5G WIFI 802.11ax40 mode Low Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 24.5℃
 Humidity: 48%
 Atmospheric Pressure: 101.9kPa
 Test Engineer: Destine Hu
 Check by: Jenny Yang
 Test Date: 2026/5/15

Fundamental test with Band reject filter

Full Spectrum

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	37.54	—	74.00	36.46	V	-15.9
1061.200000	—	22.88	54.00	31.12	V	-15.9
4709.400000	43.15	—	74.00	30.85	V	-3.7
4709.400000	—	32.69	54.00	21.31	V	-3.7
7531.400000	—	40.26	54.00	13.74	V	3.3
7531.400000	50.20	—	74.00	23.80	V	3.3
12080.600000	53.04	—	74.00	20.96	H	9.0
12080.600000	—	44.83	54.00	9.17	H	9.0
14477.600000	—	46.30	54.00	7.70	V	11.1
14477.600000	54.47	—	74.00	19.53	V	11.1
17976.200000	—	46.95	54.00	7.05	H	13.7
17976.200000	54.77	—	74.00	19.23	H	13.7

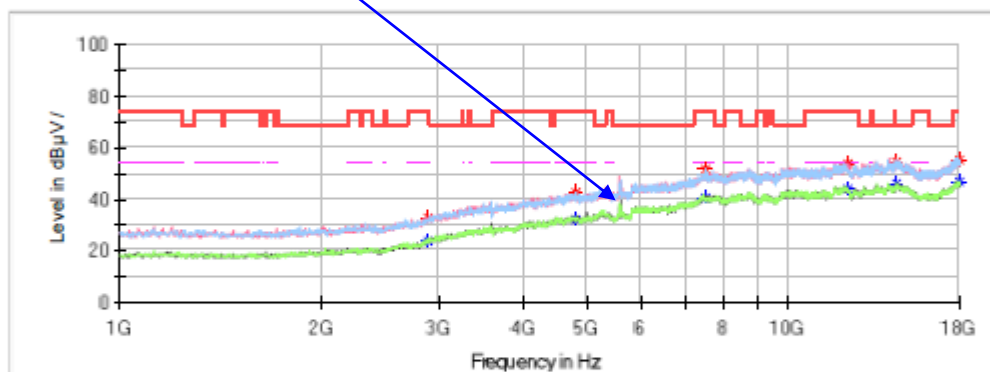
Middle Channel: 5590MHz

Common Information

Project No.: RBJ260414001
EUT Model: ZSM-1
Test Mode: 5G WIFI 802.11ax40 mode Middle Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.5°C
Humidity: 48%
Atmospheric Pressure: 101.9kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/5/15

Fundamental test with Band reject filter

Full Spectrum



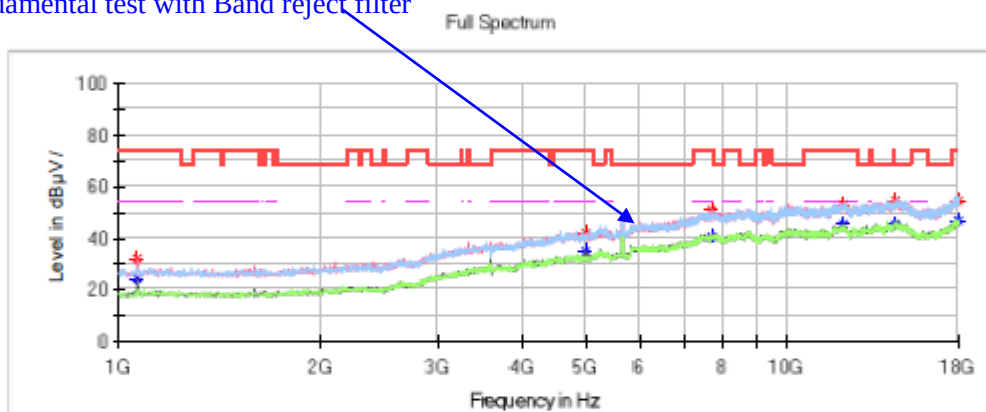
Critical Freqs

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2883.600000	—	23.91	54.00	30.09	H	-8.8
2883.600000	32.87	—	74.00	41.13	H	-8.8
4791.000000	—	31.87	54.00	22.13	H	-3.5
4791.000000	42.93	—	74.00	31.07	H	-3.5
7524.600000	—	40.47	54.00	13.53	H	3.3
7524.600000	51.63	—	74.00	22.37	H	3.3
12233.600000	—	43.82	54.00	10.18	V	8.9
12233.600000	53.71	—	74.00	20.29	V	8.9
14481.000000	54.33	—	74.00	19.67	V	11.1
14481.000000	—	46.21	54.00	7.79	V	11.1
17996.600000	55.24	—	74.00	18.76	V	13.8
17996.600000	—	47.20	54.00	6.80	V	13.8

High Channel: 5670MHz**Common Information**

Project No.: RBJ260414001
EUT Model: ZSM-1
Test Mode: 5G WIFI 802.11ax40 mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.5°C
Humidity: 48%
Atmospheric Pressure: 101.9kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/5/15

Fundamental test with Band reject filter

**Critical Freqs**

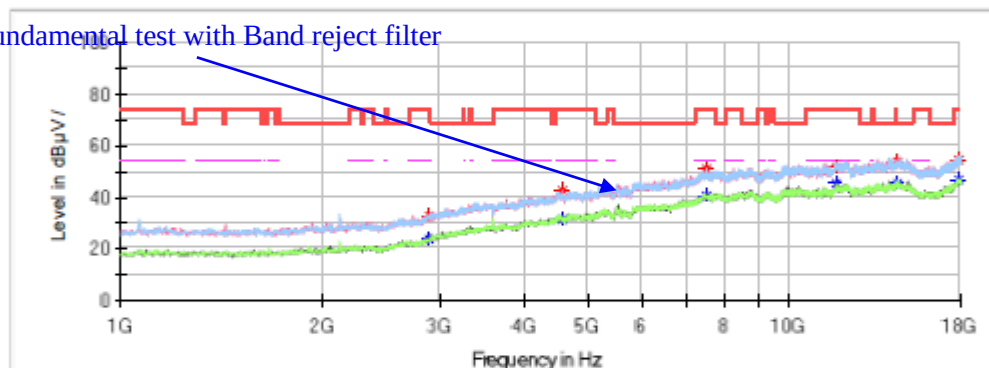
Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1064.600000	31.88	—	74.00	42.12	V	-15.9
1064.600000	—	24.46	54.00	29.54	V	-15.9
4998.400000	—	34.78	54.00	19.22	V	-2.8
4998.400000	41.79	—	74.00	32.21	V	-2.8
7704.800000	—	40.28	54.00	13.72	V	3.4
7704.800000	50.88	—	74.00	23.12	V	3.4
12131.600000	52.98	—	74.00	21.02	V	9.0
12131.600000	—	45.21	54.00	8.79	V	9.0
14481.000000	54.73	—	74.00	19.27	V	11.1
14481.000000	—	45.62	54.00	8.38	V	11.1
17962.600000	54.50	—	74.00	19.50	H	13.6
17962.600000	—	47.07	54.00	6.93	H	13.6

802.11ax80 Mode:**Low Channel: 5530MHz****Common Information**

Project No.: RBJ260414001
EUT Model: ZSM-1
Test Mode: 5G WIFI 802.11ax80 mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.5℃
Humidity: 48%
Atmospheric Pressure: 101.9kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/5/15

Full Spectrum

Fundamental test with Band reject filter

**Critical Freqs**

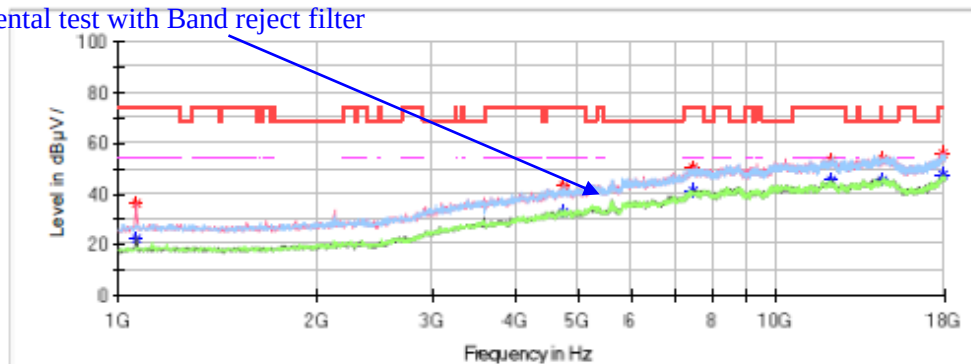
Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2893.800000	33.10	—	74.00	40.90	V	-8.8
2893.800000	—	23.84	54.00	30.16	V	-8.8
4563.200000	42.71	—	74.00	31.29	V	-4.2
4563.200000	—	31.74	54.00	22.26	V	-4.2
7487.200000	51.38	—	74.00	22.62	V	3.3
7487.200000	—	40.50	54.00	13.50	V	3.3
11767.800000	52.07	—	74.00	21.93	V	8.6
11767.800000	—	45.11	54.00	8.89	V	8.6
14481.000000	54.05	—	74.00	19.95	H	11.1
14481.000000	—	45.80	54.00	8.20	H	11.1
17938.800000	54.69	—	74.00	19.31	V	13.5
17938.800000	—	47.17	54.00	6.83	V	13.5

High Channel: 5610MHz**Common Information**

Project No.: RBJ260414001
 EUT Model: ZSM-1
 Test Mode: 5G WIFI 802.11ax80 mode High Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 24.5℃
 Humidity: 48%
 Atmospheric Pressure: 101.9kPa
 Test Engineer: Destine Hu
 Check by: Jenny Yang
 Test Date: 2026/5/15

Full Spectrum

Fundamental test with Band reject filter

**Critical Freqs**

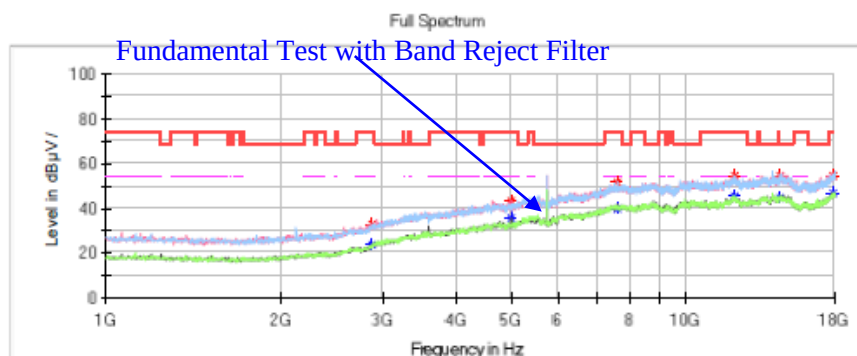
Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	36.40	—	74.00	37.60	V	-15.9
1061.200000	—	22.70	54.00	31.30	V	-15.9
4750.200000	43.24	—	74.00	30.76	V	-3.6
4750.200000	—	32.54	54.00	21.46	V	-3.6
7463.400000	—	41.44	54.00	12.56	V	3.2
7463.400000	50.40	—	74.00	23.60	V	3.2
12131.600000	52.84	—	74.00	21.16	V	9.0
12131.600000	—	45.27	54.00	8.73	V	9.0
14477.600000	53.89	—	74.00	20.11	H	11.1
14477.600000	—	45.19	54.00	8.81	H	11.1
17840.200000	55.67	—	74.00	18.33	V	12.9
17840.200000	—	47.54	54.00	6.46	V	12.9

1GHz-18GHz(5725-5850MHz Band):

Chain 0

802.11a Mode:**Low Channel: 5745MHz****Common Information**

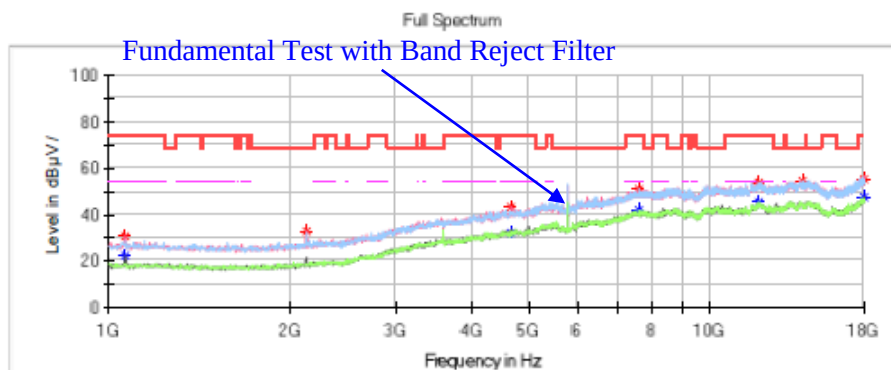
Project No.:	RBJ260414001
EUT Model:	ZSM-1
Test Mode:	5G WIFI 802.11a mode Low Channel
Standard:	FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	24.5℃
Humidity:	48%
Atmospheric Pressure:	101.9kPa
Test Engineer:	Destine Hu
Check by:	Jenny Yang
Test Date:	2026/5/15

**Critical Freqsw**

Frequency (MHz)	MaxPeak (dB µV/m)	Average (dB µV/m)	Limit (dB µV/m)	Margin (dB)	Pol	Corr. (dB/m)
2876.800000	33.04	—	74.00	40.96	V	-8.9
2876.800000	—	23.78	54.00	30.22	V	-8.9
4998.400000	43.06	—	74.00	30.94	V	-2.8
4998.400000	—	35.56	54.00	18.44	V	-2.8
7589.200000	51.68	—	74.00	22.32	V	3.3
7589.200000	—	39.77	54.00	14.23	V	3.3
12087.400000	54.48	—	74.00	19.52	H	9.0
12087.400000	—	45.72	54.00	8.28	H	9.0
14481.000000	—	44.65	54.00	9.35	V	11.1
14481.000000	54.33	—	74.00	19.67	V	11.1
17884.400000	54.56	—	74.00	19.44	H	13.1
17884.400000	—	47.09	54.00	6.91	H	13.1

Middle Channel: 5785MHz**Common Information**

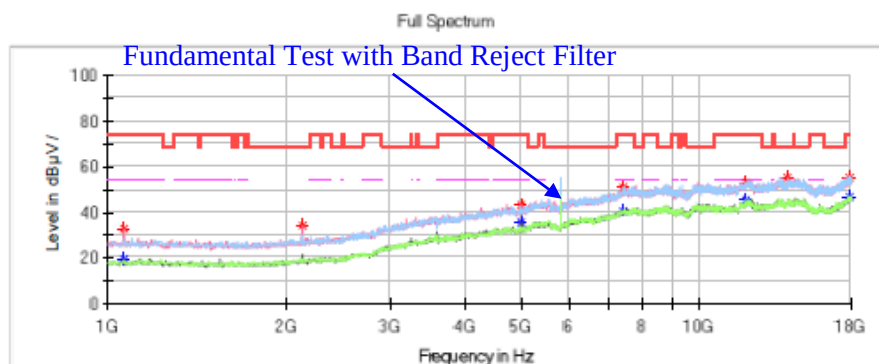
Project No.: RBJ260414001
EUT Model: ZSM-1
Test Mode: 5G WIFI 802.11a mode Middle Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.5℃
Humidity: 48%
Atmospheric Pressure: 101.9kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/5/15

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µV/m)	Average (dB µV/m)	Limit (dB µV/m)	Margin (dB)	Pol	Corr. (dB/m)
1064.600000	30.54	—	74.00	43.46	V	-15.9
1064.600000	—	22.64	54.00	31.36	V	-15.9
2132.200000	32.54	—	68.20	35.66	V	-11.3
4648.200000	43.39	—	74.00	30.61	V	-3.9
4648.200000	—	32.40	54.00	21.60	V	-3.9
7599.400000	—	41.75	54.00	12.25	H	3.3
7599.400000	50.74	—	74.00	23.26	H	3.3
12022.800000	53.60	—	74.00	20.40	H	9.0
12022.800000	—	45.24	54.00	8.76	H	9.0
14192.000000	54.72	—	68.20	13.48	H	10.8
17989.800000	—	47.21	54.00	6.79	H	13.8
17989.800000	54.97	—	74.00	19.03	H	13.8

High Channel: 5825MHz**Common Information**

Project No.: RBJ260414001
 EUT Model: ZSM-1
 Test Mode: 5G WIFI 802.11a mode High Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 24.5℃
 Humidity: 48%
 Atmospheric Pressure: 101.9kPa
 Test Engineer: Destine Hu
 Check by: Jenny Yang
 Test Date: 2026/5/15

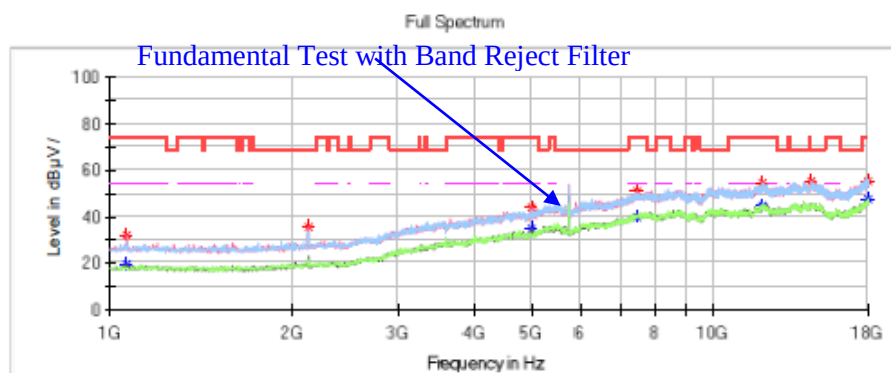
**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	32.72	—	74.00	41.28	V	-15.9
1061.200000	—	19.36	54.00	34.64	V	-15.9
2125.400000	34.36	—	68.20	33.84	V	-11.3
4998.400000	43.17	—	74.00	30.83	V	-2.8
4998.400000	—	35.92	54.00	18.08	V	-2.8
7436.200000	—	40.69	54.00	13.31	H	3.1
7436.200000	51.10	—	74.00	22.90	H	3.1
11968.400000	53.04	—	74.00	20.96	H	9.0
11968.400000	—	45.45	54.00	8.55	H	9.0
14022.000000	55.08	—	68.20	13.12	H	10.7
17898.000000	55.02	—	74.00	18.98	H	13.2
17898.000000	—	47.08	54.00	6.92	H	13.2

Chain 1

802.11a Mode:**Low Channel: 5745MHz****Common Information**

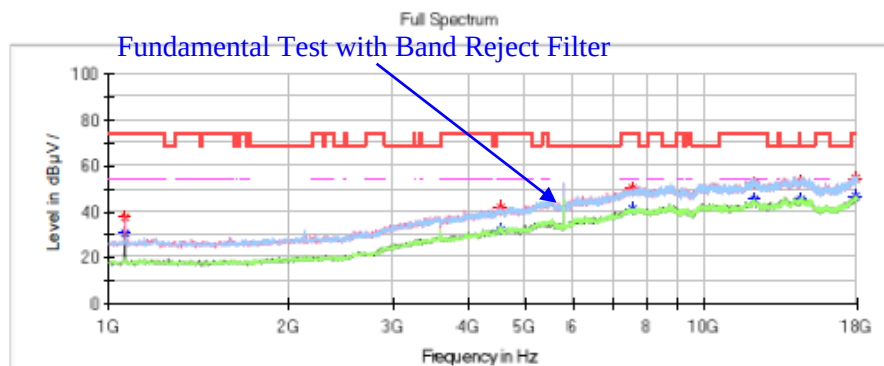
Project No.: RBJ260414001
 EUT Model: ZSM-1
 Test Mode: 5G WIFI 802.11a mode Low Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 24.5℃
 Humidity: 48%
 Atmospheric Pressure: 101.9kPa
 Test Engineer: Destine Hu
 Check by: Jenny Yang
 Test Date: 2026/5/15

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1064.600000	32.34	—	74.00	41.66	V	-15.9
1064.600000	—	19.47	54.00	34.53	V	-15.9
2125.400000	35.64	—	68.20	32.56	V	-11.3
4998.400000	—	34.84	54.00	19.16	V	-2.8
4998.400000	43.95	—	74.00	30.05	V	-2.8
7477.000000	—	39.93	54.00	14.07	V	3.2
7477.000000	50.77	—	74.00	23.23	V	3.2
11992.200000	—	44.61	54.00	9.39	H	9.0
11992.200000	54.30	—	74.00	19.70	H	9.0
14504.800000	54.99	—	68.20	13.21	H	11.1
17969.400000	54.92	—	74.00	19.08	H	13.6
17969.400000	—	47.54	54.00	6.46	H	13.6

Middle Channel: 5785MHz**Common Information**

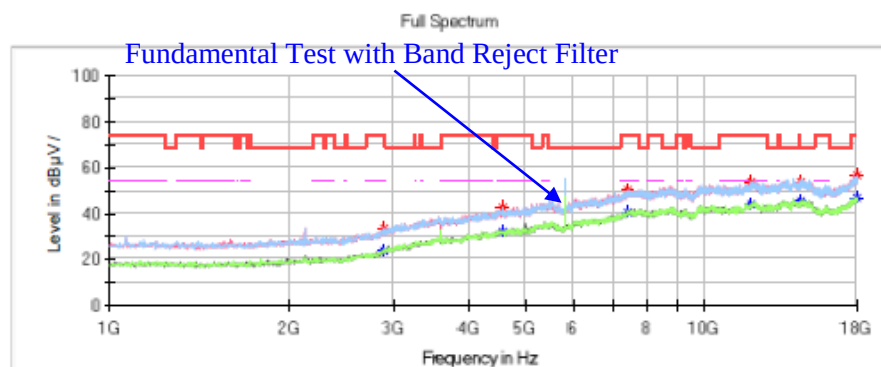
Project No.: RBJ260414001
EUT Model: ZSM-1
Test Mode: 5G WIFI 802.11a mode Middle Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.5°C
Humidity: 48%
Atmospheric Pressure: 101.9kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/5/15

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µV/m)	Average (dB µV/m)	Limit (dB µV/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	37.89	—	74.00	36.11	V	-15.9
1061.200000	—	30.43	54.00	23.57	V	-15.9
4546.200000	41.82	—	74.00	32.18	V	-4.3
4546.200000	—	31.95	54.00	22.05	V	-4.3
7541.600000	—	40.93	54.00	13.07	V	3.3
7541.600000	50.60	—	74.00	23.40	V	3.3
12067.000000	52.48	—	74.00	21.52	H	9.0
12067.000000	—	45.21	54.00	8.79	H	9.0
14481.000000	53.44	—	74.00	20.56	H	11.1
14481.000000	—	45.17	54.00	8.83	H	11.1
17925.200000	54.45	—	74.00	19.55	H	13.4
17925.200000	—	46.90	54.00	7.10	H	13.4

High Channel: 5825MHz**Common Information**

Project No.: RBJ260414001
 EUT Model: ZSM-1
 Test Mode: 5G WIFI 802.11a mode High Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 24.5°C
 Humidity: 48%
 Atmospheric Pressure: 101.9kPa
 Test Engineer: Destine Hu
 Check by: Jenny Yang
 Test Date: 2026/5/15

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2883.600000	33.40	—	74.00	40.60	H	-8.8
2883.600000	—	23.84	54.00	30.16	H	-8.8
4570.000000	42.37	—	74.00	31.63	H	-4.2
4570.000000	—	32.03	54.00	21.97	H	-4.2
7422.600000	—	40.54	54.00	13.46	H	3.0
7422.600000	50.12	—	74.00	23.88	H	3.0
11988.800000	—	44.05	54.00	9.95	H	9.0
11988.800000	54.10	—	74.00	19.90	H	9.0
14487.800000	53.78	—	74.00	20.22	V	11.1
14487.800000	—	45.44	54.00	8.56	V	11.1
17979.600000	56.57	—	74.00	17.43	V	13.7
17979.600000	—	46.97	54.00	7.03	V	13.7