



# TEST REPORT



Report No. : KES-RF260192  
Page 1 / 23

**KES Co., Ltd.**  
#3002, #3503, #3701, 40, Simin-daero365beon-gil, Dongan-gu,  
Anyang-si, Gyeonggi-do, 14057, Republic of Korea  
Tel : +82-31-425-6200, Fax : +82-31-341-3838

## ■ FCC TEST REPORT

### 1. Client

- Name : GreenTalk Co., Ltd.
- Address : 45, Jami-ro 6beon-gil, Buk-gu, Gwangju, Republic of Korea

### 2. Sample Description

- Product item : Smart Golf Ball Wireless Charger
- Model name : G8WLC-01
- Manufacturer etc. : GreenTalk Co., Ltd.

3. Date of test : 2026.03.19 ~ 2026.04.08

4. Location of Test : ☒ Permanent Testing Lab ☐ On Site Testing

- Address : 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Rep. of Korea

5. FCC Rule part(s) : Part 15 Subpart C 15.209

6. Test result : PASS

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

This test report cannot be reproduced and copied without permission without the written consent of KES Co., Ltd.

This laboratory is not accredited for the test results marked \*.

This test report is not related to KOLAS accreditation.

|             |                                  |                                   |
|-------------|----------------------------------|-----------------------------------|
| Affirmation | Tested by                        | Technical Manager                 |
|             | Name : Gu-Bong, Kang (Signature) | Name : Young-Jin, Lee (Signature) |

2026. 05. 13.

**KES Co., Ltd.**



REPORT REVISION HISTORY

| Date       | Test Report No. | Revision History |
|------------|-----------------|------------------|
| 2026.05.13 | KES-RF260192    | Initial          |
|            |                 |                  |
|            |                 |                  |

*This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.*





## TABLE OF CONTENTS

|             |                                              |    |
|-------------|----------------------------------------------|----|
| 1.          | General information .....                    | 4  |
| 1.1.        | EUT description .....                        | 4  |
| 1.2.        | Test configuration.....                      | 4  |
| 1.3.        | Information about derivative model .....     | 5  |
| 1.4.        | Accessory information .....                  | 5  |
| 1.5.        | Device modifications.....                    | 5  |
| 1.6.        | Sample calculation .....                     | 5  |
| 1.7.        | Measurement Uncertainty .....                | 5  |
| 1.8.        | Frequency/channel operations .....           | 6  |
| 1.9.        | Test mode .....                              | 6  |
| 2.          | Summary of tests .....                       | 7  |
| 3.          | Test results .....                           | 8  |
| 3.1.        | Radiated restricted band and emissions ..... | 8  |
| 3.2.        | 20 dB Bandwidth.....                         | 18 |
| 3.3.        | AC conducted emissions .....                 | 19 |
| Appendix A. | Measurement equipment.....                   | 23 |



Report No. : KES-RF260192

## 1. General information

Applicant: GreenTalk Co., Ltd.  
Applicant address: 45, Jami-ro 6beon-gil, Buk-gu, Gwangju, Republic of Korea  
Test site: KES Co., Ltd.  
Test site address: ☐ #3002, #3503, #3701, 40, Simin-daero365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Rep. of Korea  
☒ 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Rep. of Korea  
Test Facility: FCC Accreditation Designation No.: KR0100, Registration No.: 444148  
FCC rule part(s): 15.209  
FCC ID: 2BVPSG8WLC-01  
Module Model: MDBT42Q  
Module FCC ID: SH6MDBT42Q  
Test device serial No.: ☒ Production ☐ Pre-production ☐ Engineering

### 1.1. EUT description

Equipment under test: Smart Golf Ball Wireless Charger  
Frequency range & Number of channels: 2 402 MHz ~ 2 480 MHz (LE 1 Mbps) : 40 ch  
0.146 8 MHz (WPT)  
Inductive charging technique: Magnetic Induction  
Model: G8WLC-01  
Modulation technique: GFSK(LE 1 Mbps), Non-Modulation (WPT)  
Antenna specification: Chip Antenna (LE 1 Mbps) // Peak gain: -1.6 dBi  
Internal type : Coil Antenna (WPT)  
Power source: Operating : DC 3.7 V (Battery)  
Charging : AC 120 V (Adapter DC output 5 V)  
H/W version: V0 .01  
F/W version: V0 .01

### 1.2. Test configuration

The **GreenTalk Co., Ltd. // Smart Golf Ball Wireless Charger // G8WLC-01 // FCC ID: 2BVPSG8WLC-01** was tested according to the specification of EUT, the EUT must comply with following standards and KDB documents.

FCC Part 15C  
ANSI C63.10-2020



Report No. : KES-RF260192

**1.3. Information about derivative model**

N/A.

**1.4. Accessory information**

| Equipment | Manufacturer | Model | Serial No. | Power source |
|-----------|--------------|-------|------------|--------------|
| -         | -            | -     | -          | -            |

**1.5. Device modifications**

N/A

**1.6. Sample calculation**

Where relevant, the following sample calculation is provided

For all conducted test items :

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

For Radiation test :

Field strength level (dB  $\mu$ V/m) = Measured level (dB  $\mu$ V) + Antenna factor (dB) + Cable loss (dB) – Amplifier gain (dB)

**1.7. Measurement Uncertainty**

| Test Item                                                                                                                                        |             | Uncertainty                |
|--------------------------------------------------------------------------------------------------------------------------------------------------|-------------|----------------------------|
| Uncertainty for Conduction emission test                                                                                                         |             | 2.22 dB ( SHIELD ROOM #6 ) |
| Uncertainty for Radiation emission test<br>(include Fundamental emission)                                                                        | Below 1 GHz | 4.04 dB ( SAC #6 )         |
|                                                                                                                                                  | Above 1 GHz | 5.32 dB ( SAC #5 )         |
| Note. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$ . |             |                            |

**1.8. Frequency/channel operations**

| Ch. | Frequency (MHz) | Mode      |
|-----|-----------------|-----------|
| 00  | 2 402           | LE 1 Mbps |
| .   | .               | .         |
| 20  | 2 442           | LE 1 Mbps |
| .   | .               | .         |
| 39  | 2 480           | LE 1 Mbps |

| Ch. | Frequency (MHz) | Mode |
|-----|-----------------|------|
| 00  | 0.146 8         | WPT  |

**1.9. Test mode**

| Mode                       | Charging current | Description    |
|----------------------------|------------------|----------------|
| Charging mode<br>With load | 90%              | Using Max load |
|                            | 50%              | Using Mid load |
|                            | 10%              | Using Min load |

**2. Summary of tests**

| Section in<br>FCC Part 15 | Parameter                  | Test results |
|---------------------------|----------------------------|--------------|
| 15.209                    | Radiated spurious emission | Pass         |
| 2.1049                    | 20 dB Bandwidth            | Pass         |
| 15.207                    | AC conducted emissions     | Pass         |






### 3. Test results


#### 3.1. Radiated restricted band and emissions

##### Test setup

The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz Emissions.

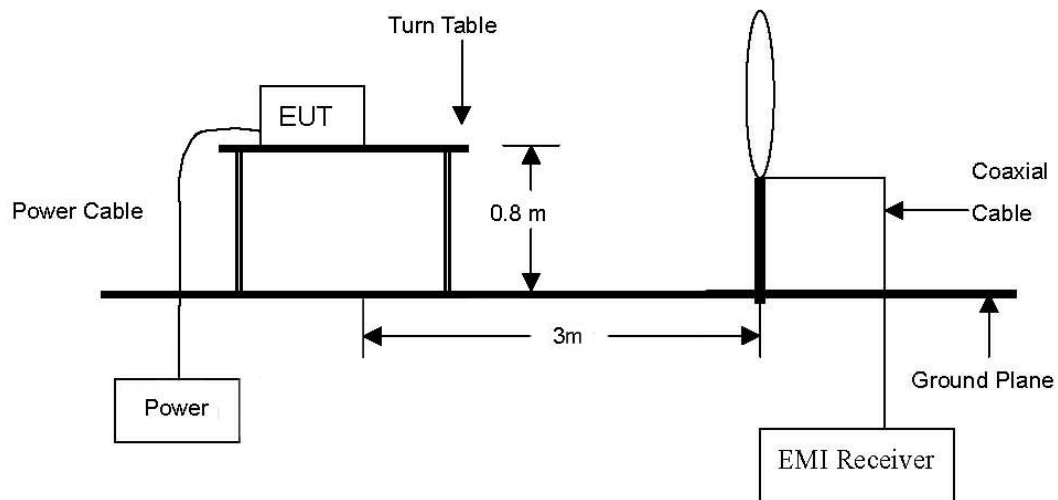


The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

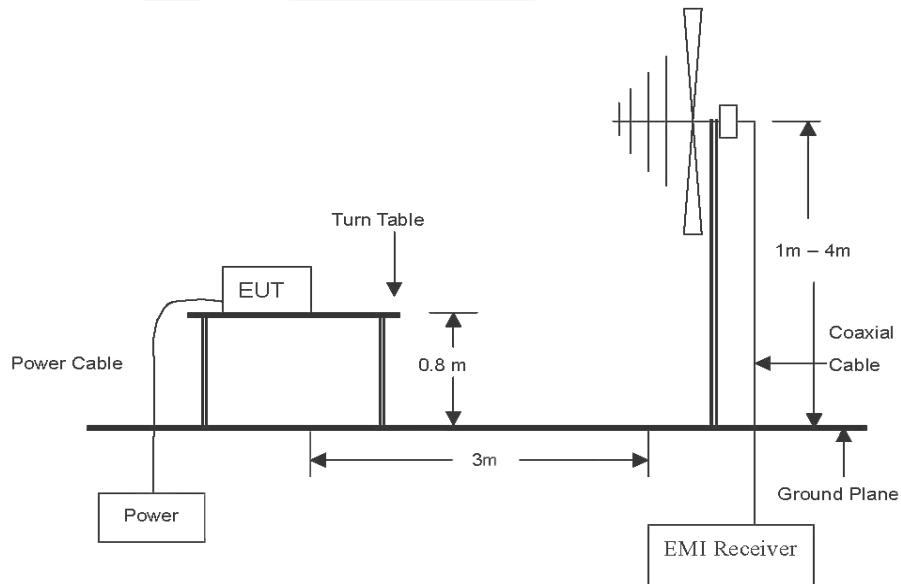



The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz emissions, whichever is lower.

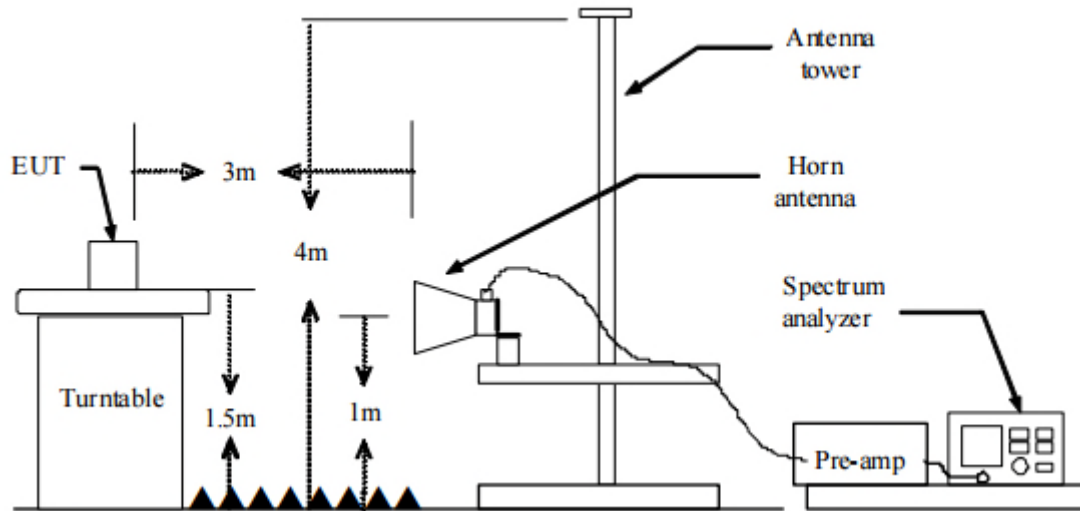

### Test procedure

Radiated emissions from the EUT were measured according to the dictates in section 11.11 & 11.12 of ANSI C63.10-2020.

#### Test procedure below 30 MHz

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
2. Then antenna is a loop antenna is fixed at one meter above the ground to determine the maximum value of the field strength. Both parallel, ground parallel and perpendicular of the antenna are set to make the measurement. It was determined that parallel was worst-case orientation; therefore, all final radiated testing was performed with the EUT in parallel.
3. For each suspected emission, the EUT was arranged to its worst case and then the table was turned from 0 degrees to 360 degrees to find the maximum reading.
4. The test-receiver system was set to average or quasi peak detect function and Specified Bandwidth with Maximum hold mode.

#### Test procedure above 30 MHz

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground for 30 MHz-1 GHz and 1.5 meters for above 1 GHz at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The antenna is a bi-log antenna, a horn antenna, and its height are varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
4. The test receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

5. Spectrum analyzer settings for  $f < 1$  GHz:

- ① Span = wide enough to fully capture the emission being measured
- ② RBW = 120 kHz
- ③ VBW  $\geq$  RBW
- ④ Detector = quasi peak
- ⑤ Sweep time = auto
- ⑥ Trace = max hold

6. Spectrum analyzer settings for  $f \geq 1$  GHz: Peak

- ① Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- ② RBW = 1 MHz
- ③ VBW  $\geq 3$  MHz
- ④ Detector = peak
- ⑤ Sweep time = auto
- ⑥ Trace = max hold
- ⑦ Trace was allowed to stabilize

7. Spectrum analyzer settings for  $f \geq 1$  GHz: Average

- ① Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- ② RBW = 1 MHz
- ③ VBW  $\geq 3 \times$  RBW
- ④ Detector = RMS, if  $\text{span}/(\# \text{ of points in sweep}) \leq (\text{RBW}/2)$ . Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
- ⑤ Averaging type = power(i.e., RMS)
  - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
  - 2) Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.
- ⑥ Sweep = auto
- ⑦ Trace = max hold
- ⑧ Perform a trace average of at least 100 traces.
- ⑨ A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:
  - 1) If power averaging (RMS) mode was used in step ⑤, then the applicable correction factor is  $10 \log(1/x)$ , where  $x$  is the duty cycle.
  - 2) If linear voltage averaging mode was used in step ⑤, then the applicable correction factor is  $20 \log(1/x)$ , where  $x$  is the duty cycle.
  - 3) If a specific emission is demonstrated to be continuous ( $\geq 98$  percent duty cycle) rather than turning on and off with the transmit cycle, then no duty cycle correction is required for that emission.

**Note.**

1.  $f < 30$  MHz, extrapolation factor of 40 dB/decade of distance.  $F_d = 40\log(D_m/D_s)$   
 $f \geq 30$  MHz, extrapolation factor of 20 dB/decade of distance.  $F_d = 20\log(D_m/D_s)$   
 Where:  
 $F_d$  = Distance factor in dB  
 $D_m$  = Measurement distance in meters  
 $D_s$  = Specification distance in meters
2. Field strength(dB $\mu$ V/m) = Level(dB $\mu$ V) + CF (dB) + or DCF(dB)
3. Margin(dB) = Limit(dB $\mu$ V/m) - Field strength(dB $\mu$ V/m)
4. Emissions below 18 GHz were measured at a 3 meter test distance while emissions above 18 GHz were measured at a 1 meter test distance with the application of a distance correction factor.
5. The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z, it was determined that **X orientation** was worst-case orientation; therefore, all final radiated testing was performed with the EUT in **X orientation**.
6. The worst-case emissions are reported however emissions whose levels were not within 20 dB of respective limits were not reported.
7. According to exploratory test no any obvious emission were detected from 9 kHz to 30 MHz. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30 m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

**Limit**


According to 15.209(a), for an intentional radiator devices, the general required of field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values :

| Frequency (MHz) | Distance (Meters) | Radiated ( $\mu$ V/m) |
|-----------------|-------------------|-----------------------|
| 0.009 ~ 0.490   | 300               | $2400/F(\text{kHz})$  |
| 0.490 ~ 1.705   | 30                | $24000/F(\text{kHz})$ |
| 1.705 ~ 30.0    | 30                | 30                    |
| 30 ~ 88         | 3                 | 100**                 |
| 88 ~ 216        | 3                 | 150**                 |
| 216 ~ 960       | 3                 | 200**                 |
| Above 960       | 3                 | 500                   |

\*\*Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 ~ 72 MHz, 76 ~ 88 MHz, 174 ~ 216 MHz or 470 ~ 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

**Test results (Below 30 MHz)**

Mode: 10 % charging  
Distance of measurement: 3 meter

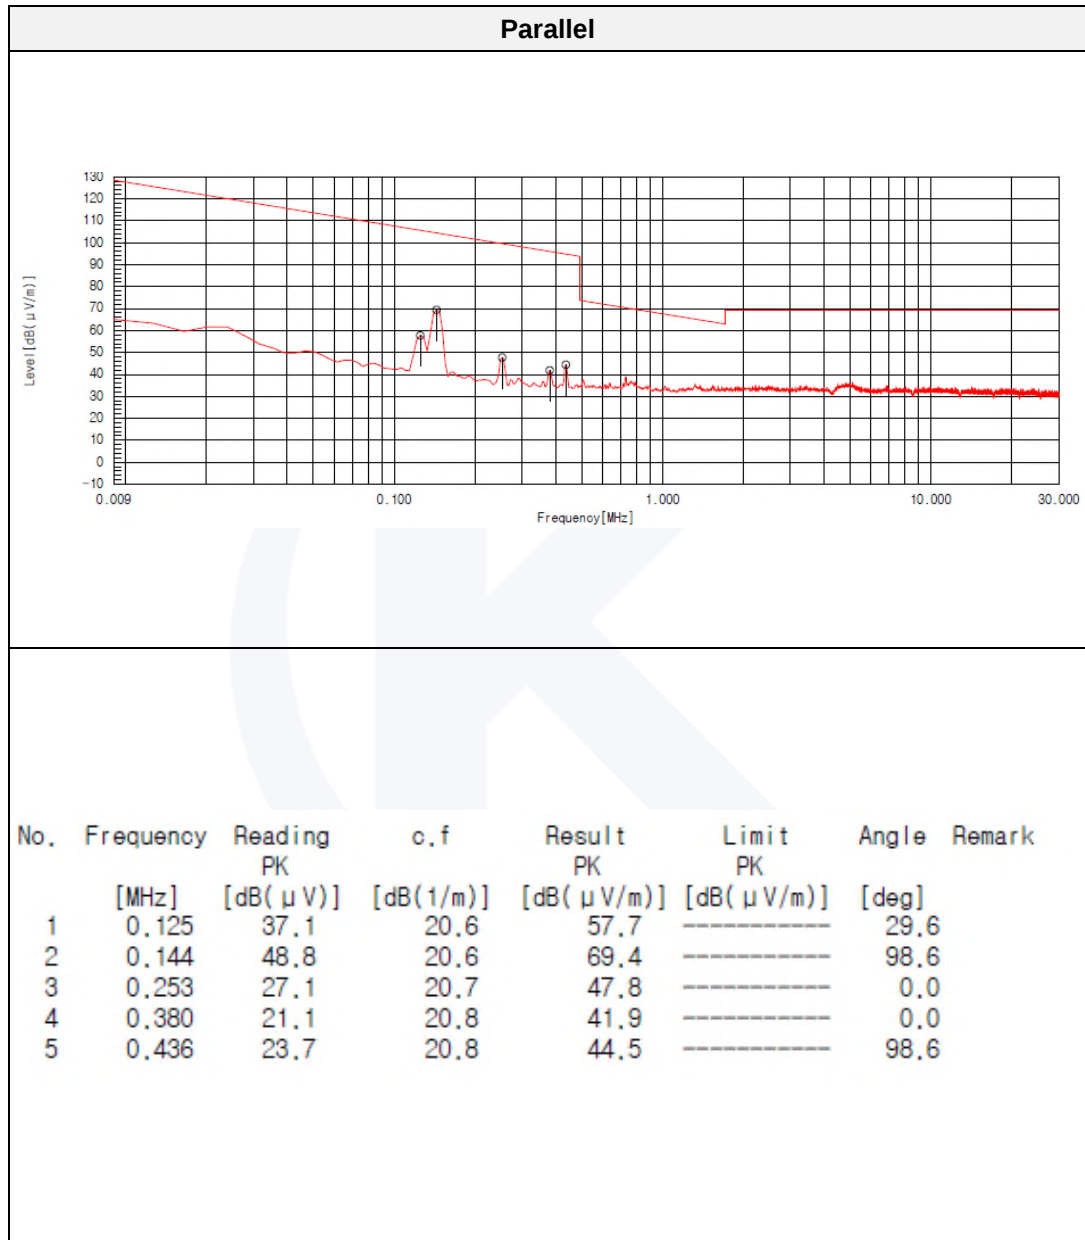


Note.

1. Signal at 0.144 MHz is fundamental signal and the above test results are peak results.



Mode: 50 % charging  
Distance of measurement: 3 meter

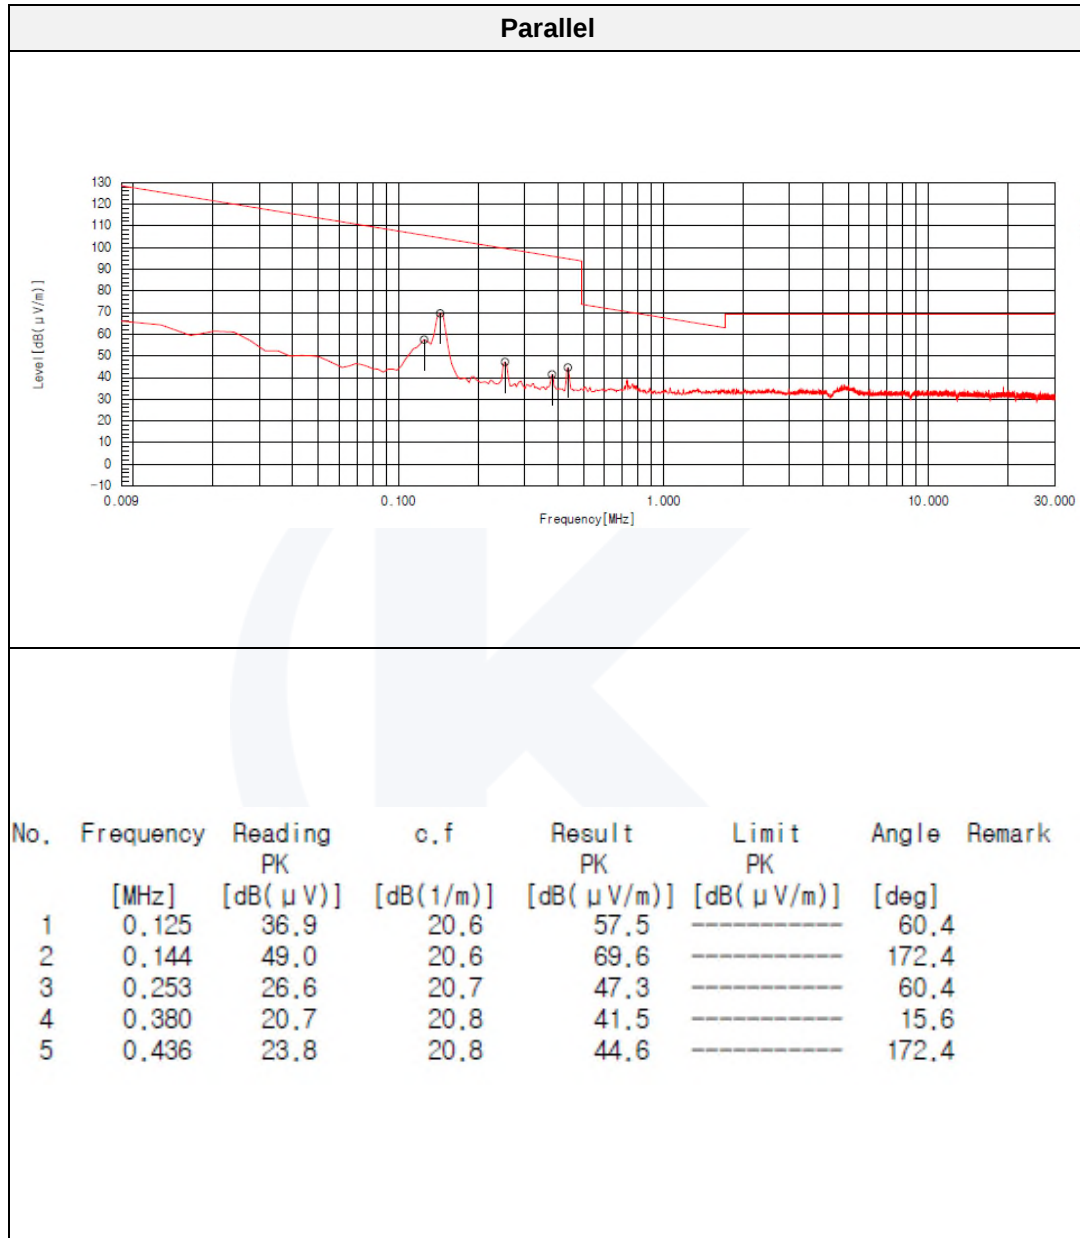


Note.

1. Signal at 0.144 MHz is fundamental signal and the above test results are peak results.



Mode: 90 % charging  
Distance of measurement: 3 meter

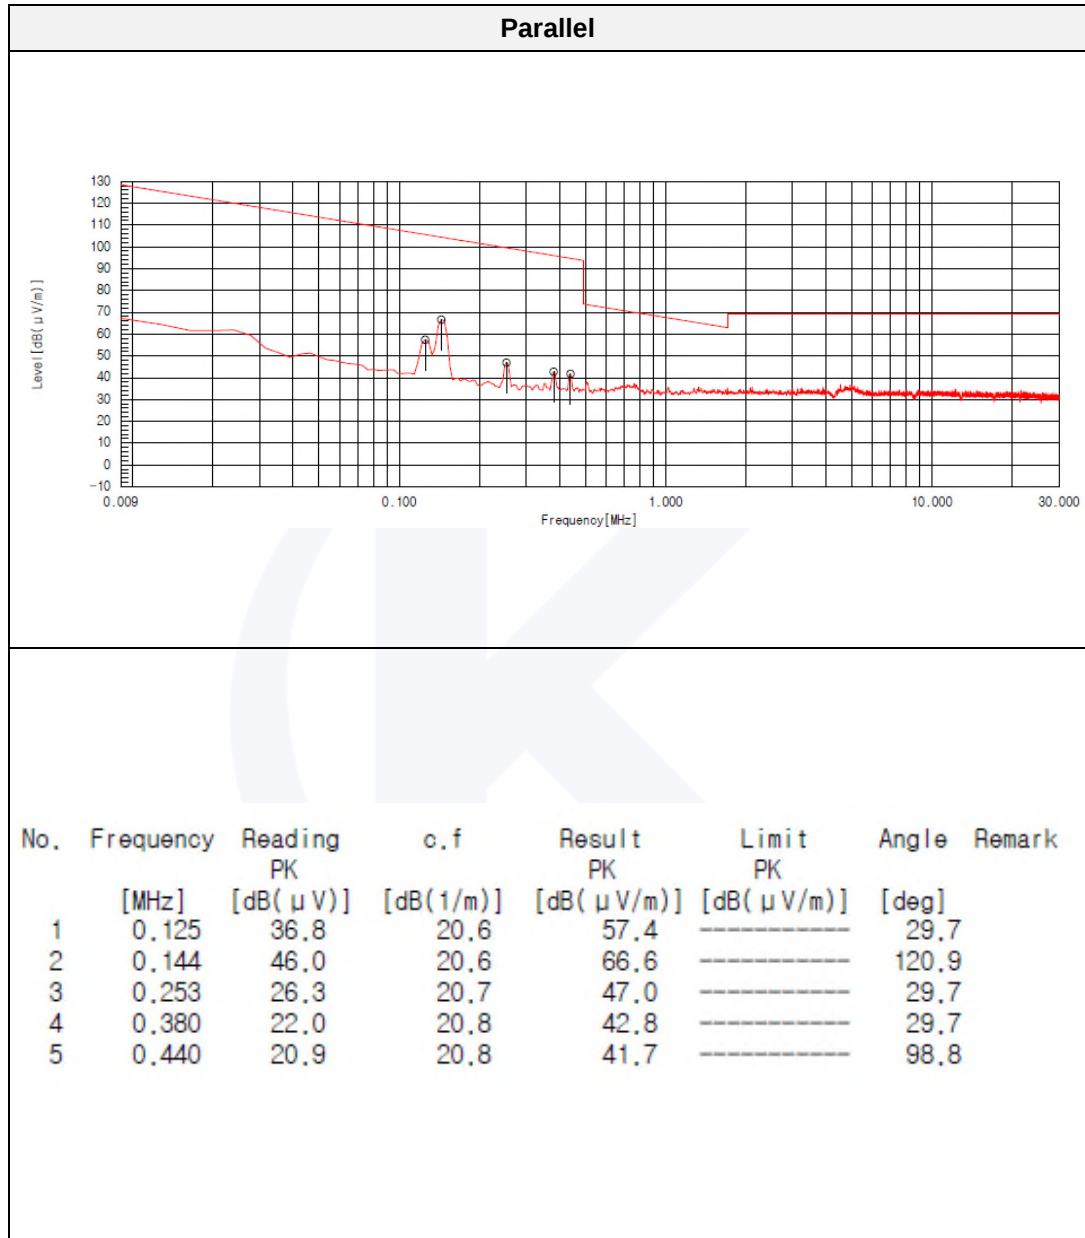


Note.

1. Signal at 0.144 MHz is fundamental signal and the above test results are peak results.


**Test results (Below 1 000 MHz)**

Mode: 10 % charging  
Distance of measurement: 3 meter

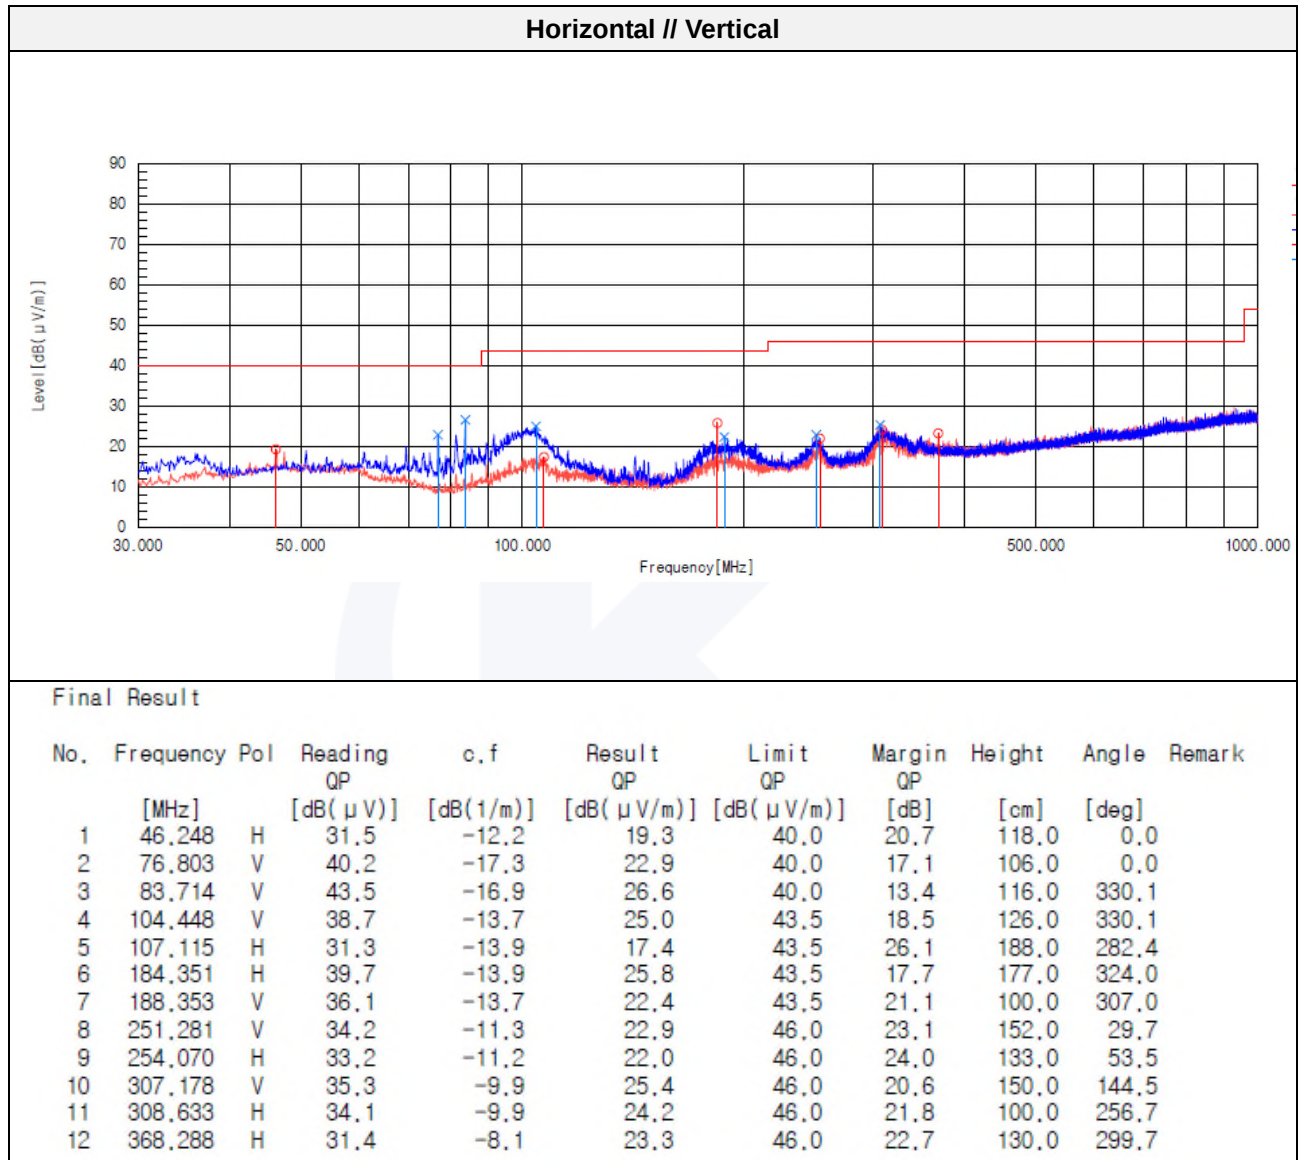




Mode: 50 % charging  
Distance of measurement: 3 meter

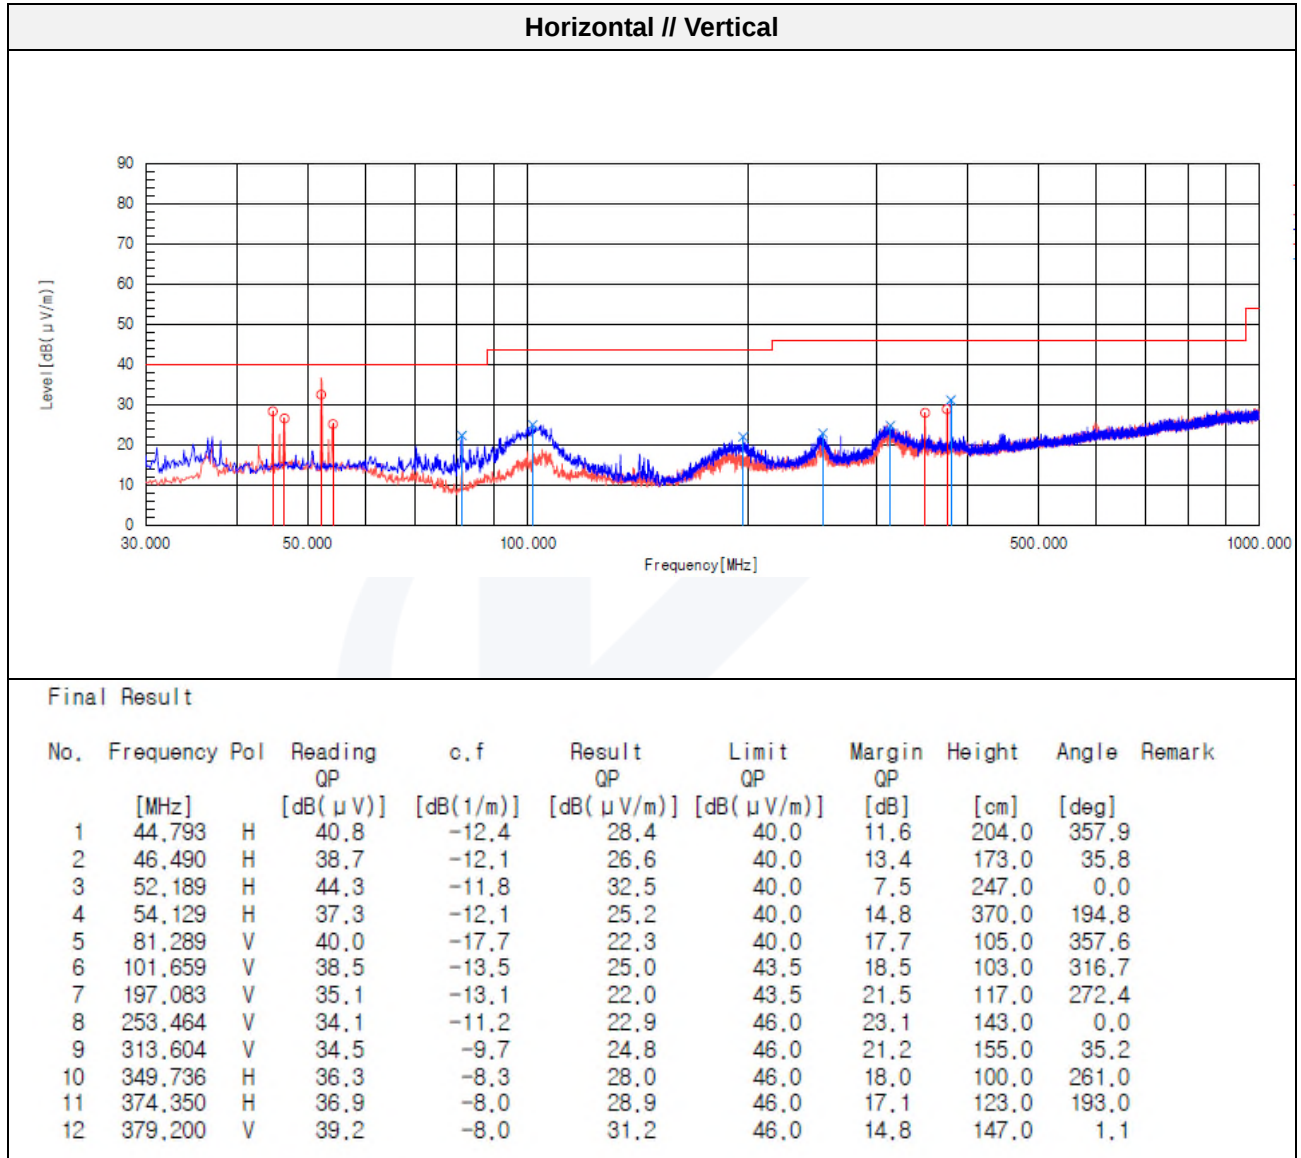




Mode: 90 % charging  
Distance of measurement: 3 meter

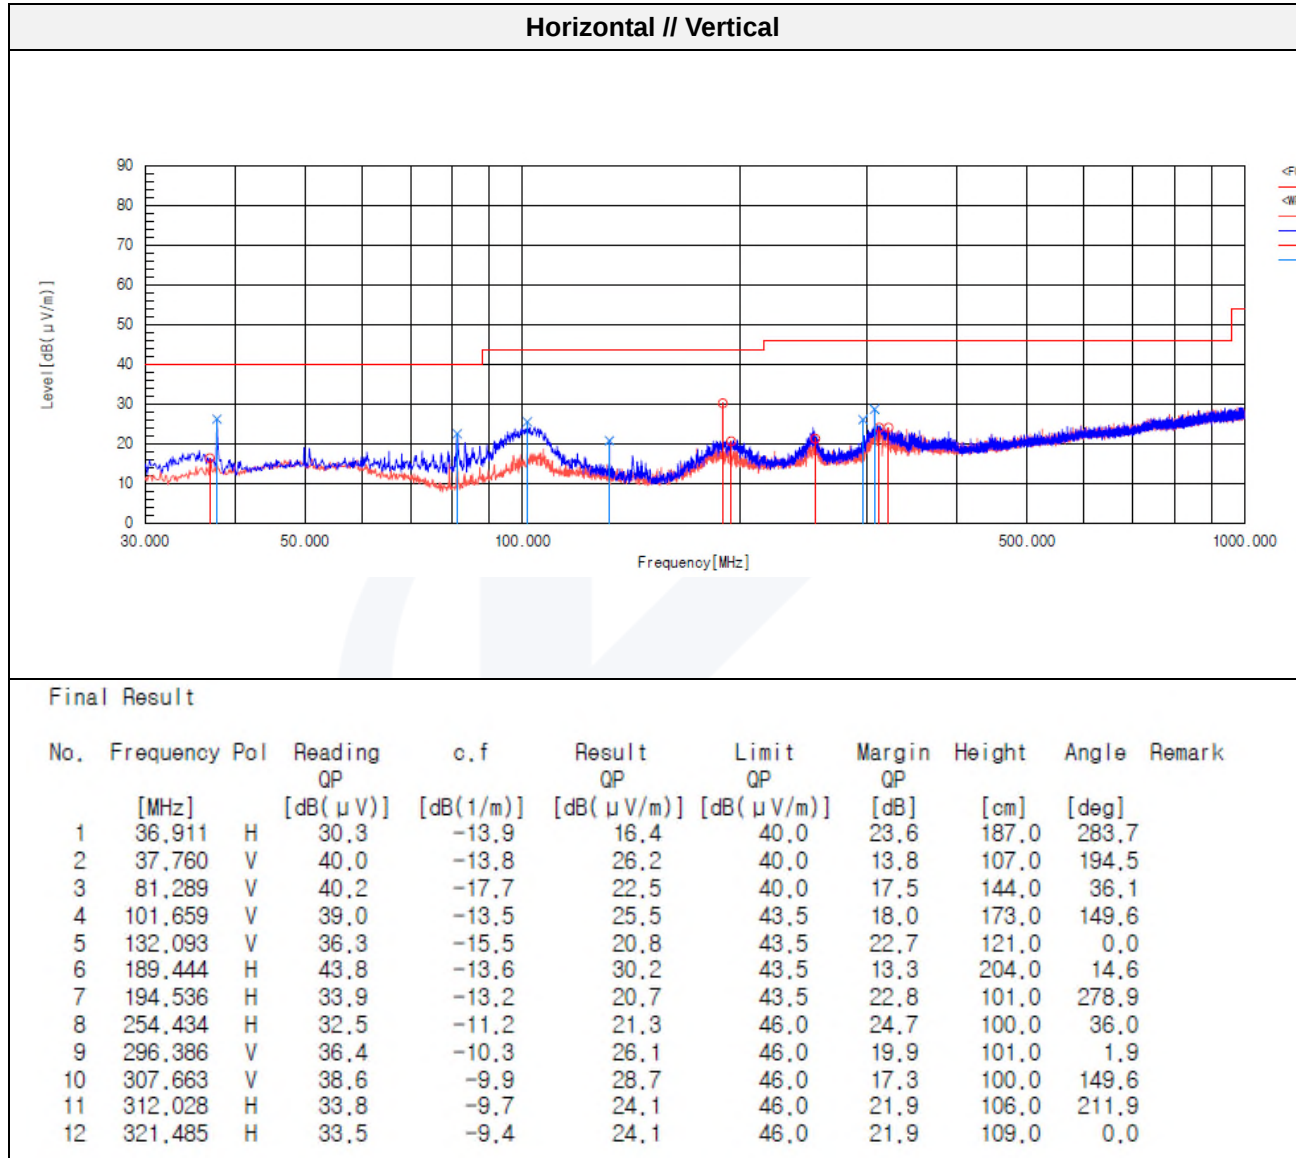



### 3.2. 20 dB Bandwidth

#### Test setup



#### Test procedures


The transmitter output is connected to a spectrum analyzer. The RBW is set to  $\geq 1\%$  of the emission bandwidth. The VBW is set to  $\geq \text{RBW}$ . The sweep time is coupled.

#### Limit

None; for reporting purposes only.

#### Test results

| Test Mode | Frequency(MHz) | Measured bandwidth(kHz) |
|-----------|----------------|-------------------------|
| Charging  | 0.146 8        | 1.469 9                 |

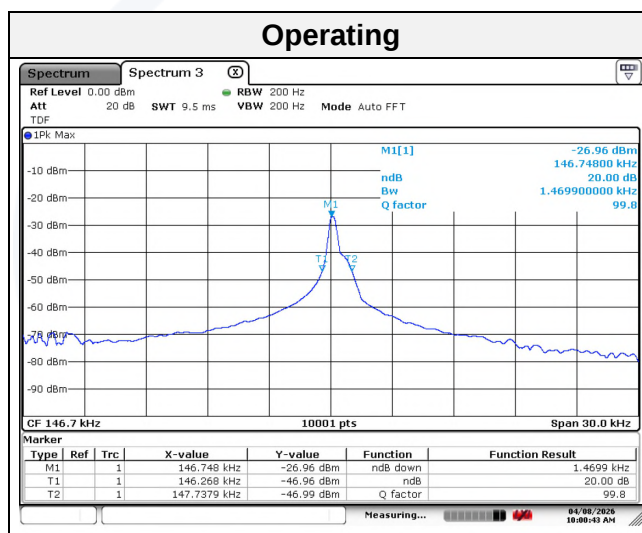

#### Note.

Because the measured signal is CW/CW-like, adjusting the RBW per C63.10 would not be practical since measured bandwidth will always follow the RBW and the result will be approximately twice the RBW.



### 3.3. AC conducted emissions

#### Limit


According to 15.207(a), for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50uH/50 ohm line impedance stabilization network (LISN). Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequencies ranges.

| Frequency of Emission (MHz) | Conducted limit (dB $\mu$ V) |          |
|-----------------------------|------------------------------|----------|
|                             | Quasi-peak                   | Average  |
| 0.15 – 0.50                 | 66 - 56*                     | 56 - 46* |
| 0.50 – 5.00                 | 56                           | 46       |
| 5.00 – 30.0                 | 60                           | 50       |



## Test results


Mode: 10% charging

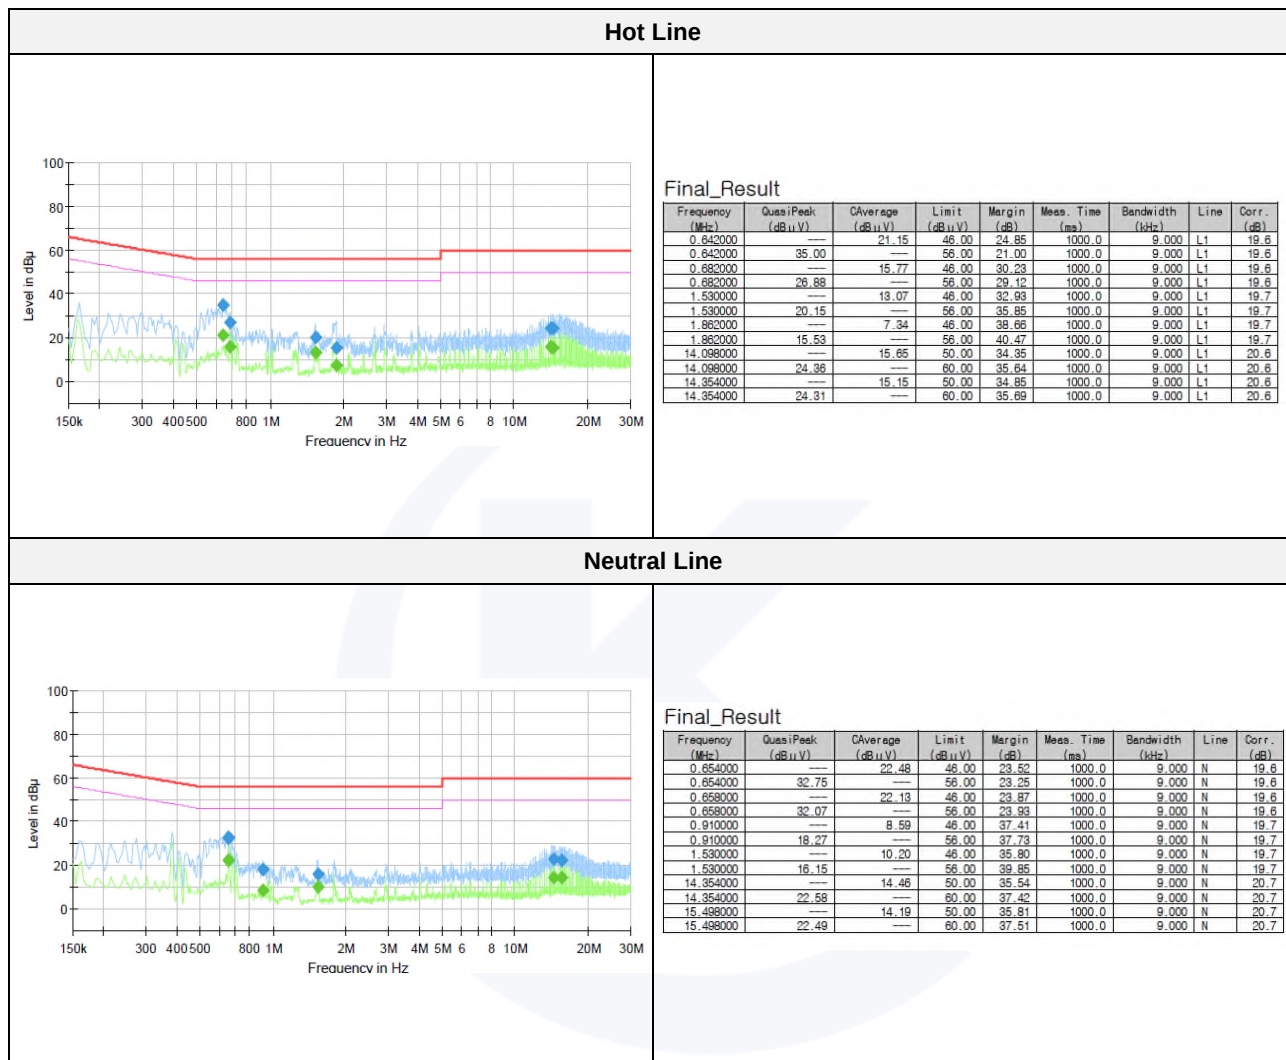



Mode: 50% charging


## Hot Line

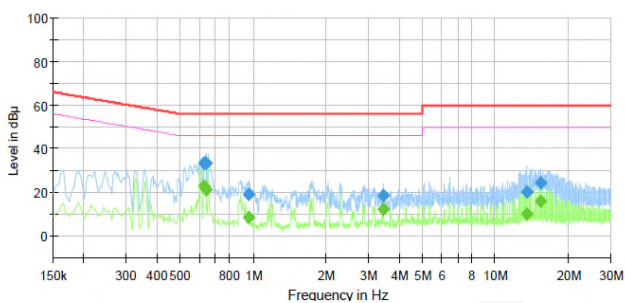

## Final\_Result

| Frequency (MHz) | QuasiPeak (dBuV) | CAverage (dBuV) | Limit (dBuV) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line | Corr. (dB) |
|-----------------|------------------|-----------------|--------------|-------------|-----------------|-----------------|------|------------|
| 0.630000        | ---              | 22.54           | 46.00        | 23.46       | 1000.0          | 9.000           | L1   | 19.6       |
| 0.630000        | 33.34            | ---             | 56.00        | 22.66       | 1000.0          | 9.000           | L1   | 19.6       |
| 0.638000        | ---              | 21.10           | 46.00        | 24.90       | 1000.0          | 9.000           | L1   | 19.6       |
| 0.638000        | 33.52            | ---             | 56.00        | 22.48       | 1000.0          | 9.000           | L1   | 19.6       |
| 0.966000        | ---              | 8.63            | 46.00        | 37.37       | 1000.0          | 9.000           | L1   | 19.7       |
| 0.966000        | 18.94            | ---             | 56.00        | 37.06       | 1000.0          | 9.000           | L1   | 19.7       |
| 3.438000        | ---              | 12.29           | 46.00        | 33.71       | 1000.0          | 9.000           | L1   | 19.9       |
| 3.438000        | 18.45            | ---             | 56.00        | 37.55       | 1000.0          | 9.000           | L1   | 19.9       |
| 13.482000       | ---              | 10.19           | 50.00        | 39.81       | 1000.0          | 9.000           | L1   | 20.6       |
| 13.482000       | 19.95            | ---             | 60.00        | 40.05       | 1000.0          | 9.000           | L1   | 20.6       |
| 15.382000       | ---              | 15.87           | 50.00        | 34.13       | 1000.0          | 9.000           | L1   | 20.7       |
| 15.382000       | 24.56            | ---             | 60.00        | 35.44       | 1000.0          | 9.000           | L1   | 20.7       |

## Neutral Line

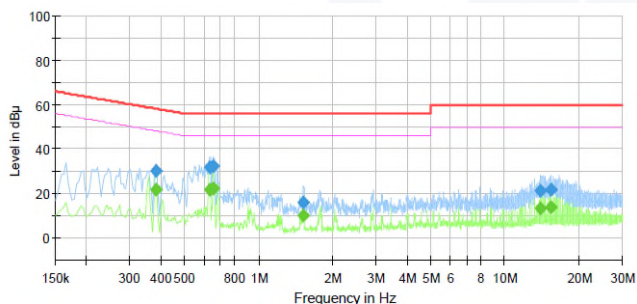


## Final\_Result

| Frequency (MHz) | QuasiPeak (dBuV) | CAverage (dBuV) | Limit (dBuV) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line | Corr. (dB) |
|-----------------|------------------|-----------------|--------------|-------------|-----------------|-----------------|------|------------|
| 0.382000        | 30.25            | ---             | 58.24        | 27.99       | 1000.0          | 9.000           | N    | 19.6       |
| 0.382000        | ---              | 21.84           | 46.24        | 26.40       | 1000.0          | 9.000           | N    | 19.6       |
| 0.634000        | ---              | 21.58           | 46.00        | 24.42       | 1000.0          | 9.000           | N    | 19.6       |
| 0.634000        | 31.61            | ---             | 56.00        | 24.39       | 1000.0          | 9.000           | N    | 19.6       |
| 0.658000        | ---              | 22.44           | 46.00        | 23.56       | 1000.0          | 9.000           | N    | 19.6       |
| 0.658000        | 32.07            | ---             | 56.00        | 23.93       | 1000.0          | 9.000           | N    | 19.6       |
| 1.528000        | ---              | 10.32           | 46.00        | 35.68       | 1000.0          | 9.000           | N    | 19.7       |
| 1.528000        | 15.97            | ---             | 56.00        | 40.03       | 1000.0          | 9.000           | N    | 19.7       |
| 14.038000       | ---              | 13.09           | 50.00        | 36.91       | 1000.0          | 9.000           | N    | 20.6       |
| 14.038000       | 21.21            | ---             | 60.00        | 38.79       | 1000.0          | 9.000           | N    | 20.6       |
| 15.418000       | ---              | 13.73           | 50.00        | 36.27       | 1000.0          | 9.000           | N    | 20.7       |
| 15.418000       | 21.83            | ---             | 60.00        | 38.17       | 1000.0          | 9.000           | N    | 20.7       |



Mode: 90% charging


## Hot Line

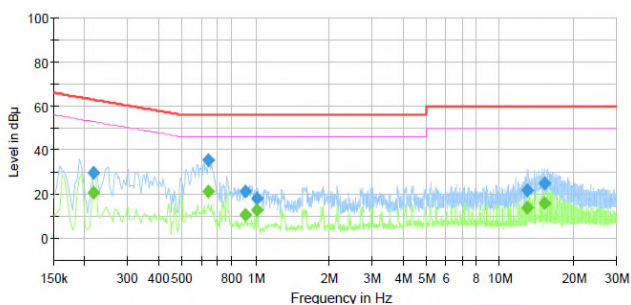

## Final\_Result

| Frequency (MHz) | QuasiPeak (dBμV) | CAverage (dBμV) | Limit (dBμV) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line | Corr. (dB) |
|-----------------|------------------|-----------------|--------------|-------------|-----------------|-----------------|------|------------|
| 0.218000        | ---              | 20.73           | 52.89        | 32.16       | 1000.0          | 9.000           | L1   | 19.6       |
| 0.218000        | 29.54            | ---             | 62.89        | 33.35       | 1000.0          | 9.000           | L1   | 19.6       |
| 0.642000        | ---              | 21.10           | 48.00        | 24.90       | 1000.0          | 9.000           | L1   | 19.6       |
| 0.642000        | 35.25            | ---             | 58.00        | 20.75       | 1000.0          | 9.000           | L1   | 19.6       |
| 0.906000        | ---              | 10.85           | 48.00        | 35.15       | 1000.0          | 9.000           | L1   | 19.7       |
| 0.906000        | 21.08            | ---             | 56.00        | 34.92       | 1000.0          | 9.000           | L1   | 19.7       |
| 1.018000        | ---              | 12.48           | 46.00        | 33.52       | 1000.0          | 9.000           | L1   | 19.7       |
| 1.018000        | 17.87            | ---             | 56.00        | 38.13       | 1000.0          | 9.000           | L1   | 19.7       |
| 12.990000       | ---              | 13.90           | 50.00        | 36.10       | 1000.0          | 9.000           | L1   | 20.5       |
| 12.990000       | 21.89            | ---             | 60.00        | 38.11       | 1000.0          | 9.000           | L1   | 20.5       |
| 15.258000       | ---              | 15.86           | 50.00        | 34.14       | 1000.0          | 9.000           | L1   | 20.7       |
| 15.258000       | 24.67            | ---             | 60.00        | 35.33       | 1000.0          | 9.000           | L1   | 20.7       |

## Neutral Line

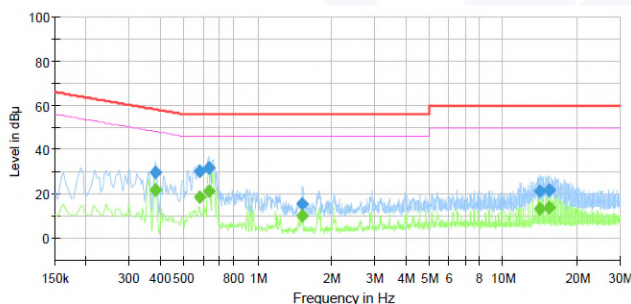

## Final\_Result

| Frequency (MHz) | QuasiPeak (dBμV) | CAverage (dBμV) | Limit (dBμV) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line | Corr. (dB) |
|-----------------|------------------|-----------------|--------------|-------------|-----------------|-----------------|------|------------|
| 0.382000        | 29.91            | ---             | 58.24        | 28.33       | 1000.0          | 9.000           | N    | 19.6       |
| 0.382000        | ---              | 21.73           | 48.24        | 26.51       | 1000.0          | 9.000           | N    | 19.6       |
| 0.582000        | ---              | 18.33           | 46.00        | 27.67       | 1000.0          | 9.000           | N    | 19.6       |
| 0.582000        | 29.93            | ---             | 56.00        | 26.07       | 1000.0          | 9.000           | N    | 19.6       |
| 0.634000        | 31.63            | ---             | 56.00        | 24.37       | 1000.0          | 9.000           | N    | 19.6       |
| 0.634000        | ---              | 21.44           | 46.00        | 24.56       | 1000.0          | 9.000           | N    | 19.6       |
| 1.526000        | ---              | 10.05           | 46.00        | 35.95       | 1000.0          | 9.000           | N    | 19.7       |
| 1.526000        | 15.57            | ---             | 56.00        | 40.43       | 1000.0          | 9.000           | N    | 19.7       |
| 14.050000       | 21.24            | ---             | 60.00        | 38.76       | 1000.0          | 9.000           | N    | 20.6       |
| 14.050000       | ---              | 13.24           | 50.00        | 36.76       | 1000.0          | 9.000           | N    | 20.6       |
| 15.434000       | 21.71            | ---             | 60.00        | 38.29       | 1000.0          | 9.000           | N    | 20.7       |
| 15.434000       | ---              | 13.76           | 50.00        | 36.24       | 1000.0          | 9.000           | N    | 20.7       |

**Appendix A. Measurement equipment**

| Equipment                | Manufacturer            | Model     | Serial No.  | Calibration interval | Calibration due. |
|--------------------------|-------------------------|-----------|-------------|----------------------|------------------|
| Spectrum analyzer        | R&S                     | FSV40     | 101725      | 1 year               | 2026.06.10       |
| Spectrum analyzer        | R&S                     | FSV40     | 101002      | 1 year               | 2027.01.06       |
| SIGNAL GENERATOR         | KEYSIGHT                | N5182B    | MY59100115  | 1 year               | 2026.04.16       |
|                          |                         |           |             |                      | 2027.04.02       |
| SIGNAL GENERATOR         | Anritsu                 | 68369B    | 002118      | 1 year               | 2026.04.21       |
|                          |                         |           |             |                      | 2027.04.02       |
| LOOP ANTENNA             | TESEQ                   | HLA6121   | 66547       | 2 years              | 2028.01.13       |
| TRILOG-BROADBAND ANTENNA | Schwarzbeck             | VULB 9163 | 714         | 2 years              | 2026.04.19       |
|                          |                         |           |             |                      | 2028.04.16       |
| Amplifier                | SONOMA INSTRUMENT       | 310N      | 401123      | 1 year               | 2027.02.12       |
| EMI TEST RECEIVER        | R&S                     | ESU26     | 100517      | 1 year               | 2026.07.08       |
| EMI Test S/W             | TOYO Corporation        | ES10/RE   | 2022.01.000 | -                    | -                |
| PULSE LIMITER            | R&S                     | ESH2-Z2   | 101915      | 1 year               | 2026.11.03       |
| LISN                     | R&S                     | ENV216    | 101786      | 1 year               | 2027.01.08       |
| Cable (SR #6)            | RG 400                  | -         | -           | 0.5 year             | 2026.07.25       |
| Cable (SAC #6)           | TCLH21D-SMSM-2.5M 0222  | OSI Cable | -           | 0.5 year             | 2026.07.25       |
|                          | TCLH21D-NMNM-10.0M 0222 | OSI Cable | -           | 0.5 year             | 2026.07.25       |
|                          | TCLH21D-SMSM-7.0M 0222  | OSI Cable | -           | 0.5 year             | 2026.07.25       |

\* Statement of Traceability: KES Co., Ltd. Attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Peripheral devices**

| Device                 | Manufacturer                                                            | Model No. | Serial No.       |
|------------------------|-------------------------------------------------------------------------|-----------|------------------|
| Notebook computer      | LG Electronics Inc.,                                                    | LGS53     | 306QCZP560949    |
| AC/DC adapter          | Anker Innovations Limited(DongGuan City JieShuai Electronics Co., Ltd.) | A2674     | AGD5R40F26200136 |
| GINOBO Smart Golf Ball | GreenTalk Co., Ltd.                                                     | GSB-V2    | -                |

**The End.**