

Test Report

Product: SmartDrive Media Screen

Trade Mark: N/A

Model Number: SG25-NBT

FCC ID: 2BVQ8-SG25NBT

Prepared for

Shenzhen Yizhi Changlian Technology Co., Ltd.
Room 205A, 2nd Floor, Liangji Building, Donghuan 1st Road, Fukang
Community, Longhua Street, Longhua District, Shenzhen

Prepared by

Shenzhen HongBiao Certification& Testing Co., Ltd
Room 102, 201, Building 2, Yuanwanggu RFID Industrial Park, Tongguan
Road, Tianliao Community, Yutang Street, Guangming District, Shenzhen,
China
Tel.: +86-755-2998 9321 Fax.: +86-755-2998 5110
Website: <http://www.sz-hongbiao.com>

Table of Contents

1	GENERAL DESCRIPTION	6
1.1	DESCRIPTION OF EUT	6
1.2	TEST MODE.....	6
1.3	OPERATION CHANNEL LIST	7
1.4	TEST SETUP	7
1.5	POWER SETTING CONFIGURATION PARAMETERS	7
1.6	ANCILLARY EQUIPMENT	8
2	SUMMARY OF TEST RESULT	9
3	TEST FACILITIES AND ACCREDITATIONS	10
3.1	TEST LABORATORY	10
3.2	ENVIRONMENTAL CONDITIONS	10
3.3	MEASUREMENT UNCERTAINTY	10
3.4	TEST SOFTWARE	11
4	LIST OF TEST EQUIPMENT	12
5	TEST ITEM AND RESULTS.....	14
5.1	ANTENNA REQUIREMENT	14
5.1.1	<i>Standard Requirement</i>	14
5.1.2	<i>Test Result</i>	14
5.2	POWER LINE CONDUCTED EMISSION	15
5.2.1	<i>Limits</i>	15
5.2.2	<i>Test Procedures</i>	15
5.2.3	<i>Test Setup</i>	16
5.2.4	<i>Test Result</i>	16
5.3	RADIATED EMISSION	17
5.3.1	<i>Limits</i>	17
5.3.2	<i>Test Procedures</i>	18
5.3.3	<i>Test Setup</i>	18
5.3.4	<i>Test Result</i>	19
5.3.5	<i>Radiated Band Edge</i>	24
5.4	RF OUTPUT POWER.....	27
5.4.1	<i>Limit</i>	27
5.4.2	<i>Test Procedure</i>	27
5.4.3	<i>Test Setup</i>	27
5.4.4	<i>Test Results</i>	27
5.5	POWER SPECTRAL DENSITY.....	29
5.5.1	<i>Limit</i>	29
5.5.2	<i>Test Procedure</i>	29
5.5.3	<i>Test Setup</i>	29
5.5.4	<i>Test Results</i>	30
5.6	26dB EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH	38
5.6.1	<i>Limit</i>	38
5.6.2	<i>Test Procedure</i>	38
5.6.3	<i>Test Setup</i>	38
5.6.4	<i>Test Results</i>	38
5.7	6 dB BANDWIDTH	47
5.7.1	<i>Limit</i>	47
5.7.2	<i>Test Procedure</i>	47

5.7.3	Test Setup.....	47
5.7.4	Test Results	47
5.8	DUTY CYCLE	56
5.8.1	Limit	56
5.8.2	Test Procedure	56
5.8.3	Test Setup.....	56
5.8.4	Test Results	56
5.9	OUT OF BAND EMISSION	65
5.9.1	Limit	65
5.9.2	Test Procedure	65
5.9.3	Test Setup.....	65
5.9.4	Test Results	66
5.10	SPURIOUS RF CONDUCTED EMISSIONS.....	69
5.10.1	Limit	69
5.10.2	Test Procedure.....	69
5.10.3	Test Setup.....	69
5.10.4	Test Results	69
5.11	FREQUENCY STABILITY.....	77
5.11.1	Limit	77
5.11.2	Test Procedure.....	77
5.11.3	Test Setup.....	77
5.11.4	Test Results	77
6	PHOTOGRAPHS OF THE TEST SETUP.....	83
7	PHOTOGRAPHS OF THE EUT.....	84

TEST RESULT CERTIFICATION

Applicant's Name..... : Shenzhen Yizhi Changlian Technology Co., Ltd.
Room 205A, 2nd Floor, Liangji Building, Donghuan 1st Road,
Address : Fukang Community, Longhua Street, Longhua District,
Shenzhen

Manufacturer's Name : Shenzhen Yizhi Changlian Technology Co., Ltd.
Room 205A, 2nd Floor, Liangji Building, Donghuan 1st Road,
Address : Fukang Community, Longhua Street, Longhua District,
Shenzhen

Product description

Product name : SmartDrive Media Screen

Model Number : SG25-NBT

Standards : FCC Part 15.407

Test procedure..... : IEEE/ANSI C63.10-2020

789033 D02 General UNII Test Procedures New Rules v02r01


This device described above has been tested by Shenzhen HongBiao Certification& Testing Co., Ltd and the test results show that the equipment under test (EUT) is in compliance with the EMC requirements. And it is applicable only to the tested sample identified in the report.

Date of Test

Date (s) of performance of tests..... : Jan. 20, 2026~Apr. 22, 2026

Test Result..... : **Pass**

Testing Engineer :




(Z o e S u)

Technical Manager :



(G a r y L u)

Authorized Signatory :



(L e o S u)

[illegible]

1 General Description

1.1 Description of EUT

Product name:	SmartDrive Media Screen
Model name:	SG25-NBT
Series Model:	SG25-CCC, SG25-CIC, SG25-EVO, SG25-Q5H, SG25-Q5L, SG25-Q7, SG25-MQB, SG25-4X, SG25-5X, SG25-4.0, SG25-3X, SG25-LEX, SG25-LEX-V, SG25-LRB, SG25-LRH, SG25-VOL, SG25-PND
Different of series model:	The circuitry and modules are identical across all models; only the appearance, model numbers, and the shapes of the accessories, cables, and connectors differ.
Frequency range:	U-NII-3: 5745-5825MHz
Modulation type:	802.11a/n/ac: OFDM(BPSK,QPSK,16QAM,64QAM,256QAM)
Transfer rate:	802.11a: 6/9/12/18/24/36/48/54Mbps 802.11n (20MHz): MCS0-7, up to 150Mbps 802.11n (40MHz): MCS0-7, up to 300Mbps 802.11ac (20MHz): MCS0-8, up to 86.7Mbps 802.11ac (40MHz): MCS0-9, up to 200Mbps
Channel bandwidth:	802.11n: 20 MHz, 40 MHz 802.11ac: 20 MHz, 40 MHz
Antenna type:	External Antenna
Antenna gain:	6.04dBi
Max. output power:	17.16dBm
Hardware version:	V1.0
Software version:	V1.0
Battery:	N/A
Power supply:	DC 12V from battery
Adapter information:	N/A

1.2 Test Mode

For 802.11a/ n(HT20)/ ac(VHT20)

U-NII-3(5725 - 5850 MHz)		
Channel Number	Channel	Frequency (MHz)
149	Low	5745
157	Mid	5785

165	High	5825
-----	------	------

For 802.11n (HT40)/ ac (VHT40)

U-NII-3(5725 - 5850 MHz)		
Channel Number	Channel	Frequency (MHz)
151	Low	5755
159	High	5795

1.3 Operation Channel List

For U-NII-3:

20 MHz		40 MHz		80 MHz	
Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795	--	--
157	5785	--	--	--	--
161	5805	--	--	--	--
165	5825	--	--	--	--

1.4 Test Setup

See photographs of the test setup in the report for the actual setup and connections between EUT and support equipment.

1.5 Power setting configuration parameters

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

The software is TermAssist and SecureCRT tool Use together.

Test Items	Mode	Data Rate	TX/RX
Radiated Emissions	802.11a/n/ac(HT20/40)	MCSO	TX
Duty Cycle	802.11a/n/ac(HT20/40)	MCSO	TX
Band Edge	802.11a/n/ac(HT20/40)	MCSO	TX
6dB Bandwidth	802.11a/n/ac(HT20/40)	MCSO	TX

26dB Bandwidth and 99% Occupied Bandwidth	802.11a/n/ac(HT20/40)	MCSO	TX
Conducted Output Power	802.11a/n/ac(HT20/40)	MCSO	TX
Power Spectral Density	802.11a/n/ac(HT20/40)	MCSO	TX
Frequency Stability	Un-modulation	/	TX

1.6 Ancillary Equipment

Equipment	Model	S/N	Manufacturer
Notebook	BDR-WDH	A3RQPM242 0002411	Honor Terminal Co., Ltd.
Battery	6-QW-45(370)-L	2C24H6K166 0C	Camel Group Co.,Ltd.

Note: The notebook is used to assist the RF test. In order to prevent the notebook from causing unnecessary impact on the test, the notebook will be removed from the test environment after the EUT successfully transmits at a fixed frequency using the notebook.

2 Summary of Test Result

No.	Standard Section	Test Item	Result	Remark
1	15.203/15.407	Antenna Requirement	Pass	
2	15.207	Power Line Conducted Emission	N/A	
3	15.407(b) 15.209	Radiation Spurious Emission	Pass	
4	15.407(a)	RF Output Power	Pass	
5	15.407(a)	Power Spectral Density	Pass	
6	15.407(a)	26dB Emission Bandwidth and Occupied bandwidth	Pass	
7	15.407(e)	6 dB bandwidth	Pass	
8	/	Duty Cycle	Pass	
9	15.407(b)	Out Of Band Emission	Pass	
10	15.407(b)	Spurious RF Conducted Emissions	Pass	
11	15.407(g)	Frequency Stability	Pass	

Note: "N/A" means the test item not applicable.

3 Test Facilities and Accreditations

3.1 Test Laboratory

Test Site	Shenzhen HongBiao Certification& Testing Co., Ltd
Test Site Location	Room 102, 201, Building 2, Yuanwanggu RFID Industrial Park, Tongguan Road, Tianliao Community, Yutang Street, Guangming District, Shenzhen, China
Telephone:	(86-755) 2998 9321
Fax:	(86-755) 2998 5110
FCC Registration No.:	CN1341
A2LA Certificate No.:	6765.01

3.2 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15°C~35°C
Relative Humidity:	20%~75%
Air Pressure:	98kPa~101kPa

3.3 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

The data and results quoted in this document are true and accurate values, and uncertainties are not involved in the calculations.

In addition, components and mass production processes that are similar to testing equipment may introduce additional deviations, and the manufacturer is solely responsible for the continued compliance of the equipment.

Measurement Frequency Range	U, (dB)	Note
RF frequency	2×10^{-5}	
RF power, conducted	± 0.57 dB	
Conducted emission(150kHz~30MHz)	± 2.5 dB	
Radiated emission(9kHz-30MHz)	± 2.5 dB	
Radiated emission(30MHz~1GHz)	± 4.2 dB	
Radiated emission (above 1GHz)	± 4.7 dB	
Occupied Bandwidth	$\pm 3\%$	
Temperature	± 1 degree	

Humidity	± 5 %	
----------	-------	--

3.4 Test Software

Software name	Manufacturer	Model	Version
Conducted Emission test Software	Farad	EZ-EMC	EMC-CON 3A1.1+
Radiated Emission test Software	Farad	EZ-EMC	FA-03A2
RF Test System	MWRF	MTS 8310	2.0.0.0

4 List of Test Equipment

Radiation emission							
Item	Equipment No.	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	HB-E001	Horn Antenna	Schwarzbeck	BBHA 9120D	02592	2024-05-18	2026-05-17
2	HB-E002	Biconical log-periodic composite antenna	Schwarzbeck	VULB 9168	01340	2024-05-18	2026-05-17
3	HB-E003	SHF-EHF Horn	Schwarzbeck	BBHA 9170	01193	2024-05-18	2026-05-17
4	HB-E005	Preamplifier	Noyetec	LAN-0118	NYCM1420102	2025-05-07	2026-05-06
5	HB-E006	Preamplifier	Noyetec	LAN-1840	NYCM1420103	2025-05-07	2026-05-06
6	HB-E007	EMI TEST RECEIVER	R&S	ESR7	102520	2025-05-07	2026-05-06
7	HB-E009	POSITINAL COTROLLE R	Noyetec	N/A	N/A	/	/
8	HB-E013	RF switch	Noyetec	NY-RF4	NY0CM1420204	/	/
9	HB-E066	Illuminance Tester	TASI	TA8121	N/A	2025-05-13	2026-05-12
10	HB-E075	Active loop antenna	Schwarzbeck	FMZB 1519B	1519B-245	2024-05-18	2026-05-17
11	HB-E076	Preamplifier	Hewlett Packard	8447D	1937A02278	2025-05-07	2026-05-06
Conduction emission							
Item	Equipment No.	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	HB-E014	4 Path V-LISN	Schwarzbeck	NNLK 8121	00770	2025-05-07	2026-05-06
2	HB-E015	Pulse Limiter	Schwarzbeck	VTSD 9561-F	00949	2025-05-07	2026-05-06
3	HB-E016	Absorb clamp	ZHINAN	ZN23201	N/A	2025-05-10	2026-05-09
4	HB-E059	Attenuator	Xianghua	TS2-6-1	220215166	2025-05-10	2026-05-09
5	HB-E069	EMI TEST RECEIVER	R&S	ESCI	N/A	2025-05-07	2026-05-06

RF							
Item	Equipment No.	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	HB-E041	MXG Anaio Signal Generator	Agilent	N5181A	MY47070421	2025-05-07	2026-05-06

2	HB-E042	WIDEBAND RADIO COMMUNICA TION TESTER	R&S	CMW500	132108	2025-05-08	2026-05-07
3	HB-E043	MXG Anaio Signal Generator	Agilent	N5182A	US46240335	2025-05-08	2026-05-07
4	HB-E044	Signal& spectrum Analyzer	R&S	FSV3044	101264	2025-05-07	2026-05-06
5	HB-E045	RF Control Box	Noyetec	NY100-R FCB	N/A	2025-05-08	2026-05-07
6	HB-E058	Thermometer Clock Humidity Monitor	N/A	HTC-1S	N/A	2025-05-09	2026-05-08

Note: the calibration interval of the above test instruments is 12&24 months and the calibrations are traceable to international system unit (SI).

5 Test Item And Results

5.1 Antenna Requirement

5.1.1 Standard Requirement

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device

5.1.2 Test Result

The antenna is External Antenna, which was permanently affixed to the device and un-replaced, complies with 15.203. In addition, the maximum antenna gain is 6.04dBi.

5.2 Power Line Conducted Emission

5.2.1 Limits

Limits – Class B		
Frequency (MHz)	Limit (dBμV)	
	Quasi-Peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5	56	46
5 to 30	60	50
Note: 1. the tighter limit applies at the band edges. 2. the limit of "*" marked band means the limitation decreases linearly with the logarithm of the frequency in the range.		

5.2.2 Test Procedures

a) EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.


b) The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

- c) The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- d) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- e) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- f) LISN is at least 80 cm from nearest part of EUT chassis.
- g) For the actual test configuration, please refer to the related Item – photographs of the test

setup.

5.2.3 Test Setup

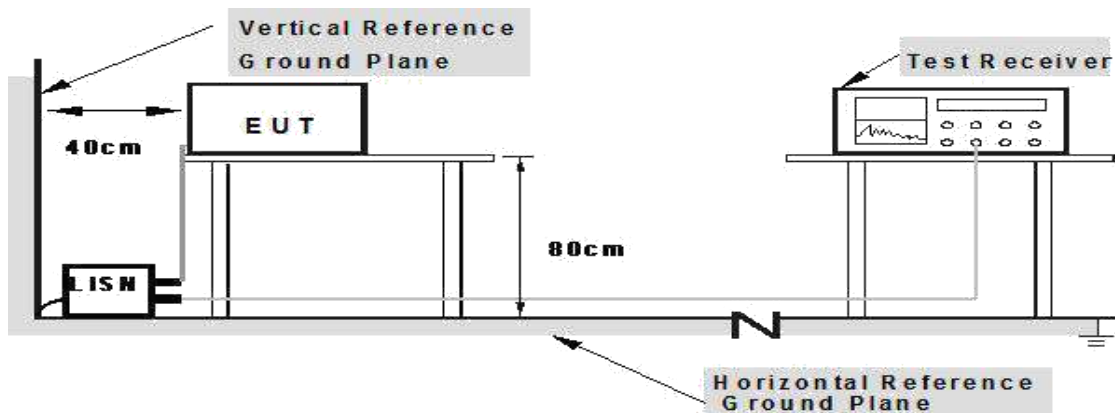

5.2.4 Test Result

Note: This device is a vehicle-mounted product powered by DC, so it is not suitable for this project.

5.3 Radiated Emission

5.3.1 Limits

1. For transmitters operating in the 5.15-5.25 GHz band:

All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

2. For transmitters operating in the 5.25-5.35 GHz band:

All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

3. For transmitters operating in the 5.47-5.725 GHz band:

All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

4. For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Frequency Range	RBW	VBW	Measurement
30MHz-1GHz	1MHz	3MHz	Peak
Above 1GHz	1MHz	10Hz ^{Note1}	Average
	1MHz	>1/T ^{Note2}	Average
Note1	When duty cycle is no less than 98%		

Note2	When duty cycle is less than 98%
-------	----------------------------------

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

5.3.2 Test Procedures

The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.

The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.

The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

For emission measurements above 1 GHz, the EUT shall be placed at a height of 1.5 m above the floor on a support that is RF transparent for the frequencies of interest. Final measurements for the EUT require a measurement antenna height scan of 1 m to 4 m.


The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.

If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. For the actual test configuration, please refer to the related Item –EUT Test Photos.


Note: Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

5.3.3 Test Setup


Radiated Emission Test-Up Frequency Below 30MHz

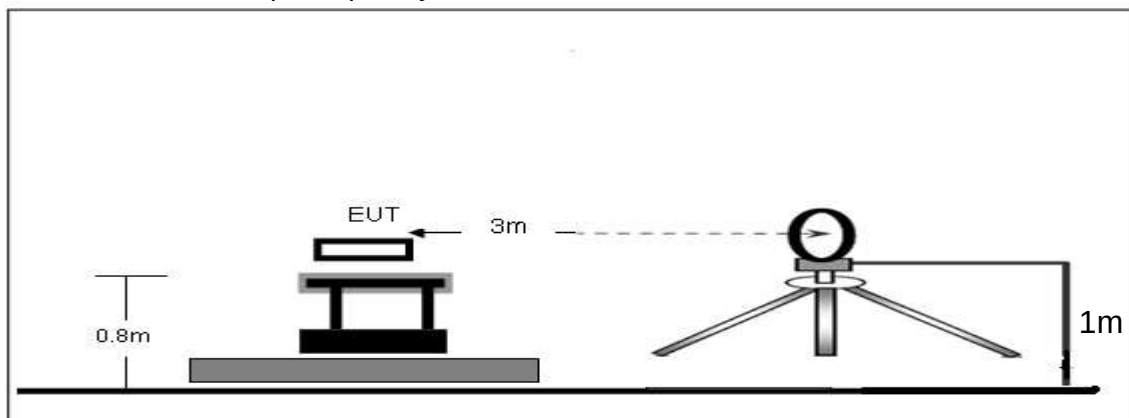

Radiated Emission Test-Up Frequency 30MHz~1GHz

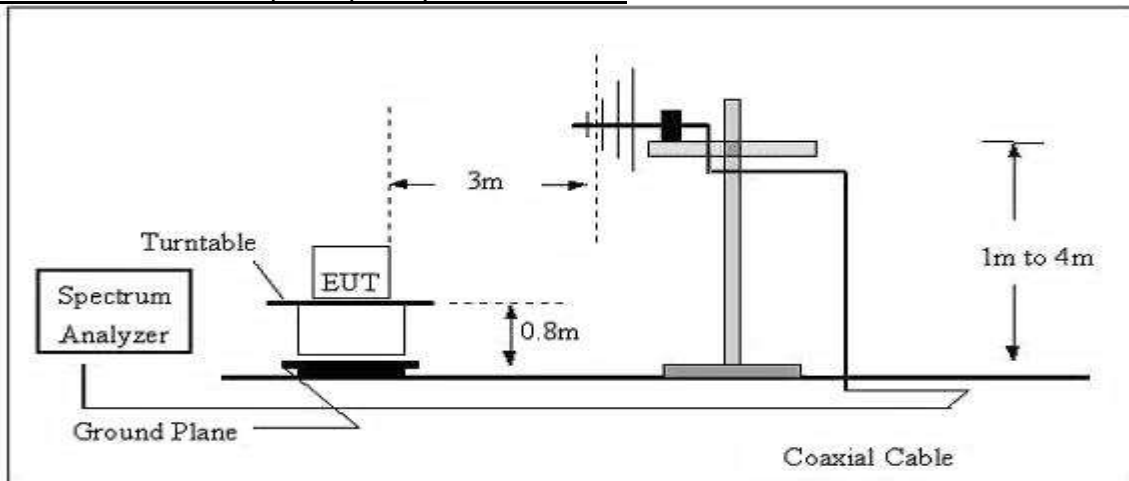

Radiated emission test-up frequency above 1GHz

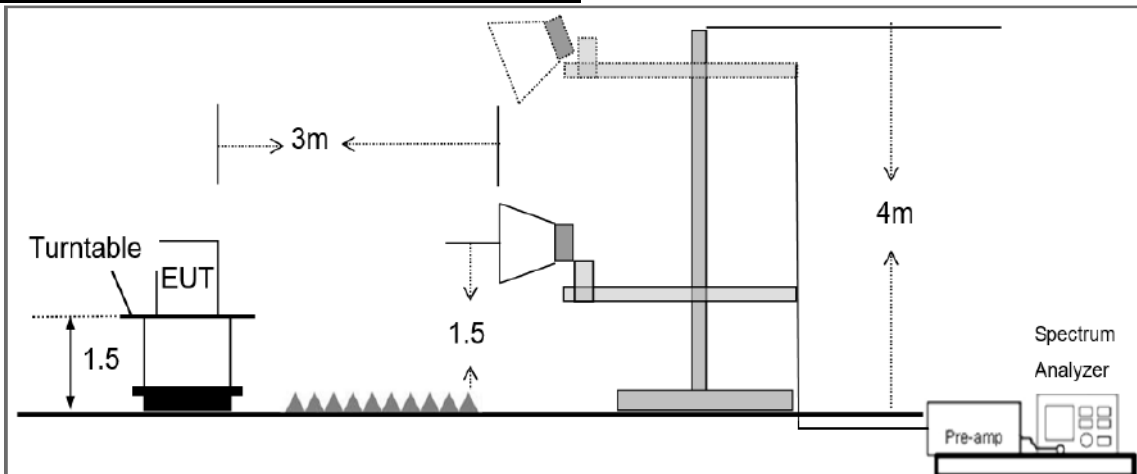

5.3.4 Test Result

Below 30MHz

EUT:	SmartDrive Media Screen	Model Name:	SG25-NBT
Pressure:	1010 hPa	Test Voltage:	DC 12V from battery
Test Mode:	TX	Polarization:	--


Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	Pass
--	--	--	--	Pass

Note:

1. For 9kHz-30MHz, 18-40GHz the amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})$ (dB);
3. Limit line = specific limits (dBuV) + distance extrapolation factor.


Frequency range (30MHz – 1GHz)

EUT:	SmartDrive Media Screen	Model Name:	SG25-NBT
Test Mode:	TX	Phase:	Vertical
Test Voltage:	DC 12V from battery		

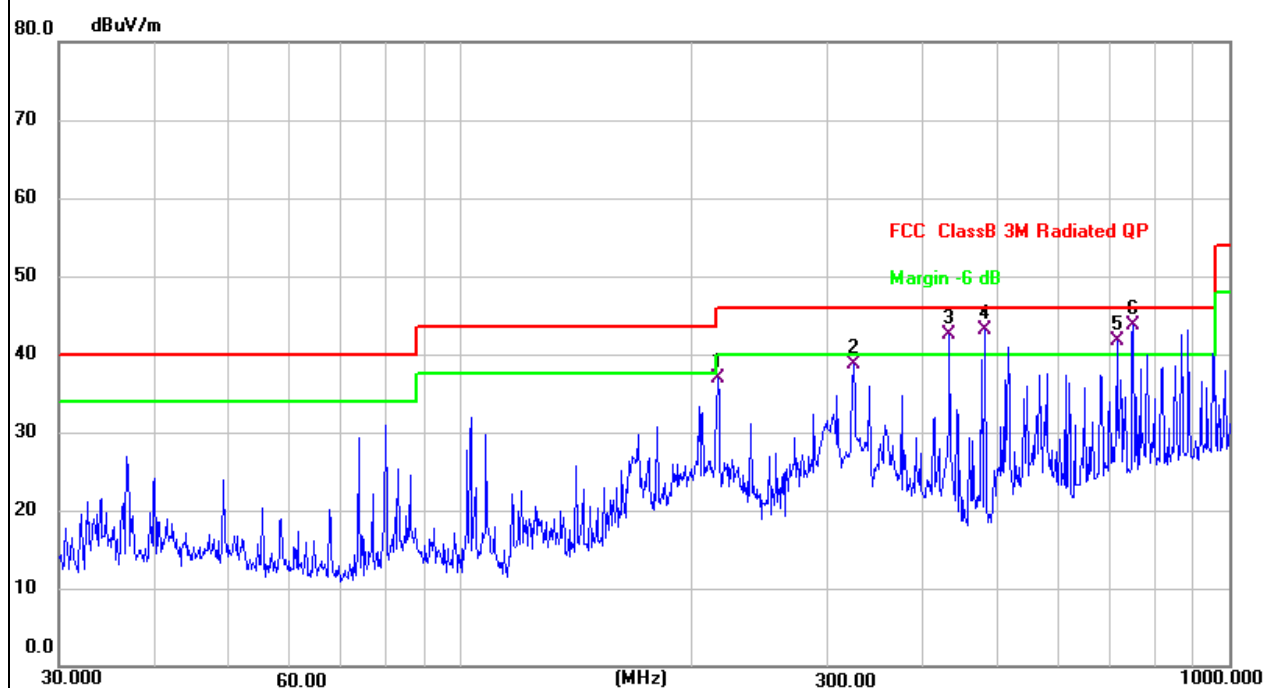

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	216.0239	53.59	-16.64	36.95	46.00	-9.05	QP
2	324.4560	50.49	-11.77	38.72	46.00	-7.28	QP
3 !	432.5456	50.82	-8.39	42.43	46.00	-3.57	QP
4 !	480.5276	50.66	-7.57	43.09	46.00	-2.91	QP
5 !	714.1733	43.01	-1.36	41.65	46.00	-4.35	QP
6 *	750.1082	44.23	-0.52	43.71	46.00	-2.29	QP

EUT:	SmartDrive Media Screen	Model Name:	SG25-NBT
Test Mode:	TX	Phase:	Horizontal
Test Voltage:	DC 12V from battery		

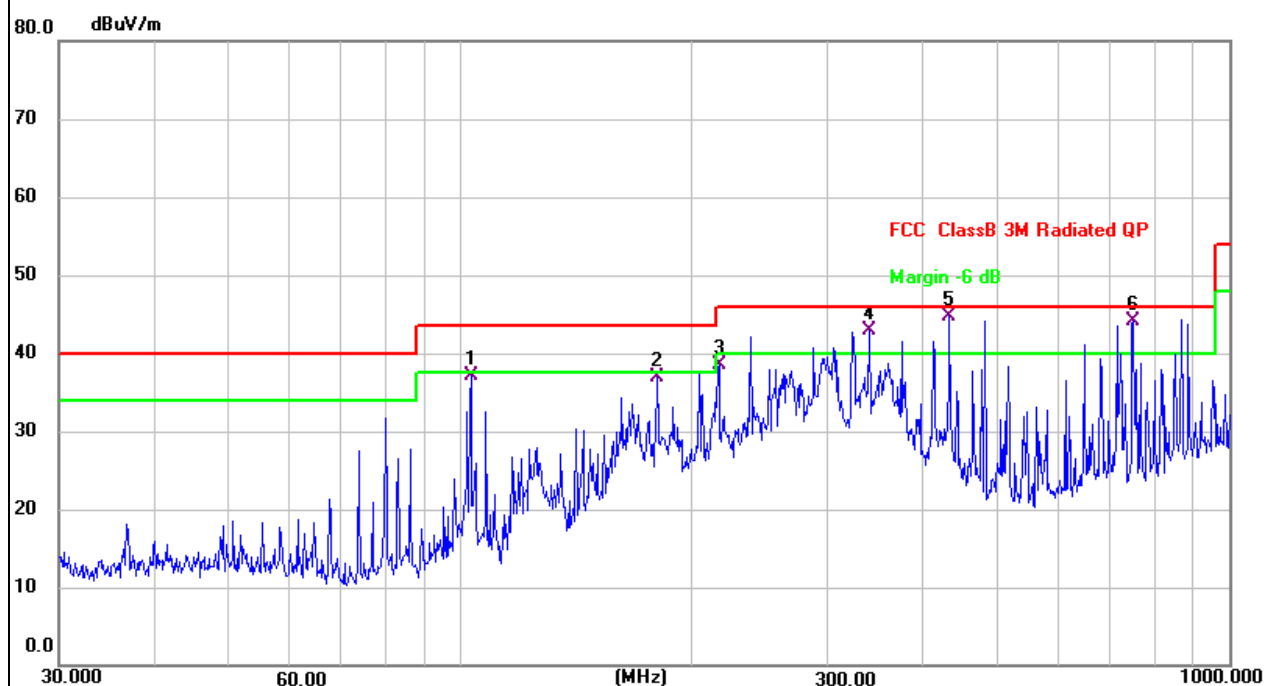

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	103.0800	54.54	-17.40	37.14	43.50	-6.36	QP
2	180.0164	51.81	-14.97	36.84	43.50	-6.66	QP
3	216.7828	55.17	-16.61	38.56	46.00	-7.44	QP
4 !	340.7816	54.20	-11.25	42.95	46.00	-3.05	QP
5 *	432.5455	53.01	-8.39	44.62	46.00	-1.38	QP
6 !	750.1082	44.63	-0.52	44.11	46.00	-1.89	QP

Frequency range (1GHz-40GHz)

For U-NII-3

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low Channel (5745 MHz)-Above 1G									
Vertical	4681.178	58.49	5.94	35.40	44.00	55.83	74.00	-18.17	Pk
Vertical	4680.942	46.40	5.94	35.40	44.00	43.74	54.00	-10.26	AV
Vertical	11491.921	59.63	8.46	39.75	44.50	63.34	74.00	-10.66	Pk
Vertical	11491.952	46.64	8.46	39.75	44.50	50.35	54.00	-3.65	AV
Vertical	17235.566	58.32	10.12	38.80	44.10	63.14	74.00	-10.86	Pk
Vertical	17236.117	41.37	10.12	38.80	42.70	47.59	54.00	-6.41	AV
Horizontal	4680.275	58.11	5.94	35.18	44.00	55.23	74.00	-18.77	Pk
Horizontal	4679.665	45.34	5.94	35.18	44.00	42.46	54.00	-11.54	AV
Horizontal	11490.871	59.93	8.46	38.71	44.50	62.60	74.00	-11.40	Pk
Horizontal	11491.410	45.18	8.46	38.71	44.50	47.85	54.00	-6.15	AV
Horizontal	17236.289	59.51	10.12	38.38	44.10	63.91	74.00	-10.09	Pk
Horizontal	17236.958	43.25	10.12	38.38	44.10	47.65	54.00	-6.35	AV
middle Channel (5785 MHz)-Above 1G									
Vertical	4594.067	58.92	6.48	36.35	44.05	57.70	74.00	-16.30	Pk
Vertical	4594.184	45.24	6.48	36.35	44.05	44.02	54.00	-9.98	AV
Vertical	11572.051	60.59	8.47	37.88	44.51	62.43	74.00	-11.57	Pk
Vertical	11570.840	44.31	8.47	37.88	44.51	46.15	54.00	-7.85	AV
Vertical	17355.607	59.19	10.12	38.8	44.10	64.01	74.00	-9.99	Pk
Vertical	17355.770	41.70	10.12	38.8	42.70	47.92	54.00	-6.08	AV
Horizontal	4593.741	61.37	6.48	36.37	44.05	60.17	74.00	-13.83	Pk
Horizontal	4593.721	44.16	6.48	36.37	44.05	42.96	54.00	-11.04	AV
Horizontal	11570.802	62.19	8.47	38.64	44.50	64.80	74.00	-9.20	Pk
Horizontal	11570.259	47.30	8.47	38.64	44.50	49.91	54.00	-4.09	AV
Horizontal	17357.118	61.00	10.12	38.38	44.10	65.40	74.00	-8.60	Pk
Horizontal	17355.129	45.88	10.12	38.38	44.10	50.28	54.00	-3.72	AV
High Channel (5825 MHz)-Above 1G									
Vertical	5039.952	59.63	7.10	37.24	43.50	60.47	74.00	-13.53	Pk
Vertical	5040.611	46.98	7.10	37.24	43.50	47.82	54.00	-6.18	AV
Vertical	11651.314	56.04	8.46	37.68	44.50	57.68	74.00	-16.32	Pk
Vertical	11650.472	42.63	8.46	37.68	44.50	44.27	54.00	-9.73	AV
Vertical	17475.701	60.04	10.12	38.8	44.10	64.86	74.00	-9.14	Pk
Vertical	17475.984	41.06	10.12	38.8	42.70	47.28	54.00	-6.72	AV
Horizontal	5040.401	66.83	7.10	37.24	43.50	67.67	74.00	-6.33	Pk
Horizontal	5039.808	42.35	7.10	37.24	43.50	43.19	54.00	-10.81	AV
Horizontal	11650.862	57.67	8.46	38.57	44.50	60.20	74.00	-13.80	Pk
Horizontal	11650.265	44.19	8.46	38.57	44.50	46.72	54.00	-7.28	AV
Horizontal	17476.172	60.08	10.12	38.38	44.10	64.48	74.00	-9.52	Pk
Horizontal	17476.561	45.86	10.12	38.38	44.10	50.26	54.00	-3.74	AV

Note: All modes have been tested, and only the worst mode 802.11n20 mode is mentioned in the report.

5.3.5 Radiated Band Edge

For U-NII-3

For 802.11a mode: (CH149 5745MHz&CH165 5825MHz)

Polarization	Frequency (MHz)	Read Level (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamplifier Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Over Limit (dB)	Detector Type
Horizontal	5725	67.15	8.69	29.4	42.59	62.65	74	-11.35	Pk
Horizontal	5850	63.23	9.37	30.41	43.25	59.76	74	-14.24	Pk
Vertical	5725	69.48	9.21	29.4	42.59	65.50	74	-8.50	Pk
Vertical	5850	59.33	9.12	30.41	43.25	55.61	74	-18.39	Pk
Horizontal	5725	46.90	8.69	29.4	42.59	42.40	54	-11.60	AV
Horizontal	5850	52.00	8.46	30.41	43.25	47.62	54	-6.38	AV
Vertical	5725	48.90	9.21	29.4	42.59	44.92	54	-9.08	AV
Vertical	5850	52.12	9.12	30.41	43.25	48.40	54	-5.60	AV

For 802.11n20 mode: (CH149 5745MHz&CH165 5825MHz)

Polarization	Frequency (MHz)	Read Level (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamplifier Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Over Limit (dB)	Detector Type
Horizontal	5725	65.97	8.69	29.4	42.59	61.47	74	-12.53	Pk
Horizontal	5850	64.69	9.37	30.41	43.25	61.22	74	-12.78	Pk
Vertical	5725	69.67	9.21	29.4	42.59	65.69	74	-8.31	Pk
Vertical	5850	59.43	9.12	30.41	43.25	55.71	74	-18.29	Pk
Horizontal	5725	45.60	8.69	29.4	42.59	41.10	54	-12.90	AV
Horizontal	5850	49.63	8.46	30.41	43.25	45.25	54	-8.75	AV
Vertical	5725	50.84	9.21	29.4	42.59	46.86	54	-7.14	AV
Vertical	5850	51.98	9.12	30.41	43.25	48.26	54	-5.74	AV

For 802.11n40 mode: (CH151 5755MHz&CH159 5795MHz)

Polarization	Frequency	Read Lavel	Cable loss	Antenna Factor	Preampl Factor	Emission Level	Limits	Over Limit	Detector Type
	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Horizontal	5725	67.27	8.69	29.4	42.59	62.77	74	-11.23	Pk
Horizontal	5850	63.42	9.37	30.41	43.25	59.95	74	-14.05	Pk
Vertical	5725	68.30	9.21	29.4	42.59	64.32	74	-9.68	Pk
Vertical	5850	61.23	9.12	30.41	43.25	57.51	74	-16.49	Pk
Horizontal	5725	48.74	8.69	29.4	42.59	44.24	54	-9.76	AV
Horizontal	5850	52.39	8.46	30.41	43.25	48.01	54	-5.99	AV
Vertical	5725	50.96	9.21	29.4	42.59	46.98	54	-7.02	AV
Vertical	5850	51.10	9.12	30.41	43.25	47.38	54	-6.62	AV

For 802.11ac20 mode: (CH149 5745MHz&CH165 5825MHz)

Polarization	Frequency	Read Lavel	Cable loss	Antenna Factor	Preampl Factor	Emission Level	Limits	Over Limit	Detector Type
	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Horizontal	5725	65.93	8.69	29.4	42.59	61.43	74	-12.57	Pk
Horizontal	5850	63.98	9.37	30.41	43.25	60.51	74	-13.49	Pk
Vertical	5725	70.25	9.21	29.4	42.59	66.27	74	-7.73	Pk
Vertical	5850	59.70	9.12	30.41	43.25	55.98	74	-18.02	Pk
Horizontal	5725	47.76	8.69	29.4	42.59	43.26	54	-10.74	AV
Horizontal	5850	50.78	8.46	30.41	43.25	46.40	54	-7.60	AV
Vertical	5725	51.08	9.21	29.4	42.59	47.10	54	-6.90	AV
Vertical	5850	51.33	9.12	30.41	43.25	47.61	54	-6.39	AV

For 802.11ac40 mode: (CH151 5755MHz&CH159 5795MHz)

Polarization	Frequency (MHz)	Read Level (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamplifier Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Over Limit (dB)	Detector Type
Horizontal	5725	65.50	8.69	29.4	42.59	61.00	74	-13.00	Pk
Horizontal	5850	65.49	9.37	30.41	43.25	62.02	74	-11.98	Pk
Vertical	5725	69.28	9.21	29.4	42.59	65.30	74	-8.70	Pk
Vertical	5850	61.59	9.12	30.41	43.25	57.87	74	-16.13	Pk
Horizontal	5725	47.61	8.69	29.4	42.59	43.11	54	-10.89	AV
Horizontal	5850	49.69	8.46	30.41	43.25	45.31	54	-8.69	AV
Vertical	5725	48.70	9.21	29.4	42.59	44.72	54	-9.28	AV
Vertical	5850	49.73	9.12	30.41	43.25	46.01	54	-7.99	AV

5.4 RF Output Power

5.4.1 Limit

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz band

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


For the band 5.725-5.85 GHz

The maximum conducted output power over the frequency band of operation shall not exceed 1 W. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.4.2 Test Procedure

The maximum average conducted output power may be measured using a broadband average RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the emission bandwidth and utilize a fast-responding diode detector.

5.4.3 Test Setup



5.4.4 Test Results

EUT:	SmartDrive Media Screen	Model Name:	SG25-NBT
Test Mode:	TX	Test Voltage:	DC 12V from battery

Directional gain and the maximum output power limit:

Frequency Band	Gain (dBi)	Correlated chins directional gain(dBi)	Conducted Power Limit (dBm)
U-NII-3	6.04	6.04	29.96

Note: Basic methodology with N_{ANT} transmit antennas, each with the same directional gain G_{ANT} dBi, being driven by N_{ANT} transmitter outputs of equal power.

Directional gain is to be computed as follows:

Directional gain = $G_{ANT} + 10 \log(N_{ANT})$ dBi

The limit should be calculated as below: Limit = $30 - (\text{Directional gain} - 6) = 29.96\text{dbm}$

For U-NII-3

Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
a	5745	Ant1	16.08	0.44	16.52	29.96	Pass
a	5785	Ant1	16.48	0.23	16.71	29.96	Pass
a	5825	Ant1	16.3	0.46	16.76	29.96	Pass
n20	5745	Ant1	16.22	0.42	16.64	29.96	Pass
n20	5785	Ant1	16.51	0.32	16.83	29.96	Pass
n20	5825	Ant1	16.19	0.23	16.42	29.96	Pass
n40	5755	Ant1	16.31	0.45	16.76	29.96	Pass
n40	5795	Ant1	16.29	0.6	16.89	29.96	Pass
ac20	5745	Ant1	16.03	0.26	16.29	29.96	Pass
ac20	5785	Ant1	16.4	0.43	16.83	29.96	Pass
ac20	5825	Ant1	16.49	0.31	16.8	29.96	Pass
ac40	5755	Ant1	16.41	0.75	17.16	29.96	Pass
ac40	5795	Ant1	16.3	0.86	17.16	29.96	Pass

5.5 Power Spectral Density

5.5.1 Limit

For the band 5.15-5.25 GHz

For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.25-5.35 GHz and 5.47-5.725 GHz

The maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz

The maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.5.2 Test Procedure


For U-NII-1

1. Set analyzer center frequency to NII channel center frequency.
2. Set the RBW $\geq$ 1MHz.
3. Set the VBW $\geq$ 3 x RBW.
4. Detector = RMS.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum amplitude level.

For U-NII-3

1. Set analyzer center frequency to NII channel center frequency.
2. Set the RBW $\geq$ 500kHz.
3. Set the VBW $\geq$ 3 x RBW.
4. Detector = RMS.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum amplitude level.

5.5.3 Test Setup



5.5.4 Test Results

EUT:	SmartDrive Media Screen	Model Name:	SG25-NBT
Test Mode:	TX	Test Voltage:	DC 12V from battery

Directional gain and the maximum output power limit:

Frequency Band	Gain (dBi)	Correlated chins directional gain(dBi)	PSD Limit (dBm/MHz)
U-NII-3	6.04	6.04	29.96

Note: Basic methodology with N_{ANT} transmit antennas, each with the same directional gain G_{ANT} dBi, being driven by N_{ANT} transmitter outputs of equal power.

Directional gain is to be computed as follows:


Directional gain = $G_{ANT} + 10 \log(N_{ANT})$ dBi

The limit should be calculated as below: Limit = $30 - (\text{Directional gain} - 6) = 29.96\text{dbm}$


For U-NII-3

Mode	Channel	Frequency (MHz)	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm/MHz)	Result
11a	CH149	5745	3.2	0.44	3.64	29.96	Pass
11a	CH157	5785	3.53	0.23	3.76	29.96	Pass
11a	CH165	5825	3.37	0.46	3.83	29.96	Pass
11n(HT20)	CH149	5745	2.91	0.42	3.33	29.96	Pass
11n(HT20)	CH157	5785	3.19	0.32	3.51	29.96	Pass
11n(HT20)	CH165	5825	2.86	0.23	3.09	29.96	Pass
11n(HT40)	CH151	5755	0.15	0.45	0.6	29.96	Pass
11n(HT40)	CH159	5795	0.62	0.6	1.22	29.96	Pass
11ac(VHT20)	CH149	5745	2.9	0.26	3.16	29.96	Pass
11ac(VHT20)	CH157	5785	3.2	0.43	3.63	29.96	Pass
11ac(VHT20)	CH165	5825	3.2	0.31	3.51	29.96	Pass
11ac(VHT40)	CH151	5755	0.27	0.75	1.02	29.96	Pass
11ac(VHT40)	CH159	5795	0.56	0.86	1.42	29.96	Pass


PSD NVNT a 5745MHz Ant1

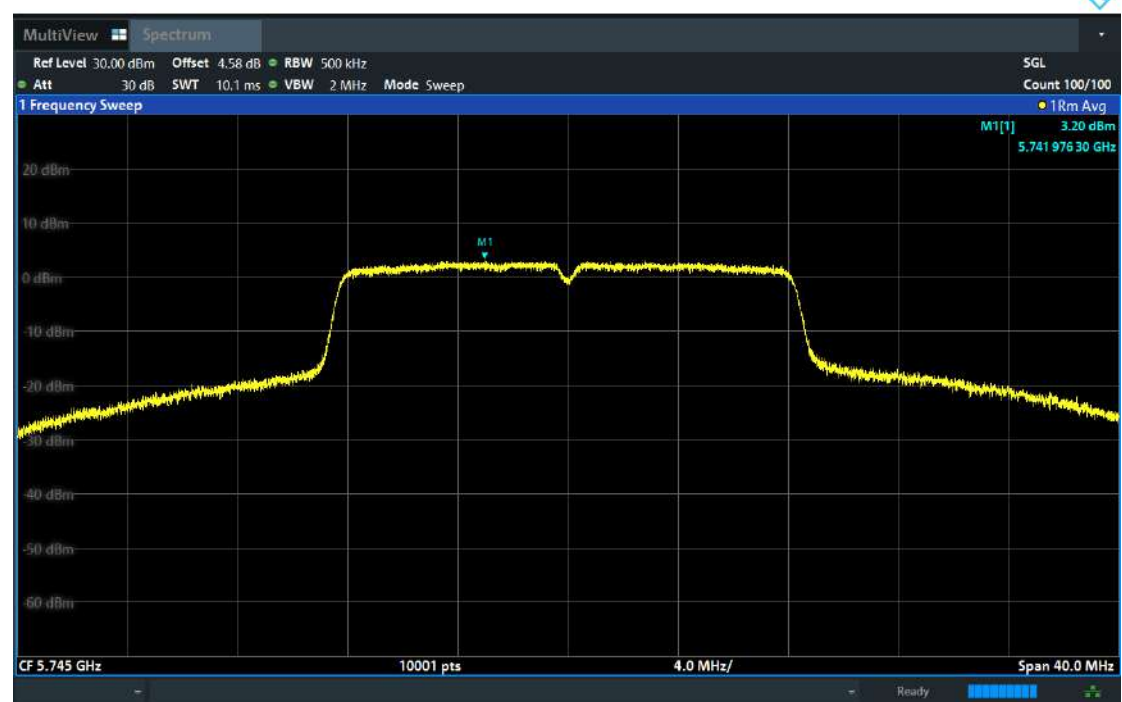


PSD NVNT a 5785MHz Ant1

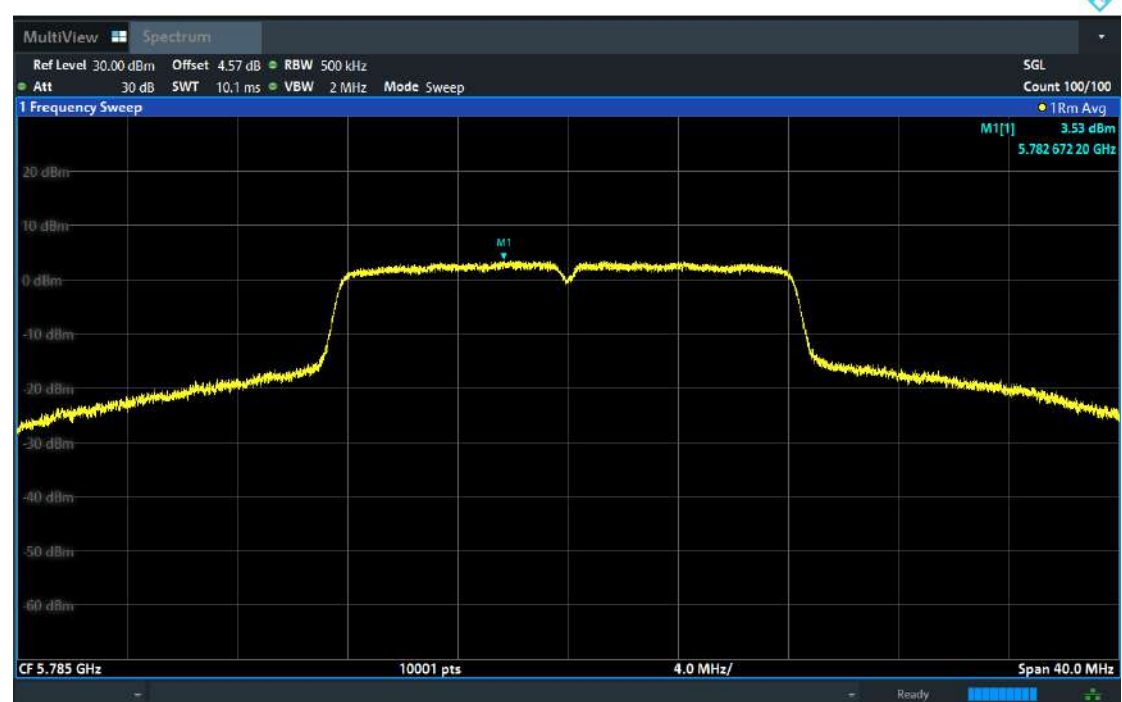


PSD NVNT a 5825MHz Ant1

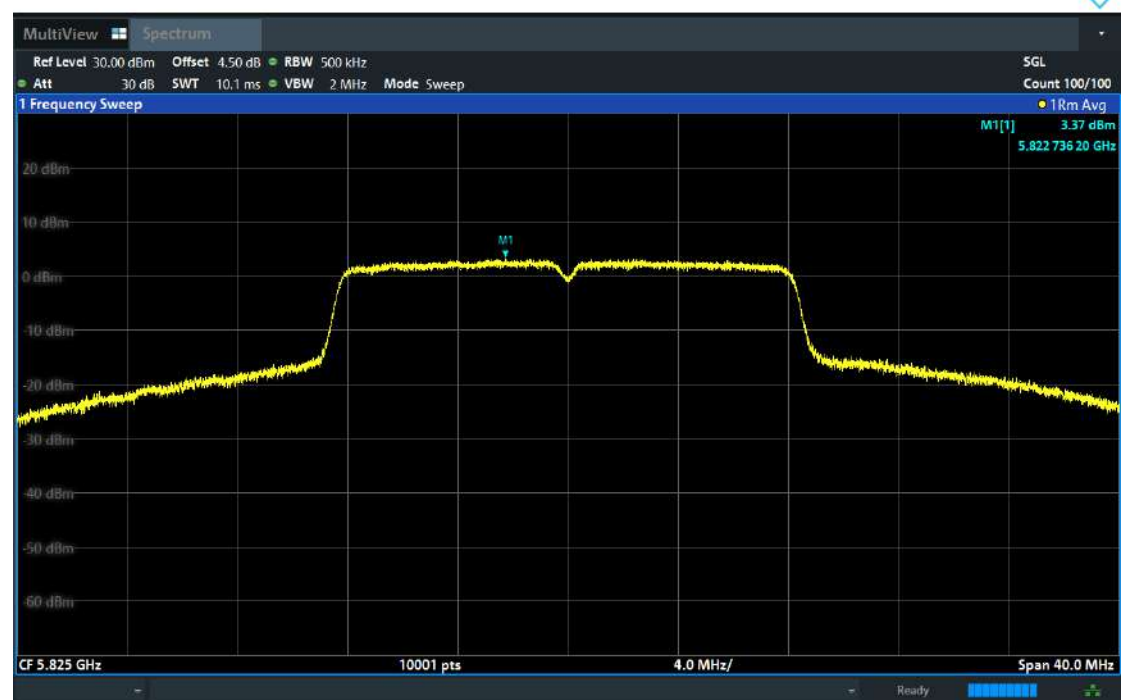


PSD NVNT n20 5745MHz Ant1

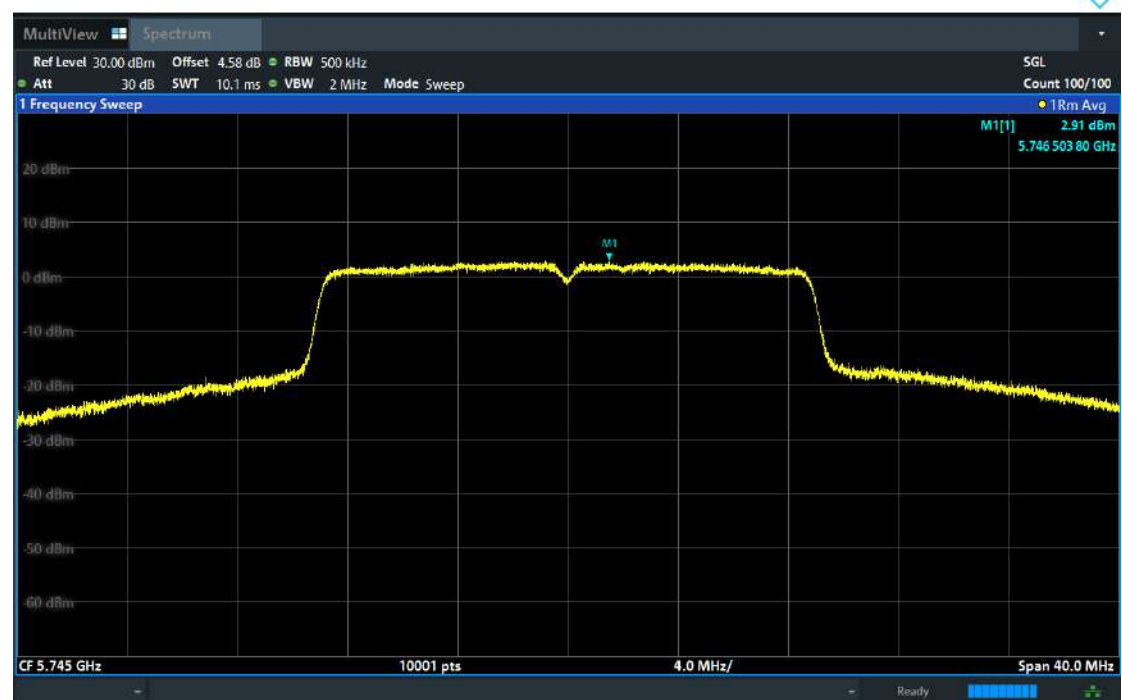


PSD NVNT n20 5785MHz Ant1

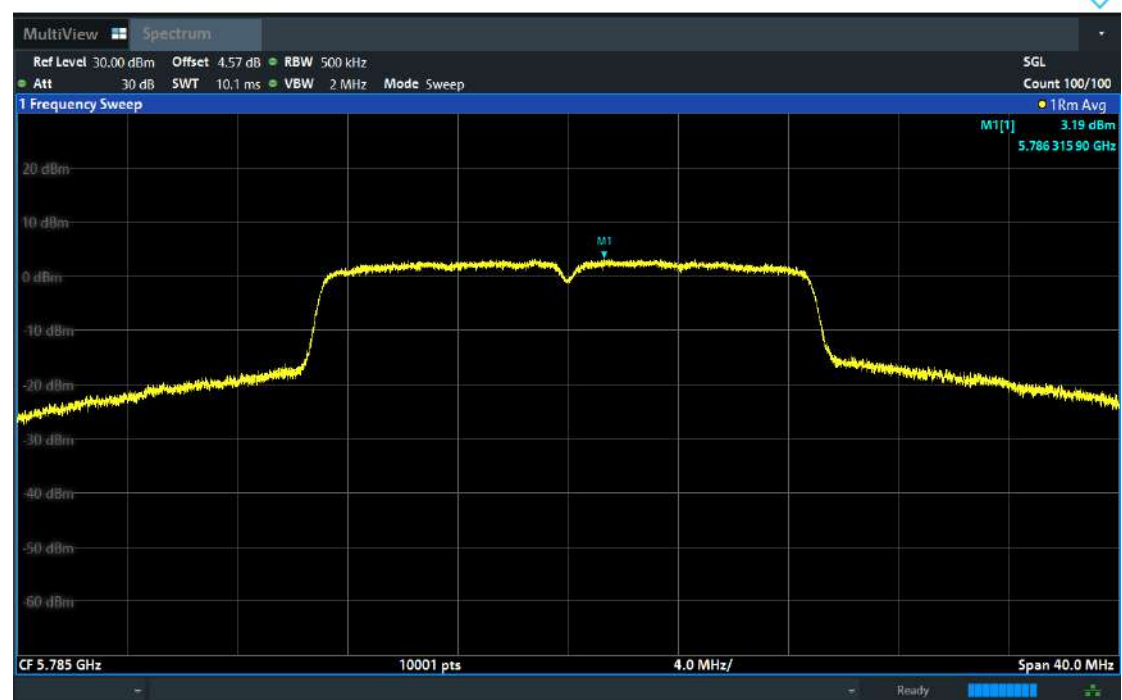


PSD NVNT n20 5825MHz Ant1

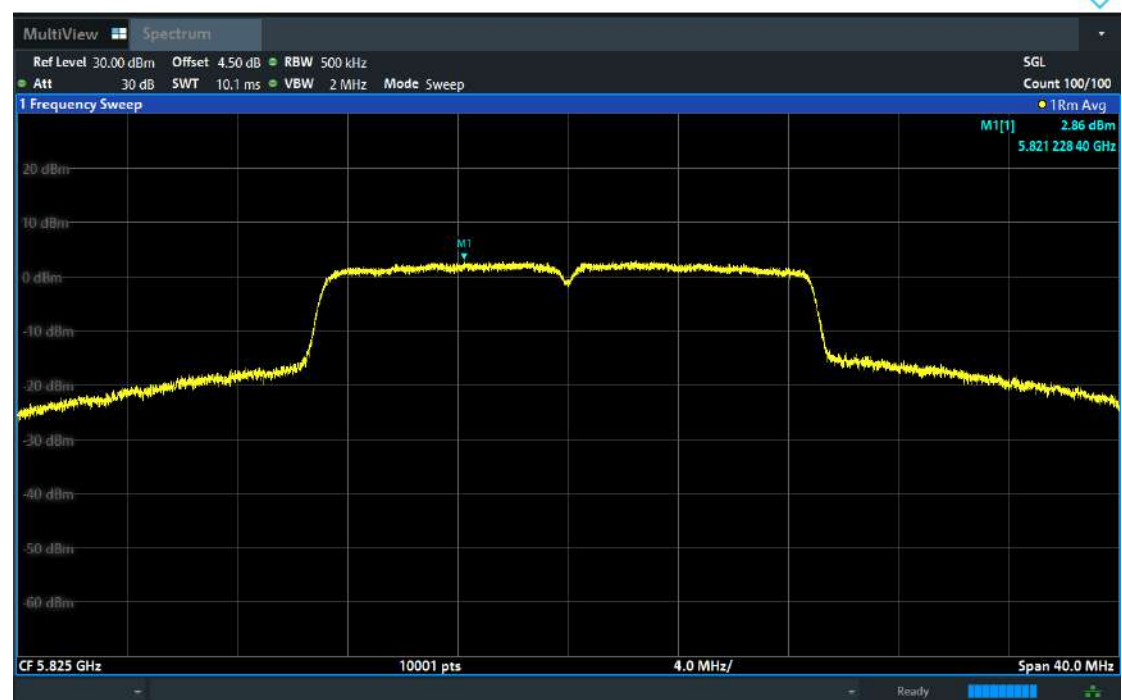


PSD NVNT n40 5755MHz Ant1

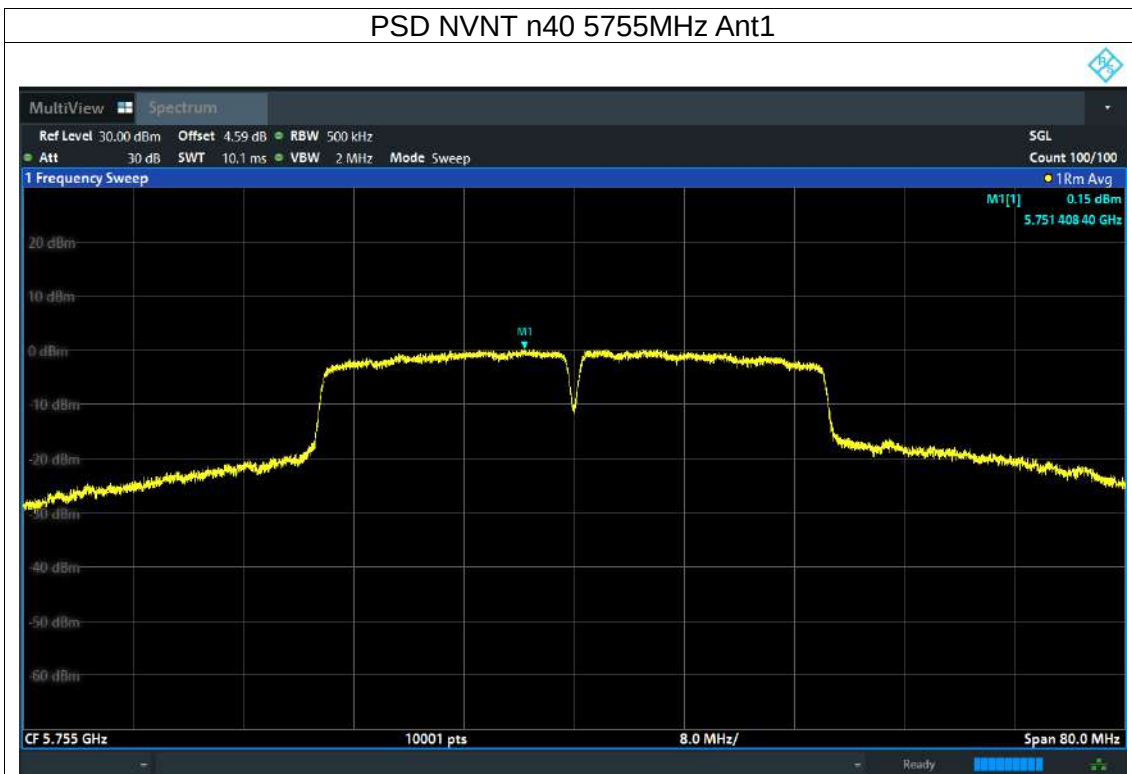


PSD NVNT n40 5795MHz Ant1

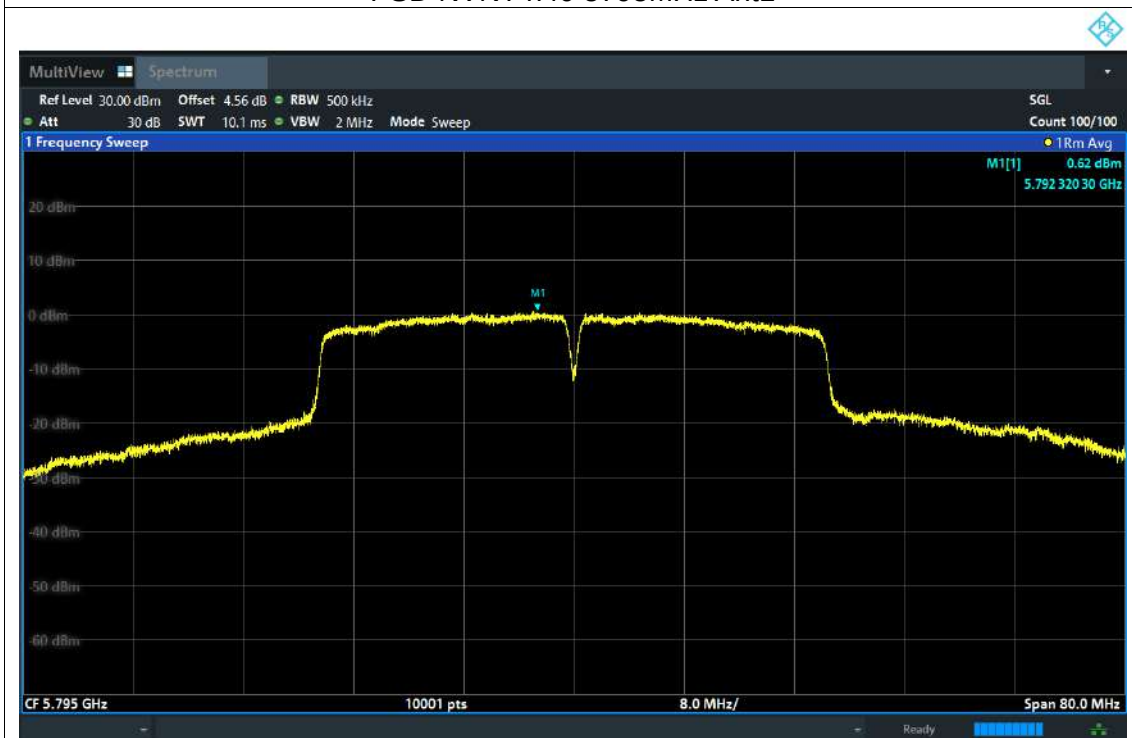


PSD NVNT ac20 5745MHz Ant1

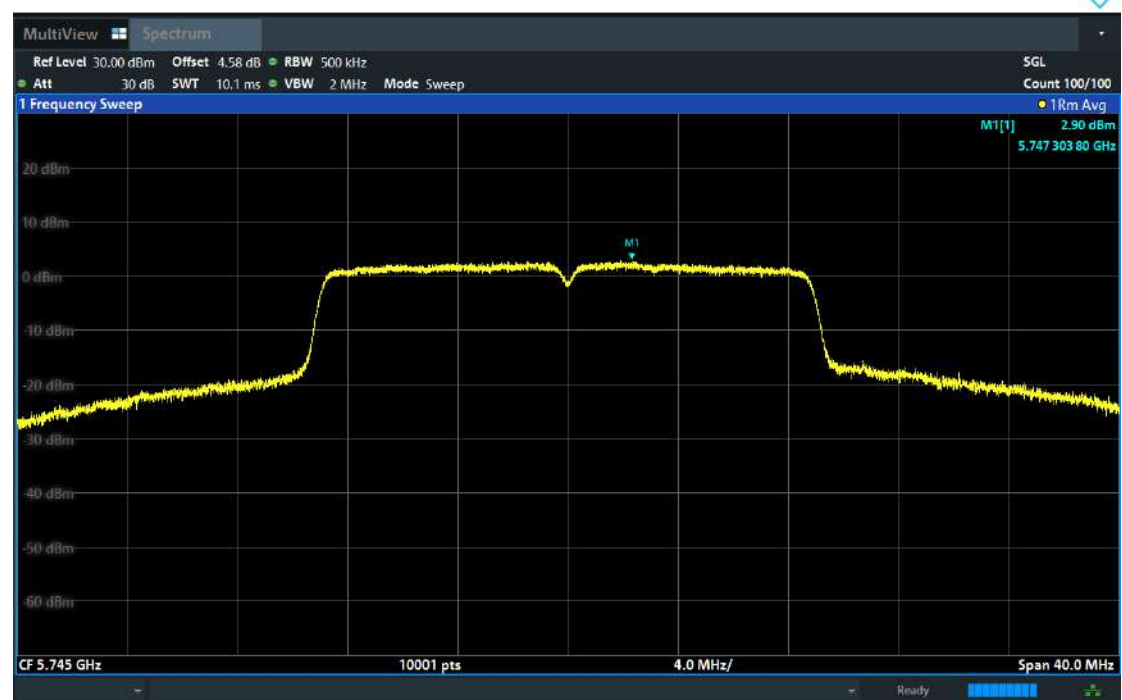


PSD NVNT ac20 5785MHz Ant1

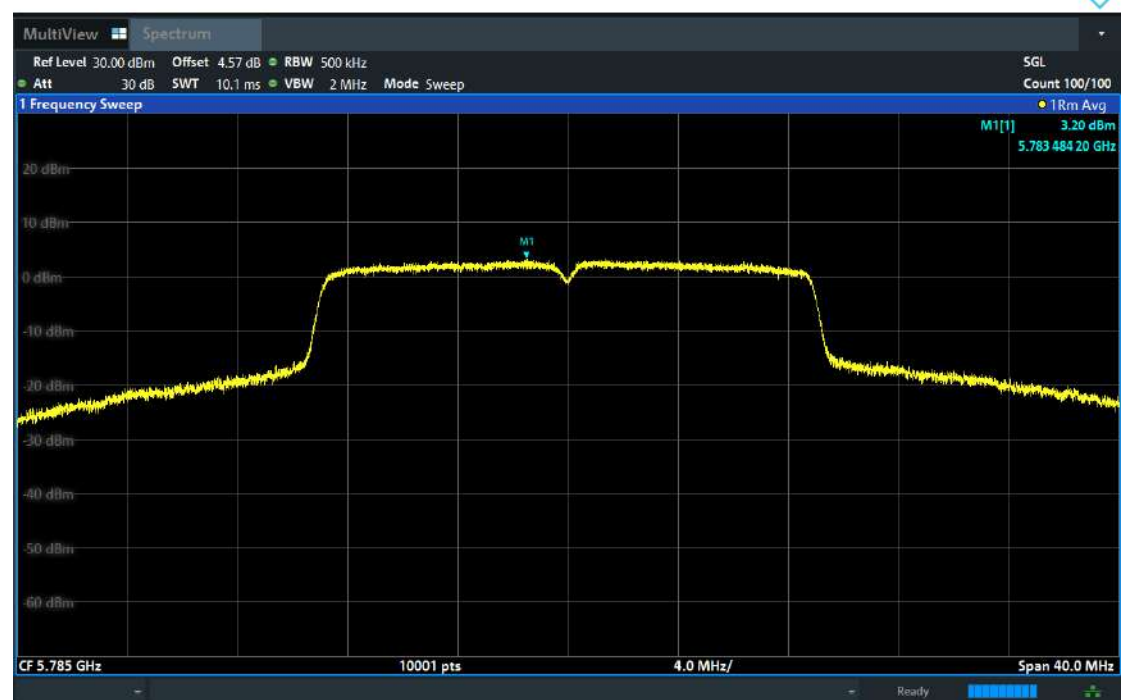


PSD NVNT ac20 5825MHz Ant1

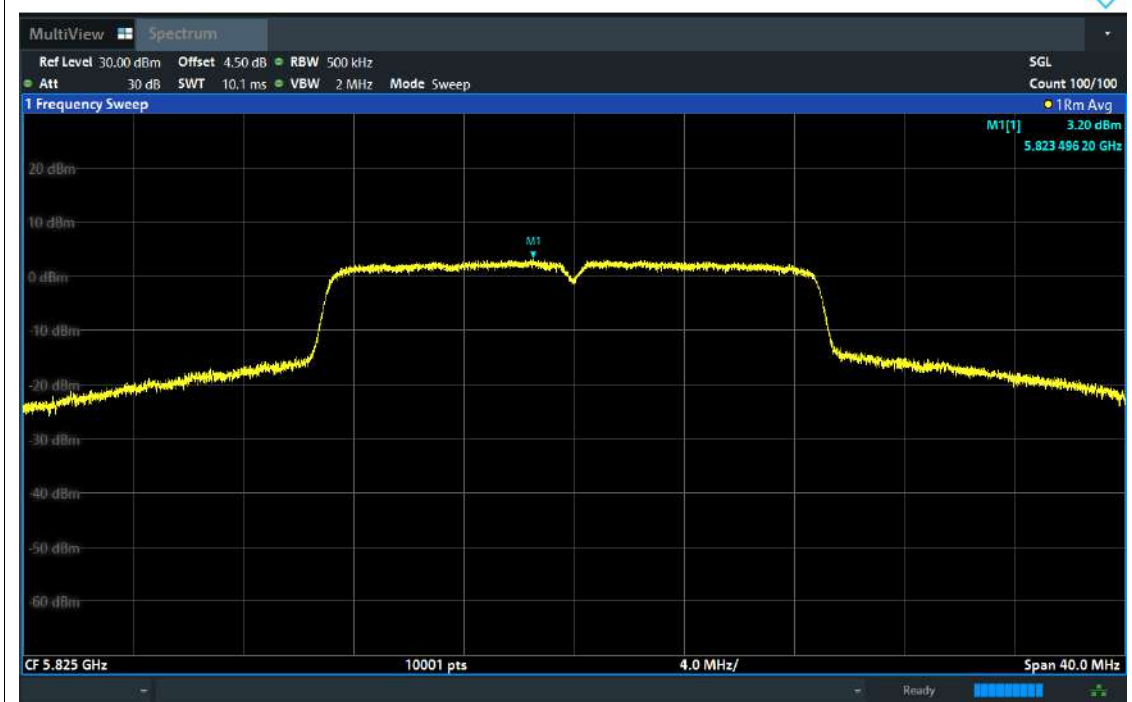

PSD NVNT ac40 5755MHz Ant1

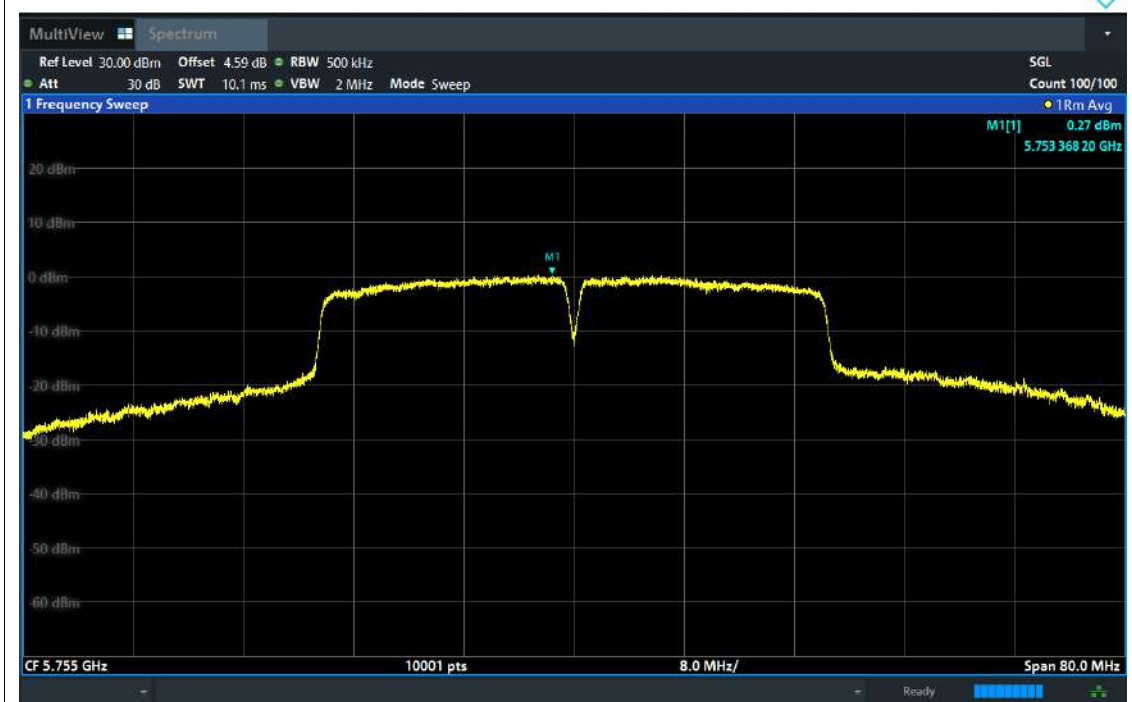

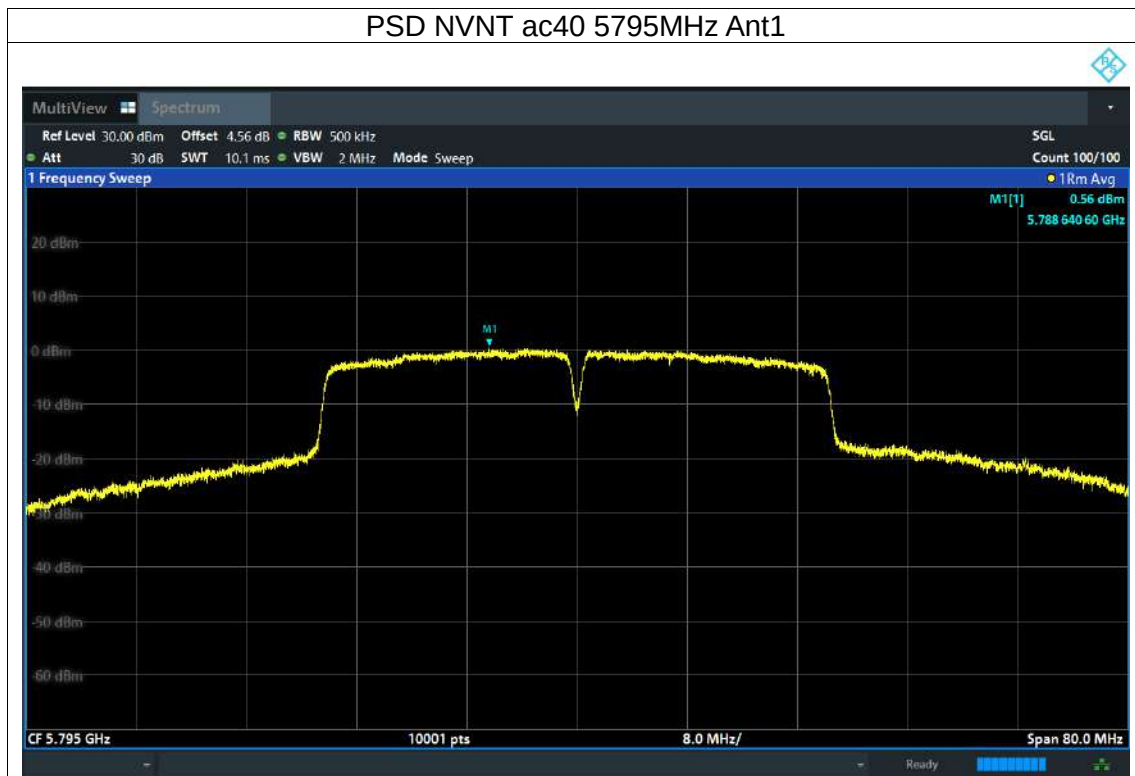

5.6 26dB Emission Bandwidth and Occupied bandwidth

5.6.1 Limit

For purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier

5.6.2 Test Procedure

26dB Emission bandwidth

Set RBW = approximately 1% of the emission bandwidth.

Set VBW $\geq 3 \times \text{RBW}$

Detector = Peak.

Trace mode = Max hold.

Measure the maximum width of the emission that is 26 dB down from the peak of the emission.

Occupied Bandwidth

Set Span = 1.5 times to 5.0 times the OBW


Set RBW = 1% to 5% of the OBW.

Set VBW $\geq 3 \times \text{RBW}$, Detector = Peak.

Trace mode = Max hold.

Use the 99% power bandwidth function of the instrument.



5.6.3 Test Setup




5.6.4 Test Results

For U-NII-3

Channel	Frequency (MHz)	99% bandwidth (MHz)	Limit (kHz)	Result
11a	5745	22.114	/	Pass
11a	5785	23.105	/	Pass
11a	5825	24.574	/	Pass
11n (HT20)	5745	23.137	/	Pass
11n (HT20)	5785	23.96	/	Pass
11n (HT20)	5825	24.851	/	Pass
11n (HT40)	5755	49.736	/	Pass
11n (HT40)	5795	47.341	/	Pass
11ac (VHT20)	5745	22.926	/	Pass
11ac (VHT20)	5785	23.548	/	Pass
11ac (VHT20)	5825	25.906	/	Pass
11ac (VHT40)	5755	49.565	/	Pass
11ac (VHT40)	5795	47.616	/	Pass

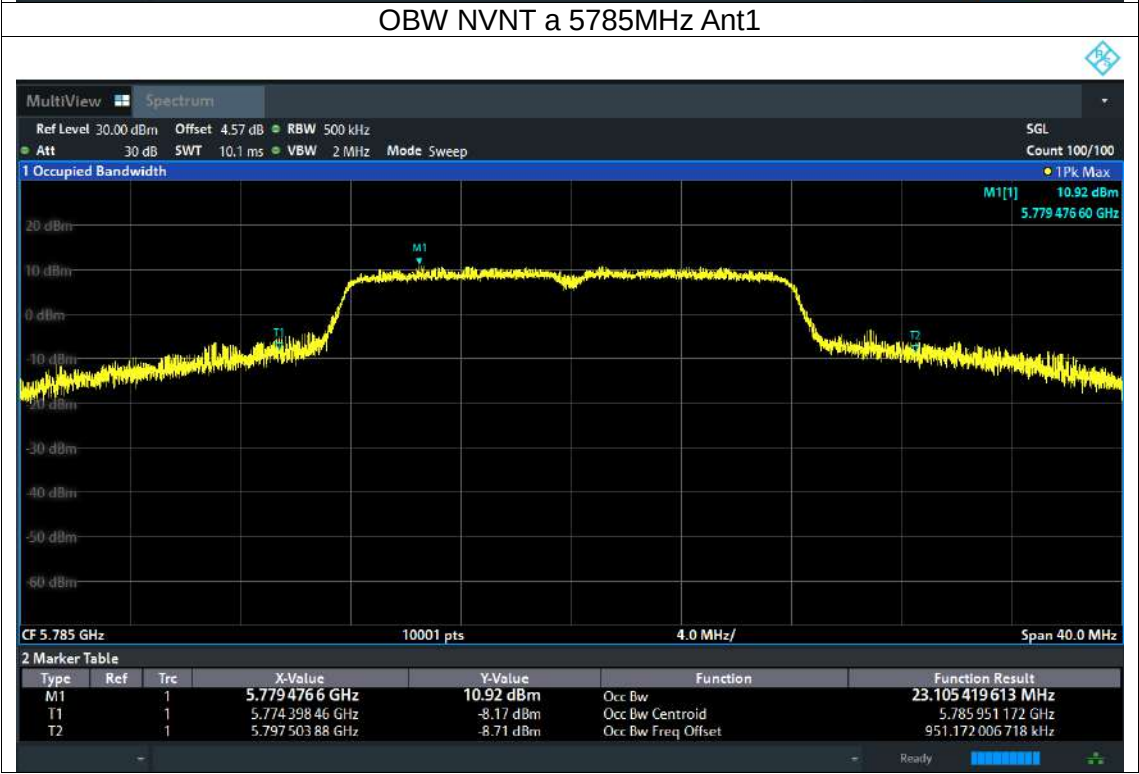
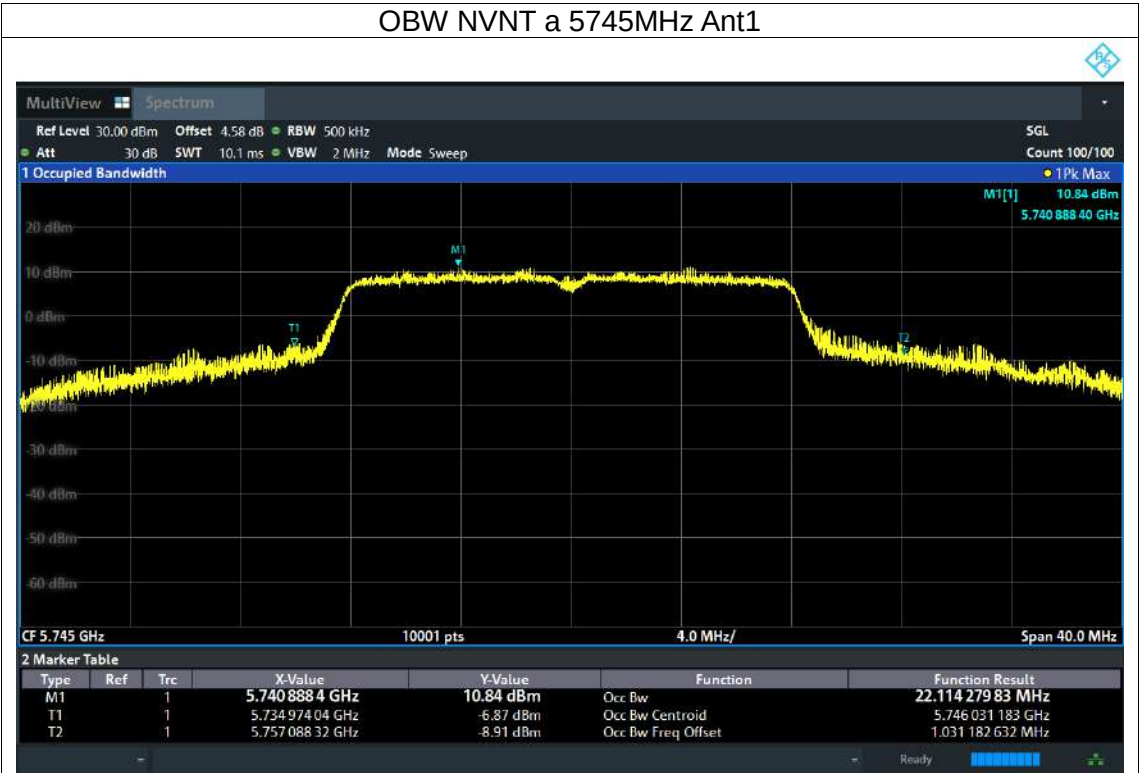



OBW NVNT a 5825MHz Ant1


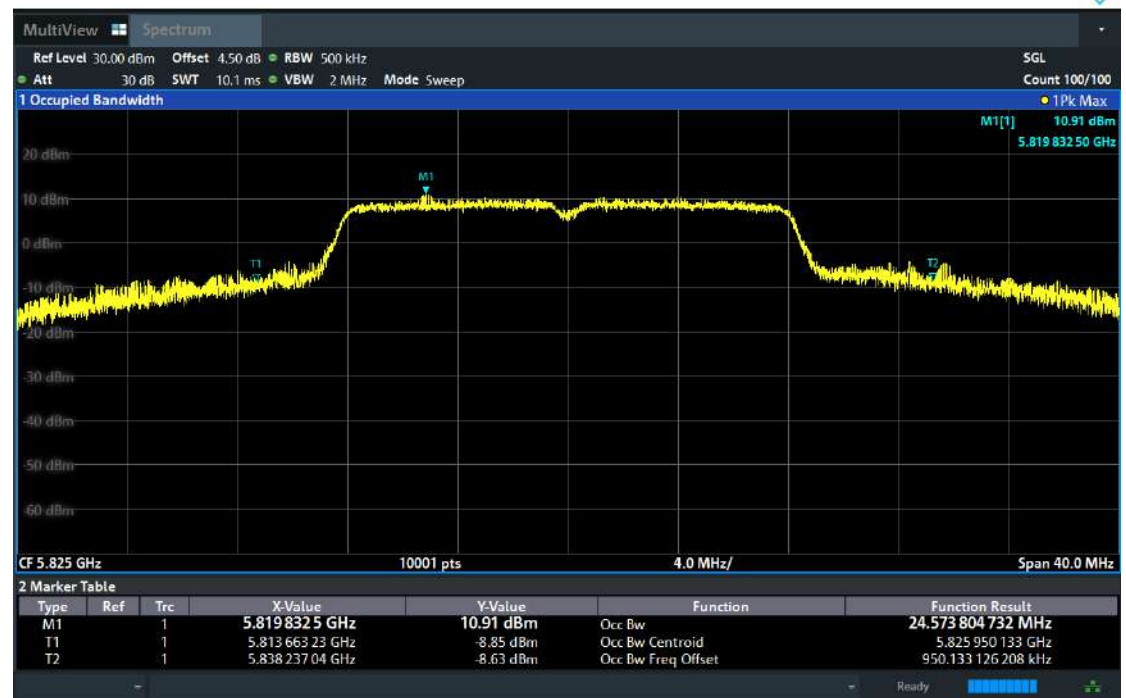


OBW NVNT n20 5745MHz Ant1




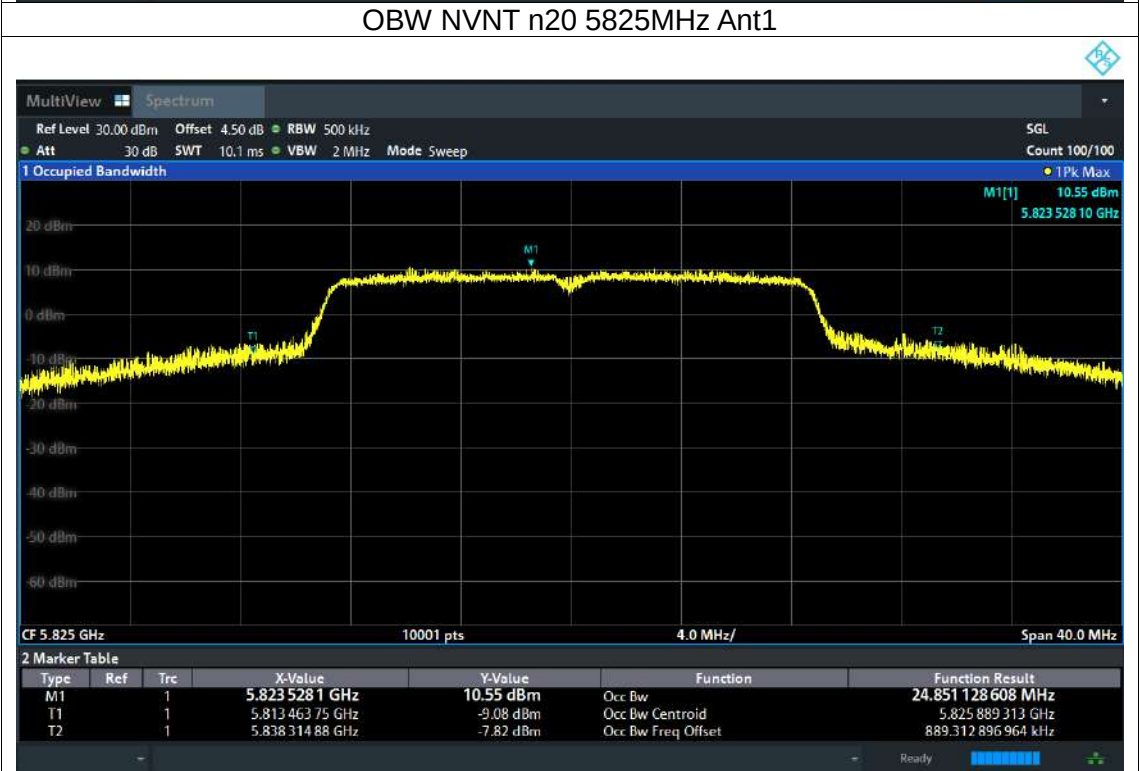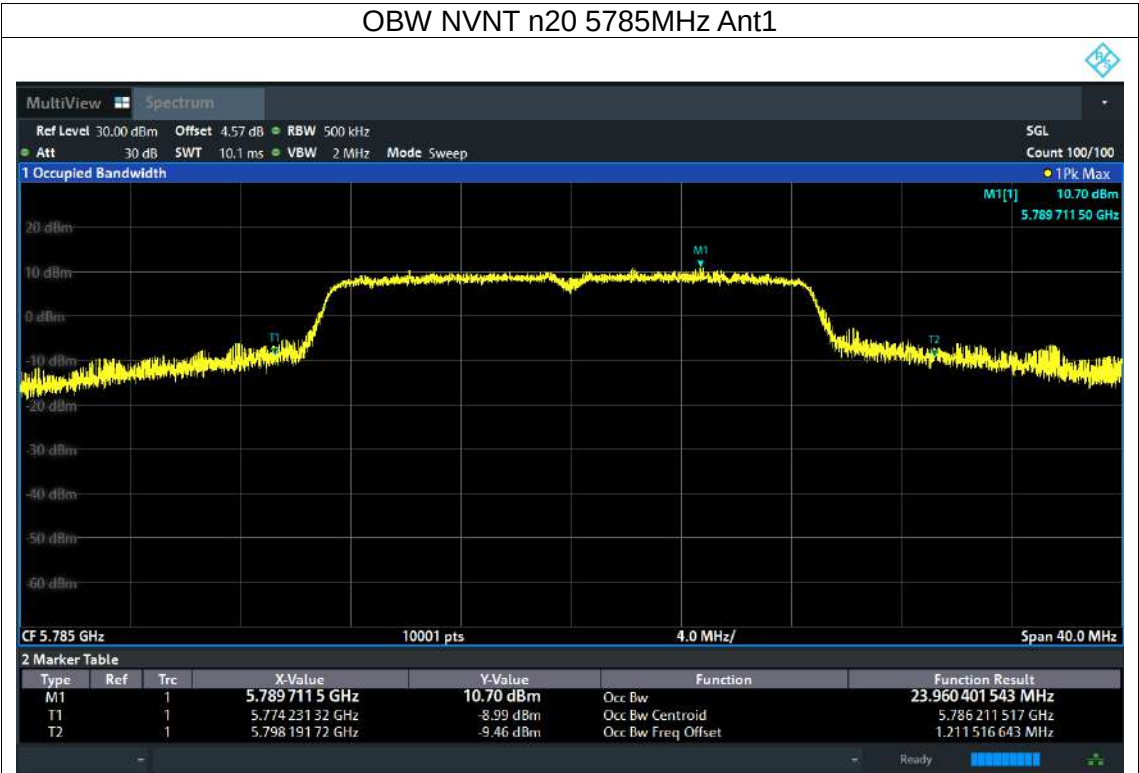

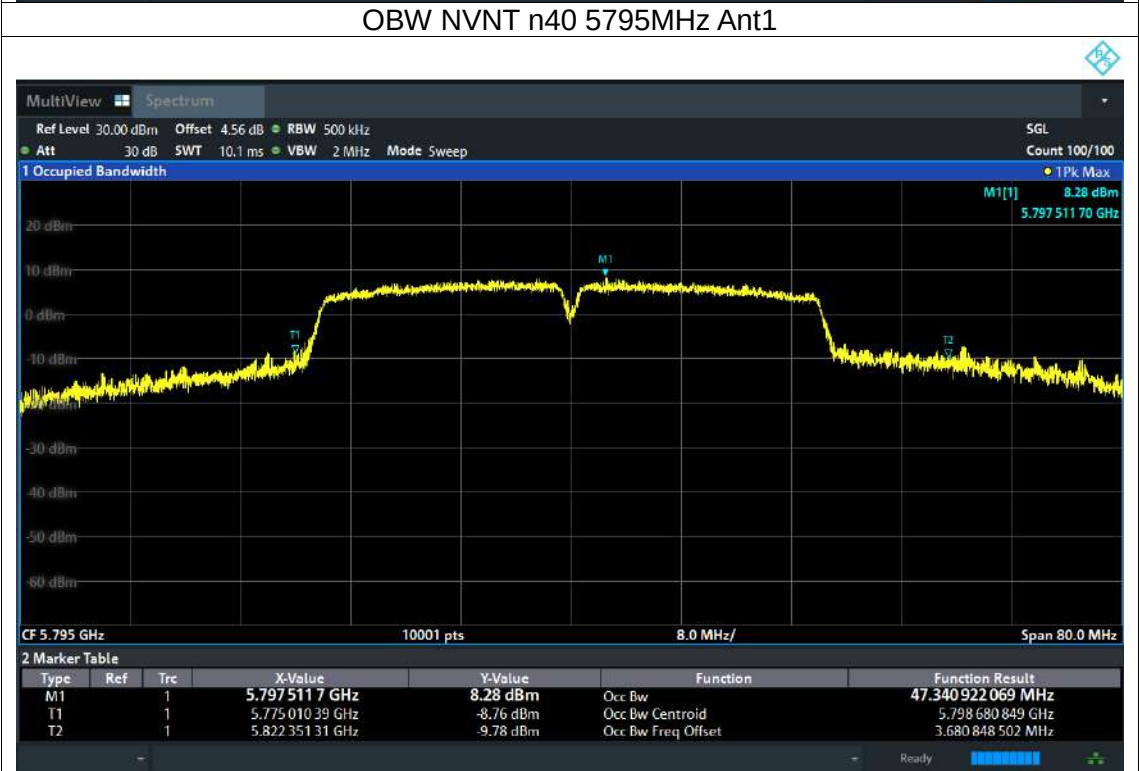

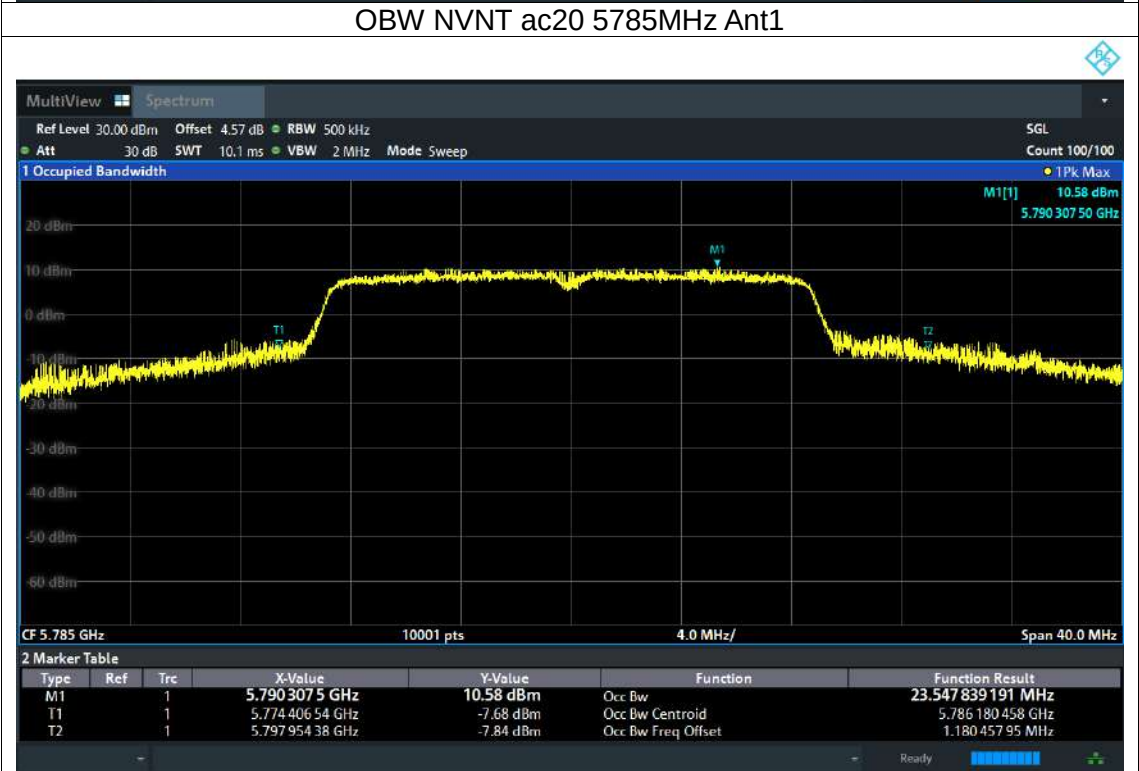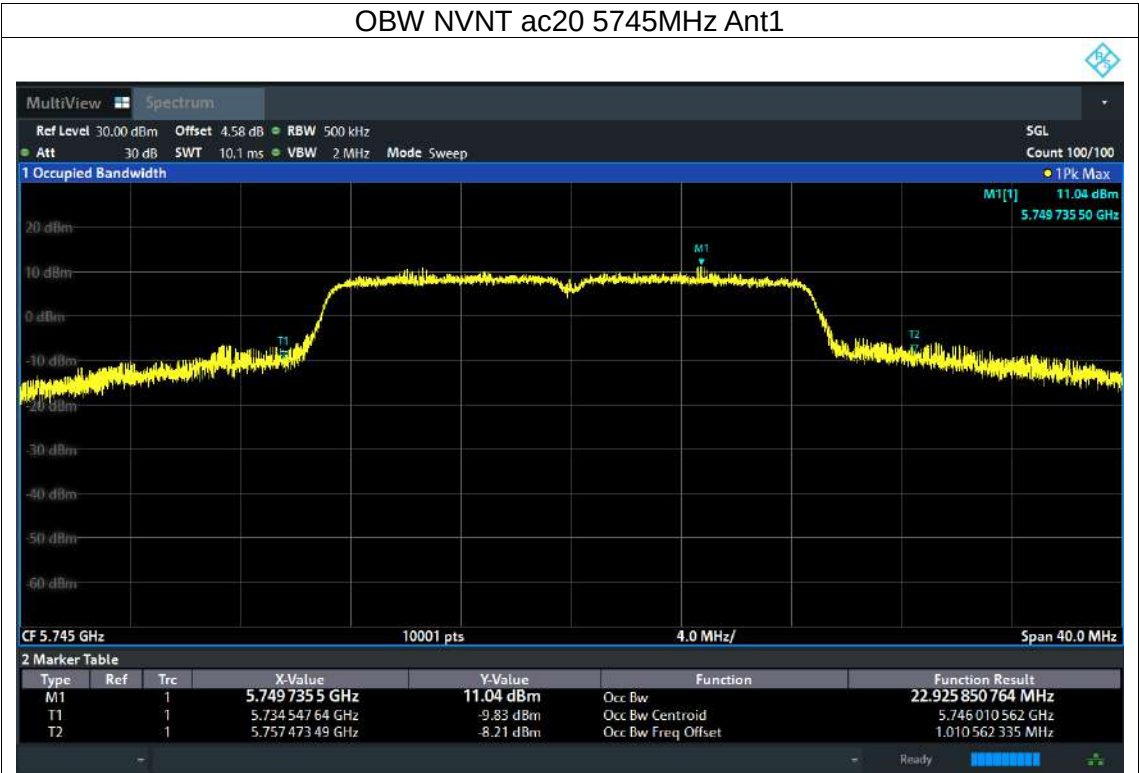


OBW NVNT ac20 5825MHz Ant1

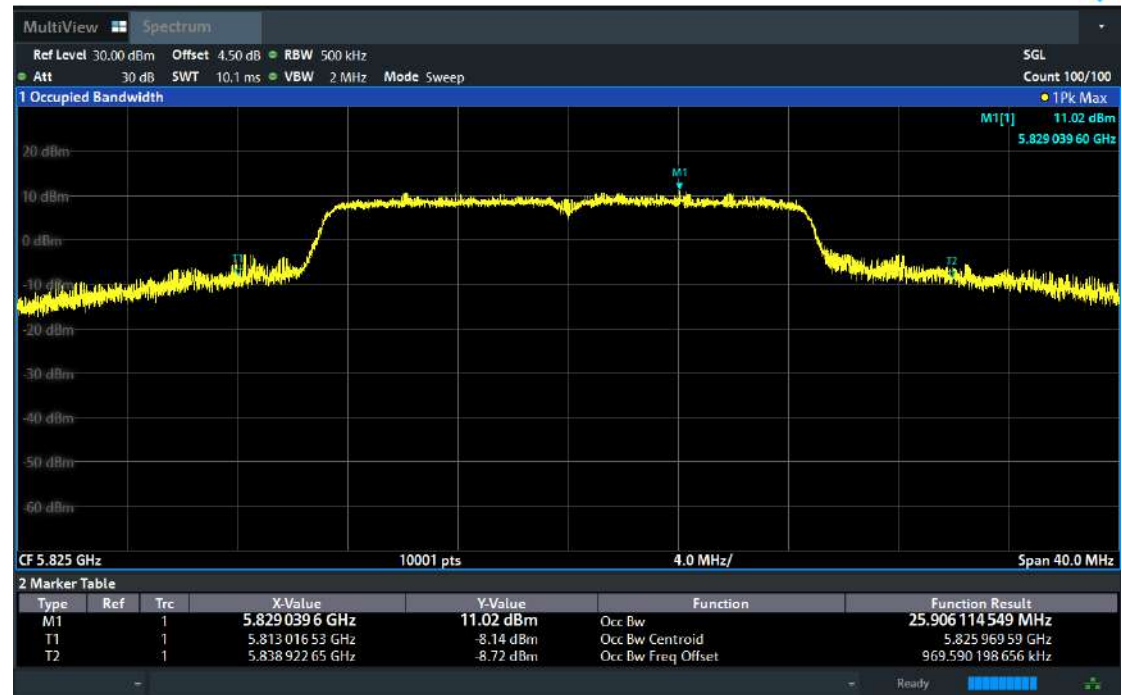

OBW NVNT ac40 5755MHz Ant1



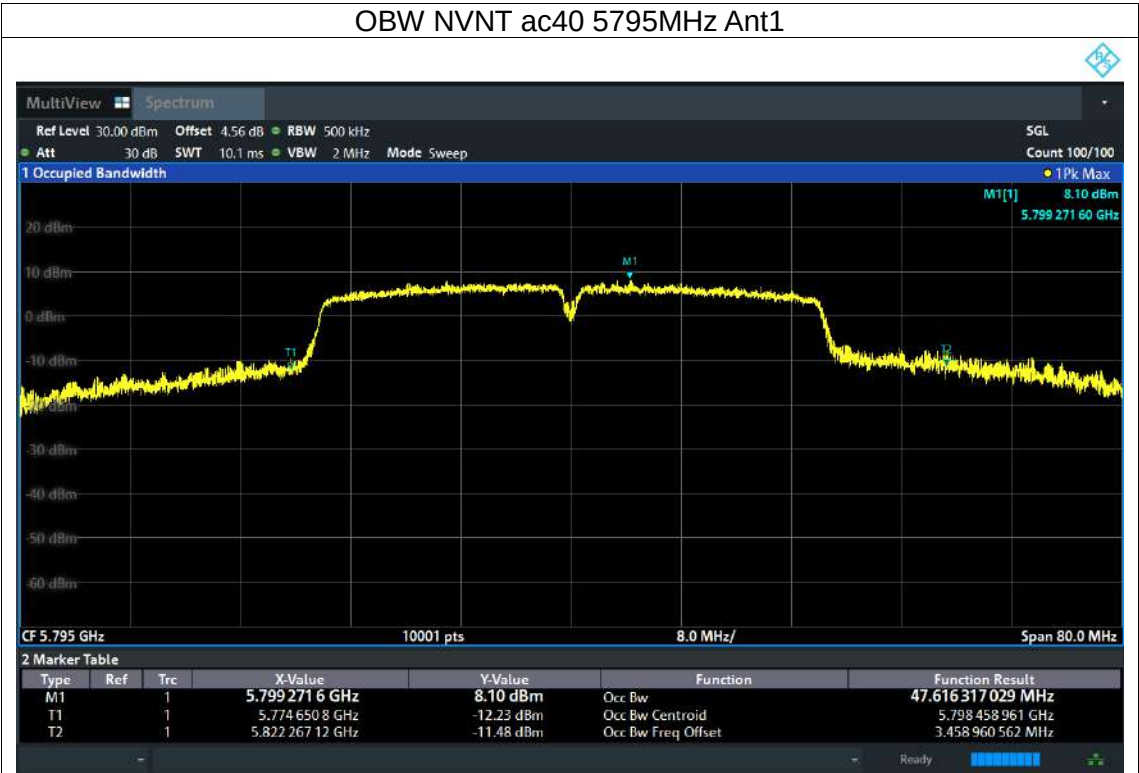

5.7 6 dB Bandwidth


5.7.1 Limit

(e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

5.7.2 Test Procedure

1. Set RBW= 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 26 dB relative to the maximum level measured in the fundamental emission.

5.7.3 Test Setup



5.7.4 Test Results

EUT:	SmartDrive Media Screen	Model Name:	SG25-NBT
Test Mode:	TX	Test Voltage:	DC 12V from battery

For U-NII-3

Channel	Test Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
11a	CH149	5745	16.244	500	Pass
11a	CH157	5785	16.052	500	Pass
11a	CH165	5825	16.288	500	Pass
11n (HT20)	CH149	5745	16.968	500	Pass
11n (HT20)	CH157	5785	16.776	500	Pass
11n (HT20)	CH165	5825	16.892	500	Pass
11n (HT40)	CH151	5755	33.864	500	Pass
11n (HT40)	CH159	5795	33.792	500	Pass
11ac (VHT20)	CH149	5745	16.904	500	Pass
11ac (VHT20)	CH157	5785	16.552	500	Pass
11ac (VHT20)	CH165	5825	17.248	500	Pass
11ac (VHT40)	CH151	5755	35.088	500	Pass
11ac (VHT40)	CH159	5795	35	500	Pass


-6dB Bandwidth NVNT a 5745MHz Ant1



-6dB Bandwidth NVNT a 5785MHz Ant1




-6dB Bandwidth NVNT a 5825MHz Ant1

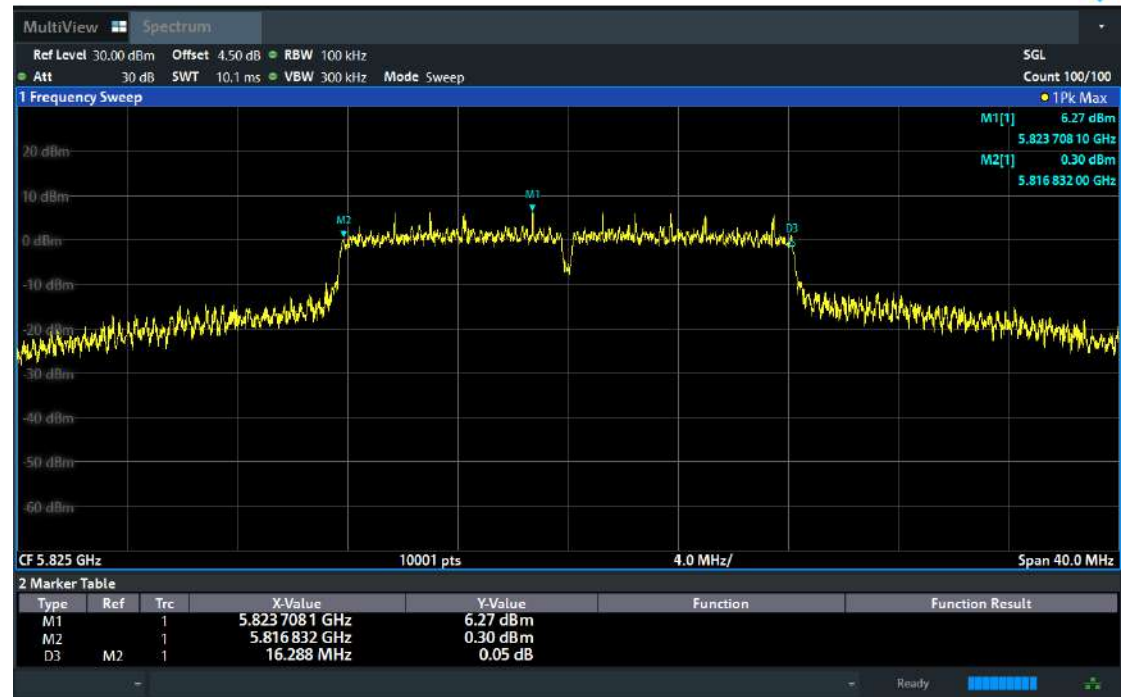

-6dB Bandwidth NVNT n20 5745MHz Ant1




-6dB Bandwidth NVNT n20 5785MHz Ant1

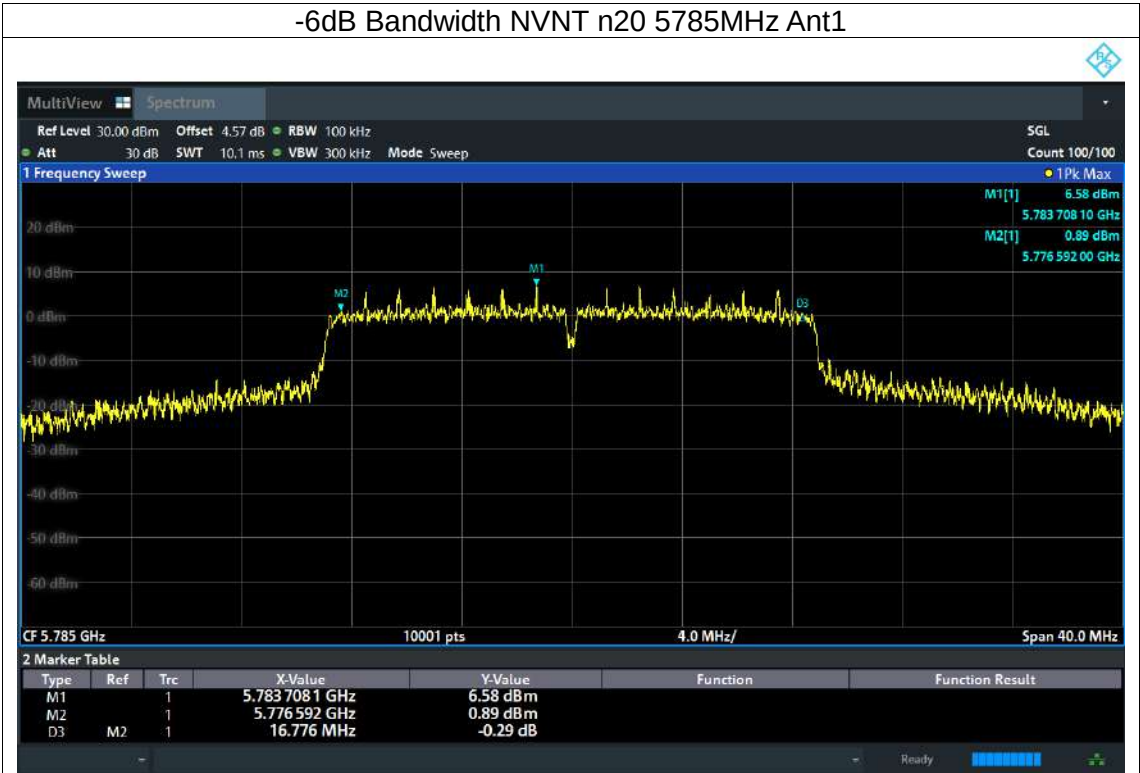

-6dB Bandwidth NVNT n20 5825MHz Ant1




-6dB Bandwidth NVNT n40 5755MHz Ant1

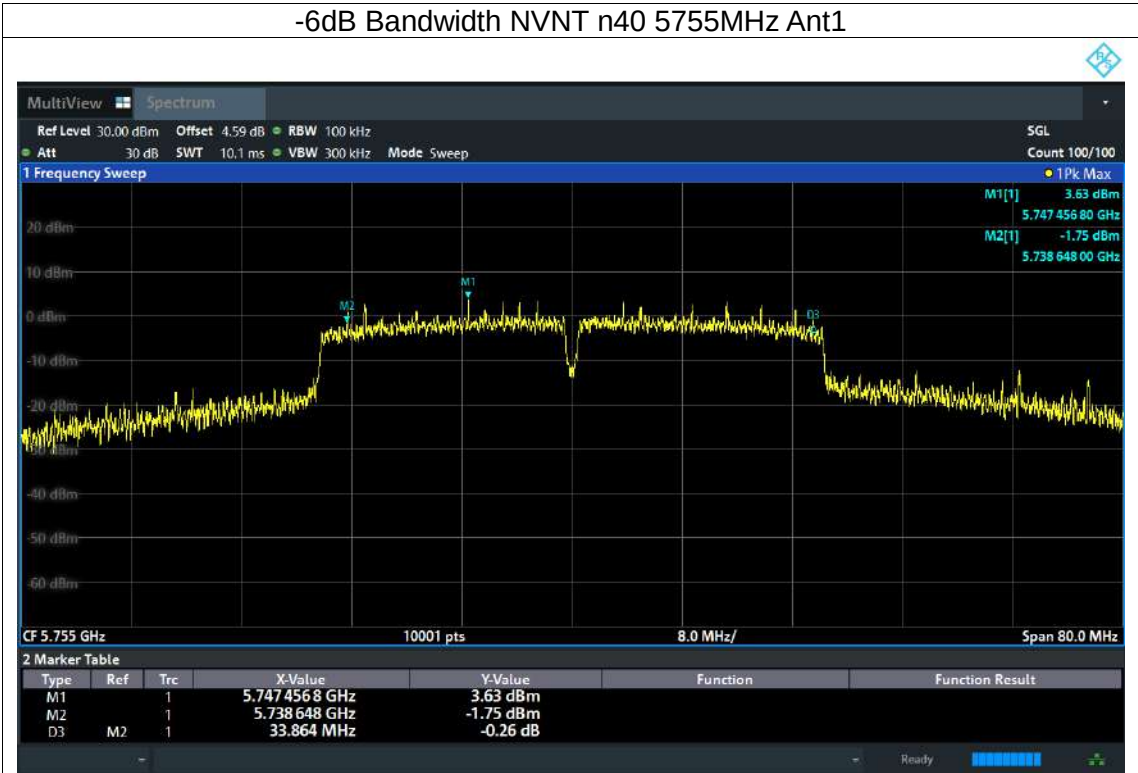

-6dB Bandwidth NVNT n40 5795MHz Ant1




-6dB Bandwidth NVNT ac20 5745MHz Ant1

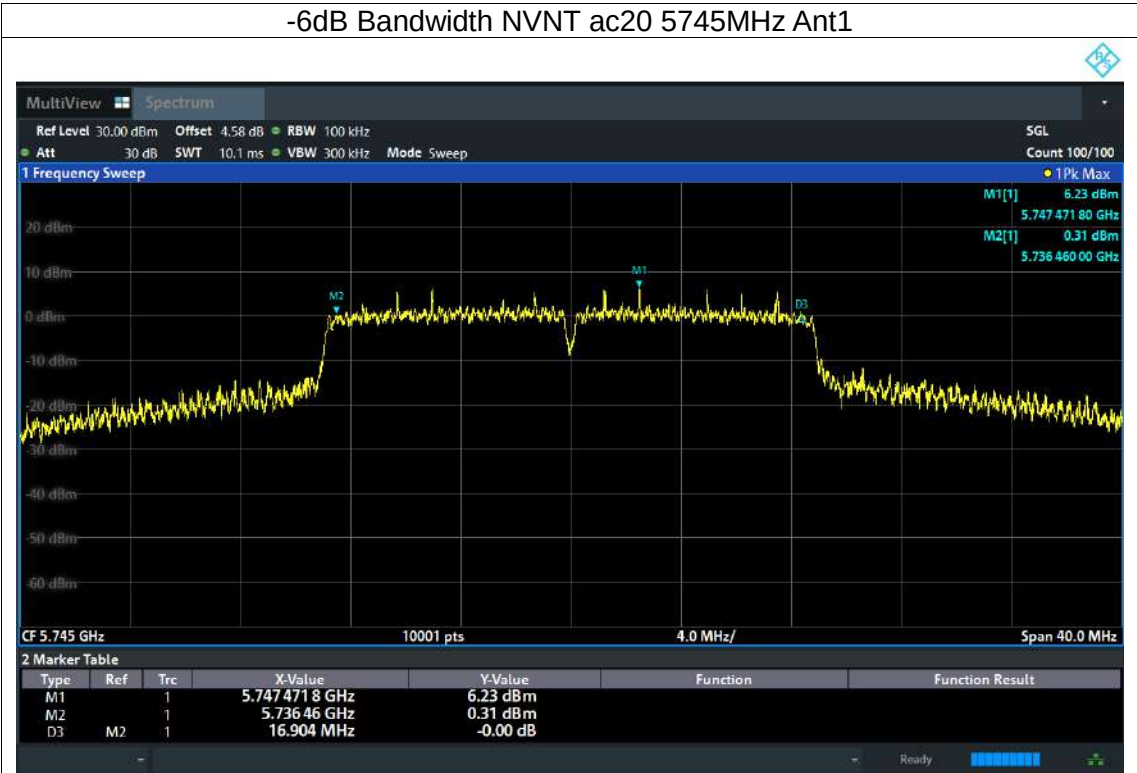


-6dB Bandwidth NVNT ac20 5785MHz Ant1




-6dB Bandwidth NVNT ac20 5825MHz Ant1

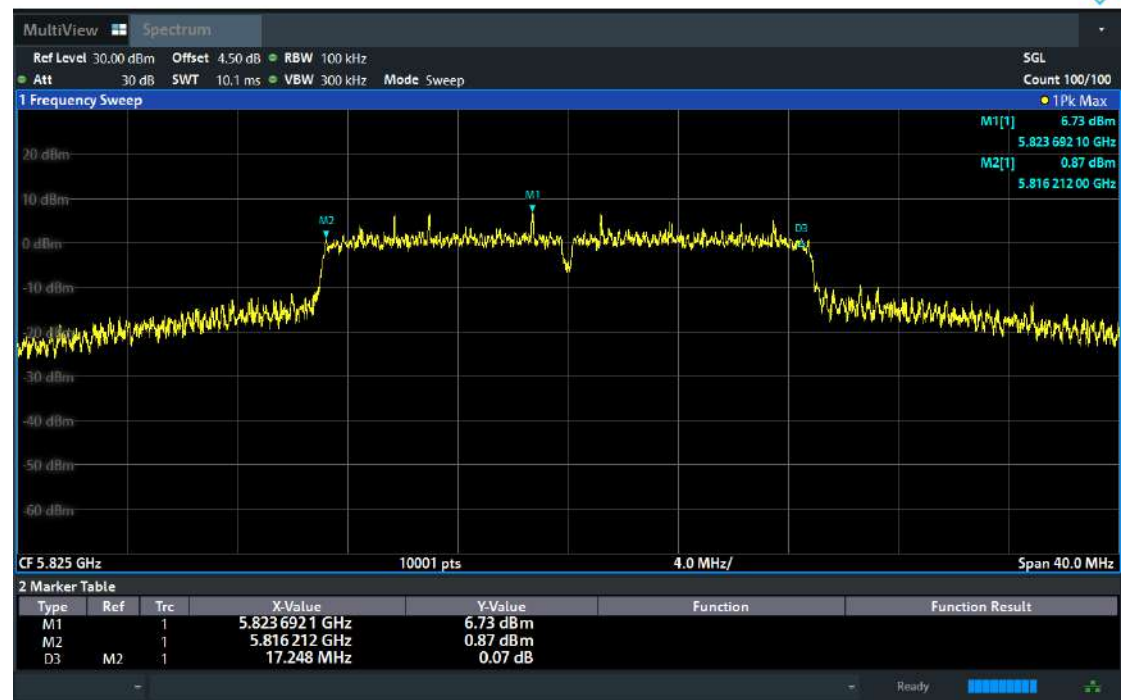

-6dB Bandwidth NVNT ac40 5755MHz Ant1

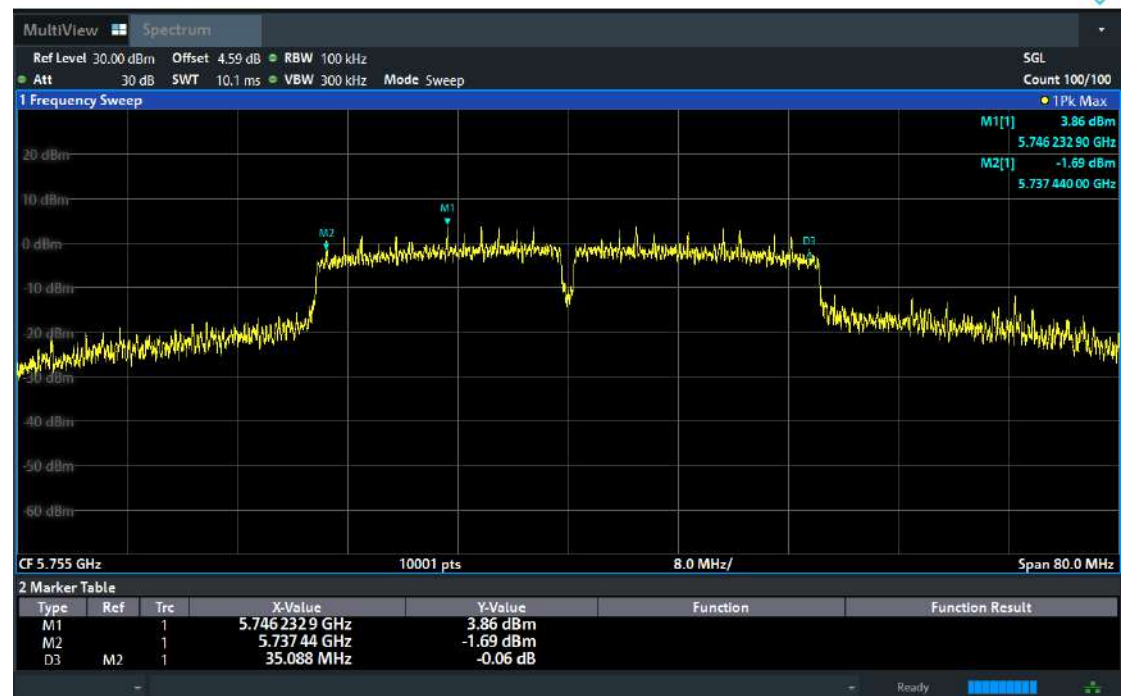

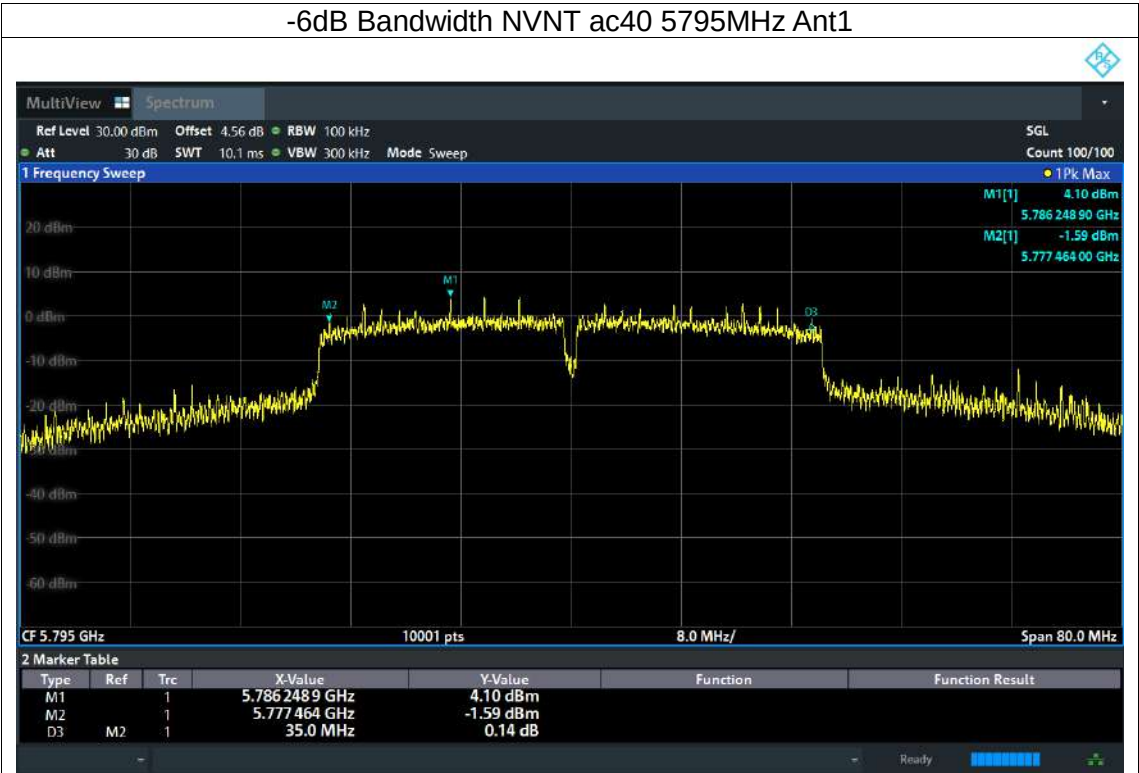

5.8 Duty Cycle

5.8.1 Limit

N/A

5.8.2 Test Procedure

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value. Set $VBW \geq RBW$. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Use the following spectrum analyzer settings:

Span = Zero Span

RBW = 10MHz (the largest available value)

VBW = 10MHz ($\geq$ RBW)

Number of points in Sweep > 100


Detector function = peak

Trace = Clear write

Measure Total and Ton

Calculate Duty Cycle = $Ton / Total$

5.8.3 Test Setup



5.8.4 Test Results

EUT:	SmartDrive Media Screen	Model Name:	SG25-NBT
Pressure:	1012 hPa	Test Voltage:	DC 12V from battery


U-NII-1:

Mode	Frequency (MHz)	T _{on} (ms)	T _{total} (ms)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
11a	5745	2.066	2.287	90.34	0.44	0.48
11a	5785	2.065	2.179	94.77	0.23	0.48
11a	5825	2.066	2.295	90.02	0.46	0.48
11n (HT20)	5745	1.921	2.115	90.83	0.42	0.52
11n (HT20)	5785	1.921	2.070	92.80	0.32	0.52
11n (HT20)	5825	1.921	2.025	94.86	0.23	0.52
11n (HT40)	5755	0.945	1.049	90.09	0.45	1.06
11n (HT40)	5795	0.945	1.085	87.10	0.60	1.06
11ac (VHT20)	5745	1.933	2.052	94.20	0.26	0.52
11ac (VHT20)	5785	1.933	2.133	90.62	0.43	0.52
11ac (VHT20)	5825	1.934	2.079	93.03	0.31	0.52
11ac (VHT40)	5755	0.954	1.135	84.05	0.75	1.05
11ac (VHT40)	5795	0.945	1.049	90.09	0.45	1.06


Note:



1. Duty Cycle = T_{on} / T_{total}
2. Correction Factor = $10 \log (1 / \text{Duty Cycle})$
3. $1 / T = 1 / T_{on}$



Duty Cycle NVNT a 5745MHz Ant1


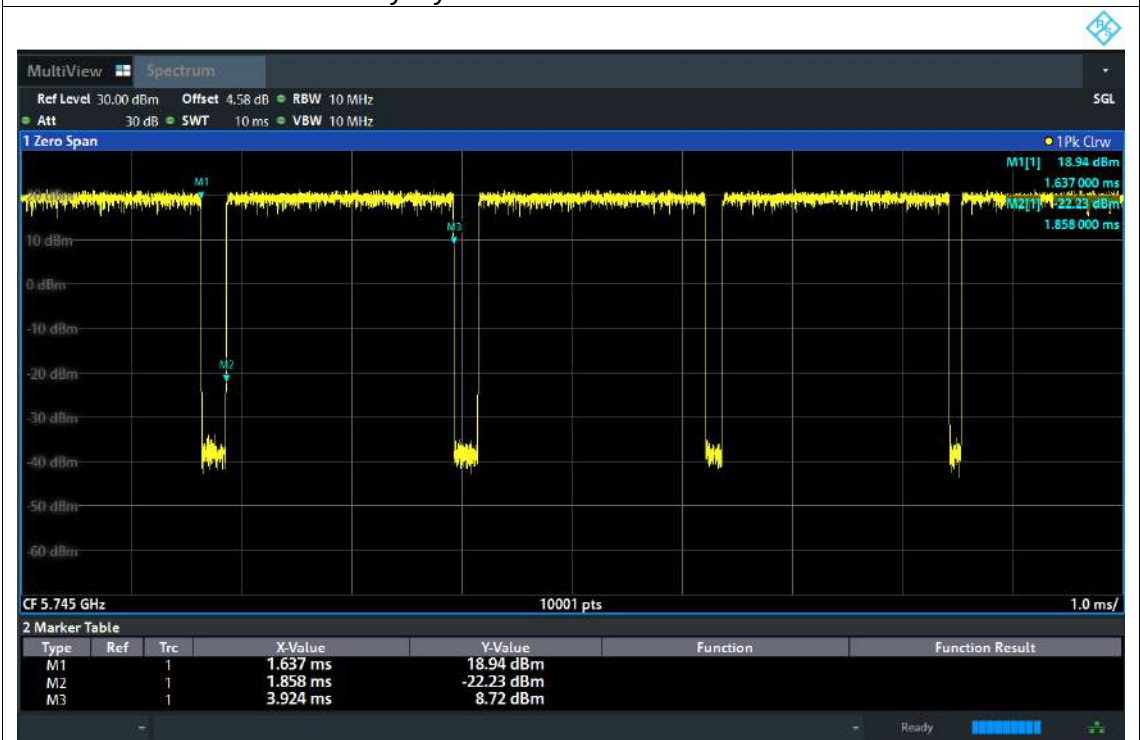




Duty Cycle NVNT a 5785MHz Ant1


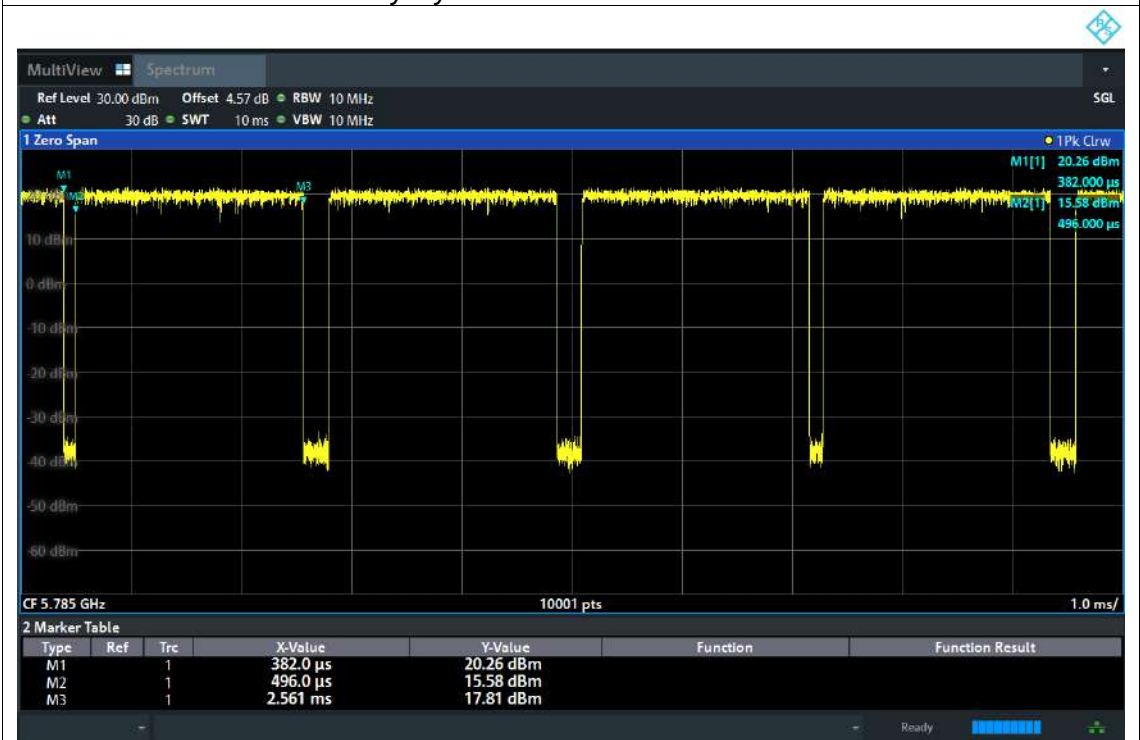


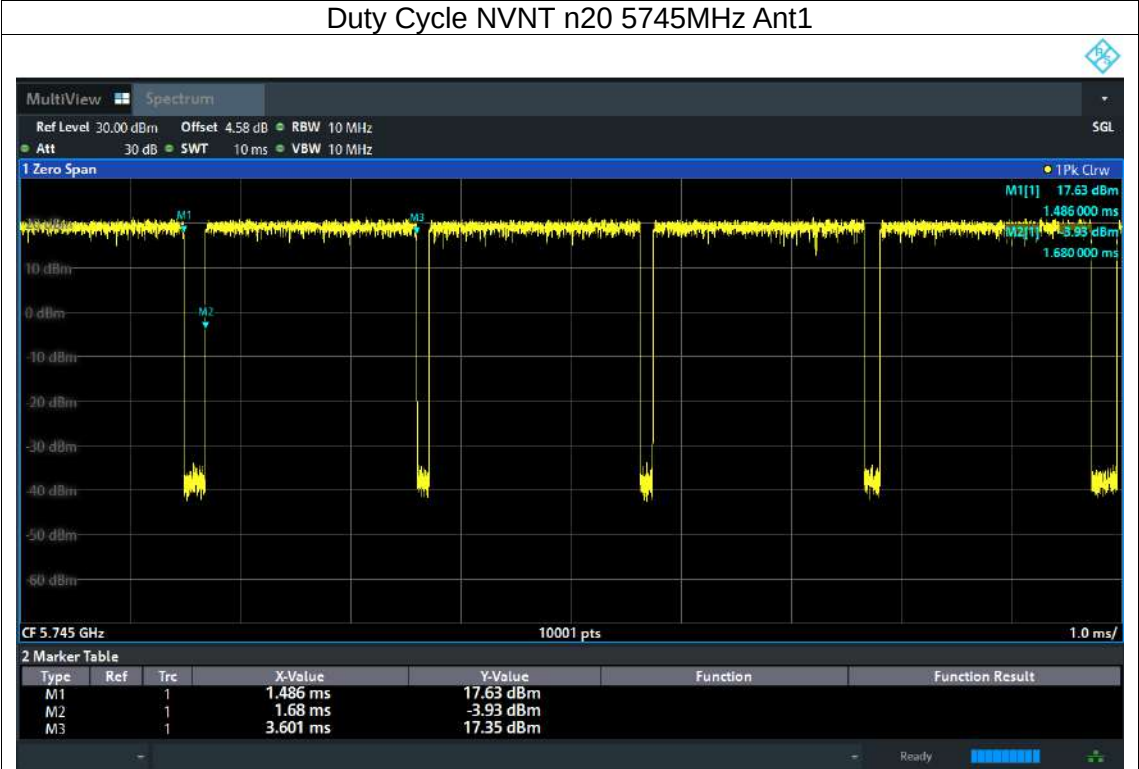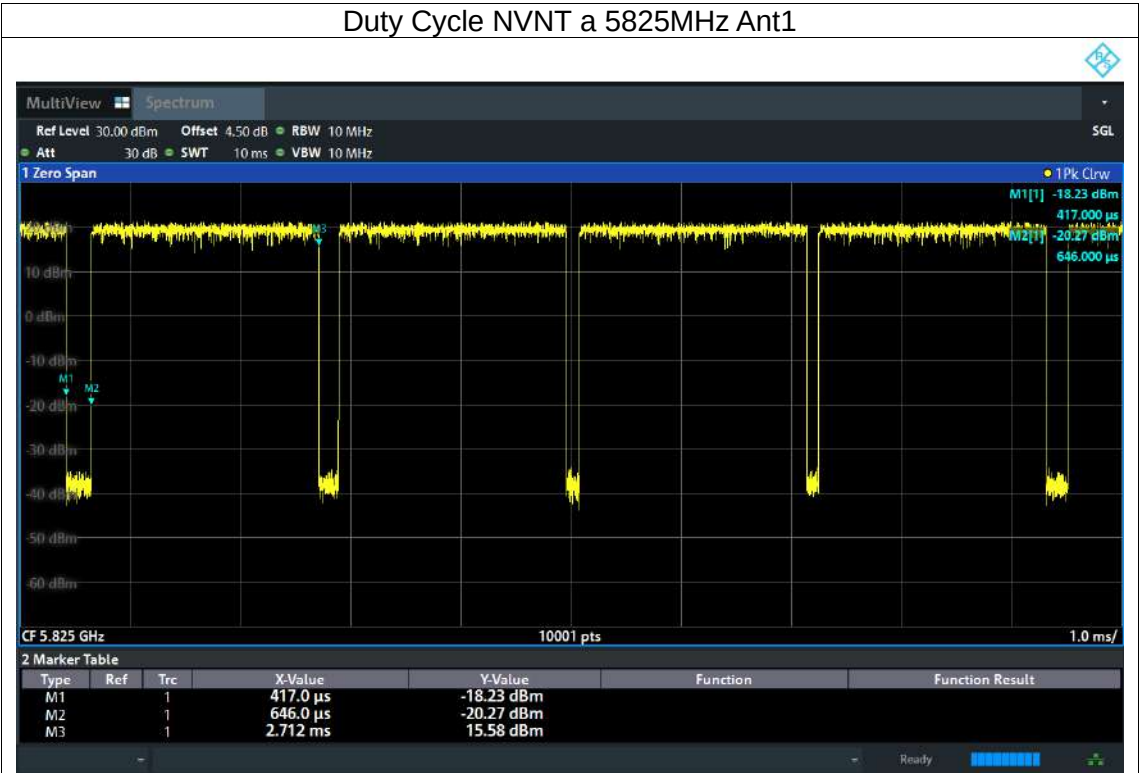


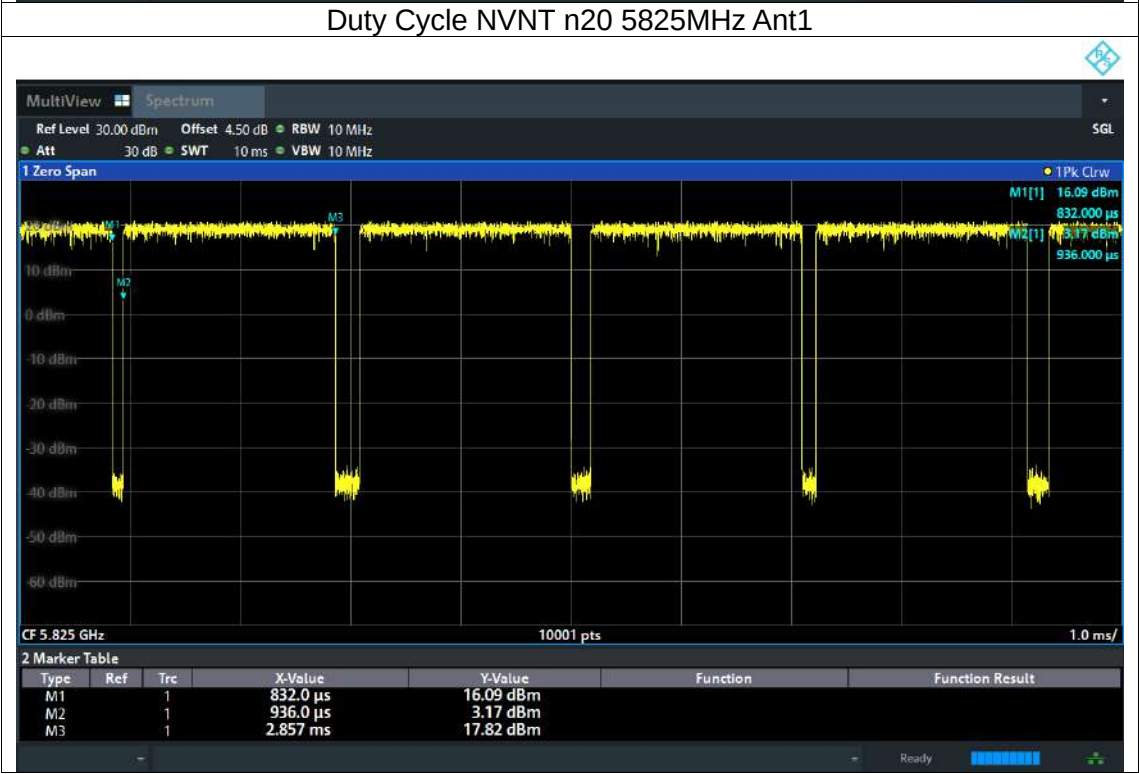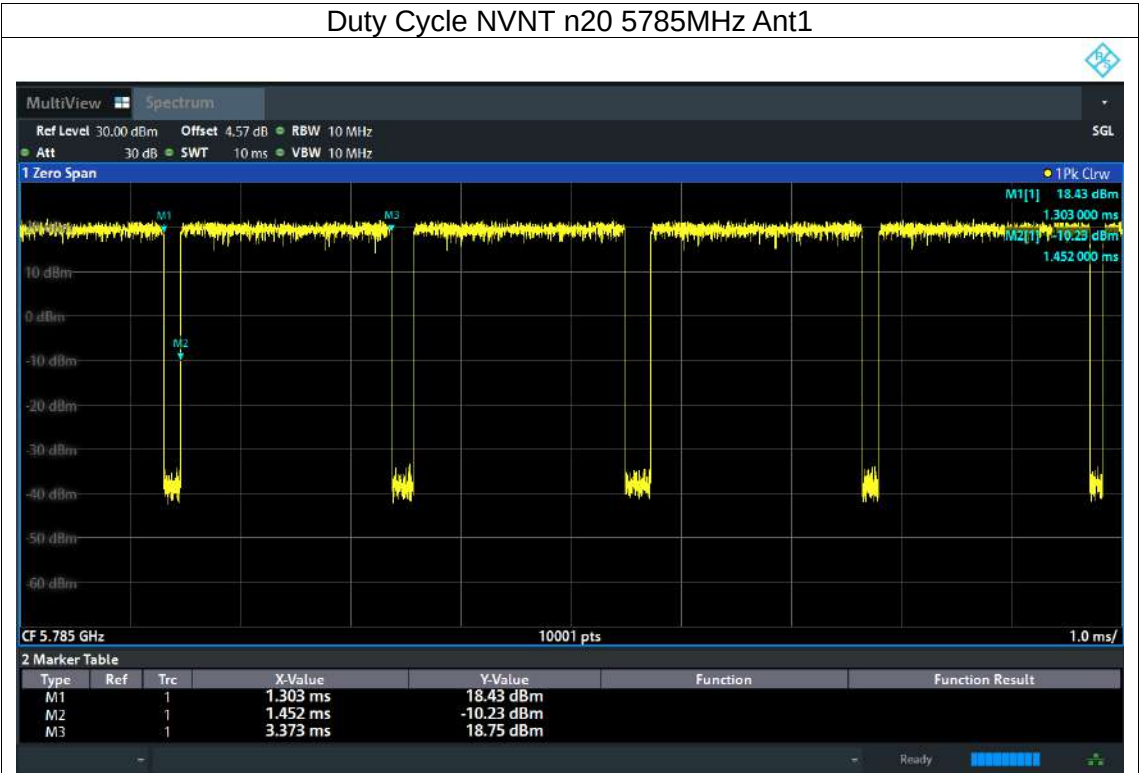

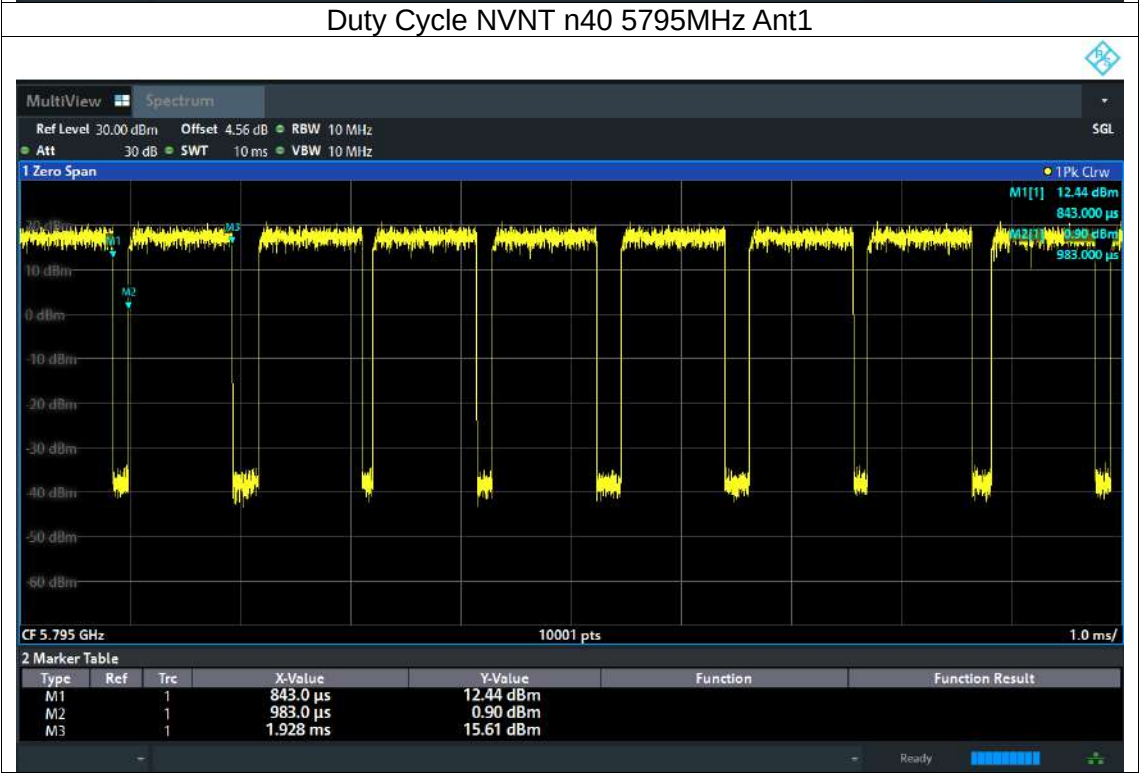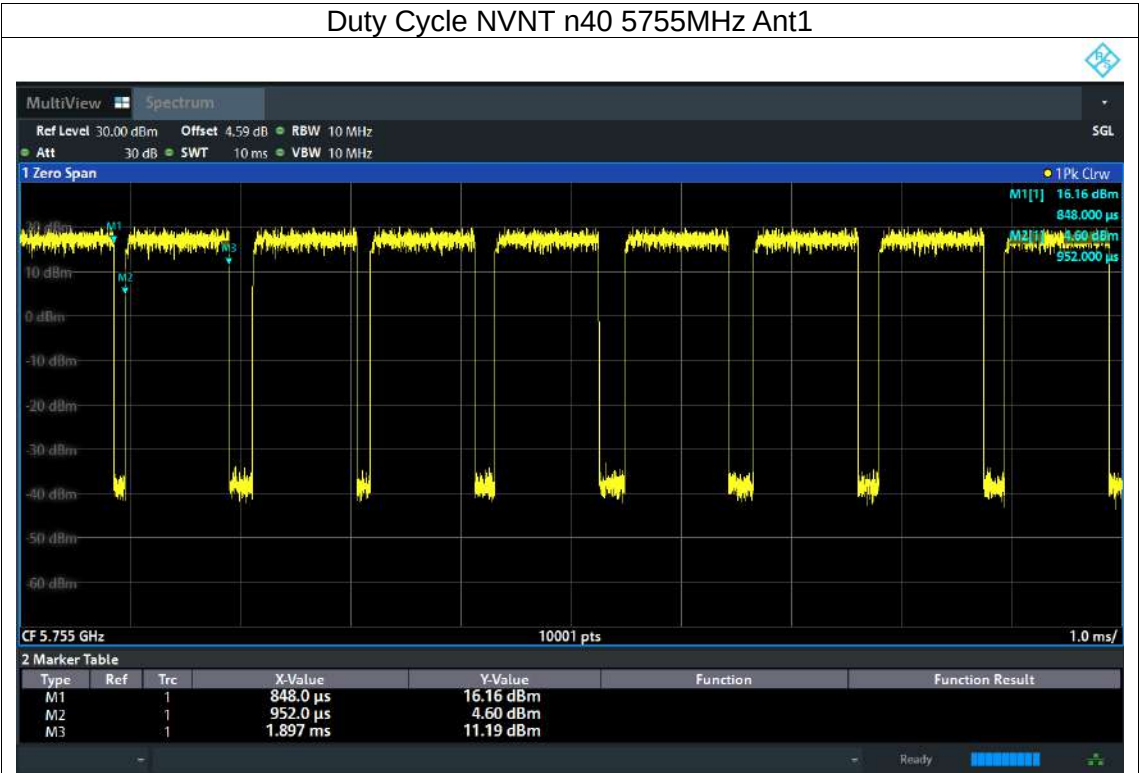

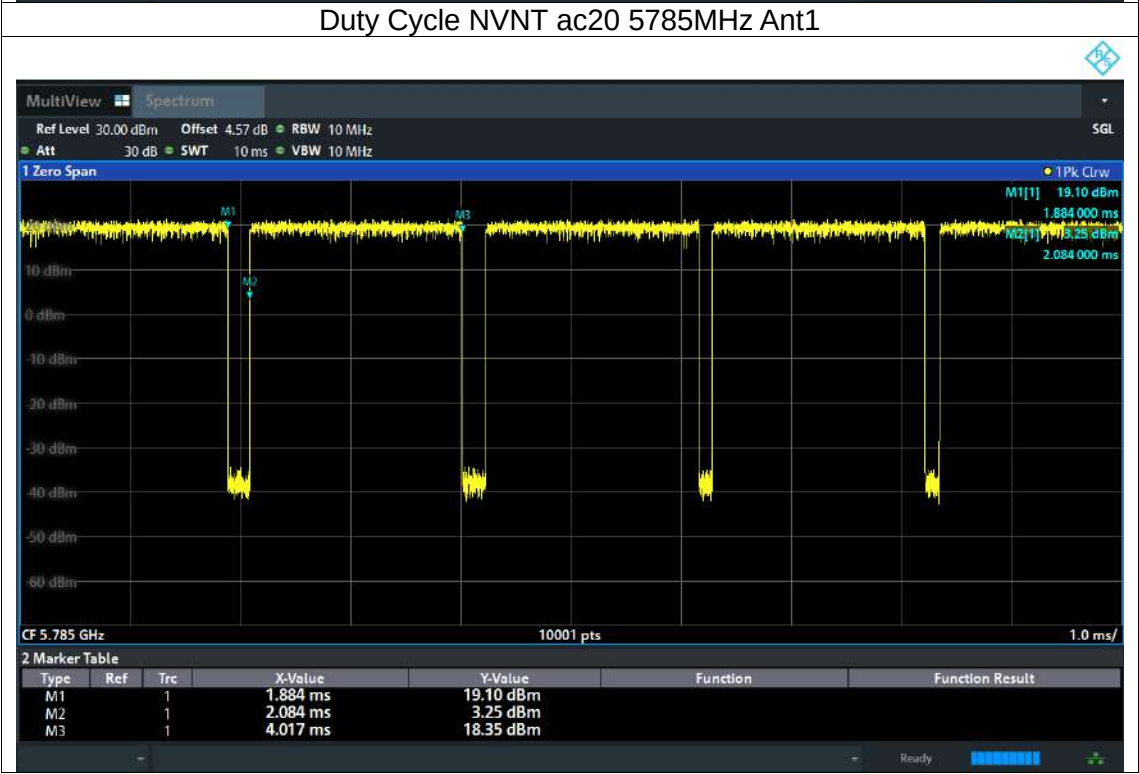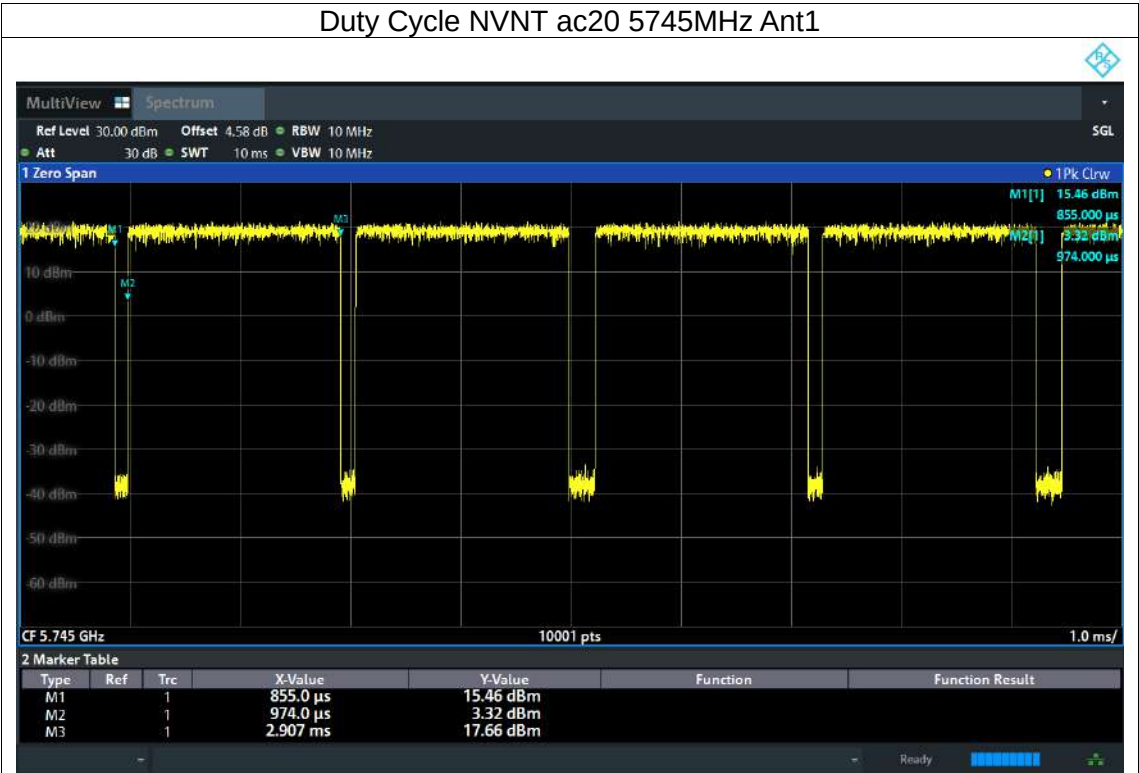

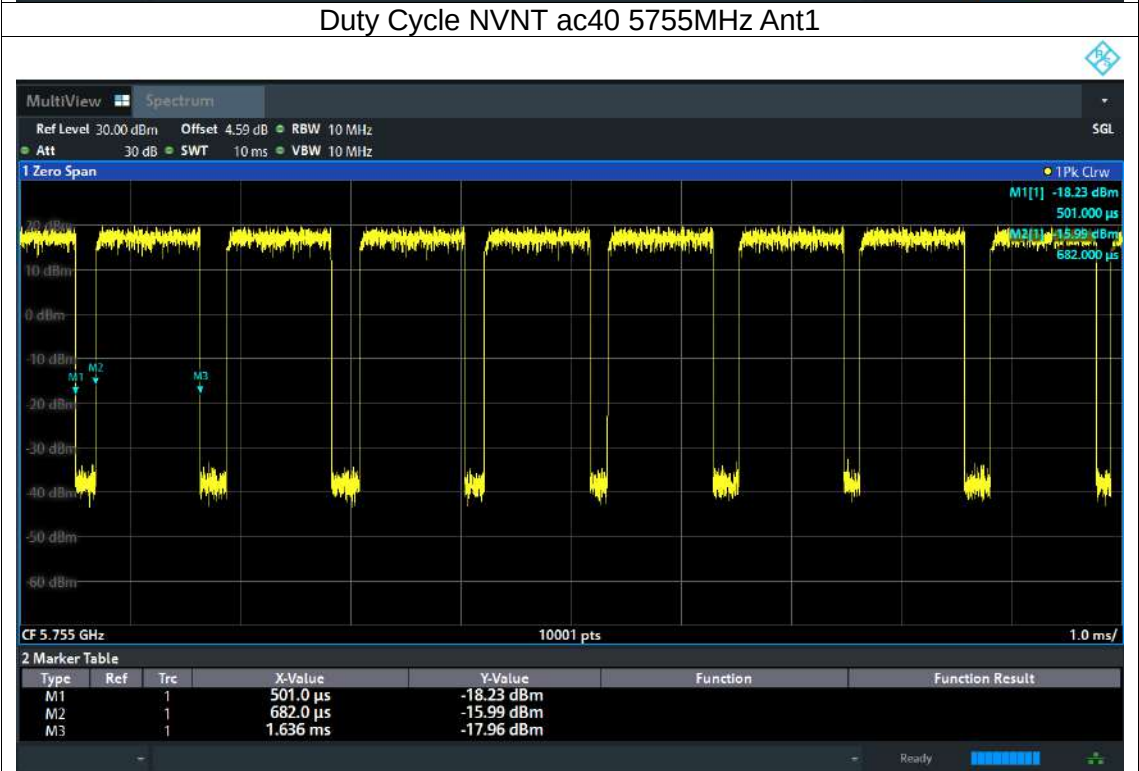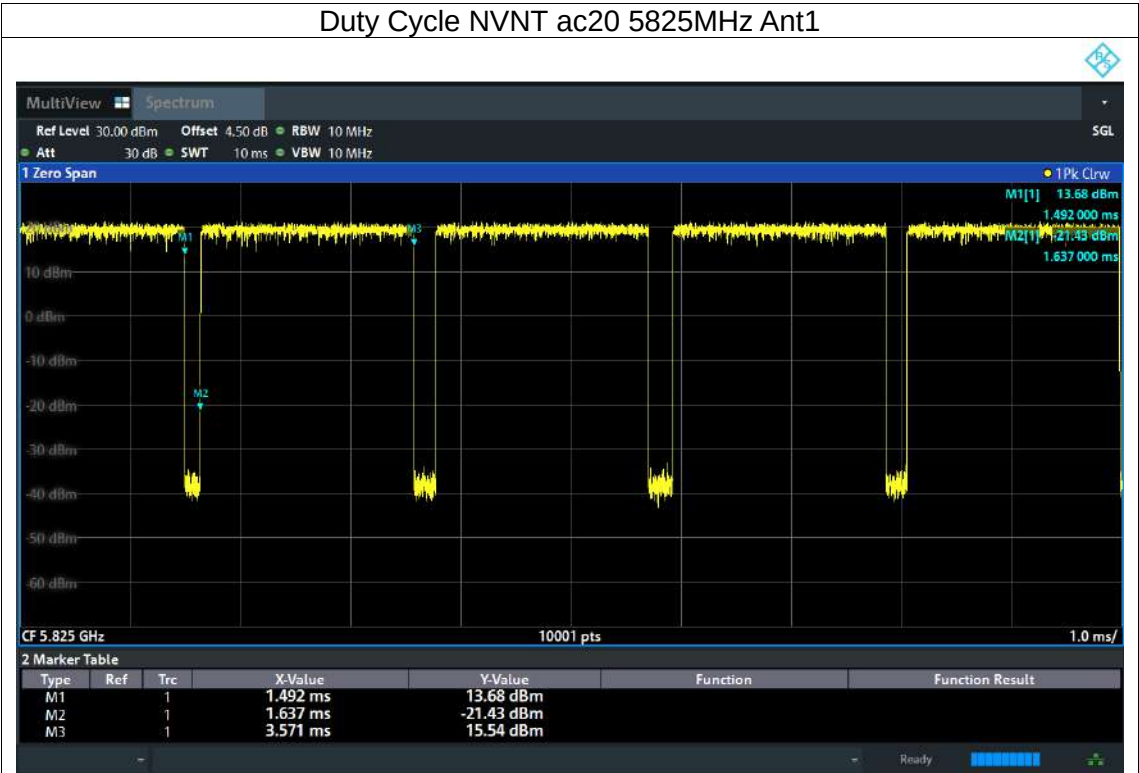

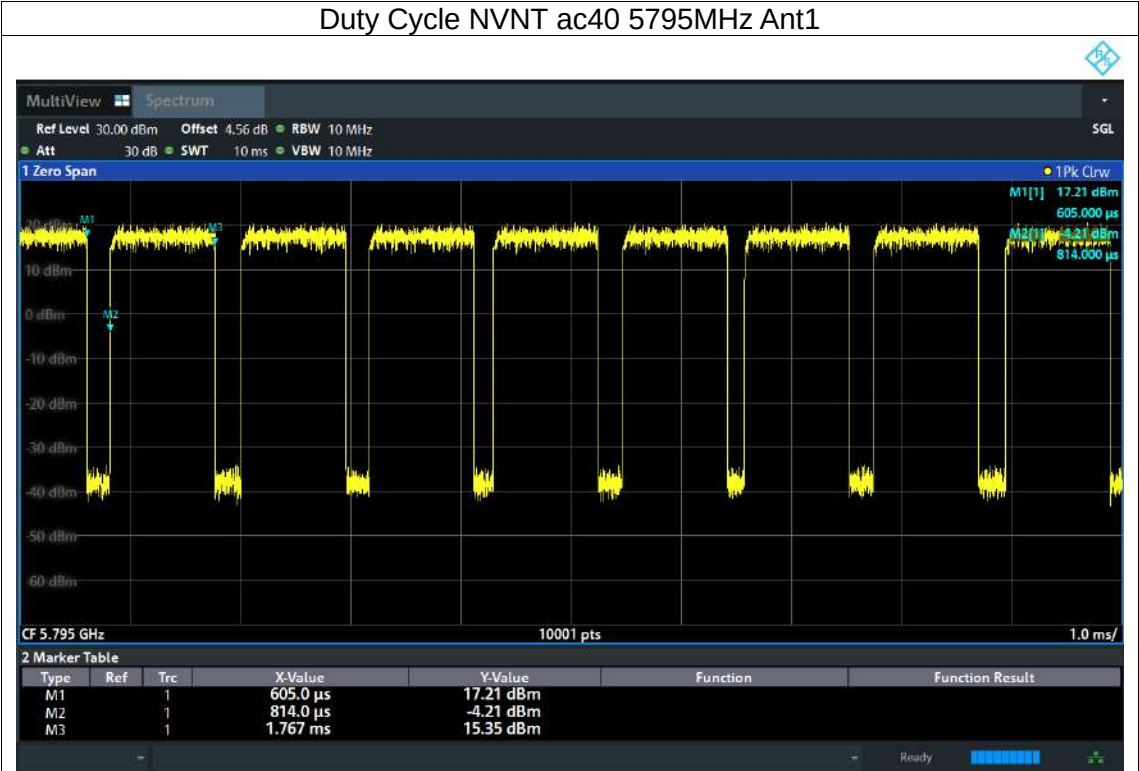

5.9 Out Of Band Emission

5.9.1 Limit

According to FCC §15.407(b).


Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15–5.25 GHz band: All emissions outside of the 5.15–5.35 GHz band shall not exceed an e.i.r.p. of –27 dBm/MHz.
- (2) For transmitters operating in the 5.25–5.35 GHz band: All emissions outside of the 5.15–5.35 GHz band shall not exceed an e.i.r.p. of –27 dBm/MHz.
- (3) For transmitters operating in the 5.47–5.725 GHz band: All emissions outside of the 5.47–5.725 GHz band shall not exceed an e.i.r.p. of –27 dBm/MHz.
- (4) For transmitters operating solely in the 5.725–5.850 GHz band:
 - (i) All emissions shall be limited to a level of –27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.


5.9.2 Test Procedure

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- c. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
- d. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- e. Repeat above procedures until all measured frequencies were complete.

5.9.3 Test Setup



5.9.4 Test Results

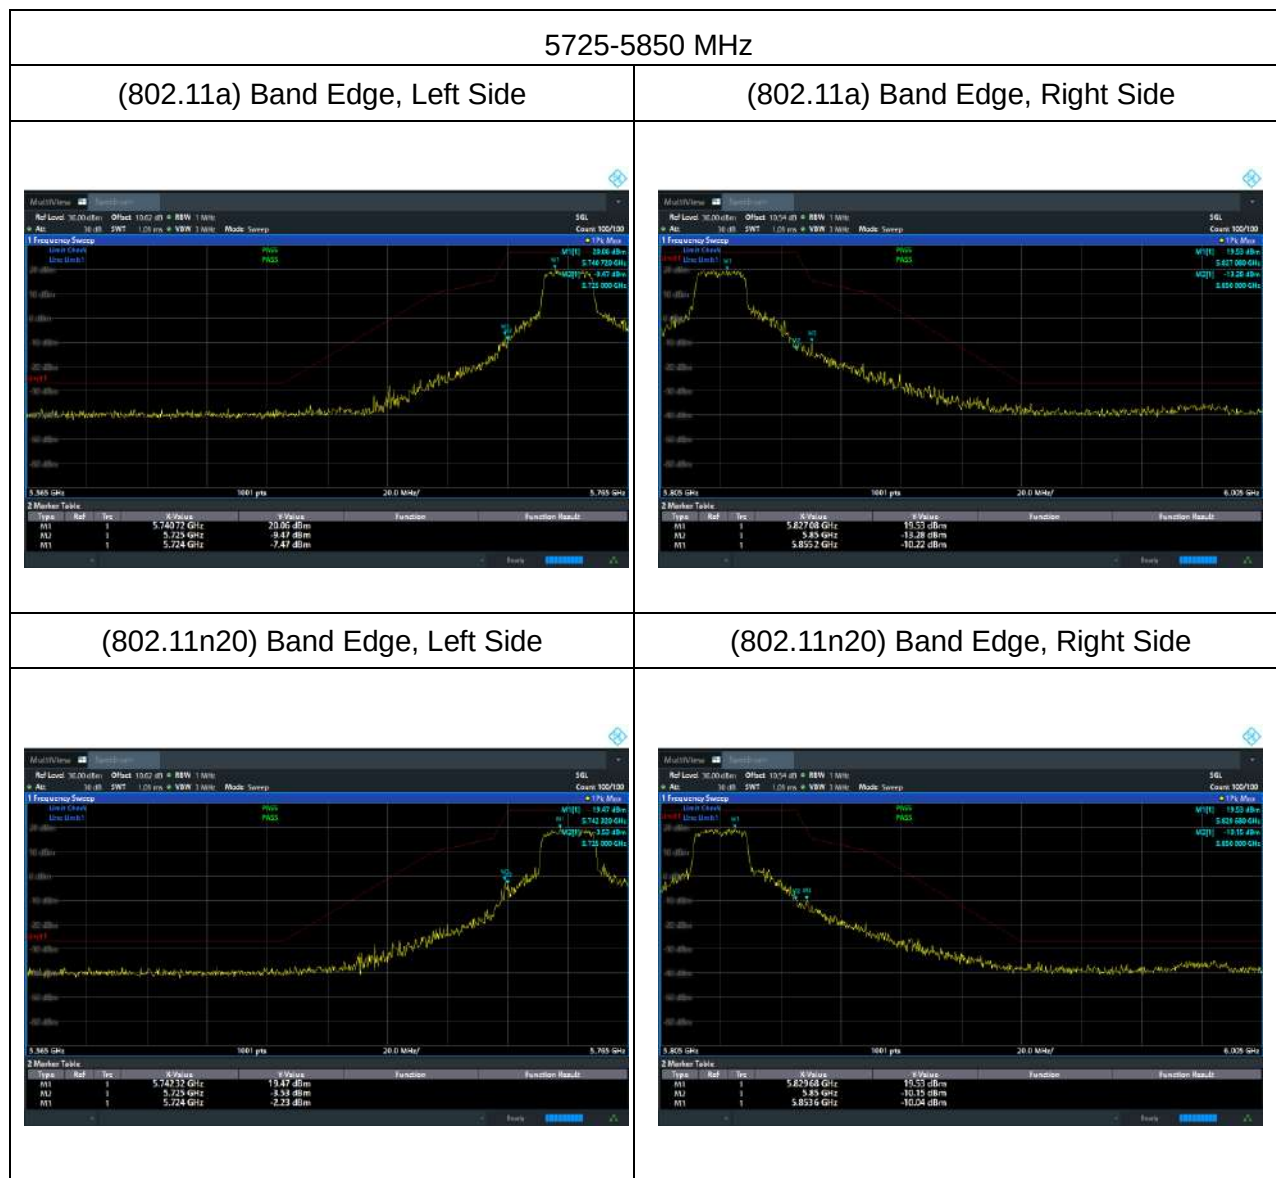

5725-5850 MHz

(802.11n40) Band Edge, Left Side




(802.11n40) Band Edge, Right Side



(802.11ac20) Band Edge, Left Side



(802.11ac20) Band Edge, Right Side

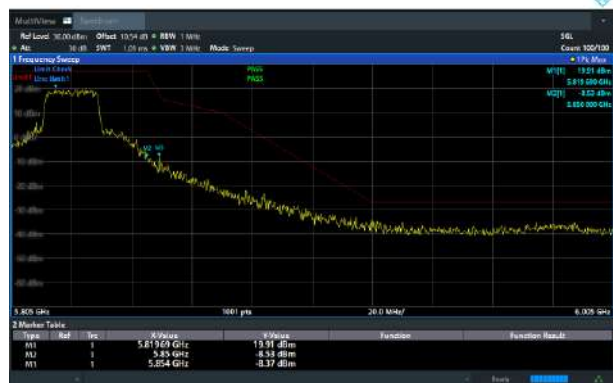



5.10 Spurious RF Conducted Emissions

5.10.1 Limit

According to FCC §15.407(b).


Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15–5.25 GHz band: All emissions outside of the 5.15–5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25–5.35 GHz band: All emissions outside of the 5.15–5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47–5.725 GHz band: All emissions outside of the 5.47–5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating solely in the 5.725–5.850 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

5.10.2 Test Procedure

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2020 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBW=300kHz to measure the avg field strength, and measure frequency range from 9kHz to 26.5GHz.


5.10.3 Test Setup



5.10.4 Test Results

Note: The measurement frequency range is from 9kHz to the 10th harmonic of the fundamental frequency; The lowest, middle and highest channels are tested to verify the spurious emissions and band edge measurement data.

Tx. Spurious NVNT a 5745MHz Ant1 Emission

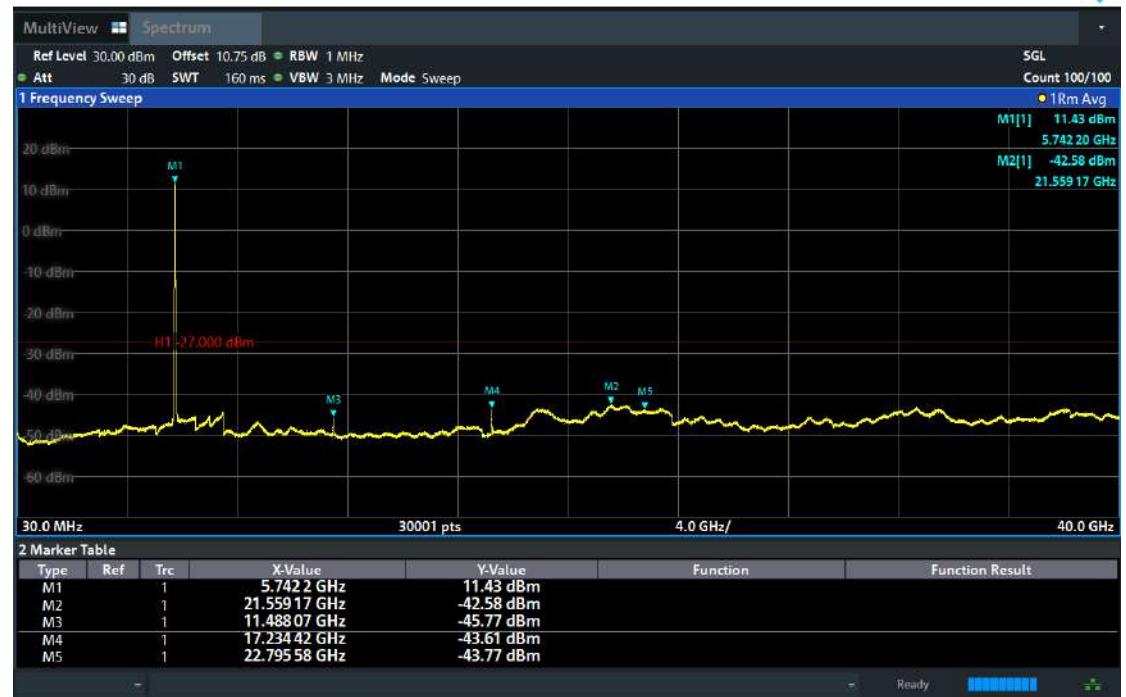

Tx. Spurious NVNT a 5785MHz Ant1 Emission




Tx. Spurious NVNT a 5825MHz Ant1 Emission



Tx. Spurious NVNT n20 5745MHz Ant1 Emission




Tx. Spurious NVNT n20 5785MHz Ant1 Emission

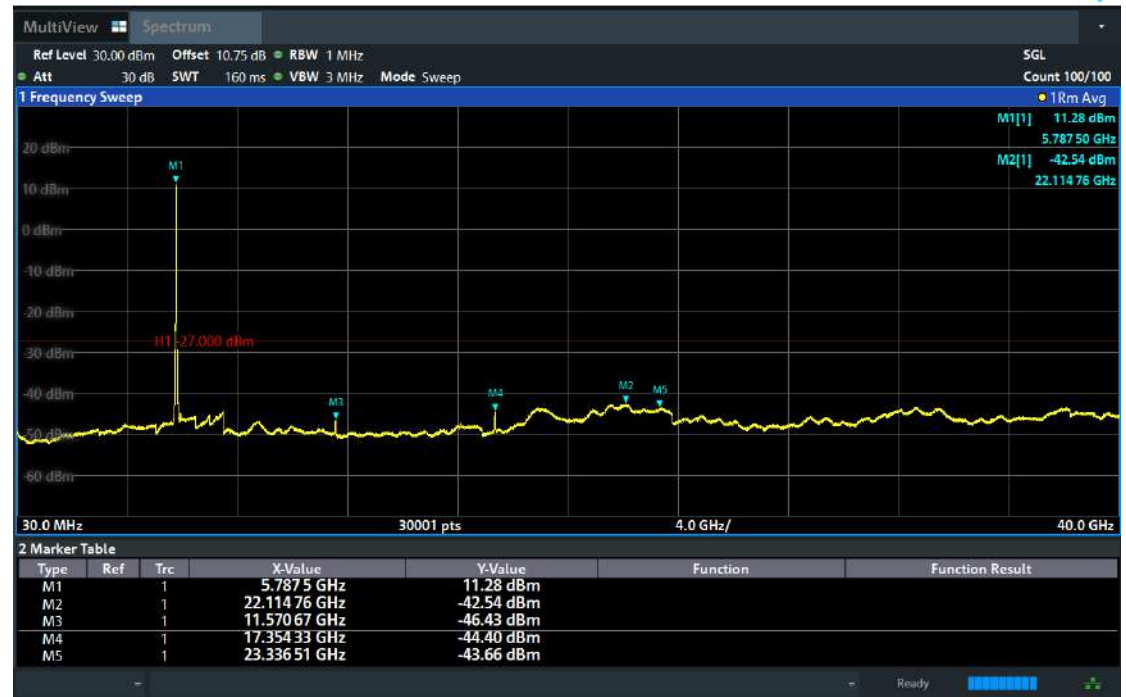

Tx. Spurious NVNT n20 5825MHz Ant1 Emission




Tx. Spurious NVNT n40 5755MHz Ant1 Emission

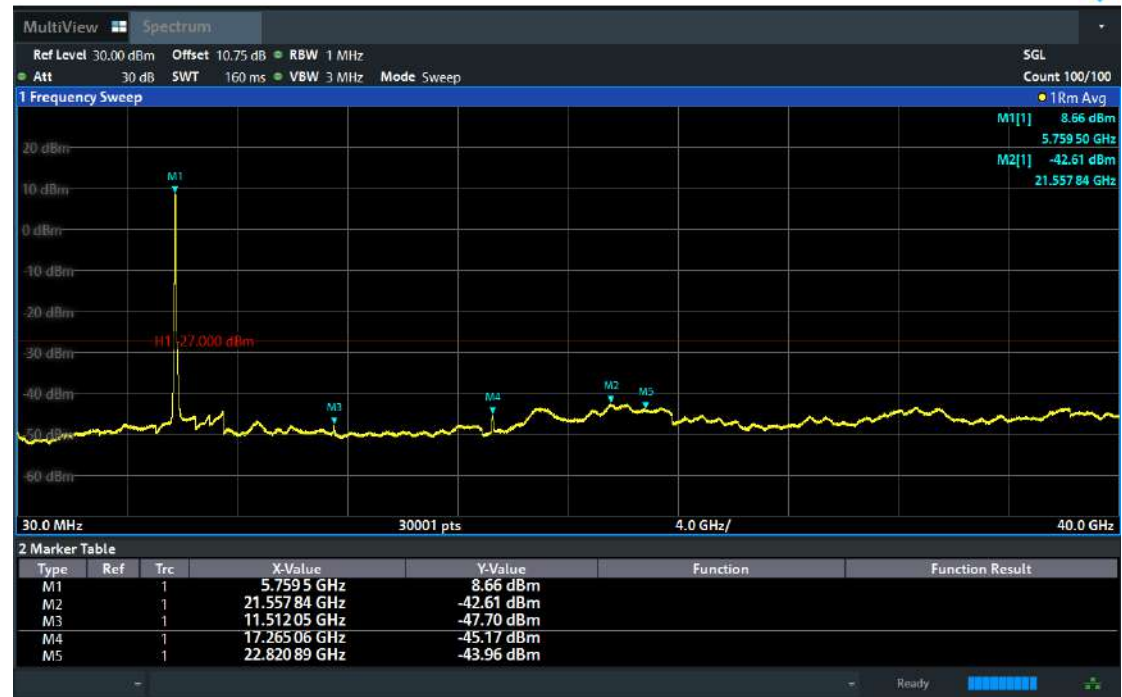

Tx. Spurious NVNT n40 5795MHz Ant1 Emission




Tx. Spurious NVNT ac20 5745MHz Ant1 Emission

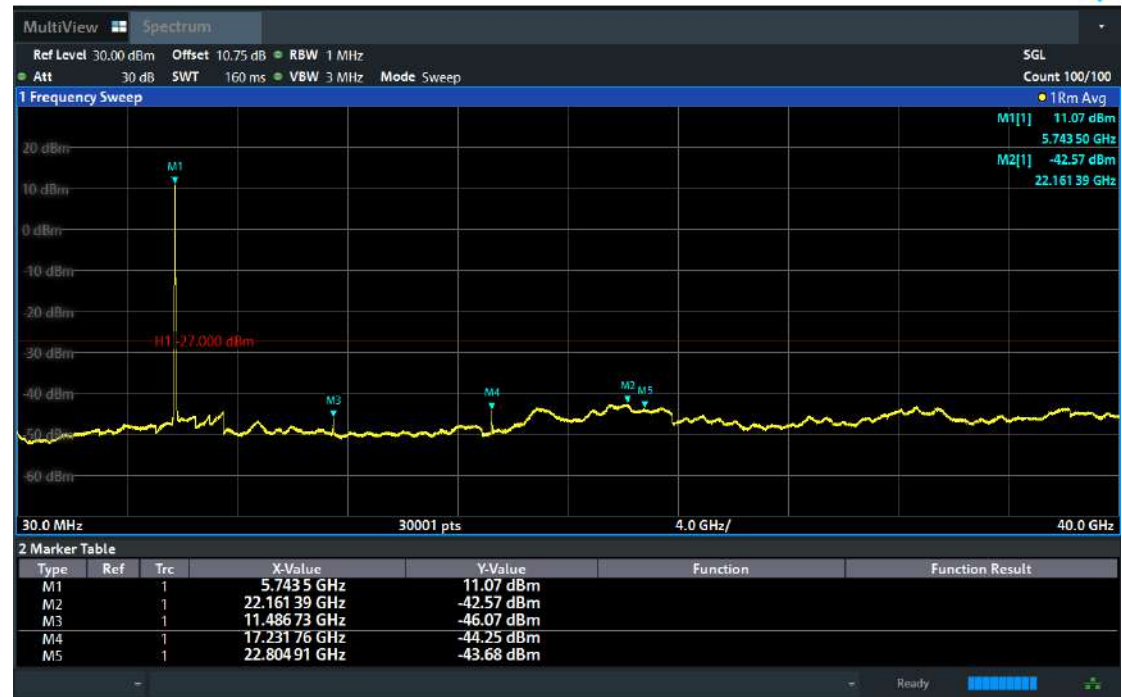

Tx. Spurious NVNT ac20 5785MHz Ant1 Emission




Tx. Spurious NVNT ac20 5825MHz Ant1 Emission

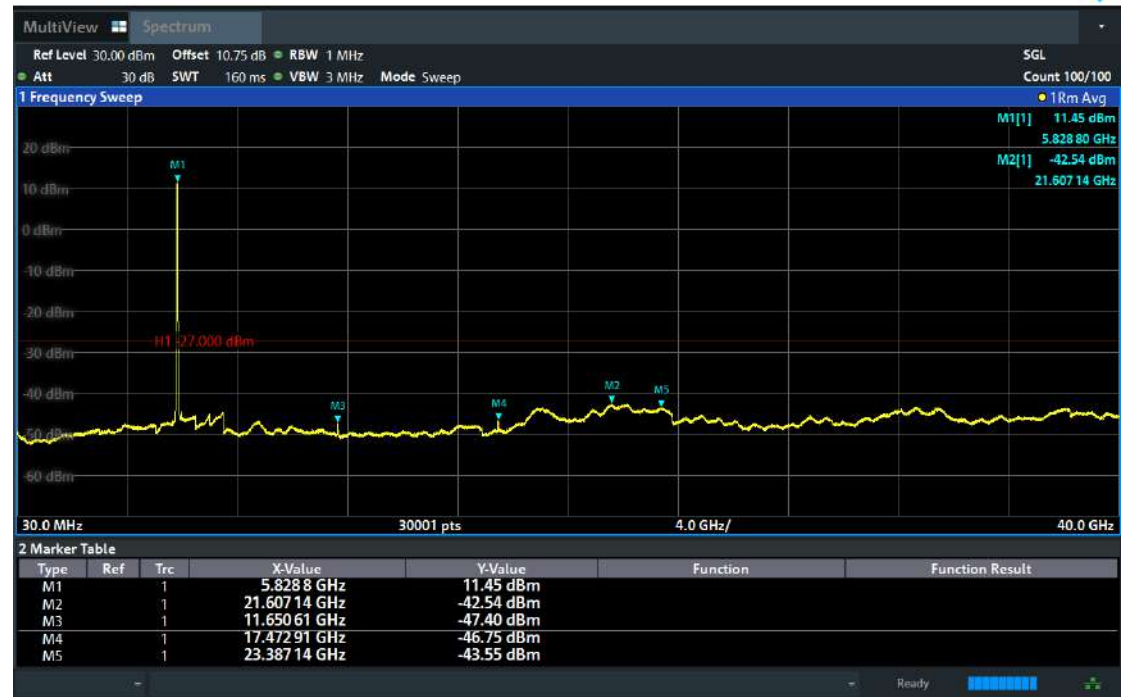

Tx. Spurious NVNT ac40 5755MHz Ant1 Emission



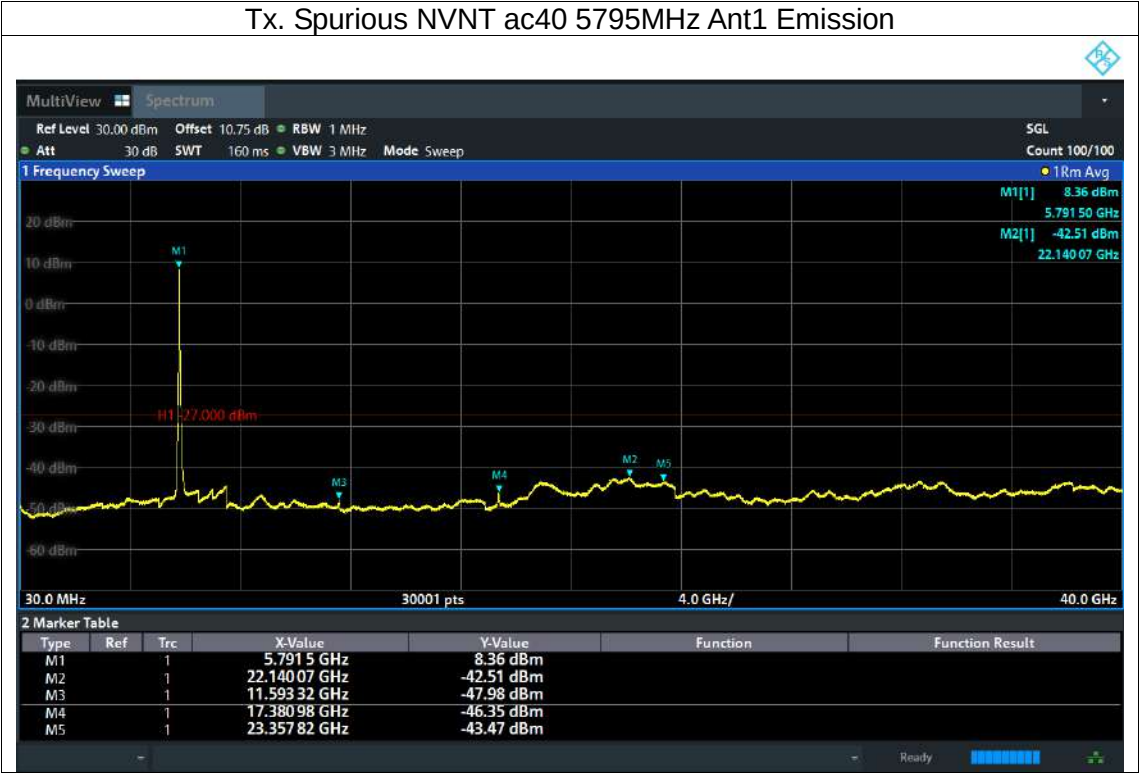

5.11 Frequency Stability

5.11.1 Limit


Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification).

5.11.2 Test Procedure

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6$ ppm and the limit is less than ± 20 ppm (IEEE 802.11n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is $-20^{\circ}\text{C} \sim 70^{\circ}\text{C}$.

5.11.3 Test Setup



5.11.4 Test Results

EUT:	SmartDrive Media Screen	Model Name:	SG25-NBT
Test Mode:	TX	Test Voltage:	DC 12V from battery

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	12	5745.020	5745	0.020	3.50
		V max (V)	13.2	5745.004	5745	0.004	0.70
		V min (V)	10.8	5745.029	5745	0.029	4.97
Limits				± 20 ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	5	T (°C)	-20	5745.045	5745	0.045	7.86
		T (°C)	-10	5745.028	5745	0.028	4.92
		T (°C)	0	5745.047	5745	0.047	8.21
		T (°C)	10	5745.006	5745	0.006	1.03
		T (°C)	20	5745.024	5745	0.024	4.19
		T (°C)	30	5745.026	5745	0.026	4.48
		T (°C)	40	5745.032	5745	0.032	5.60
		T (°C)	50	5745.026	5745	0.026	4.52
		T (°C)	60	5745.009	5745	0.009	1.61
		T (°C)	70	5745.026	5745	0.026	4.54
Limits				± 20 ppm			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	12	5785.021	5785	0.021	3.62
		V max (V)	13.2	5785.043	5785	0.043	7.50
		V min (V)	10.8	5785.014	5785	0.014	2.42
Limits				± 20 ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	5	T (°C)	-20	5785.045	5785	0.045	7.86
		T (°C)	-10	5785.029	5785	0.029	5.09
		T (°C)	0	5785.039	5785	0.039	6.82
		T (°C)	10	5785.002	5785	0.002	0.32
		T (°C)	20	5785.043	5785	0.043	7.38
		T (°C)	30	5785.042	5785	0.042	7.18
		T (°C)	40	5785.046	5785	0.046	8.00
		T (°C)	50	5785.002	5785	0.002	0.33
		T (°C)	60	5785.016	5785	0.016	2.81
		T (°C)	70	5785.027	5785	0.027	4.72
Limits				± 20 ppm			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	12	5825.003	5825	0.003	0.59
		V max (V)	13.2	5825.040	5825	0.040	6.80
		V min (V)	10.8	5825.004	5825	0.004	0.63
Limits				± 20 ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	5	T (°C)	-20	5825.020	5825	0.020	3.48
		T (°C)	-10	5825.034	5825	0.034	5.92
		T (°C)	0	5825.011	5825	0.011	1.82
		T (°C)	10	5825.004	5825	0.004	0.70
		T (°C)	20	5825.031	5825	0.031	5.24
		T (°C)	30	5825.014	5825	0.014	2.35
		T (°C)	40	5825.039	5825	0.039	6.77
		T (°C)	50	5825.045	5825	0.045	7.69
		T (°C)	60	5825.036	5825	0.036	6.13
		T (°C)	70	5825.024	5825	0.024	4.16
Limits				± 20 ppm			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5755MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	12	5755.000	5755	0.000	0.02
		V max (V)	13.2	5755.047	5755	0.047	8.25
		V min (V)	10.8	5755.012	5755	0.012	2.14
Limits				± 20 ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5755MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	5	T (°C)	-20	5755.000	5755	0.000	0.01
		T (°C)	-10	5755.001	5755	0.001	0.18
		T (°C)	0	5755.024	5755	0.024	4.21
		T (°C)	10	5755.010	5755	0.010	1.74
		T (°C)	20	5755.016	5755	0.016	2.72
		T (°C)	30	5755.036	5755	0.036	6.28
		T (°C)	40	5755.004	5755	0.004	0.62
		T (°C)	50	5755.049	5755	0.049	8.57
		T (°C)	60	5755.002	5755	0.002	0.33
		T (°C)	70	5755.027	5755	0.027	4.66
Limits				± 20 ppm			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5795MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	12	5795.035	5795	0.035	5.96
		V max (V)	13.2	5795.018	5795	0.018	3.19
		V min (V)	10.8	5795.008	5795	0.008	1.33
Limits				± 20 ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5795MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	5	T (°C)	-20	5795.008	5795	0.008	1.44
		T (°C)	-10	5795.036	5795	0.036	6.15
		T (°C)	0	5795.048	5795	0.048	8.26
		T (°C)	10	5795.033	5795	0.033	5.75
		T (°C)	20	5795.048	5795	0.048	8.24
		T (°C)	30	5795.037	5795	0.037	6.46
		T (°C)	40	5795.039	5795	0.039	6.78
		T (°C)	50	5795.021	5795	0.021	3.66
		T (°C)	60	5795.035	5795	0.035	6.04
		T (°C)	70	5795.024	5795	0.024	4.10
Limits				± 20 ppm			
Result				Complies			

6 Photographs of the Test Setup

Radiated Emission Below 1GHz



Radiated Emission Above 1GHz



7 Photographs of the EUT

Please refer to report HB20260120005E-01 for product photos.

******* END OF REPORT *******