



FCC Part 15E Test Report

FCC ID: 2BVQK-CHD21

Applicant: Shenzhen Chuangyi High-Tech Co., Ltd.

Address: Room 610, Yufeng Building, No.21, Xitou New Village 3rd District, Minzhi Street, Longhua District, Shenzhen, Guangdong Province

Manufacturer: Shenzhen Chuangyi High-Tech Co., Ltd.

Address: Room 610, Yufeng Building, No.21, Xitou New Village 3rd District, Minzhi Street, Longhua District, Shenzhen, Guangdong Province

Product Name: Wireless HDMI Transmitter and Receiver

Trade Mark: N/A

Model Number: CHD21, D01, D02, D03, D04, D05, D06, D07, D08, S1, S2, S3, S4, S5, S18, G04, G147, G100, G72, CHD18, LD52

Date of Receipt: Apr. 06, 2026

Test Date: Apr. 06, 2026 - Apr. 17, 2026

Date of Report: Apr. 17, 2026

Prepared By: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area, No.1 Baolong Fifth Road, Baolong Community, Baolong Street, Longgang District, Shenzhen, China

Applicable Standards: FCC PART 15 E 15.407
ANSI C63.10-2020+Cor 1-2023

Test Result: Pass

Report Number: DLE-260328019R

Prepared (Test Engineer): Ken Tan

Reviewer (Supervisor): Jack Bu

Approved (Manager): Jade Yang



This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.



Table of Contents	Page
1 . SUMMARY OF TEST RESULTS	5
1.1 MEASUREMENT UNCERTAINTY	5
2 . GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	7
2.3 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	8
2.4 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING	8
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	9
3 . EMC EMISSION TEST	10
3.1 CONDUCTED EMISSION MEASUREMENT	10
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	10
3.1.2 TEST PROCEDURE	10
3.1.3 DEVIATION FROM TEST STANDARD	10
3.1.4 TEST SETUP	11
3.1.5 EUT OPERATING CONDITIONS	11
3.1.6 TEST RESULTS	11
3.2 RADIATED EMISSION MEASUREMENT	14
3.2.1 RADIATED EMISSION LIMITS	14
3.2.2 TEST PROCEDURE	15
3.2.3 DEVIATION FROM TEST STANDARD	15
3.2.4 TEST SETUP	16
3.2.5 EUT OPERATING CONDITIONS	17
3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)	18
3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)	19
3.2.8 TEST RESULTS (1GHZ~40GHZ)	21
3.3 RADIATED BAND EMISSION MEASUREMENT	24
3.3.1 TEST REQUIREMENT:	24
3.3.2 TEST PROCEDURE	25
3.3.3 DEVIATION FROM TEST STANDARD	25
3.3.4 TEST SETUP	25
3.3.5 EUT OPERATING CONDITIONS	25
3.4 CONDUCTED BAND EMISSION MEASUREMENT	29
3.4.1 TEST REQUIREMENT:	29
3.4.2 TEST PROCEDURE	29
3.4.3 DEVIATION FROM TEST STANDARD	29
3.4.4 TEST SETUP	29
3.4.5 EUT OPERATING CONDITIONS	29



Table of Contents	Page
4 . CONDUCTED OUTPUT POWER	31
4.1 APPLIED PROCEDURES / LIMIT	31
4.1.1 TEST PROCEDURE	31
4.1.2 DEVIATION FROM STANDARD	31
4.1.3 TEST SETUP	31
4.1.4 EUT OPERATION CONDITIONS	31
4.1.5 TEST RESULTS	32
5 . POWER SPECTRAL DENSITY TEST	33
5.1 APPLIED PROCEDURES / LIMIT	33
5.1.1 TEST PROCEDURE	33
5.1.2 DEVIATION FROM STANDARD	33
5.1.3 TEST SETUP	33
5.1.4 EUT OPERATION CONDITIONS	33
5.1.5 TEST RESULTS	34
6 . BANDWIDTH TEST	37
6.1 APPLIED PROCEDURES / LIMIT	37
6.1.1 TEST PROCEDURE	37
6.1.2 DEVIATION FROM STANDARD	37
6.1.3 TEST SETUP	37
6.1.4 EUT OPERATION CONDITIONS	37
6.1.5 TEST RESULTS	38
7 . DUTY CYCLE TEST SIGNAL	41
7.1 APPLIED PROCEDURES / LIMIT	41
7.1.1 TEST PROCEDURE	41
7.1.2 DEVIATION FROM STANDARD	41
7.1.3 TEST SETUP	41
7.1.4 EUT OPERATION CONDITIONS	41
7.1.5 TEST RESULTS	42
8 . FREQUENCY STABILITY	45
8.1 APPLIED PROCEDURES / LIMIT	45
8.1.1 TEST PROCEDURE	45
8.1.2 DEVIATION FROM STANDARD	45
8.1.3 TEST SETUP	45
8.1.4 EUT OPERATION CONDITIONS	45
8.1.5 TEST RESULTS	46
9 . TRANSMISSION IN THE ABSENCE OF DATA	47
9.1 STANDARD REQUIREMENT	47
9.2 TEST RESULT	47



Table of Contents	Page
10 . ANTENNA REQUIREMENT	47
10.1 STANDARD REQUIREMENT	47
10.2 EUT ANTENNA	47
11. TEST SETUP PHOTO	47
12 . EUT PHOTO	47



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.407) , Subpart E			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.407(b), 15.205, 15.209	Radiated Spurious Emission	PASS	
15.407(b), 15.205, 15.209	Band Edge Emission	PASS	
15.407 (a)	Maximum Conducted Output Power	PASS	
15.407 (a)	Power Spectral Density	PASS	
15.407(a) (e)	bandwidth	PASS	
15.407(g)	Frequency Stability	PASS	
15.407(c)	Transmission in case of Absence of Information	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

Test lab: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Building C, Shuanghuan, No.8, Baoqing Road, Baolong Industrial Zone, Baolong Street, Longgang District, Shenzhen, Guangdong, China

FCC Test Firm Registration Number: 854456

Designation Number: CN1307

IC Registered No.: 27485

CAB ID.: CN0118

1.1 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 2.56\text{dB}$
2	RF power,conducted	$\pm 0.42\text{dB}$
3	Spurious emissions,conducted	$\pm 2.76\text{dB}$
4	All emissions,radiated(<1G)	$\pm 3.65\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$
8	Bandwidth	$\pm 0.2\%$
9	Power Spectral Density	$\pm 2.45\text{dBm}$
10	Frequency Stability	$\pm 0.3\text{MHz}$
11	Time	$\pm 2\%$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Product Name:	Wireless HDMI Transmitter and Receiver
Trademark	N/A
Model No.:	CHD21, D01, D02, D03, D04, D05, D06, D07, D08, S1, S2, S3, S4, S5, S18, G04, G147, G100, G72, CHD18, LD52
Model Difference	All models are same as the samples except model name, they have the same structure and circuit.
Operation Frequency:	5180-5240 (802.11a/n(HT20)) 5190-5230 (802.11n(HT40))
Channel numbers:	See channel list
Channel separation:	20MHz/40MHz
Modulation technology:	64QAM, 16QAM, QPSK, BPSK for OFDM
Rate of Transmitter	802.11a: 6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps, 54Mbps 802.11n: Up to 500Mbps
Antenna Type:	Internal Antenna
Antenna gain:	3.6dBi
Power Supply:	DC 5V from USB Port

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
2. The EUT's all information provided by client.

2. Channel List

Channel List for 802.11a/n(HT20)/ac(HT20)			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220
40	5200	48	5240

Channel List for 802.11n(HT40)/ac(HT40)			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	46	5230



2.1.1 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was e-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Modulation	Channel
Mode 1	802.11a	CH36
Mode 2		CH44
Mode 3		CH48
Mode 4	802.11n HT20	CH36
Mode 5		CH44
Mode 6		CH48
Mode 7	802.11n HT40	CH38
Mode 8		CH46


Note: (1) The measurements are performed at the highest, middle, lowest available channels.

(2) During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.


(3) For the two items of conducted disturbance at the power supply end and space radiation below 1GHz, all modes have undergone pre-tests. The report only shows the worst test results of mode 3.

2.2 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test



Power Line Conducted Emission Test





2.3 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model/Type No.	Series No.	Note
E-1	Adapter	MDY-08-EF	N/A	XIAOMI
E-2	Notebook	Vostro 3420	N/A	DELL

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.4 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the end product.

Max output power Setting			
Test software Version	Test program: RF Test_V1.4		
Mode	802.11a	802.11n HT20	802.11n HT40
Data Rate	6Mbps	MSC0	MSC0
Power Setting of Softwave	60	60	66

**2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS**

Radiation test, Band-edge test and 20db bandwidth test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4408B	MY50140780	Oct. 25, 2025	Oct. 24, 2026
2	Test Receiver (9kHz-7GHz)	R&S	ESRP7	101393	Oct. 25, 2025	Oct. 24, 2026
3	Bilog Antenna (30MHz-1GHz)	R&S	VULB9162	00306	Oct. 25, 2025	Oct. 24, 2026
4	Horn Antenna (1GHz-18GHz)	Schwarzbeck	BBHA9120D	02139	Oct. 26, 2025	Oct. 25, 2026
5	Horn Antenna (18GHz-40GHz)	A.H. Systems	SAS-574	588	Oct. 25, 2025	Oct. 24, 2026
6	Amplifier (9KHz-6GHz)	Schwarzbeck	BBV9743B	00153	Oct. 25, 2025	Oct. 24, 2026
7	Amplifier (1GHz-18GHz)	EMEC	EM01G8GA	00270	Oct. 25, 2025	Oct. 24, 2026
8	Amplifier (18GHz-40GHz)	Quanjuda	DLE-161	97	Oct. 25, 2025	Oct. 24, 2026
9	Loop Antenna (9KHz-30MHz)	Schwarzbeck	FMZB1519B	00014	Oct. 25, 2025	Oct. 24, 2026
10	RF cables1 (9kHz-1GHz)	ChengYu	966	004	Oct. 25, 2025	Oct. 24, 2026
11	RF cables2 (1GHz-40GHz)	ChengYu	966	003	Oct. 25, 2025	Oct. 24, 2026
12	Antenna connector	Florida RF Labs	N/A	RF 01#	Oct. 25, 2025	Oct. 24, 2026
13	Power probe	KEYSIGHT	U2021XA	MY55210018	Oct. 25, 2025	Oct. 24, 2026
14	Signal Analyzer 9kHz-26.5GHz	Agilent	N9020A	MY55370280	Oct. 25, 2025	Oct. 24, 2026
15	Test Receiver 20kHz-40GHz	R&S	ESU 40	100376	Oct. 25, 2025	Oct. 24, 2026
16	D.C. Power Supply	LongWei	PS-305D	010964729	Oct. 25, 2025	Oct. 24, 2026
17	Temperature & humidity chamber	Changfeng	CF-150-40-P	CF170802-01	Oct. 25, 2025	Oct. 24, 2026
18	966 chamber	YIHENG	966 Room	966	Nov. 06, 2023	Nov. 05, 2026

Conduction Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	843 Shielded Room	ChengYu	843 Room	843	Nov. 05, 2023	Nov. 04, 2026
2	EMI Receiver	R&S	ESR	101421	Oct. 25, 2025	Oct. 24, 2026
3	LISN	R&S	ENV216	102417	Oct. 25, 2025	Oct. 24, 2026
4	843 Cable 1#	ChengYu	CE Cable	001	Oct. 25, 2025	Oct. 24, 2026

Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	FALA	EZ_EMCC	EMC-CON 3A1.1
2	EMC radiation test system	FALA	EZ_EMCC	FA-03A2
3	RF test system	MAIWEI	MTS8310	2.0.0.0
4	RF communication test system	MAIWEI	MTS8200	2.0.0.0



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.5 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.1.2 TEST PROCEDURE


- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation



3.1.4 TEST SETUP

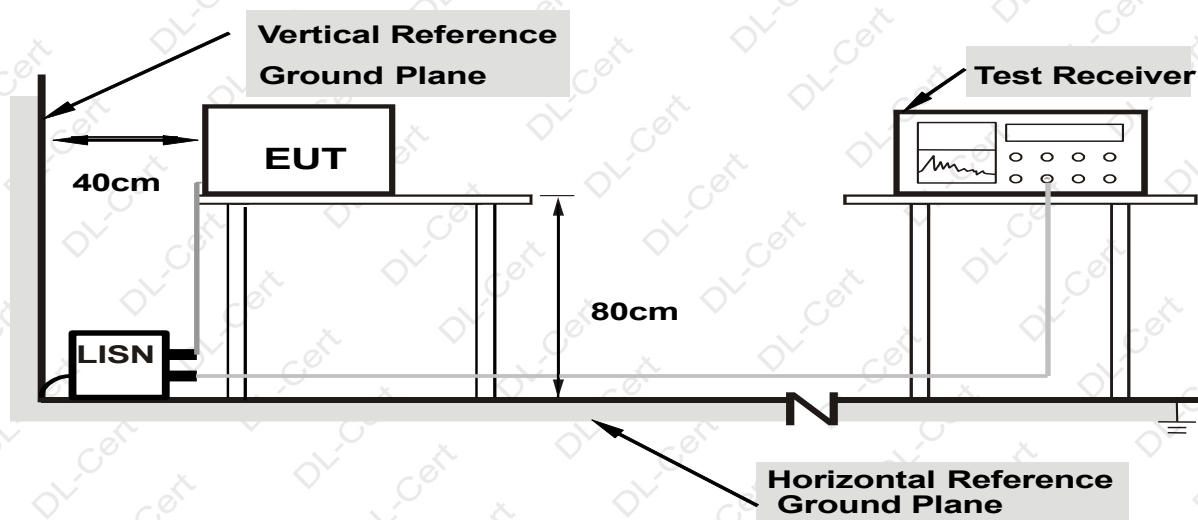

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 230V, the worst voltage was AC 120V and the data recording in the report.


3.1.6 TEST RESULTS

PASS

Please refer to the following page.



Temperature:	25 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 3

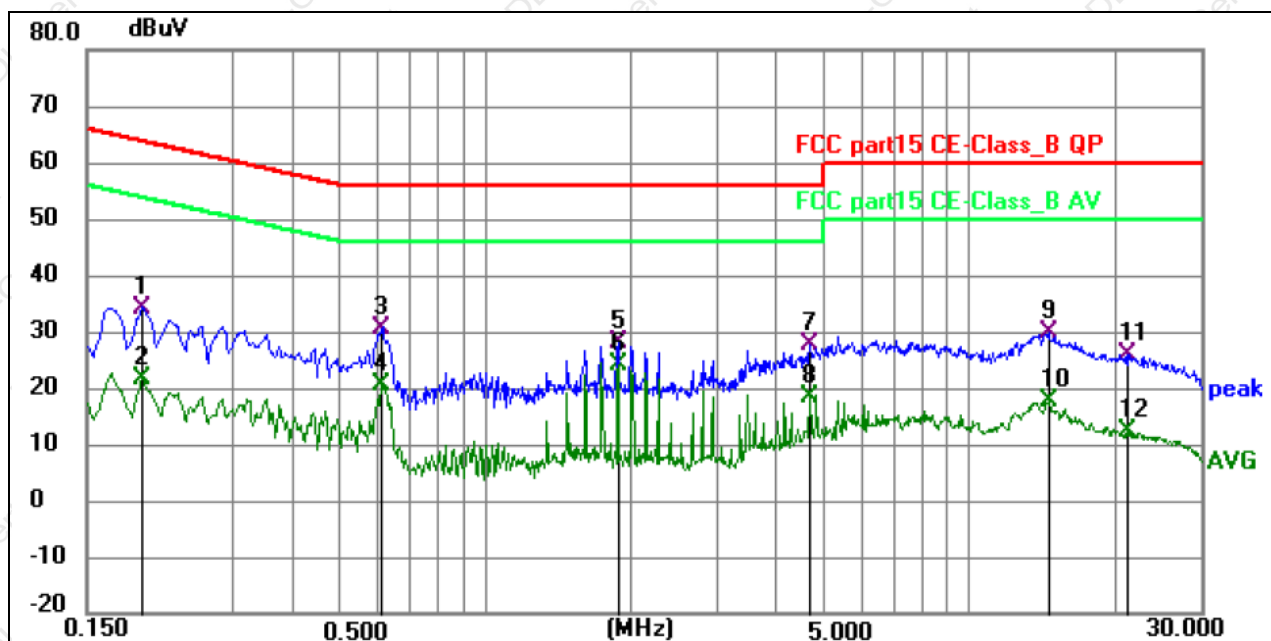


Remark:

Margin = Limit – Level, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1949	24.14	10.00	34.14	63.83	-29.69	QP	P	
2	0.1949	11.69	10.00	21.69	53.83	-32.14	AVG	P	
3	0.6134	20.53	9.89	30.42	56.00	-25.58	QP	P	
4	0.6134	10.60	9.89	20.49	46.00	-25.51	AVG	P	
5	1.8780	18.11	9.86	27.97	56.00	-28.03	QP	P	
6 *	1.8780	14.42	9.86	24.28	46.00	-21.72	AVG	P	
7	4.6905	17.56	10.10	27.66	56.00	-28.34	QP	P	
8	4.6905	8.24	10.10	18.34	46.00	-27.66	AVG	P	
9	14.5545	19.46	10.19	29.65	60.00	-30.35	QP	P	
10	14.5545	7.43	10.19	17.62	50.00	-32.38	AVG	P	
11	21.2370	15.44	10.33	25.77	60.00	-34.23	QP	P	
12	21.2370	1.99	10.33	12.32	50.00	-37.68	AVG	P	



Temperature:	25 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 3

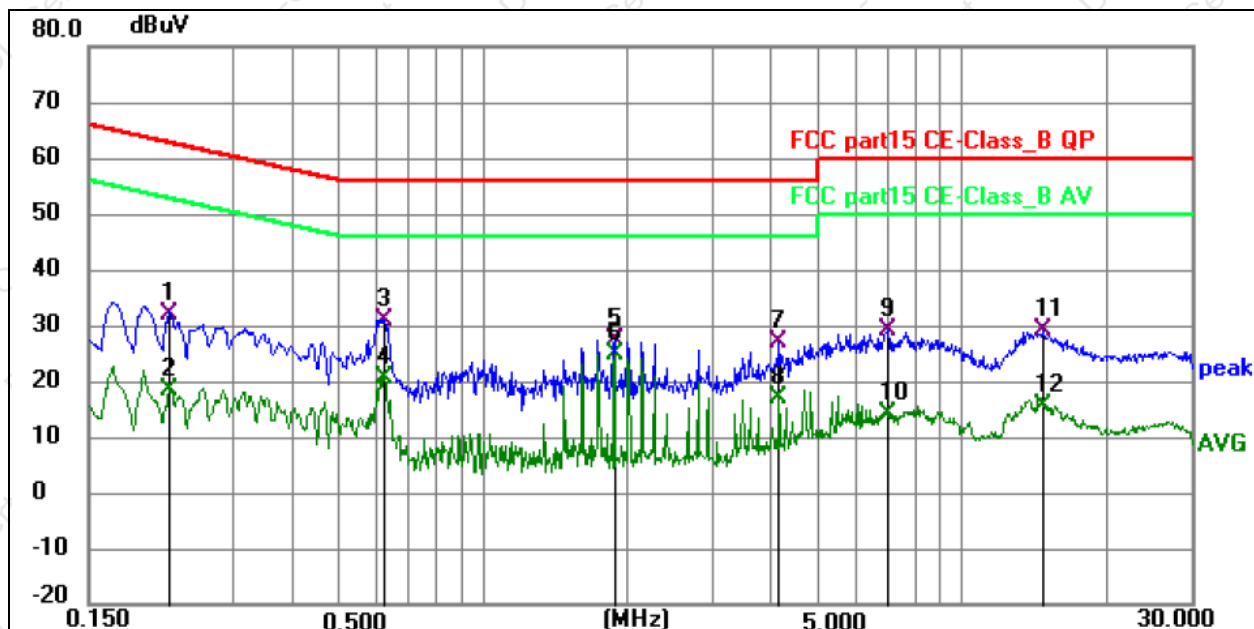

Remark:

Margin = Limit – Level, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.2220	22.16	9.92	32.08	62.74	-30.66	QP	P	
2	0.2220	8.37	9.92	18.29	52.74	-34.45	AVG	P	
3	0.6225	21.20	9.87	31.07	56.00	-24.93	QP	P	
4	0.6225	10.68	9.87	20.55	46.00	-25.45	AVG	P	
5	1.8780	17.43	9.98	27.41	56.00	-28.59	QP	P	
6 *	1.8780	14.72	9.98	24.70	46.00	-21.30	AVG	P	
7	4.1550	17.05	10.07	27.12	56.00	-28.88	QP	P	
8	4.1550	6.77	10.07	16.84	46.00	-29.16	AVG	P	
9	6.9630	18.77	10.16	28.93	60.00	-31.07	QP	P	
10	6.9630	3.82	10.16	13.98	50.00	-36.02	AVG	P	
11	14.7705	18.98	10.17	29.15	60.00	-30.85	QP	P	
12	14.7705	5.22	10.17	15.39	50.00	-34.61	AVG	P	



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

15.407(b) Undesirable emission limits. Except as shown in paragraph (b) (10) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating solely in the 5.725-5.850GHz band:
All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micromvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40GHz
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average



Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre.
- Test the EUT in the lowest channel, the middle channel, the Highest channel

Note:

The horizontal and vertical polarities of the antenna were tested, and a pre-test was conducted on the EUT placement as three orthogonal axes X,Y,Z. The worst display of the test results was the Y-axis. The worst case emissions were reported.


3.2.3 DEVIATION FROM TEST STANDARD

No deviation




3.2.4 TEST SETUP

(A) Radiated Emission Test-Up Frequency Below 30MHz

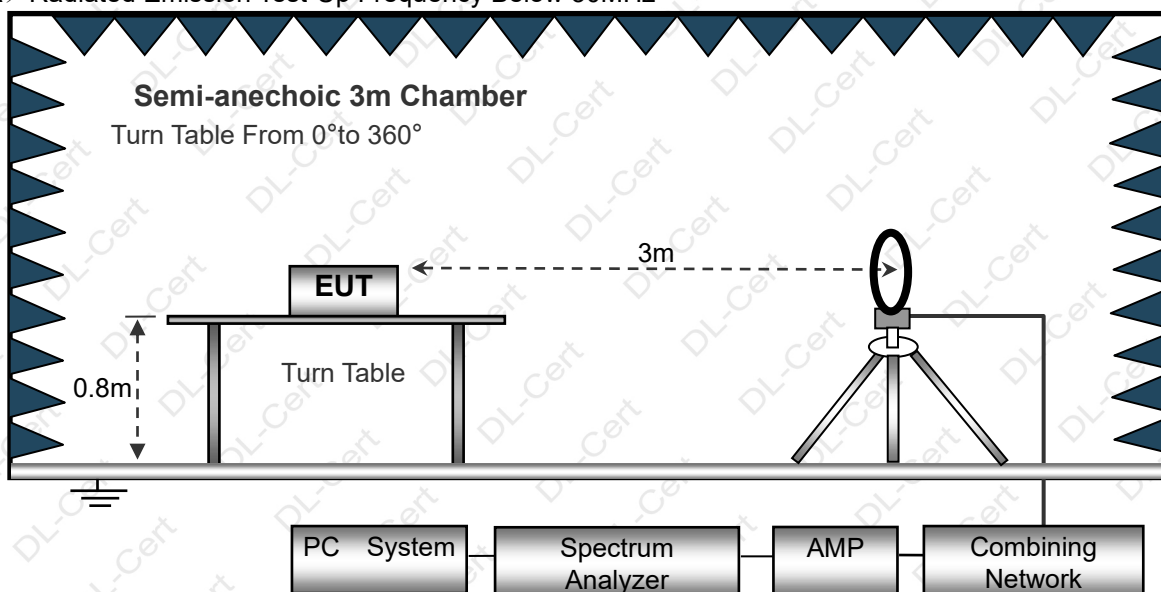


(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

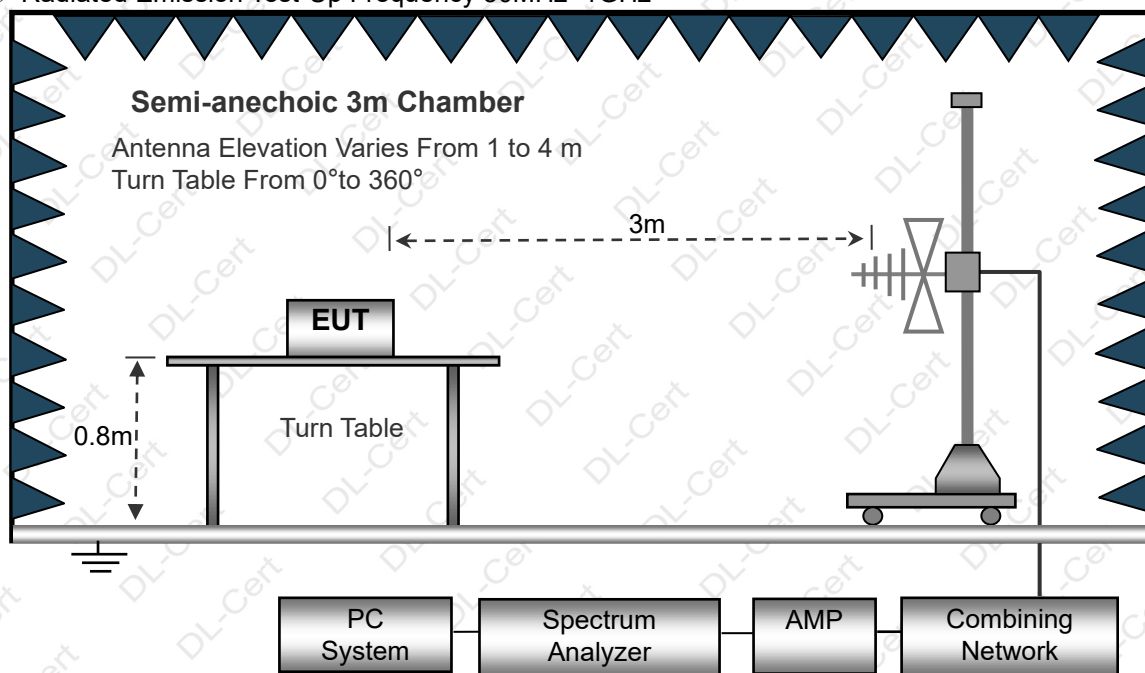



(C) Radiated Emission Test-Up Frequency Above 1GHz

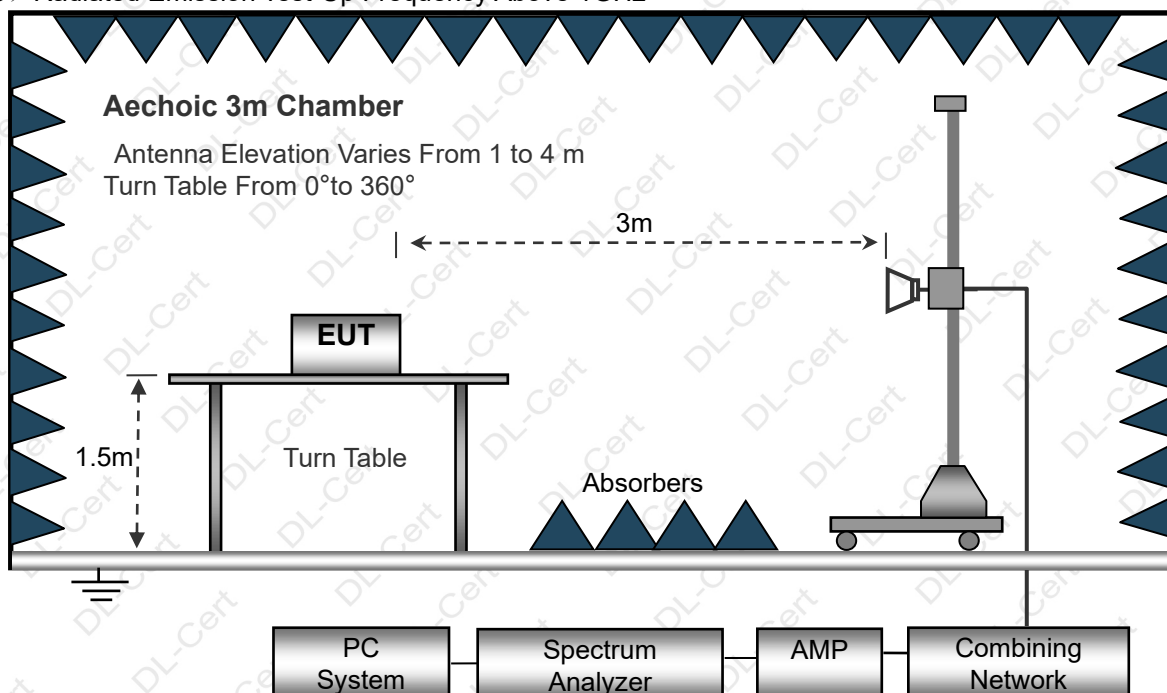**3.2.5 EUT OPERATING CONDITIONS**

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

**3.2.6 TEST RESULTS (Between 9KHz – 30 MHz)**

Temperature:	20℃	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Mode 3	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuV) + distance extrapolation factor.

**3.2.7 TEST RESULTS (Between 30MHz – 1GHz)**

Temperature:	26℃	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Horizontal
Test Voltage :	AC 120V/60Hz		
Test Mode :	Mode 3		

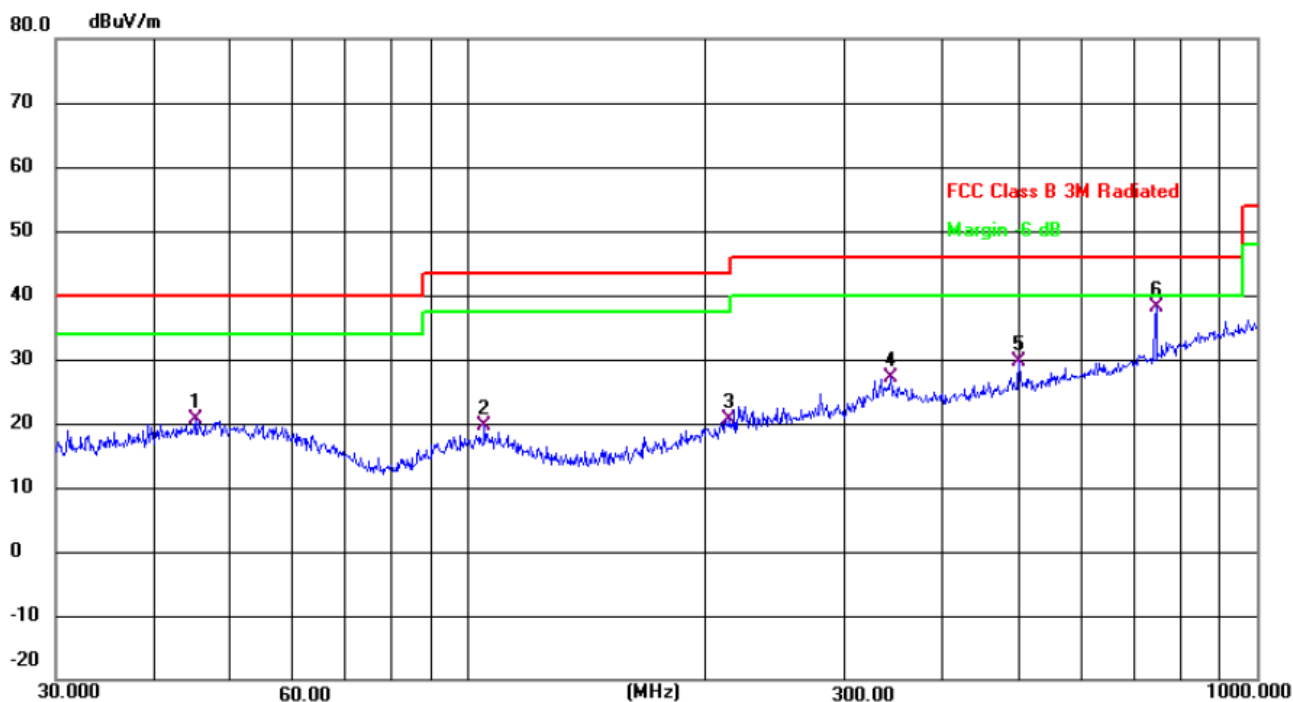

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		45.0583	27.78	-7.07	20.71	40.00	-19.29	QP
2		104.9033	28.43	-8.88	19.55	43.50	-23.95	QP
3		214.5143	29.11	-8.60	20.51	43.50	-22.99	QP
4		343.1800	31.75	-4.66	27.09	46.00	-18.91	QP
5		499.4247	31.27	-1.68	29.59	46.00	-16.41	QP
6	*	744.8661	35.00	3.02	38.02	46.00	-7.98	QP


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Level - Limit;



Temperature:	26℃	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Vertical
test voltage :	AC 120V/60Hz		
Test Mode :	Mode 3		

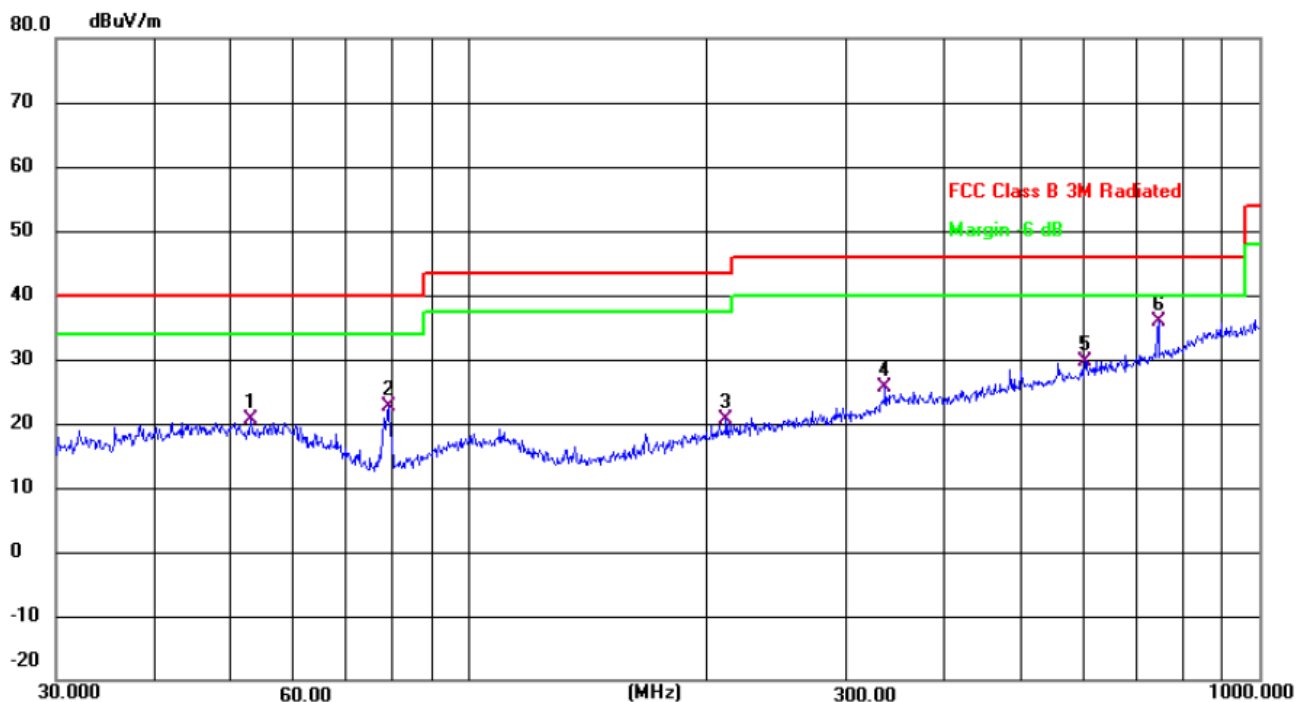

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	52.9453	28.00	-7.37	20.63	40.00	-19.37	QP
2	78.9652	36.09	-13.41	22.68	40.00	-17.32	QP
3	211.5265	29.20	-8.61	20.59	43.50	-22.91	QP
4	336.0352	30.32	-4.73	25.59	46.00	-20.41	QP
5	601.4265	29.34	0.37	29.71	46.00	-16.29	QP
6 *	744.8661	32.79	3.02	35.81	46.00	-10.19	QP

Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Level - Limit;

**3.2.8 TEST RESULTS (1ghz~40ghZ)**

802.11a band 1

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5180									
V	10360	56.53	49.05	15.3	37.39	60.17	68.2	-8.03	PK
V	10360	41.39	49.05	15.3	37.39	45.03	54	-8.97	AV
V	15540	56.82	49.16	15.27	40.45	63.38	74	-10.62	PK
V	15540	39.68	49.16	15.27	40.45	46.24	54	-7.76	AV
H	10360	56.24	49.05	15.3	37.39	59.88	68.2	-8.32	PK
H	10360	40.54	49.05	15.3	37.39	44.18	54	-9.82	AV
H	15540	59.36	49.16	15.27	40.45	65.92	74	-8.08	PK
H	15540	38.17	49.16	15.27	40.45	44.73	54	-9.27	AV
operation frequency:5200									
V	10400	57.61	49.09	15.34	37.42	61.28	68.2	-6.92	PK
V	10400	39.47	49.09	15.34	37.42	43.14	54	-10.86	AV
V	15600	59.60	49.18	15.29	40.47	66.18	74	-7.82	PK
V	15600	38.27	49.18	15.29	40.47	44.85	54	-9.15	AV
H	10400	56.84	49.09	15.34	37.42	60.51	68.2	-7.69	PK
H	10400	39.87	49.09	15.34	37.42	43.54	54	-10.46	AV
H	15600	59.67	49.18	15.29	40.47	66.25	74	-7.75	PK
H	15600	38.46	49.18	15.29	40.47	45.04	54	-8.96	AV
operation frequency:5240									
V	10480	58.73	49.11	15.37	37.46	62.45	68.2	-5.75	PK
V	10480	39.50	49.11	15.37	37.46	43.22	54	-10.78	AV
V	15720	59.32	49.21	15.34	40.51	65.96	74	-8.04	PK
V	15720	38.48	49.21	15.34	40.51	45.12	54	-8.88	AV
H	10480	57.25	49.11	15.37	31.31	54.82	68.2	-13.38	PK
H	10480	45.70	49.11	15.37	31.31	43.27	54	-10.73	AV
H	15720	57.59	49.21	15.34	40.51	64.23	74	-9.77	PK
H	15720	37.65	49.21	15.34	40.51	44.29	54	-9.71	AV
Remark:									
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit									
2. If peak below the average limit, the average emission was no test.									
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.									



802.11n HT20

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5180									
V	10360	56.92	49.05	15.3	37.39	60.56	68.2	-7.64	PK
V	10360	38.78	49.05	15.3	37.39	42.42	54	-11.58	AV
V	15540	56.44	49.16	15.27	40.45	63	74	-11.00	PK
V	15540	38.50	49.16	15.27	40.45	45.06	54	-8.94	AV
H	10360	56.83	49.05	15.3	37.39	60.47	68.2	-7.73	PK
H	10360	39.46	49.05	15.3	37.39	43.1	54	-10.90	AV
H	15540	54.34	49.16	15.27	40.45	60.9	74	-13.10	PK
H	15540	38.48	49.16	15.27	40.45	45.04	54	-8.96	AV
operation frequency:5200									
V	10400	56.41	49.09	15.34	37.42	60.08	68.2	-8.12	PK
V	10400	39.91	49.09	15.34	37.42	43.58	54	-10.42	AV
V	15600	55.49	49.18	15.29	40.47	62.07	74	-11.93	PK
V	15600	38.44	49.18	15.29	40.47	45.02	54	-8.98	AV
H	10400	55.75	49.09	15.34	37.42	59.42	68.2	-8.78	PK
H	10400	40.47	49.09	15.34	37.42	44.14	54	-9.86	AV
H	15600	55.21	49.18	15.29	40.47	61.79	74	-12.21	PK
H	15600	39.40	49.18	15.29	40.47	45.98	54	-8.02	AV
operation frequency:5240									
V	10480	57.33	49.11	15.37	37.46	61.05	68.2	-7.15	PK
V	10480	40.65	49.11	15.37	37.46	44.37	54	-9.63	AV
V	15720	54.47	49.21	15.34	40.51	61.11	74	-12.89	PK
V	15720	38.55	49.21	15.34	40.51	45.19	54	-8.81	AV
H	10480	57.31	49.11	15.37	31.31	54.88	68.2	-13.32	PK
H	10480	44.79	49.11	15.37	31.31	42.36	54	-11.64	AV
H	15720	55.55	49.21	15.34	40.51	62.19	74	-11.81	PK
H	15720	39.35	49.21	15.34	40.51	45.99	54	-8.01	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n HT40

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5190									
V	10380	56.92	49.07	15.33	37.41	60.59	68.2	-7.61	PK
V	10380	39.36	49.07	15.33	37.41	43.03	54	-10.97	AV
V	15570	56.45	49.17	15.28	40.46	63.02	74	-10.98	PK
V	15570	38.46	49.17	15.28	40.46	45.03	54	-8.97	AV
H	10380	56.83	49.07	15.33	37.41	60.5	68.2	-7.70	PK
H	10380	40.50	49.07	15.33	37.41	44.17	54	-9.83	AV
H	15570	54.79	49.17	15.28	40.46	61.36	74	-12.64	PK
H	15570	38.32	49.17	15.28	40.46	44.89	54	-9.11	AV
operation frequency:5230									
V	10460	57.34	49.11	15.37	37.46	61.06	68.2	-7.14	PK
V	10460	39.55	49.11	15.37	37.46	43.27	54	-10.73	AV
V	15690	54.61	49.21	15.34	40.51	61.25	74	-12.75	PK
V	15690	38.43	49.21	15.34	40.51	45.07	54	-8.93	AV
H	10460	57.51	49.11	15.37	31.31	55.08	68.2	-13.12	PK
H	10460	45.00	49.11	15.37	31.31	42.57	54	-11.43	AV
H	15690	55.52	49.21	15.34	40.51	62.16	74	-11.84	PK
H	15690	39.18	49.21	15.34	40.51	45.82	54	-8.18	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

**3.3 RADIATED BAND EMISSION MEASUREMENT****3.3.1 TEST REQUIREMENT:**

15.407 (b)

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating solely in the 5.725-5.850 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.

The provisions of §15.205 apply to intentional radiators operating under this section, 15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

(1) The limit for radiated test was performed according to FCC PART 15C.

(2) The tighter limit applies at the band edges.

(3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	5000MHz-5150MHz
Stop Frequency	5350MHz-5460MHz
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average



3.3.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.3.3 DEVIATION FROM TEST STANDARD

No deviation

3.3.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

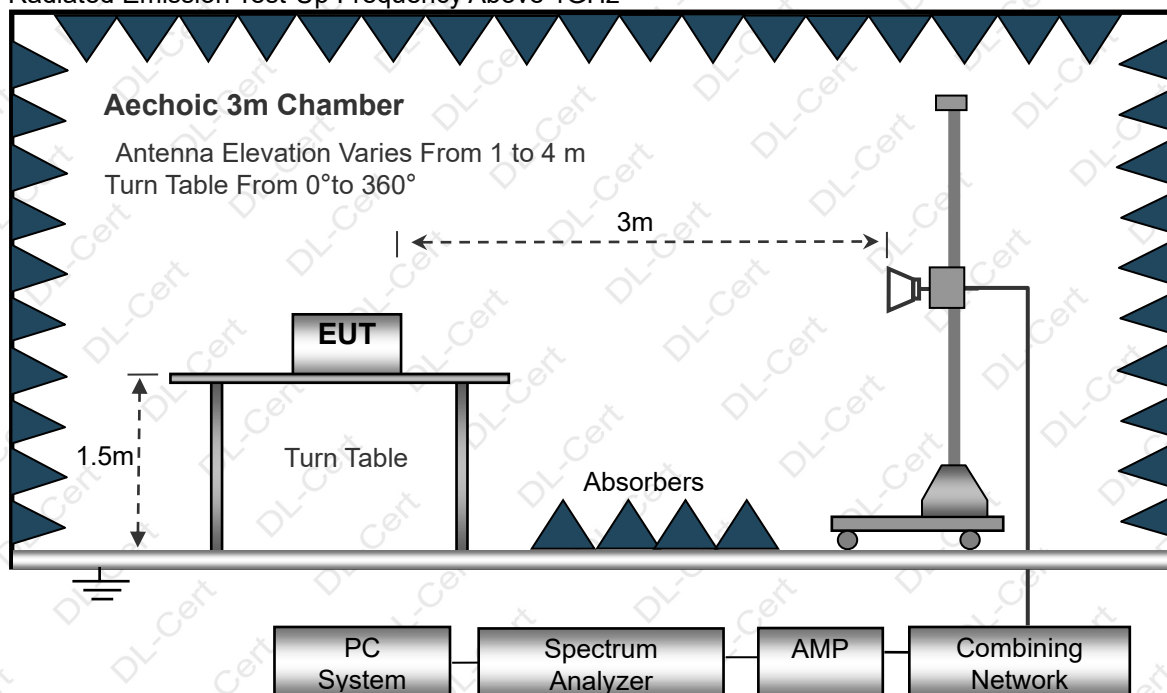

3.3.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

**3.3.6 TEST RESULT****802.11a(Band 1)**

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5180									
V	5150	53.56	49.12	15.6	37.34	57.38	74	-16.62	PK
V	5150	40.23	49.12	15.6	37.34	44.05	54	-9.95	AV
V	5145	54.65	49.19	15.24	40.43	61.13	74	-12.87	PK
V	5145	37.11	49.19	15.24	40.43	43.59	54	-10.41	AV
H	5150	52.87	49.12	15.6	37.34	56.69	74	-17.31	PK
H	5150	37.8	49.12	15.6	37.34	41.62	54	-12.38	AV
H	5145	54.49	49.19	15.24	40.43	60.97	74	-13.03	PK
H	5145	33.88	49.19	15.24	40.43	40.36	54	-13.64	AV

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5240									
V	5350	53.44	49.13	15.32	37.46	57.09	74	-16.91	PK
V	5350	36.11	49.13	15.32	37.46	39.76	54	-14.24	AV
V	5370	53.47	49.24	15.36	40.51	60.1	74	-13.9	PK
V	5370	32.42	49.24	15.36	40.51	39.05	54	-14.95	AV
H	5350	52.94	49.13	15.32	31.31	50.44	74	-23.56	PK
H	5350	41.01	49.13	15.32	31.31	38.51	54	-15.49	AV
H	5370	52.76	49.24	15.36	40.51	59.39	74	-14.61	PK
H	5370	33.1	49.24	15.36	40.51	39.73	54	-14.27	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n HT20

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5180									
V	5150	51.93	49.12	15.6	37.34	55.75	74	-18.25	PK
V	5150	33.39	49.12	15.6	37.34	37.21	54	-16.79	AV
V	5145	52.19	49.19	15.24	40.43	58.67	74	-15.33	PK
V	5145	33.88	49.19	15.24	40.43	40.36	54	-13.64	AV
H	5150	51.55	49.12	15.6	37.34	55.37	74	-18.63	PK
H	5150	33.61	49.12	15.6	37.34	37.43	54	-16.57	AV
H	5145	51.15	49.19	15.24	40.43	57.63	74	-16.37	PK
H	5145	32.61	49.19	15.24	40.43	39.09	54	-14.91	AV

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5240									
V	5350	53.56	49.13	15.32	37.46	57.21	74	-16.79	PK
V	5350	35.11	49.13	15.32	37.46	38.76	54	-15.24	AV
V	5370	51.15	49.24	15.36	40.51	57.78	74	-16.22	PK
V	5370	33.61	49.24	15.36	40.51	40.24	54	-13.76	AV
H	5350	54.56	49.13	15.32	31.31	52.06	74	-21.94	PK
H	5350	36.95	49.13	15.32	31.31	34.45	54	-19.55	AV
H	5370	51.71	49.24	15.36	40.51	58.34	74	-15.66	PK
H	5370	34.14	49.24	15.36	40.51	40.77	54	-13.23	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n HT40

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5190									
V	5150	52.94	49.12	15.6	37.39	56.81	74	-17.19	PK
V	5150	35.83	49.12	15.6	37.39	39.7	54	-14.3	AV
V	5145	51.96	49.19	15.24	40.45	58.46	74	-15.54	PK
V	5145	34.69	49.19	15.24	40.45	41.19	54	-12.81	AV
H	5150	52.89	49.12	15.6	37.39	56.76	74	-17.24	PK
H	5150	35.21	49.12	15.6	37.39	39.08	54	-14.92	AV
H	5145	50.85	49.19	15.24	40.45	57.35	74	-16.65	PK
H	5145	35.51	49.19	15.24	40.45	42.01	54	-11.99	AV

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5230									
V	5350	53.6	49.13	15.34	37.46	57.27	74	-16.73	PK
V	5350	37.67	49.13	15.34	37.46	41.34	54	-12.66	AV
V	5370	50.49	49.24	15.35	40.51	57.11	74	-16.89	PK
V	5370	36.78	49.24	15.35	40.51	43.4	54	-10.6	AV
H	5350	54.67	49.13	15.34	31.31	52.19	74	-21.81	PK
H	5350	42.13	49.13	15.34	31.31	39.65	54	-14.35	AV
H	5370	52.87	49.24	15.35	40.51	59.49	74	-14.51	PK
H	5370	36.73	49.24	15.35	40.51	43.35	54	-10.65	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



3.4 CONDUCTED BAND EMISSION MEASUREMENT

3.4.1 TEST REQUIREMENT:

FCC Part15 C Section 15.209 and 15.407

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	5150MHz
Stop Frequency	5250MHz
RB / VB (emission in restricted band)	1 MHz / 3 MHz for Peak, 1 MHz / 10Hz for Average


3.4.2 TEST PROCEDURE

Test method: FCC KDB 789033 G)& Parts 15.407(b)(4) & 15.209(a)

3.4.3 DEVIATION FROM TEST STANDARD

No deviation

3.4.4 TEST SETUP

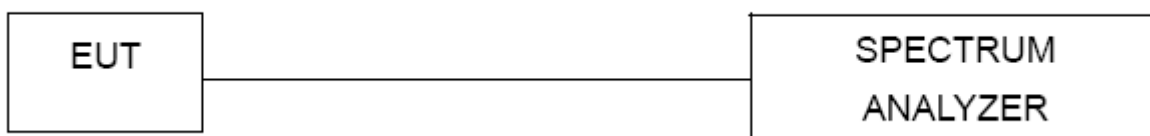

3.4.5 EUT OPERATING CONDITIONS


The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

3.4.6 TEST RESULT




The antenna gain is compensated in the test data.

802.11a

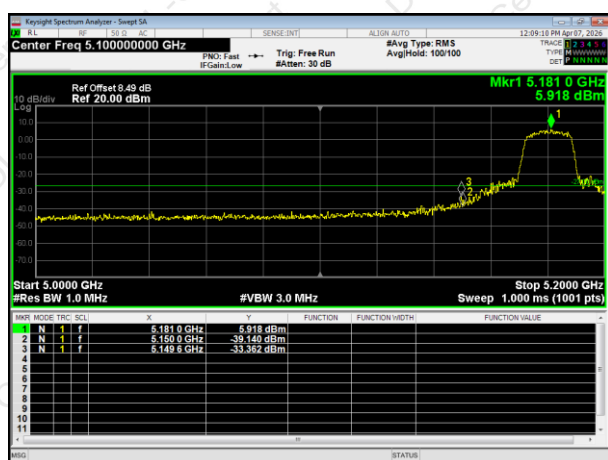


5180MHz

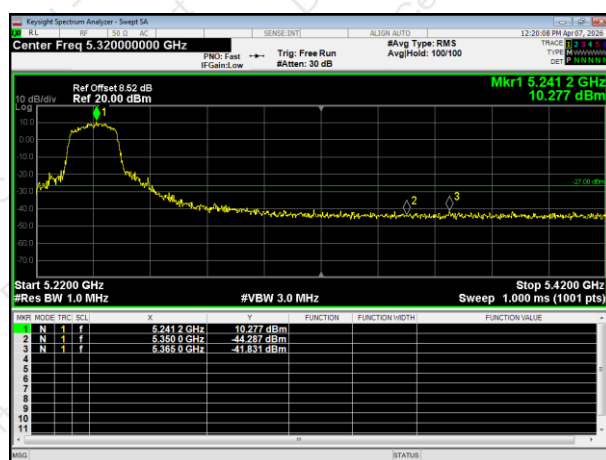


5240MHz

802.11n HT20

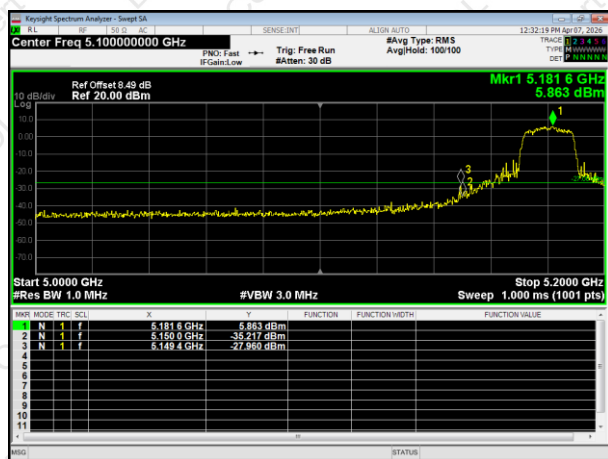


5180MHz

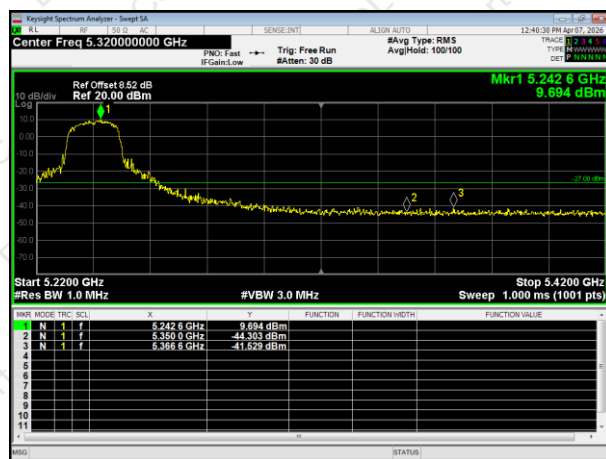


5240MHz

802.11n HT40

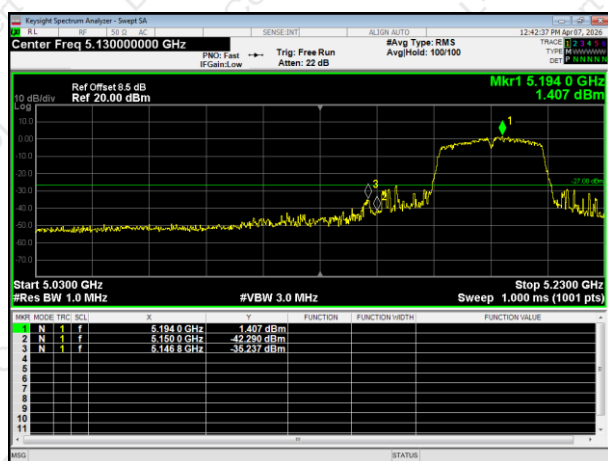

5190MHz

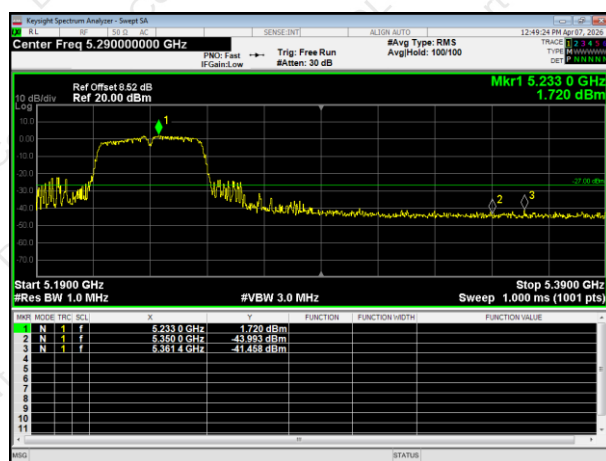

5230MHz



4. CONDUCTED OUTPUT POWER

4.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E		
Test Item	Limit	Frequency Range (MHz)
Conducted Output Power	For FCC client devices:250mW (24dBm)	5150-5250

4.1.1 TEST PROCEDURE

a)Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied:

- 1) The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.
- 2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
- 3)The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.

b) If the transmitter does not transmit continuously, measure the duty cycle D of the transmitter output signal as described in 12.2.


c) Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.

d) Correct the measurement in dBm by adding $[10 \log (1 / D)]$, where D is the duty cycle (e.g., $[10 \log (1 / 0.25)]$, if the duty cycle is 25%).

4.1.2 DEVIATION FROM STANDARD

No deviation.

4.1.3 TEST SETUP

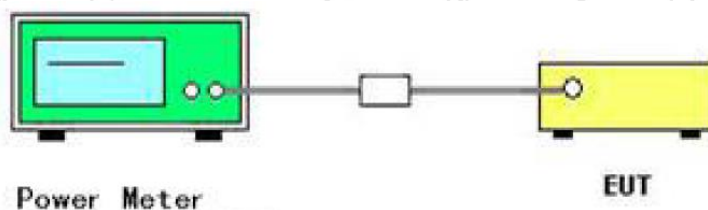

4.1.4 EUT OPERATION CONDITIONS

- 1) The EUT is configured to transmit continuously.
- 2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
- 3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.

**4.1.5 TEST RESULTS**

Temperature:	25 °C	Relative Humidity:	60%
Pressure:	1012 hPa	Test Voltage :	AC 120V/60Hz

Mode	Test Channel	Conducted Output Power (dBm)	Duty factor (dB)	Total Output Power(dB)	LIMIT (dBm)
802.11a	Low	5.256	0.87	6.126	24
	Middle	5.263	0.87	6.133	24
	High	5.861	1.12	6.981	24
802.11n HT20	Low	4.142	0.92	5.062	24
	Middle	6.017	0.97	6.987	24
	High	5.79	0.92	6.71	24
802.11n HT40	Low	5.057	0.26	5.317	24
	High	4.639	1.46	6.099	24



5. POWER SPECTRAL DENSITY TEST

5.1 APPLIED PROCEDURES / LIMIT

In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

In addition, the maximum power spectral density shall not exceed 30 dBm in any 500 kHz band.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	= the frequency band of operation
RB	RBW $\geq$ 1MHz for band 1 RBW $\geq$ 510KHz for band 4
VB	VBW $\geq$ 3RBW
Detector	RMS (i.e., power averaging).
Trace	Max Hold
Sweep Time	Auto


5.1.1 TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. The testing follows FCC KDB 789033 D02.
3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to Spectrum.
4. For U-NII1, U-NII-2A, U-NII-2C Band:
Set RBW=1MHz, VBW=3MHz, where span is enough to capture the entire bandwidth, Sweep time = Auto (601 pts), detector = sample, traces 100 sweeps of video averaging. (SA-2 with the omission of procedure x, the integration with 26dB EBW bandwidth)
For U-NII-3 Band:
Set RBW=510 kHz, VBW=3*RBW, where span is enough to capture the entire bandwidth, Sweep time = Auto (601 pts), detector = sample, traces 100 sweeps of video averaging. (SA-2 with the omission of procedure x, the integration with 26dB EBW bandwidth)
5. Use the cursor on spectrum to peak search the highest level of trace
6. Record the max. reading and add 10 log(1/duty cycle).
we test all antennas, the antenna 1 was worst mode and the data recording in the report.
7. Duty factor Reference is made to the test results in Section 7.1.5.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP

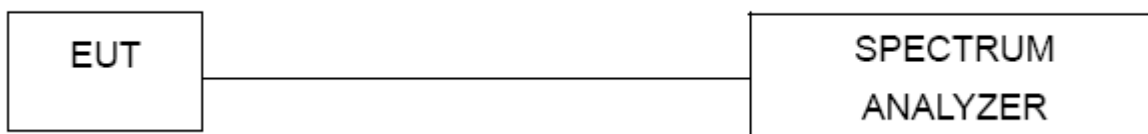

5.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**5.1.5 TEST RESULTS**


	Mode	Test Channel	Reading Level (dBm)	Duty factor (dB)	PSD (dBm/MHz)	Limit (dBm)	Result
Band1	802.11a	Low	-4.032	0.87	-3.162	11.00	PASS
		Middle	-4.155	0.87	-3.285	11.00	PASS
		High	-3.29	1.12	-2.17	11.00	PASS
	802.11n20	Low	-5.404	0.92	-4.484	11.00	PASS
		Middle	-3.371	0.97	-2.401	11.00	PASS
		High	-3.56	0.92	-2.64	11.00	PASS
	802.11n40	Low	-7.001	0.26	-6.741	11.00	PASS
		High	-8.166	1.46	-6.706	11.00	PASS




802.11a

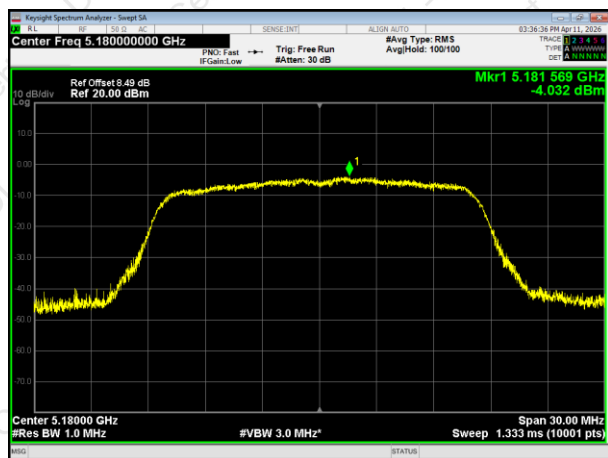


802.11n HT20

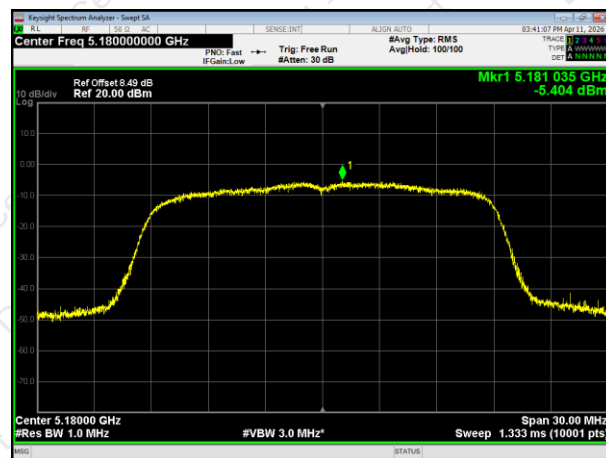


5180MHz

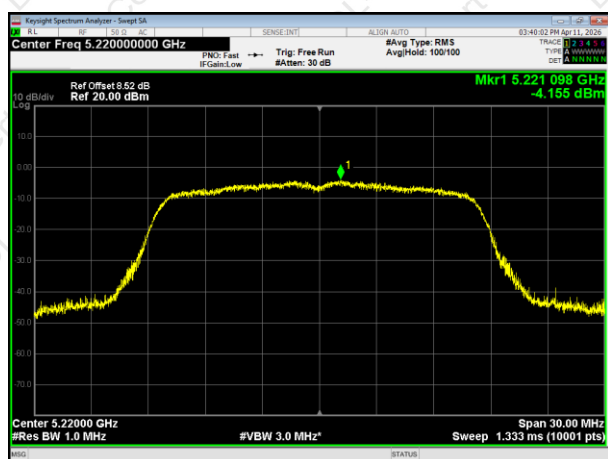

5180MHz

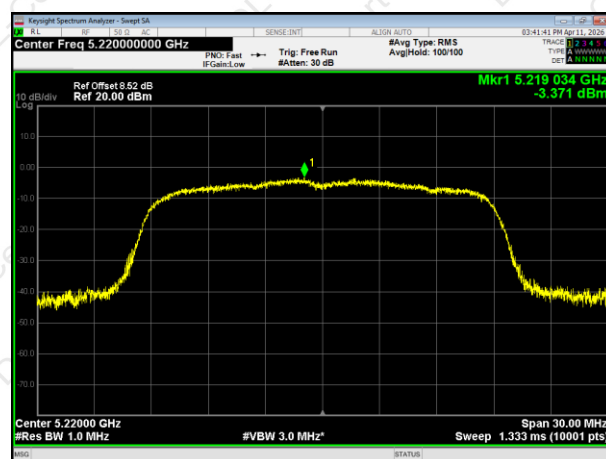

5200MHz

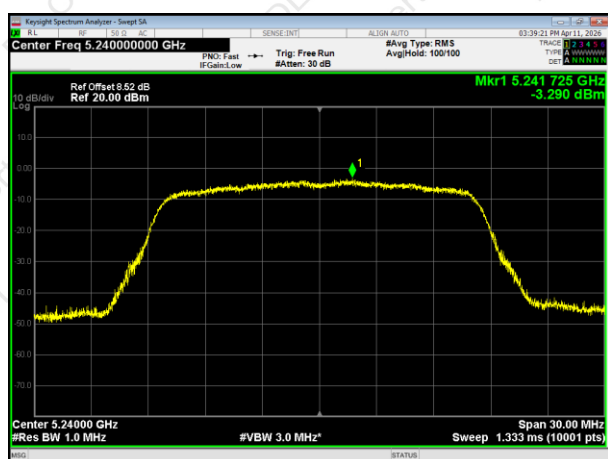

5200MHz




5240MHz


5240MHz



802.11n HT40

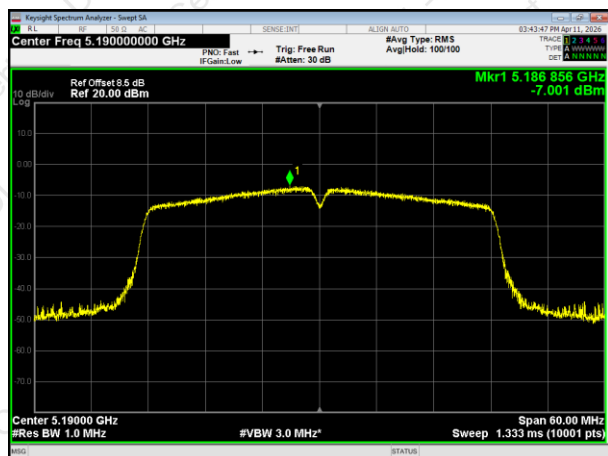

5190MHz

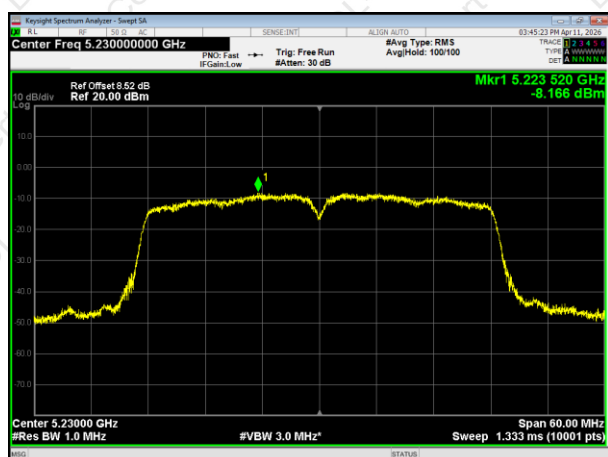

5230MHz



6. BANDWIDTH TEST

6.1 APPLIED PROCEDURES / LIMIT

The 26 dB bandwidth is used to determine the conducted power limits.

There is no limit bandwidth for U-NII-1, U-NII-2-A and U-NII-2-C.

The minimum of 6dB Bandwidth measurement is 0.5 MHz for U-NII-3

6.1.1 TEST PROCEDURE

26dB Bandwidth	
Spectrum Parameters	Setting
RBW	shall be in the range of 1% to 5% of the emission bandwidth
VBW	>RBW
Span	30MHz(20MHz Bandwidth mode) 60MHz(40MHz Bandwidth mode) 120MHz(80MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

99% Occupied Bandwidth	
Spectrum Parameters	Setting
RBW	1% to 5% of the OBW
VBW	Approximately three times the RBW
Span	between 1.5 times and 5.0 times the OBW
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

**6.1.5 TEST RESULTS**


		Test Channel	26dB Bandwidth (MHz)	Result
Band 1	802.11a	Low	20.08	Pass
		Middle	19.83	Pass
		High	19.8	Pass
	802.11n HT20	Low	27.19	Pass
		Middle	29.63	Pass
		High	26.03	Pass
	802.11n HT40	Low	40.36	Pass
		High	40.88	Pass




802.11a

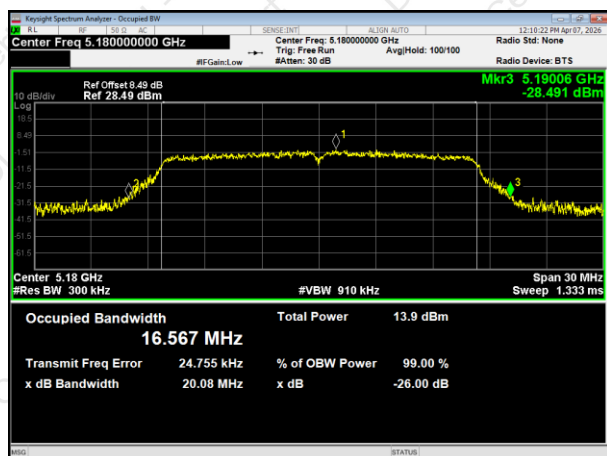


802.11n HT20

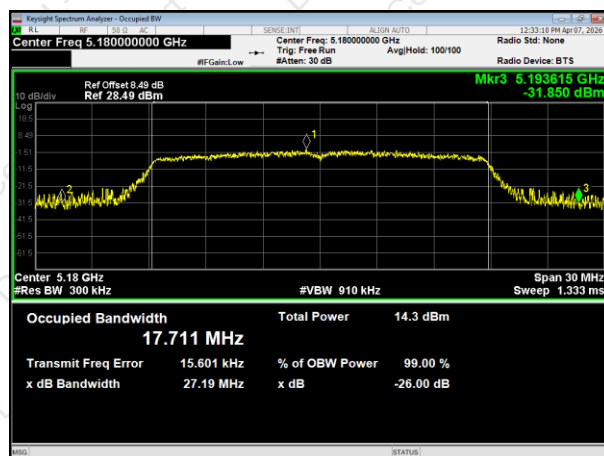


5180MHz

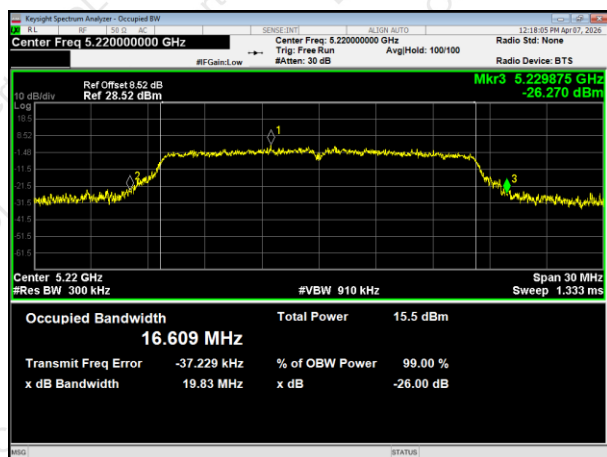


5180MHz

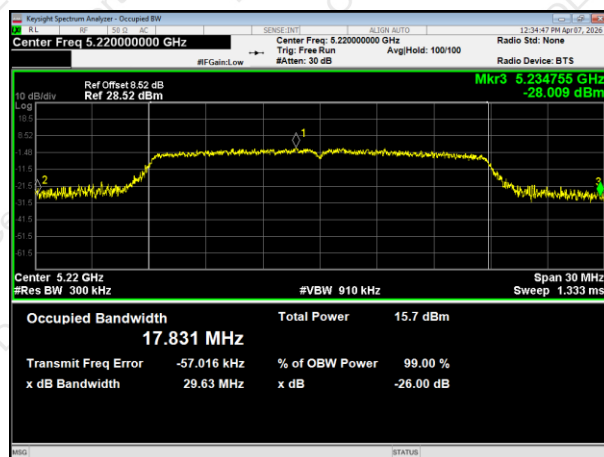

5200MHz

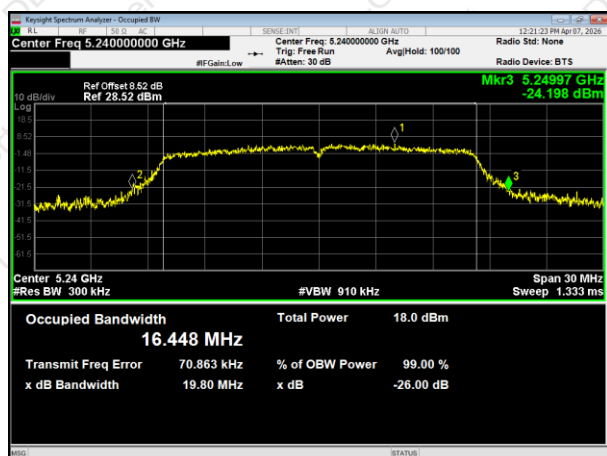

5200MHz

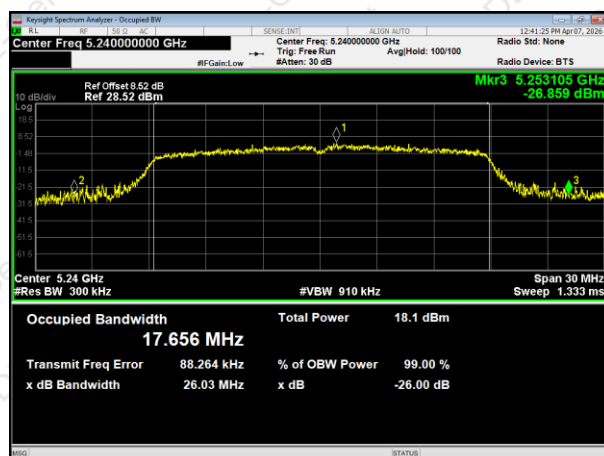


5240MHz


5240MHz



802.11n HT40

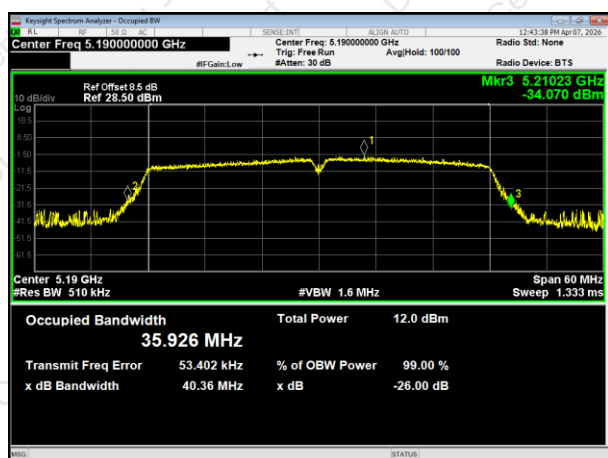

5190MHz

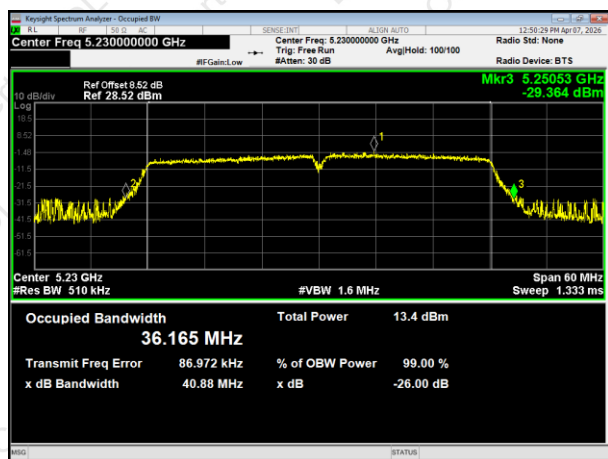

5230MHz



7. DUTY CYCLE TEST SIGNAL

7.1 APPLIED PROCEDURES / LIMIT

Pre-analysis Check: While conducting average power measurement, duty cycle of each mode shall be checked to ensure its duty cycle in order to compensate for the loss due to insufficient ratio of duty cycle. All duty cycle is pre-scanned, and result as obtained below shows only the most representative ones where duty cycle is conducted as the given transmission with given virtual operation that expresses the percentage.

7.1.1 TEST PROCEDURE

1. Set RBW = 1 MHz.
2. Set the video bandwidth (VBW) $\geq$ RBW.
3. Detector = Peak.
4. Sweep = auto couple.
5. Allow the trace to stabilize.
6. Span=0

7.1.2 DEVIATION FROM STANDARD

No deviation.

7.1.3 TEST SETUP



7.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

**7.1.5 TEST RESULTS**


Operation Mode			Duty Cycle(%)	Duty Fator (dB) 10 * log (1/ Duty cycle)
Band 1	802.11a	Low	81.82	0.87
		Middle	81.82	0.87
		High	77.27	1.12
	802.11n HT20	Low	80.95	0.92
		Middle	80	0.97
		High	80.95	0.92
	802.11n HT40	Low	94.2	0.26
		High	71.43	1.46




802.11a

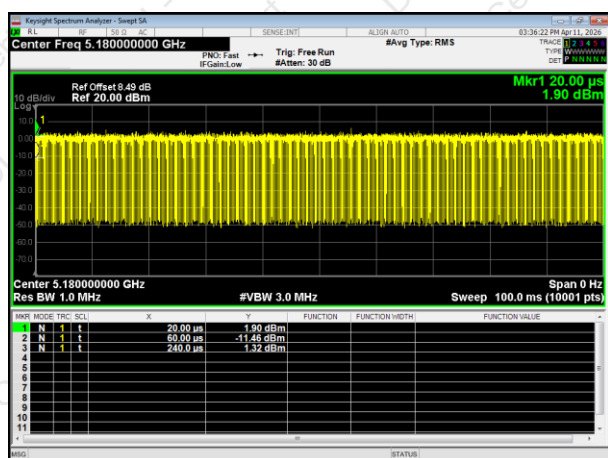


802.11n HT20

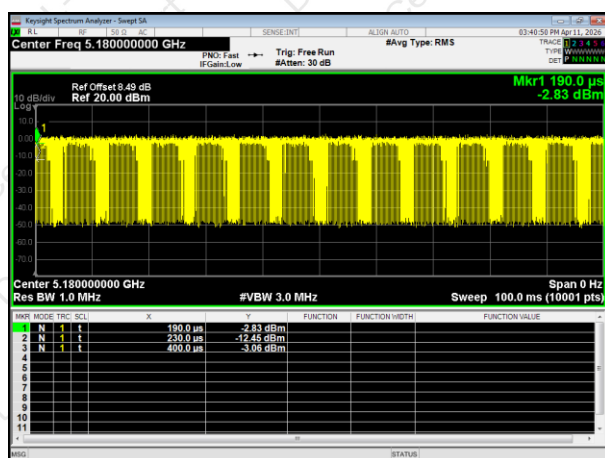


5180MHz

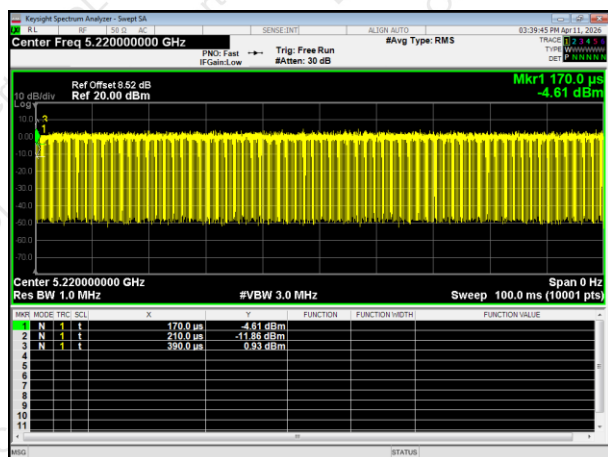


5180MHz

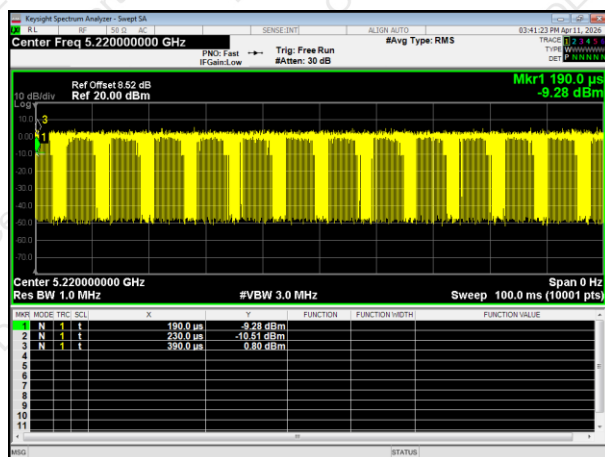

5200MHz

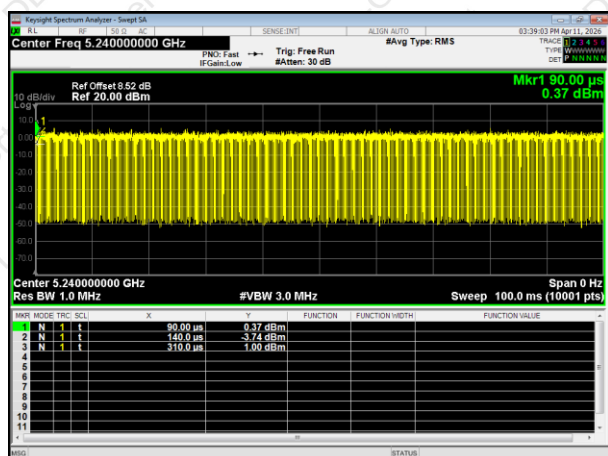

5200MHz

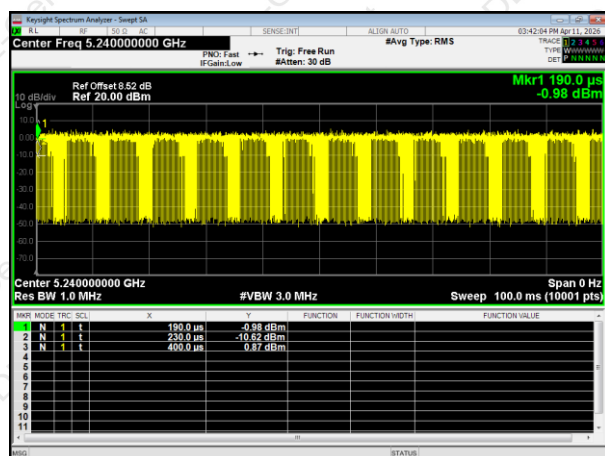


5240MHz


5240MHz



802.11n HT40

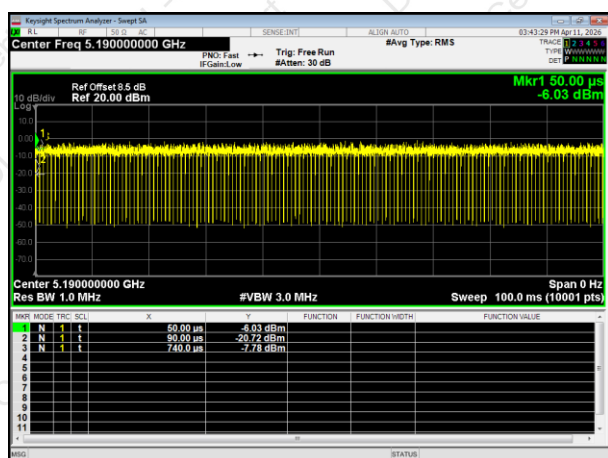

5190MHz

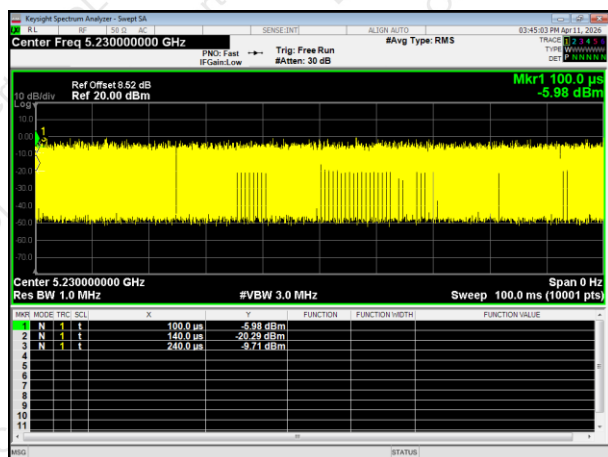

5230MHz



8. FREQUENCY STABILITY

8.1 APPLIED PROCEDURES / LIMIT

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.


8.1.1 TEST PROCEDURE

1. The EUT was placed inside temperature chamber and powered and powered by nominal DC voltage.
2. Set EUT as normal operation.
3. Turn the EUT on and couple its output to spectrum.
4. Turn the EUT off and set the chamber to the highest temperature specified.
5. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT and measure the operating frequency.
6. Repeat step with the temperature chamber set to the lowest temperature.

8.1.2 DEVIATION FROM STANDARD

No deviation.

8.1.3 TEST SETUP

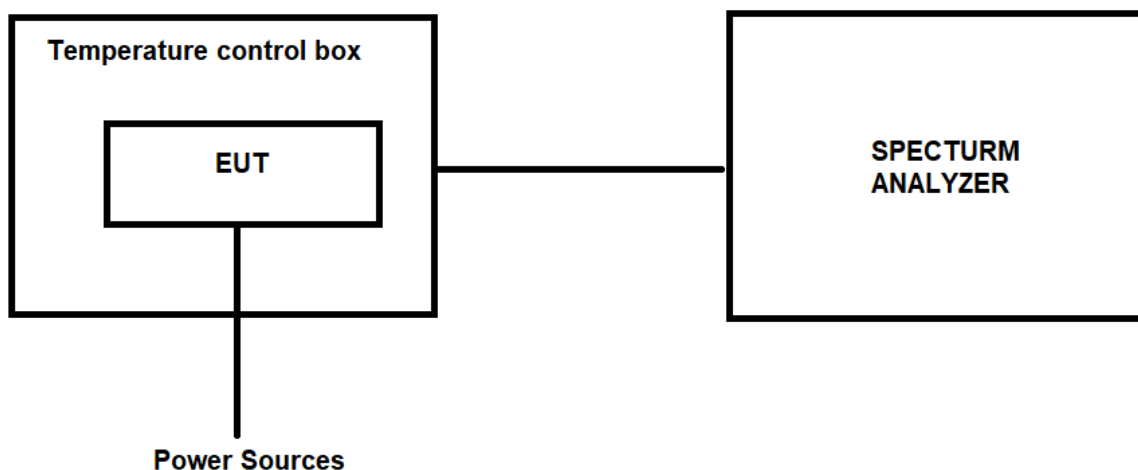

8.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



8.1.5 TEST RESULTS

Test Voltage	Test Temp.	Measured Frequency (MHz)	Spectrum Frequency (MHz)		Δ Frequency (PPM)	
			802.11a	802.11n HT20	802.11a	802.11n HT20
5.5V	-20°C	5180	5180.0374	5180.0349	0.0374	0.0349
		5220	5220.0386	5220.0386	0.0386	0.0386
		5240	5240.0248	5240.0235	0.0248	0.0235
4.5V		5180	5180.0301	5180.0270	0.0301	0.027
		5220	5220.0360	5220.0398	0.0360	0.0398
		5240	5240.0287	5240.0243	0.0287	0.0243
5V	25°C	5180	5180.0580	5180.0578	0.0580	0.0578
		5220	5220.0295	5220.0256	0.0295	0.0256
		5240	5240.0398	5240.0368	0.0398	0.0368
5.5V	50°C	5180	5180.0379	5180.0397	0.0379	0.0397
		5220	5220.0241	5220.0248	0.0241	0.0248
		5240	5240.0368	5240.0355	0.0368	0.0355
4.5V	50°C	5180	5180.0346	5180.0368	0.0346	0.0368
		5220	5220.0268	5220.0277	0.0268	0.0277
		5240	5240.0389	5240.0333	0.0389	0.0333

Note:The test result is PASS.

Test Voltage	Test Temp.	Measured Frequency (MHz)	Spectrum Frequency (MHz)	Δ Frequency (PPM)
			802.11n HT40	802.11n HT40
5.5V	-20℃	5190	5190.0236	0.0236
		5230	5230.0354	0.0354
4.5V		5190	5190.0262	0.0262
		5230	5230.0327	0.0327
5V	25℃	5190	5190.0245	0.0245
		5230	5230.0664	0.0664
5.5V	50℃	5190	5190.0627	0.0627
		5230	5230.0558	0.0558
4.5V	50℃	5190	5190.0544	0.0544
		5230	5230.0352	0.0352

Note:The test result is PASS.



9. TRANSMISSION IN THE ABSENCE OF DATA

9.1 STANDARD REQUIREMENT

According to §15.407(c)

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

9.2 TEST RESULT

No non-compliance noted:
Refer to the theory of operation.

10. ANTENNA REQUIREMENT

10.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

10.2 EUT ANTENNA

The EUT antenna is Internal Antenna, It comply with the standard requirement.

11. TEST SETUP PHOTO

Reference to the appendix I for details.

12. EUT PHOTO

Reference to the appendix II for details.

***** END OF REPORT *****