

TEST REPORT

Report No..... : ATA2604166E
FCC ID..... : 2BVS3-X80PRO
Applicant..... : Shenzhen Newxinxing Technology Co. LTD
Address..... : Unit 401, Unit 2, Jandong, No.6, Technology Middle Road. Maling Community, YuehaiStreet, Nanshan District, Shenzhen, Guangdong, China
Manufacturer..... : Shenzhen Newxinxing Technology Co. LTD
Address..... : Unit 401, Unit 2, Jandong, No.6, Technology Middle Road. Maling Community, YuehaiStreet, Nanshan District, Shenzhen, Guangdong, China
Product Name..... : X80Pro
Trade Mark..... : N/A
Test Model..... : X80 Pro
Standard..... : FCC CFR Title 47 Part 15 Subpart C Section 15.247
Test procedure..... : IEEE/ANSI C63.10-2020
Date of Receipt..... : Apr. 12, 2026
Date of Test Date..... : Apr. 12, 2026~Apr. 22, 2026
Date of issue..... : Apr. 22, 2026
Test result..... : Pass

Compiled by:

(Printed name+signature)

Lily Zheng

Lily Zheng

Supervised by:

(Printed name+signature)

Travis Young

Travis Young

Approved by:

(Printed name+signature)

Jason chen

Jason chen

Testing Laboratory Name..... : Shenzhen ATA Testing Lab. Inc

Address..... : 4th Floor, Building 10, No.60 Nanchang Road, Nanchang Community, Xixiang Street, Bao'an District, Shenzhen City, China

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by ATA. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to ATA within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit. The test report merely correspond to the test sample.

TABLE OF CONTENTS		Page
1. TEST SUMMARY		3
1.1. TEST STANDARDS		3
1.2. REPORT VERSION		3
1.3. TEST DESCRIPTION		4
1.4. TEST FACILITY		5
1.5. MEASUREMENT UNCERTAINTY		6
1.6. ENVIRONMENTAL CONDITIONS		6
2. GENERAL INFORMATION		7
2.1. GENERAL DESCRIPTION OF EUT		7
2.2. DESCRIPTION OF THE TEST MODES		8
2.3. BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED		8
2.4. DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS		9
2.5. MEASUREMENT INSTRUMENTS LIST		10
2.5. TEST SOFTWARE		11
3. TEST ITEM AND RESULTS		12
3.1. ANTENNA REQUIREMENT		12
3.2. CONDUCTED EMISSION		13
3.3. BAND EDGE AND SPURIOUS EMISSION (CONDUCTED)		16
3.4. 6dB BANDWIDTH		17
3.5. PEAK OUTPUT POWER		18
3.6. POWER SPECTRAL DENSITY		19
3.7. BAND EDGE EMISSIONS(RADIATED)		20
3.8. SPURIOUS EMISSION (RADIATED)		22
4. APPENDIX (RF TEST RESULTS)		28
4.1. MAXIMUM PEAK CONDUCTED OUTPUT POWER		28
4.2. -6dB BANDWIDTH		29
4.3. MAXIMUM POWER SPECTRAL DENSITY LEVEL		30
4.4. BAND EDGE		31
4.5. CONDUCTED RF SPURIOUS EMISSION		32
5. EUT TEST PHOTOS		34
6. PHOTOGRAPHS OF EUT CONSTRUCTIONAL		34

1. TEST SUMMARY

1.1. Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.247: Operation within the bands of 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.

ANSI C63.10-2020: American National Standard for Testing Unlicensed Wireless Devices.

1.2. Report version

Revised No.	Date of issue	Description
01	Apr. 22, 2026	Original

1.3. Test Description

FCC Part 15 Subpart C(15.247)			
Test Item	Standard Section	Result	Remark
	FCC		
Antenna Requirement	15.203	Pass	
Conducted Emission	15.207	Pass	
Restricted Bands	15.205	Pass	
Peak Output Power	15.247(b)	Pass	
Band Edge Emissions	15.247(d)	Pass	
Power Spectral Density	15.247(e)	Pass	
Radiated Emission	15.205&15.209	Pass	
6dB Bandwidth	15.247(a)(1)(i)(2)	Pass	
Spurious RF Conducted Emission	15.247(d)	Pass	

Note:(1) "N/A" denotes test is not applicable to this device.

1.4. Test Facility

Test Site	Shenzhen ATA Testing Lab. Inc
Test Site Location	4th Floor, Building 10, No. 60 Nanchang Road, Nanchang Community, Xixiang Street, Bao'an District, Shenzhen City, China
Telephone:	+86 0755-2783-0095
Fax:	+86 0755-2783-0095

The test facility is recognized, certified, or accredited by the following organizations:	A2LA Accreditation Lab Certificate Number: 839205
	FCC Accredited Lab Designation Number: CN1455

1.5. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the Shenzhen ATA Testing Lab. Inc system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device. Below is the best measurement capability for Shenzhen ATA Testing Lab. Inc

Test Items	Measurement Uncertainty	U(k=2)
Radiated Emissions 9K-30MHz	± 2.70 dB	1.96
Radiated Emissions 30~1000MHz	± 5.432 dB	1.96
Radiated Emissions 1~18GHz	± 3.88 dB	1.96
Radiated Emissions 18~40GHz	± 5.32 dB	1.96
Conducted Emissions 9kHz~150KHz	± 3.90 dB	1.96
Conducted Emissions 150Hz~30MHz	± 3.52 dB	1.96
Conducted spurious emissions	± 1.60 dB	1.96
RF Output Ppower Conducted	± 0.58 dB	1.96
Power Spectral Density Conducted	± 1.52 dB	1.96
Occupied Bandwidth	$\pm 0.463\%$	1.96
Humidity uncertainty	$\pm 2.0\%$ RH	1.96
Temperature uncertainty	$\pm 0.6^{\circ}\text{C}$	1.96
Barometric pressure uncertainty	0.5hPa	1.96

Note (1): This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

1.6. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35°C
Relative Humidity:	30~60 %
Air Pressure:	950~1050mba

2. GENERAL INFORMATION

2.1. General Description of EUT

Product Name:	X80Pro
Trade Mark:	N/A
Test Model:	X80 Pro
Series Model(s):	X80, X80 Max, X80 Mini, X80 Plus, X80 Ultra, X90, X90 Pro, X90 Mini, X90 Max, X70, X70 Pro, X70 mini, X60, X60 Pro, X60 Plus, X60 Ultra, X50, X50 Max, X50 Pro, X50 ultra, X50 Plus, X50 Mini, X40, X40 Pro, X30, X30 Pro, X20, X20 Pro, X20 Max, X10, X10 Pro, X9, X9 Pro, X8, X8 Pro, X7, X7 Pro, X6, X6 Pro, X5, X5 Pro, X4, X3, X2, X1, X0, V8 mini, V8 Max, V8 Pro, V8 ULTRA, GT20, GT2000. V9, V10, V11, V12, V15
Model Difference:	The above-mentioned products share the same circuitry, PCB layout, electrical components, materials, circuit structure and decorative accessories' materials, but they differ in color.
Power Source:	Input Voltage: 54.6 $\pm$ 2.0A Max
Adpater	Model: JY-546200 Input: 110-240V 50/60Hz 2.5A Output: 54.6 $\pm$ 2.0A Max
Battery	48V 15Ah 720Wh
Hardware version:	V1.0
Software version:	V1.0
Bluetooth 5.0+BLE	
Modulation type:	GFSK
Operation frequency:	2402MHz~2480MHz
Max Peak Output Power:	1.42dBm
Channel number:	40
Bit Rate of transmitter:	1 Mbps
Antenna type:	PCB Antenna
Antenna gain:	2.80dBi
Note: (1) All antenna information is provided by the manufacturer, test laboratory will not be responsible if any error. (2) The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity. (3) "N/A" Indicates inapplicability	

2.2. DESCRIPTION OF THE TEST MODES

Operation Frequency List: The EUT has been tested under typical operating condition. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing. BT BLE, 40 channels are provided to the EUT. Channels 00/19/39 were selected for testing.

Operation Frequency List:

Channel	Frequency (MHz)
00	2402
01	2404
⋮	⋮
19	2440
20	2442
21	2444
⋮	⋮
38	2478
39	2480

Following channel(s) was (were) selected for the test as listed below.


TESTED CHANNEL	TESTED FREQUENCY
Low	2402
Middle	2440
High	2480

2.3. BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test



AC Conducted Emission Test



RF Conducted Test



2.4. DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Mode/Type	Note
E-2	Adapter	Guangzhou Ji Yin Power Electronics Co Ltd	JY-546200	Product compatibility for use

Item	Equipment	Mfr/Brand	Length	Note
C-1	line	N/A	1m	Test use

Note : (1) For detachable type VO cables should be specified the length in cm in Length column.

(2) "YES" is means "with core"; "NO" is means "without core".

2.5. Measurement Instruments List

Radiation emission							
Item	Equipment No.	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	ATA-E-001	966 chamber	CRT	9*6*6M	CRTNDCR966	2025-03-21	2028-03-20
2	ATA-E-011	AC Power Source	XINOUEHUA	APW-1300N	202504292663	2025-05-08	2026-05-07
3	ATA-E-013	DC Power Source	XINOUEHUA	ADC250-32D	202504292667	2025-05-08	2026-05-07
4	ATA-E-033	Receiver	R&S	ESPI7	100092	2025-05-08	2026-05-07
5	ATA-E-034	Broadband antenna	Schwarzbeck	VULB9168	01839	2025-07-17	2026-07-17
6	ATA-E-035	High Frequency Horn Antenna	Schwarzbeck	BBHA 9120D	03169	2025-07-17	2026-07-17
7	ATA-E-038	Cable	Times	0-18GHz	/	2025-05-08	2026-05-07
9	ATA-E-040	6dB attenuator	Zhengchang Liubo	6dB	/	2025-05-08	2026-05-07
10	ATA-E-039	Cable	Times	0-1GHz	/	2025-05-08	2026-05-07
11	ATA-E-041	Preamplifier	COM MV	DLNA8-1-18G-2705	10241234	2025-05-08	2026-05-07
12	ATA-E-042	Preamplifier	COM MV	DLNA8-0.009-1000-1034	5252881	2025-05-08	2026-05-07
13	ATA-E-044	Filter	MWRFTesT	ZHPF6-C3000-18000-3129	08252098	2025-05-08	2026-05-07
14	ATA-E-045	Filter	MWRFTesT	ZHPF6-C6500-18000-175	08252097	2025-05-08	2026-05-07
15	ATA-E-046	Filter	MWRFTesT	ZBSF6-C2400-2483.5-543	08252096	2025-05-08	2026-05-07
16	ATA-E-047	Filter	MWRFTesT	ZBSF6-C5100-5900-5713	08252095	2025-05-08	2026-05-07
17	ATA-E-051	Spectrum Analyzer	R&S	FSV40-N	101779	2025-07-29	2026-07-28
18	ATA-E-052	Cable	HELPLIGHT	2.92J/2.92J 10M	/	2026-01-19	2027-01-18
19	ATA-E-054	Cable	HELPLIGHT	2.92J/2.92J 0.8M	/	2026-01-19	2027-01-18
20	ATA-E-059	Antenna Tower	CRT	AT-1	/	/	/
21	ATA-E-005	Temperature and humidity meter	deli	LE502-WH	/	2025-05-08	2026-05-07
22	ATA-E-064	Barometer	Qingping	CGP23W	/	2026-01-28	2027-01-27
23	ATA-E-048	Loop Antenna	ZHINA	ZN30900C	21104CCUT SE019	2025-05-08	2026-05-07
24	ATA-E-049	Horn Antenna	ECHO MICrowave.,Ltd.	OBH100400	12221225	2025-05-08	2026-05-07
25	ATA-E-051	Spectrum Analyzer	R&S	FSV40-N	101779	2025-05-08	2026-05-07

Conduction emission							
Item	Equipment No.	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	ATA-E-032	EMI TEST RECEIVER	Schwarzbeck	ESC13	1009300	2025-05-08	2026-05-08
2	ATA-E-037	Pulse Limiter	Schwarzbeck	VTSD 9561 F-N	/	2025-05-08	2026-05-08
3	ATA-E-069	Conductive test cable	Schwarzbeck	2.5m	N/A	2026-01-28	2027-01-27
4	ATA-E-036	Artificial Mains Network	Schwarzbeck	NSLK 8127	01169	2025-05-08	2026-05-08
5	ATA-E-072	Three-Line V-Network	ZHINAN	2N33770A	13003	2026-01-26	2026-01-27
6	ATA-E-009	Temperature and humidity meter	deli	LE502-WH	/	2025-05-08	2026-05-08
7	ATA-E-010	Barometer	Qingping	CGP23W	/	2025-05-08	2026-05-08

RF Conducted Test							
Item	Equipment No.	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
	ATA-E-029	Spectrum Analyzer	Keysight	N9020A	MY50530404	2025-05-08	2026-05-07
1	ATA-E-030	MXG AnaioG Signal Generator	Agilent	N5181A	MY47420598	2025-05-08	2026-05-07
2	ATA-E-031	WIDEBAND RADIO COMMUNICATION TESTER	R&S	CMW500	161163	2025-05-08	2026-05-07
3	ATA-E-043	Radio Control Unit	MWRFTest	MW100-RFCB	MW250428A TA-55	2025-05-08	2026-05-07

Note:

1)The Cal. Interval was one year.

2)The cable loss has calculated in test result which connection between each test instruments.

2.5. Test Software

Software name	Model	Version
Conducted emission Measurement Software	EZ-EMC	FARAD-3A1.1+
Radiated emission Measurement Software	EZ-EMC	FARAD-3A1.1+
Bluetooth and WIFI Test System	MWRF8310	2.0.0.0

3. TEST ITEM AND RESULTS

3.1. Antenna requirement

Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

Antenna Information

The maximum gain of antenna was 2.80dBi.

Note: The antenna gain is provided by the customer , if the data provided by the customer is not accurate, Shenzhen ATA Testing Lab. Inc does not assume any responsibility.

3.2. Conducted Emission

Limit


Conducted Emission Test Limit

Frequency	Maximum RF Line Voltage (dB μ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Notes:

- (1) *Decreasing linearly with logarithm of the frequency.
- (2) The lower limit shall apply at the transition frequencies.
- (3) The limit decrease in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

Test Configuration

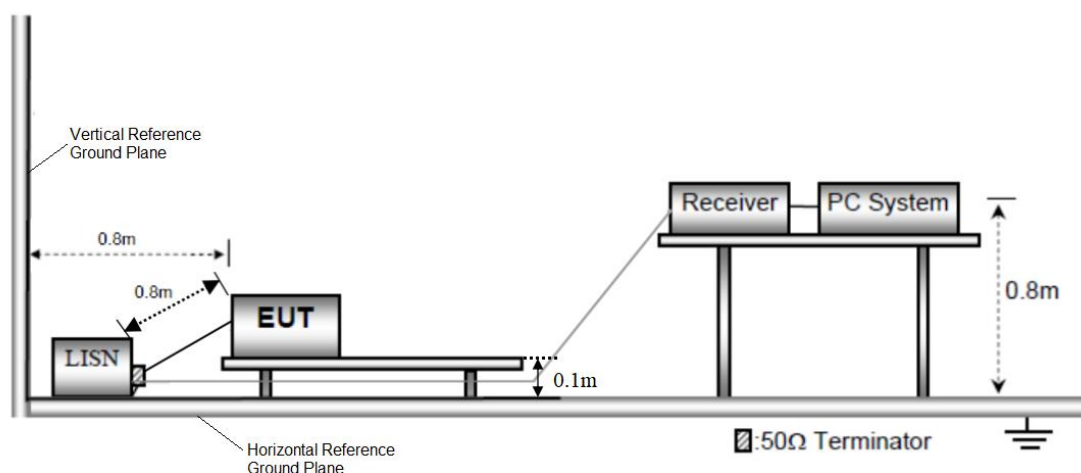

Test Procedure

1. The EUT was setup according to ANSI C63.10:2020 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 0.1m above the conducting ground plane. The vertical conducting plane was located 80 cm to the rear of the EUT. All other surfaces of EUT were at least 0.8m from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
4. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
5. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
6. Conducted Emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.

During the above scans, the emissions were maximized by cable manipulation.


Test Mode:

N/A

Test Results

Pre-scan CH00, CH19 and CH39 channel, and found CH00 channel which it is worse case, so only show the test data for worse case.


EUT:	X80 Pro	Model Name:	X80 Pro
Pressure:	1010 hPa	Phase:	L
Temperature	24.8℃	Humidity	52.1%
Test Mode:	Charging+TX	Test Voltage:	DC 48V from Adapter AC 120V/60Hz

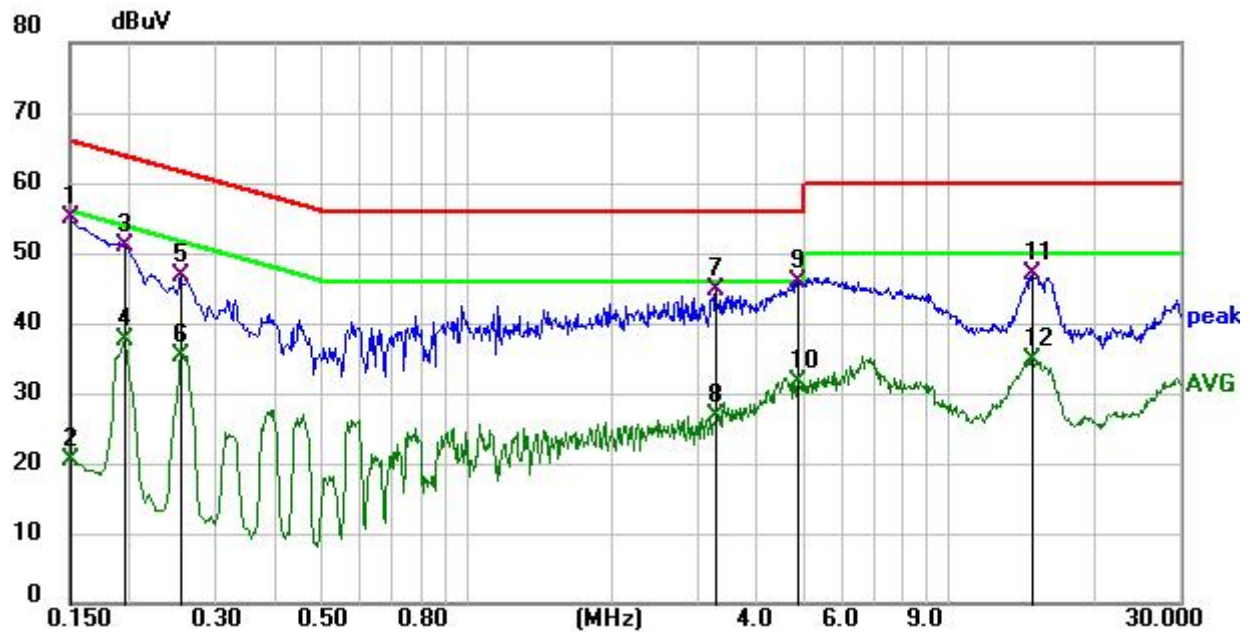

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1500	44.98	10.11	55.09	66.00	-10.91	QP
2	0.1500	10.31	10.11	20.42	56.00	-35.58	AVG
3	0.1940	40.86	10.10	50.96	63.86	-12.90	QP
4	0.1940	27.38	10.10	37.48	53.86	-16.38	AVG
5*	0.2540	36.66	10.11	46.77	61.63	-14.86	QP
6	0.2540	25.11	10.11	35.22	51.63	-16.41	AVG
7	3.2860	34.44	10.21	44.65	56.00	-11.35	QP
8	3.2860	16.55	10.21	26.76	46.00	-19.24	AVG
9	4.8820	35.67	10.22	45.89	56.00	-10.11	QP
10	4.8820	21.39	10.22	31.61	46.00	-14.39	AVG
11	14.9540	36.71	10.34	47.05	60.00	-12.95	QP
12	14.9540	24.44	10.34	34.78	50.00	-15.22	AVG

Remark: 1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result = Reading + Factor) - Limit
3. Factor = LISN factor + Cable loss + Limiter (10dB)

EUT:	X80 Pro	Model Name:	X80 Pro
Pressure:	1010 hPa	Phase:	N
Temperature	24.8°C	Humidity	52.1%
Test Mode:	Charging+TX	Test Voltage:	DC 48V from Adapter AC 120V/60Hz

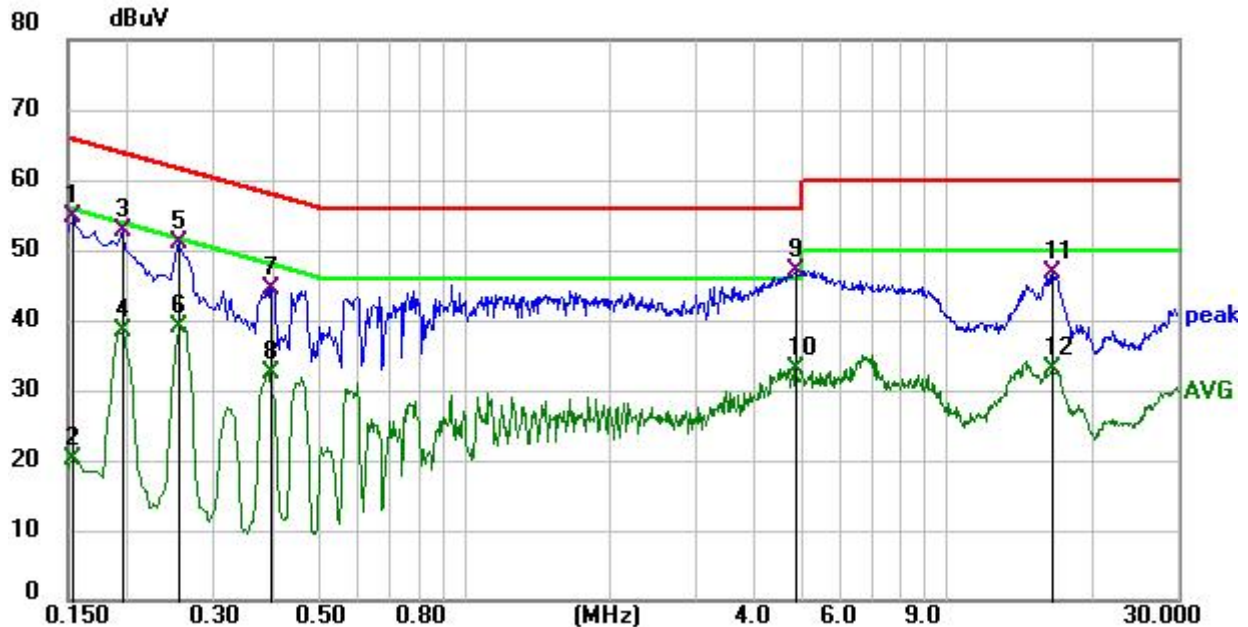

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1539	44.55	10.11	54.66	65.79	-11.13	QP
2	0.1539	10.16	10.11	20.27	55.79	-35.52	AVG
3	0.1940	42.56	10.10	52.66	63.86	-11.20	QP
4	0.1940	28.20	10.10	38.30	53.86	-15.56	AVG
5*	0.2540	41.00	10.11	51.11	61.63	-10.52	QP
6	0.2540	28.97	10.11	39.08	51.63	-12.55	AVG
7	0.3980	34.32	10.12	44.44	57.90	-13.46	QP
8	0.3980	22.42	10.12	32.54	47.90	-15.36	AVG
9	4.8859	36.64	10.22	46.86	56.00	-9.14	QP
10	4.8859	22.81	10.22	33.03	46.00	-12.97	AVG
11	16.5300	36.37	10.34	46.71	60.00	-13.29	QP
12	16.5300	22.78	10.34	33.12	50.00	-16.88	AVG

Remark: 1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result = Reading + Factor) - Limit
3. Factor = LISN factor + Cable loss + Limiter (10dB)


3.3. Band edge and Spurious Emission (conducted)

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

Test Configuration

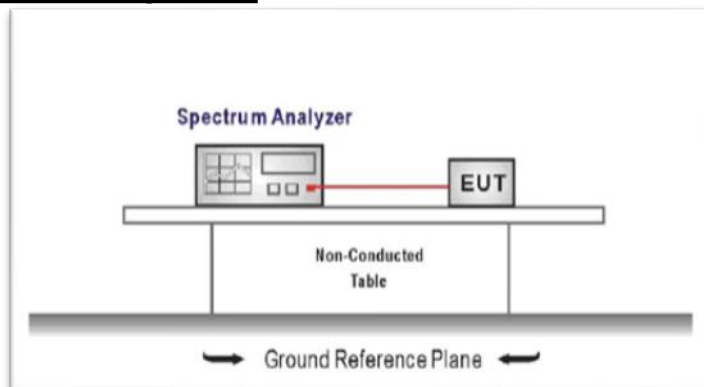

Test Procedure

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Establish a reference level by using the following procedure
Center frequency=DTS channel center frequency
The span = 1.5 times the DTS bandwidth.
RBW = 100 kHz, VBW $\geq 3 \times$ RBW
Detector = peak, Sweep time = auto couple, Trace mode = max hold
Allow trace to fully stabilize
Use the peak marker function to determine the maximum PSD level

Note: the channel found to contain the maximum PSD level can be used to establish the reference level.
3. Emission level measurement
Set the center frequency and span to encompass frequency range to be measured
RBW = 100 kHz, VBW $\geq 3 \times$ RBW
Detector = peak, Sweep time = auto couple, Trace mode = max hold
Allow trace to fully stabilize
Use the peak marker function to determine the maximum amplitude level.
4. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
5. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band excluding restricted frequency bands) are attenuated by at least the minimum requirements specified (at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz). Report the three highest emissions relative to the limit.

Test Mode

Please refer to the clause 2.3.

Test Results


Please refer to the appendix.

3.4. 6dB Bandwidth

Limit

Test Item	Limit	Frequency Range(MHz)
Bandwidth	≥ 500 KHz (6dB bandwidth)	2400~2483.5

Test Configuration



Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.
3. The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.
4. Spectrum Setting:
6dB bandwidth:
 - (1) Set RBW = 100 kHz.
 - (2) Set the video bandwidth (VBW) ≥ 3 RBW.
 - (3) Detector = Peak.
 - (4) Trace mode = Max hold.
 - (5) Sweep = Auto couple.
 - (6) Allow the trace to stabilize.
- (7) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

NOTE: The EUT was set to continuously transmitting in each mode and low, Middle and high channel for the test.

Test Mode

Please refer to the clause 2.3.

Test Results


Please refer to the appendix.

3.5. Peak Output Power

Limit

Test Item	Limit	Frequency Range(MHz)
Peak Output Power	1 Watt or 30 dBm	2400~2483.5

Test Configuration



Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. Spectrum Setting:
 - Peak Detector: $RBW \geq DTS \text{ Bandwidth}$, $VBW \geq 3 * RBW$.
 - Sweep time=Auto.
 - Detector= Peak.
 - Trace mode= Maxhold.
 - Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.

Test Mode

Please refer to the clause 2.3.

Test Result


Please refer to the appendix.

3.6. Power Spectral Density

Limit

FCC Part 15 Subpart C(15.247)		
Test Item	Limit	Frequency Range(MHz)
Power Spectral Density	8dBm(in any 3 kHz)	2400~2483.5

Test Configuration



Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement according to section 10.2 of KDB 558074 D01 DTS Meas Guidance v04.
3. Spectrum Setting:
 - Set analyser center frequency to DTS channel center frequency.
 - Set the span to 1.5 times the DTS bandwidth.
 - Set the RBW to: 10 kHz
 - Set the VBW to: 30 kHz
 - Detector: peak
 - Sweep time: auto
 - Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.

Test Mode

Please refer to the clause 2.3.

Test Result

Please refer to the appendix.

Note:


Power Density(dBm/3kHz)=Power Density(dBm/10kHz)-10*Log(10/3)

3.7. Band Edge Emissions(Radiated)

Limit

Restricted Frequency Band (MHz)	(dBuV/m)(at 3m)	
	Peak	Average
2310 ~2390	74	54
2483.5 ~2500	74	54
Note: All restriction bands have been tested, only the worst case is reported.		

Test Configuration

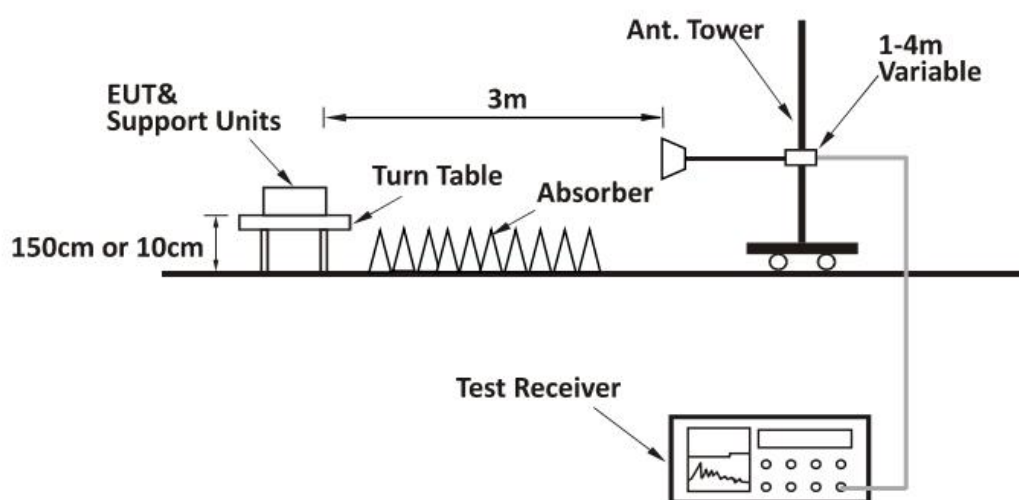

Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2020 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2020 on radiated measurement.
5. The receiver set as follow:
 RBW=1MHz, VBW=3MHz PEAK detector for Peak value.
 RBW=1MHz, VBW=10Hz with PEAK Detector for Average Value.

Test Mode

Please refer to the clause 2.3.

Test Results

Note:

Measurement = Reading level + Correct Factor

Correct Factor=Antenna Factor + Cable Loss -Preamplifier Factor

EUT:	X80 Pro	Model Name:	X80 Pro
Pressure:	1010 hPa	Phase:	L
Temperature	24.8°C	Humidity	52.1%
Test Mode:	TX	Test Voltage:	DC 3.7V

Frequency (MHz)	Meter Reading (dBμV)	Cable Loss (dB)	Antenna Factor dB/m	Preamplifier Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detect or Type	Comment
GFSK									
2310.00	63.94	2.40	27.70	40.40	53.64	74	-20.36	Pk	Horizontal
2310.00	44.18	2.40	27.70	40.40	33.88	54	-20.12	AV	Horizontal
2310.00	63.93	2.40	27.70	40.40	53.63	74	-20.37	Pk	Vertical
2310.00	42.77	2.40	27.70	40.40	32.47	54	-21.53	AV	Vertical
2390.00	66.15	2.44	28.30	40.10	56.79	74	-17.21	Pk	Vertical
2390.00	44.18	2.44	28.30	40.10	34.82	54	-19.18	AV	Vertical
2390.00	64.99	2.44	28.30	40.10	55.63	74	-18.37	Pk	Horizontal
2390.00	44.31	2.44	28.30	40.10	34.95	54	-19.05	AV	Horizontal
2483.50	63.87	2.48	28.70	39.80	55.25	74	-18.75	Pk	Vertical
2483.50	45.43	2.48	28.70	39.80	36.81	54	-17.19	AV	Vertical
2483.50	66.55	2.48	28.70	39.80	57.93	74	-16.07	Pk	Horizontal
2483.50	44.54	2.48	28.70	39.80	35.92	54	-18.08	AV	Horizontal
2500.00	46.68	3.49	29.20	32.66	46.71	74	-27.29	Pk	Vertical
2500.00	35.23	3.49	29.20	32.66	35.26	54	-18.74	AV	Vertical
2500.00	46.84	3.49	29.20	32.66	46.87	74	-27.13	Pk	Horizontal
2500.00	35.16	3.49	29.20	32.66	35.19	54	-18.81	AV	Horizontal

3.8. Spurious Emission (Radiated)

Limit

Radiated Emission Limits (9 kHz~1000 MHz)

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3


Radiated Emission Limit (Above 1000MHz)

Frequency (MHz)	Distance Meters(at 3m)	
	Peak	Average
Above 1000	74	54


Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission Level (dBuV/m)=20log Emission Level (uV/m).


Test Configuration

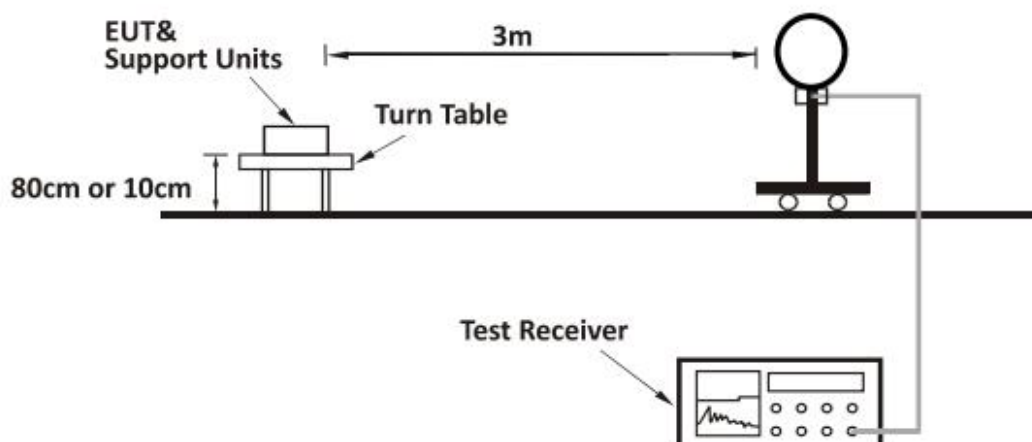

Below 30MHz Test Setup

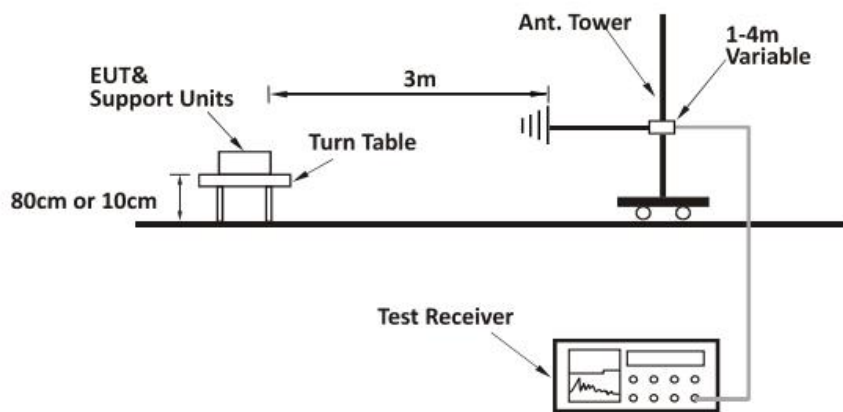

Below 1000MHz Test Setup

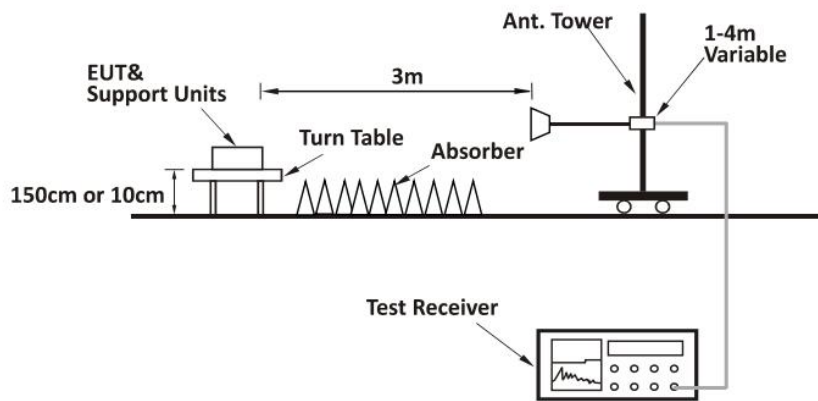

Above 1GHz Test Setup

Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2020
2. The EUT is placed on a turn table which is 0.1 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Below 1 GHz:
RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;
If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
 - (3) From 1 GHz to 10th harmonic:
RBW=1MHz, VBW=3MHz Peak detector for Peak value.
RBW=1MHz, VBW=10Hz RMS detector for Average value.

Test Mode

Please refer to the clause 2.2.

Test Result**9 KHz~30 MHz and 18GHz~25GHz**


From 9 KHz~30 MHz and 18GHz~25GHz: Conclusion: PASS

Note:

- 1) Measurement = Reading level + Correct Factor
Correct Factor=Antenna Factor + Cable Loss -Preamplifier Factor
- 2) The peak level is lower than average limit(54 dBuV/m), this data is the too weak instrument of signal is unable to test.
- 3) The emission levels of other frequencies are very lower than the limit and not show in test report.
- 4) The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
- 5) Pre-scan CH00, CH19 and CH39 modulation, and found the CH39 which it is worse case for 30MHz-1GHz , so only show the test data for worse case.

Results of Radiated Emissions (30MHz~ 1000MHz)

EUT:	X80 Pro	Model Name:	X80 Pro
Pressure:	1010 hPa	Phase:	Horizontal
Temperature	24.8℃	Humidity	52.1%
Test Mode:	TX	Test Voltage:	DC 48V

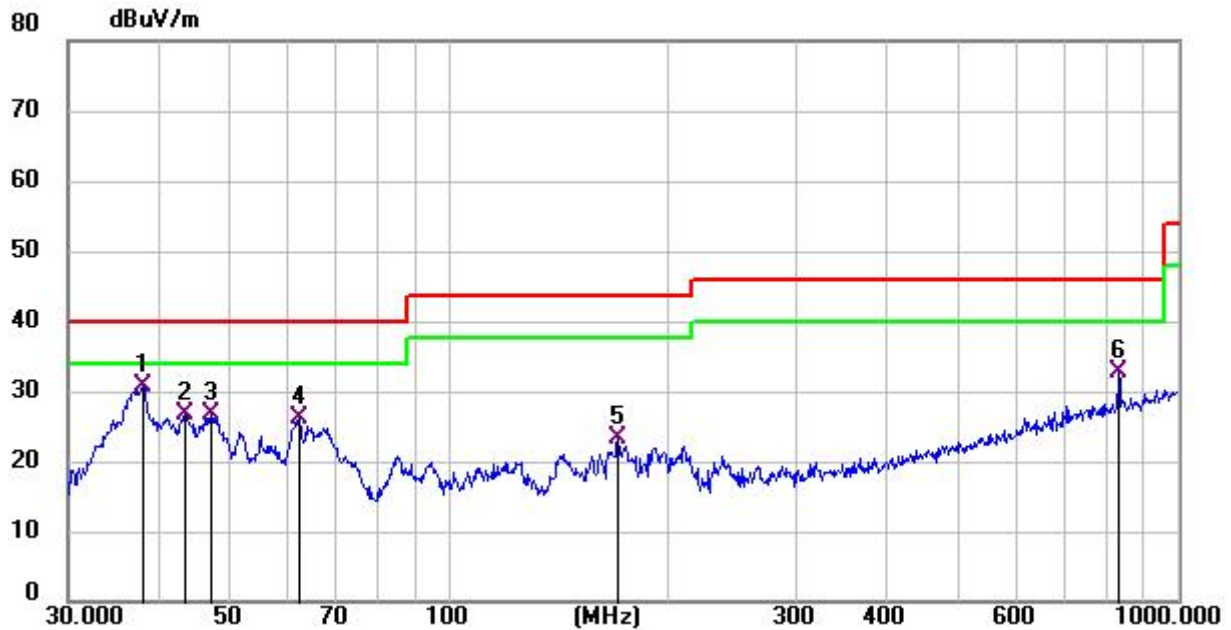

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	38.0782	43.68	-12.84	30.84	40.00	-9.16	QP
2	43.3534	39.60	-12.85	26.75	40.00	-13.25	QP
3	47.1597	39.61	-12.98	26.63	40.00	-13.37	QP
4	62.2128	40.08	-14.04	26.04	40.00	-13.96	QP
5	170.1947	35.64	-12.43	23.21	43.50	-20.29	QP
6*	830.4000	33.74	-0.99	32.75	46.00	-13.25	QP

Emission Level= Read Level+ Correct Factor

EUT:	X80 Pro	Model Name:	X80 Pro
Pressure:	1010 hPa	Phase:	Horizontal
Temperature	24.8°C	Humidity	52.1%
Test Mode:	TX	Test Voltage:	DC 48V



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	35.7490	49.01	-13.21	35.80	40.00	-4.20	QP
2	38.6160	48.24	-12.74	35.50	40.00	-4.50	QP
3	42.4508	46.47	-12.77	33.70	40.00	-6.30	QP
4	46.8301	44.38	-12.98	31.40	40.00	-8.60	QP
5	60.0690	46.15	-13.75	32.40	40.00	-7.60	QP
6*	85.5975	48.30	-16.80	31.50	40.00	-8.50	QP

Emission Level= Read Level+ Correct Factor

Results of Radiated Emissions (Above 1GHz)

Frequency (MHz)	Reading Level (dBμV)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamplifier Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type	Comment
Low Channel (2402 MHz)(GFSK)--Above 1G									
4804.319	63.09	4.36	32.92	45.53	54.84	74.00	-19.16	Pk	Vertical
4804.319	41.7	4.36	32.92	45.53	33.45	54.00	-20.55	AV	Vertical
7206.247	61.85	5.02	37.63	45.56	58.94	74.00	-15.06	Pk	Horizontal
7206.247	40.94	5.02	37.63	45.56	38.03	54.00	-15.97	AV	Horizontal
4804.166	62.74	4.36	32.92	45.53	54.49	74.00	-19.51	Pk	Vertical
4804.166	42.92	4.36	32.92	45.53	34.67	54.00	-19.33	AV	Vertical
7206.328	62.52	5.02	37.63	45.56	59.61	74.00	-14.39	Pk	Horizontal
7206.328	41.46	5.02	37.63	45.56	38.55	54.00	-15.45	AV	Horizontal
Mid Channel (2440 MHz)(GFSK)--Above 1G									
4880.416	63.53	4.41	33.01	45.76	55.19	74.00	-18.81	Pk	Vertical
4880.416	43.38	4.41	33.01	45.76	35.04	54.00	-18.96	AV	Vertical
7320.251	64.46	5.02	37.68	45.59	61.57	74.00	-12.43	Pk	Horizontal
7320.251	41.11	5.02	37.68	45.59	38.22	54.00	-15.78	AV	Horizontal
4880.322	63.05	4.41	33.01	45.76	54.71	74.00	-19.29	Pk	Vertical
4880.322	40.85	4.41	33.01	45.76	32.51	54.00	-21.49	AV	Vertical
7320.213	61.39	5.02	37.68	45.59	58.5	74.00	-15.5	Pk	Horizontal
7320.213	44.53	5.02	37.68	45.59	41.64	54.00	-12.36	AV	Horizontal
High Channel (2480 MHz)(GFSK)-- Above 1G									
4960.424	63.52	4.50	33.26	46.07	55.21	74.00	-18.79	Pk	Vertical
4960.424	41.79	4.50	33.26	46.07	33.48	54.00	-20.52	AV	Vertical
7440.169	64.53	5.02	37.78	45.77	61.56	74.00	-12.44	Pk	Horizontal
7440.169	48.03	5.02	37.78	45.77	45.06	54.00	-8.94	AV	Horizontal
4960.531	62.77	4.50	33.26	46.07	54.46	74.00	-19.54	Pk	Vertical
4960.531	45.16	4.50	33.26	46.07	36.85	54.00	-17.15	AV	Vertical
7440.219	65.27	5.02	37.78	45.77	62.30	74.00	-11.7	Pk	Horizontal
7440.219	45.61	5.02	37.78	45.77	42.64	54.00	-11.36	AV	Horizontal

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. All the modulation modes have been tested, and only the worst results are reflected in the report.


4. APPENDIX (RF TEST RESULTS)

4.1. Maximum Peak Conducted Output Power

EUT:	X80 Pro	Model Name:	X80 Pro
Pressure:	1010 hPa	Phase:	L
Temperature	24.8°C	Humidity	52.1%
Test Mode:	TX	Test Voltage:	DC 48V

Channel	Measured Output Peak Power		Limit		Verdict
	GFSK(BLE 1Mbps)		dBm	mW	
	dBm	mW			
Low Channel	1.29	1.35	30	1000	Pass
Middle Channel	1.42	1.39			Pass
High Channel	1.01	1.26			Pass

Test Graphs:

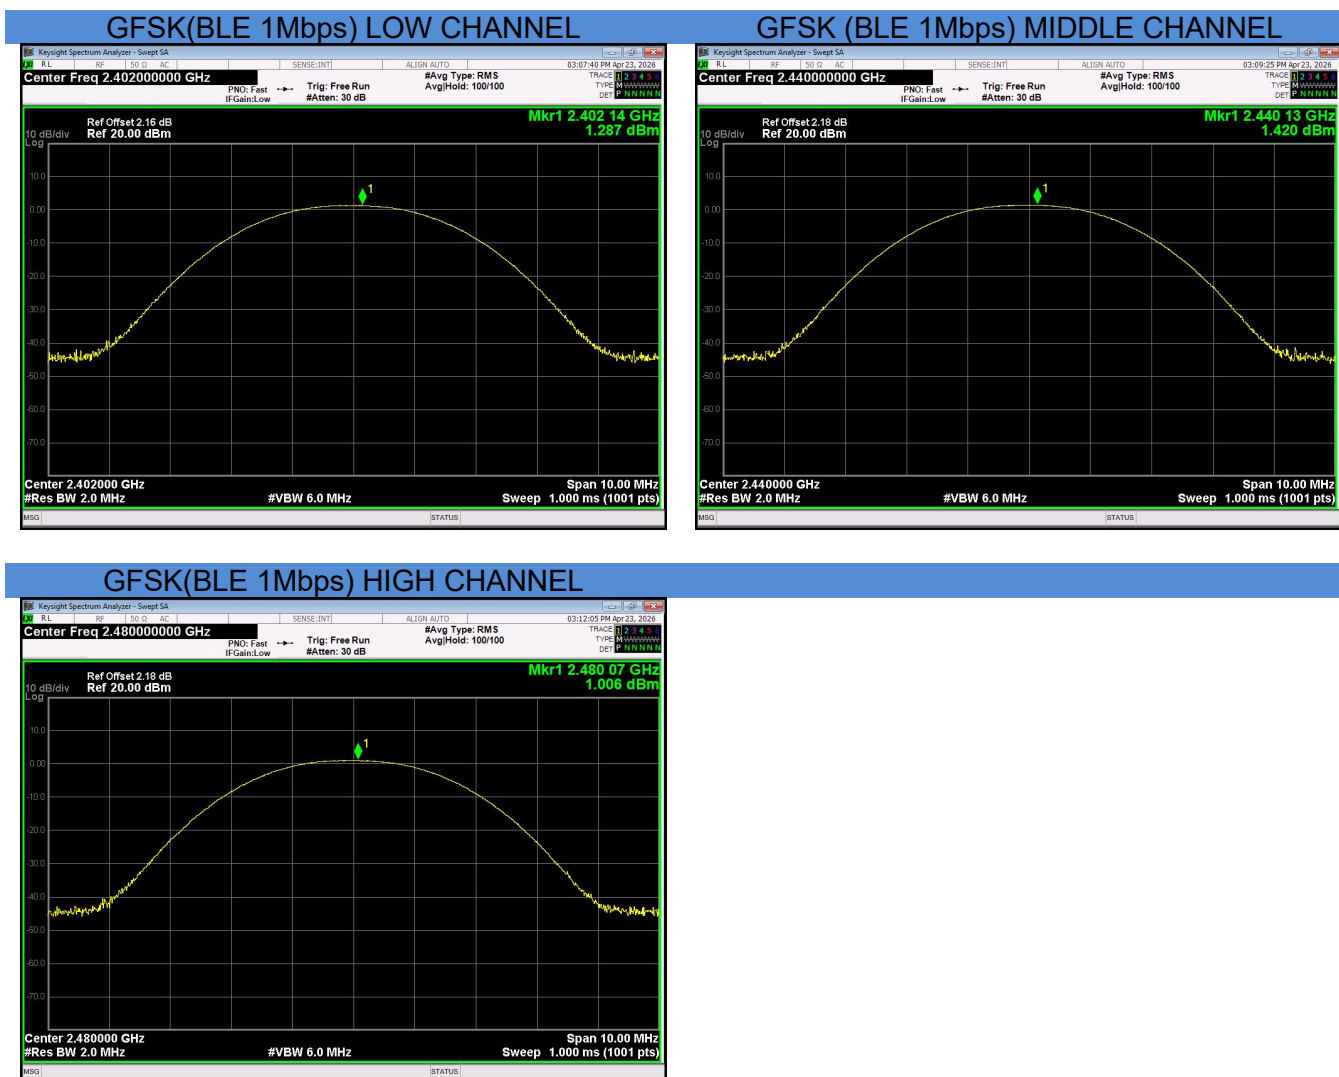


4.2. -6dB Bandwidth

EUT:	X80 Pro	Model Name:	X80 Pro
Pressure:	1010 hPa	Phase:	L
Temperature	24.8°C	Humidity	52.1%
Test Mode:	TX	Test Voltage:	DC 48V from Adapter AC 120V/60Hz


Channel	6dB Bandwidth (KHz)	6dB Bandwidth Limits(kHz)
Low	653.9	≥500
Middle	681.9	≥500
High	693.9	≥500

Test Graphs:


GFSK(BLE 1Mbps) LOW CHANNEL

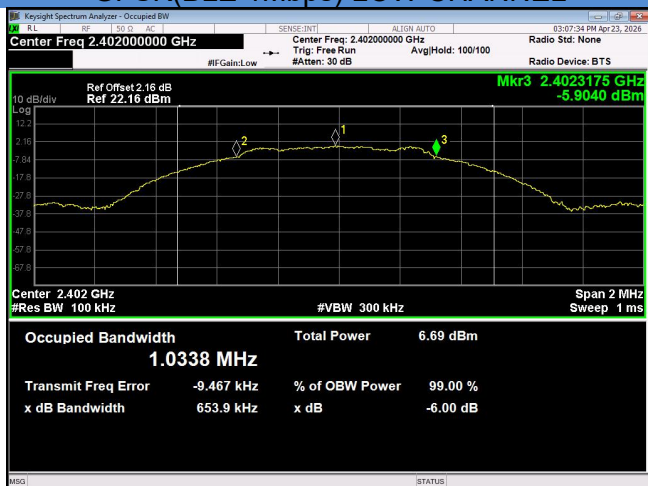

GFSK (BLE 1Mbps) MIDDLE CHANNEL

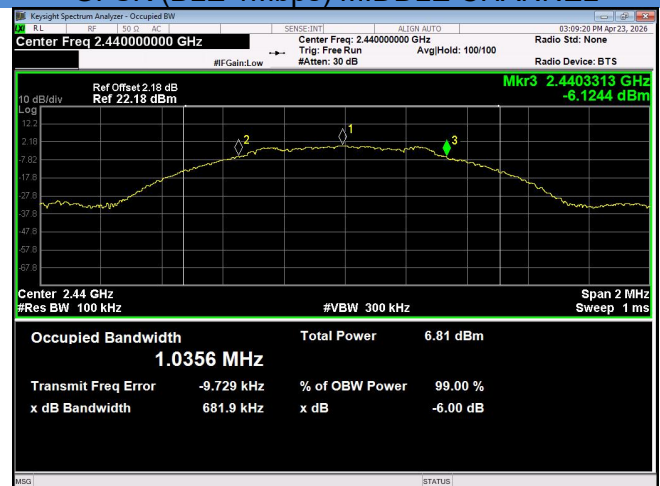

GFSK(BLE 1Mbps) HIGH CHANNEL

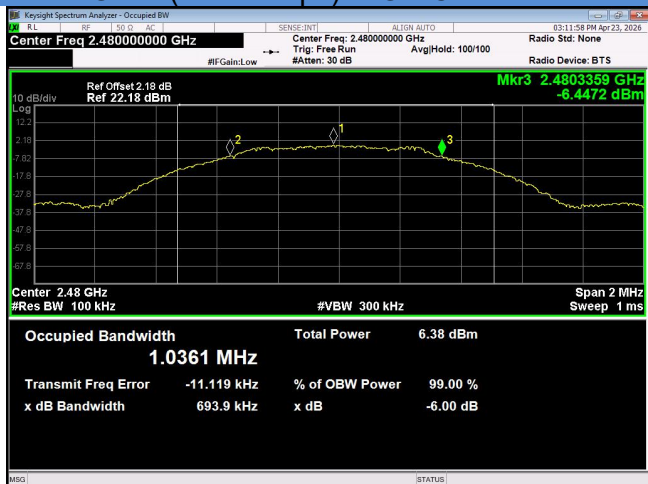


4.3. Maximum Power Spectral Density Level

EUT:	X80 Pro	Model Name:	X80 Pro
Pressure:	1010 hPa	Phase:	L
Temperature	24.8°C	Humidity	52.1%
Test Mode:	TX	Test Voltage:	DC 48V from Adapter AC 120V/60Hz


Channel	Spectral Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
Low	-15.08	8	PASS
Middle	-13.08	8	PASS
High	-13.29	8	PASS

Test Graphs:

GFSK(BLE 1Mbps) LOW CHANNEL

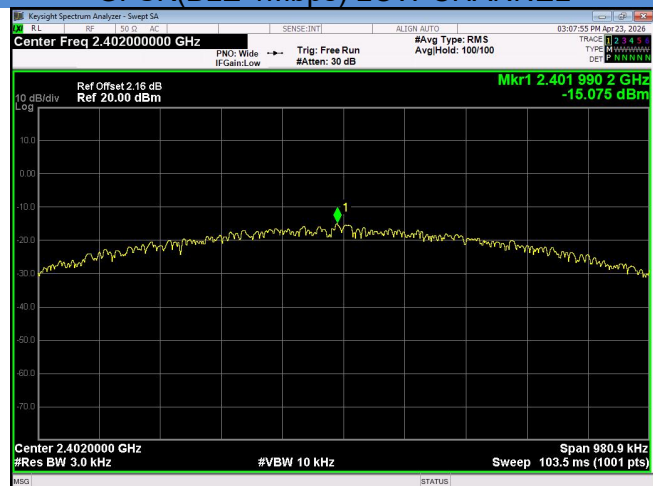

GFSK(BLE 1Mbps) MIDDLE CHANNEL

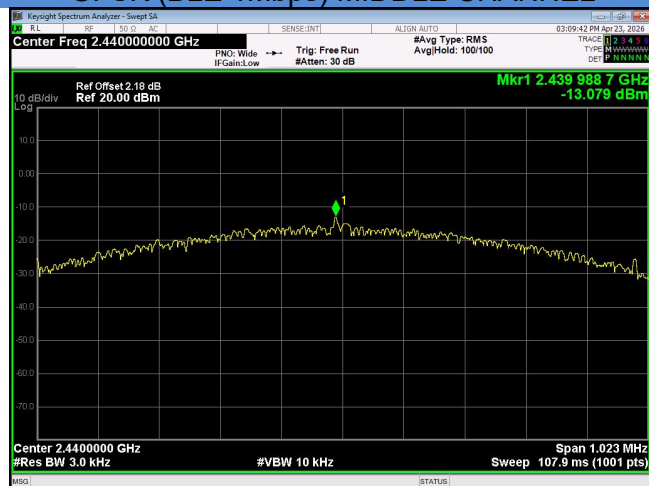

GFSK(BLE 1Mbps) HIGH CHANNEL





4.4. Band Edge

EUT:	X80 Pro	Model Name:	X80 Pro
Pressure:	1010 hPa	Phase:	L
Temperature	24.8 °C	Humidity	52.1%
Test Mode:	TX	Test Voltage:	DC 48V from Adapter AC 120V/60Hz



Channel	Measured Max. Band Edge Emission(dBc)	Limit(dBc) Carrier Level	Verdict
Low Channel	-46.59	-20	Pass
High Channel	-55.24	-20	Pass

Test Graphs:

Band Edge, Left Side

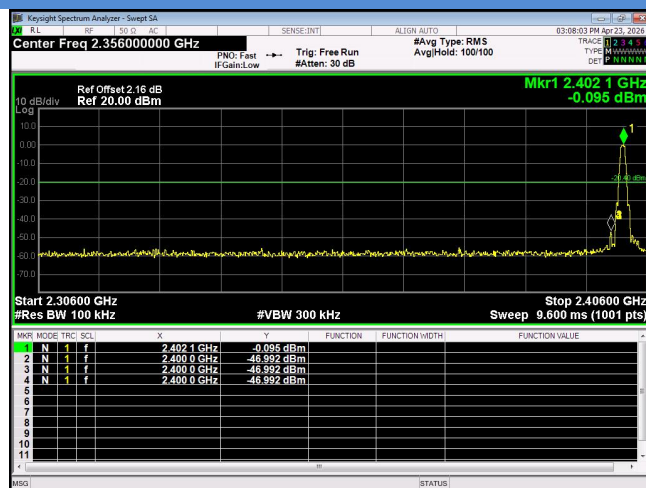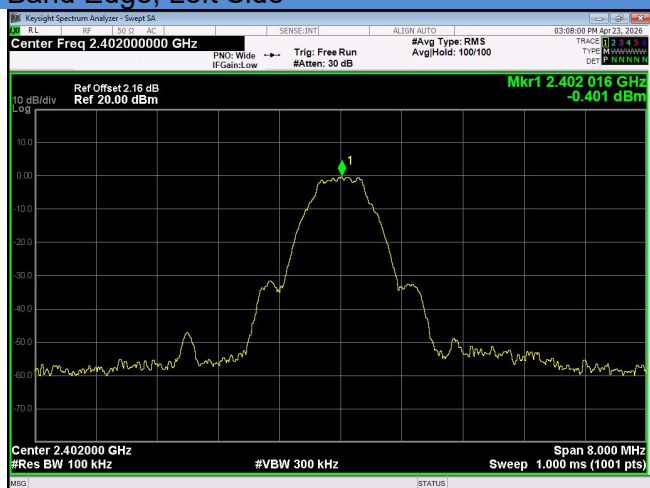

Band Edge, Right Side

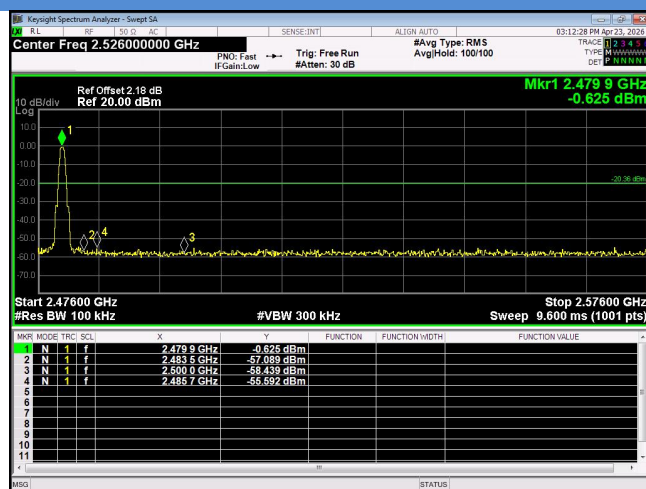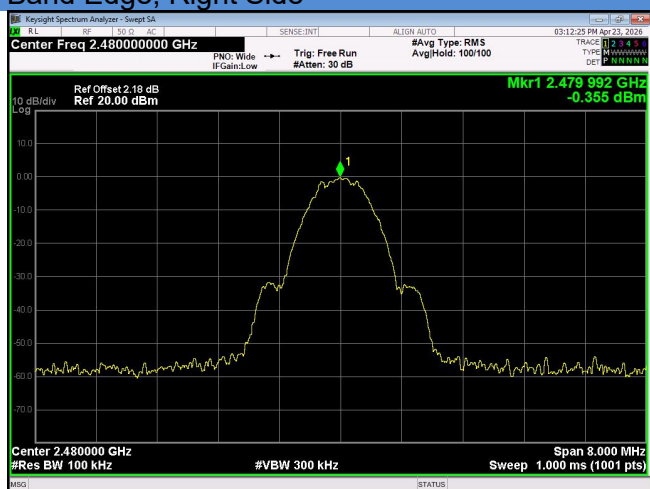

4.5. Conducted RF Spurious Emission

EUT:	X80 Pro	Model Name:	X80 Pro
Pressure:	1010 hPa	Phase:	L
Temperature	24.8°C	Humidity	52.1%
Test Mode:	TX	Test Voltage:	DC 48V from Adapter AC 120V/60Hz


GFSK(BLE 1Mbps)			
Channel	Measured Max. Out of Band Emission(dBc)	Limit(dBm)	Verdict
		Calculated 20 dBc Limit	
Low Channel	-40.78	-20	Pass
Middle Channel	-40.98	-20	Pass
High Channel	-40.55	-20	Pass

Test Graphs:

GFSK(BLE 1Mbps) LOW CHANNEL




GFSK(BLE 1Mbps) LOW CHANNEL

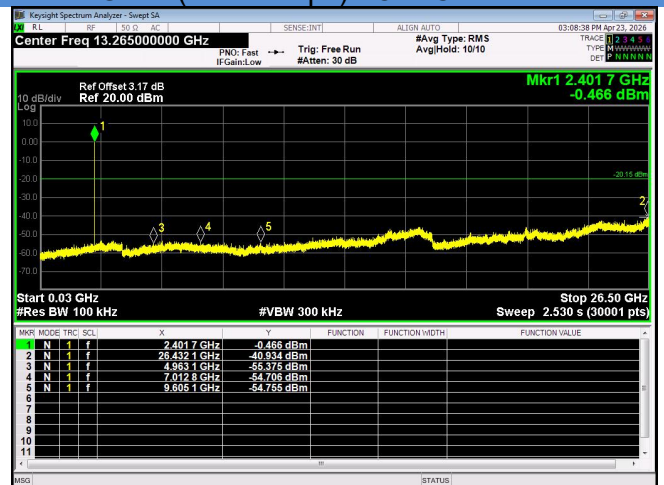


GFSK (BLE 1Mbps) MIDDLE CHANNEL




GFSK (BLE 1Mbps) MIDDLE CHANNEL

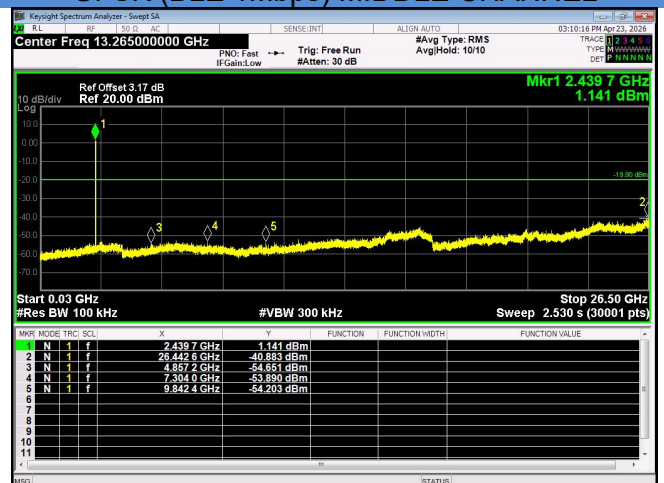

GFSK(BLE 1Mbps) HIGH CHANNEL

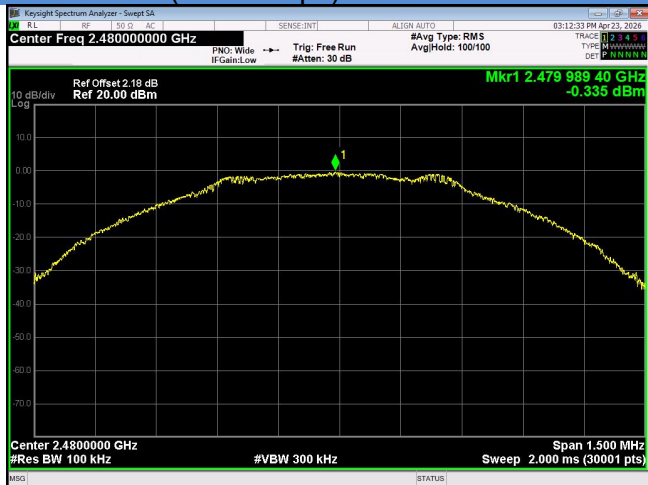

GFSK(BLE 1Mbps) HIGH CHANNEL

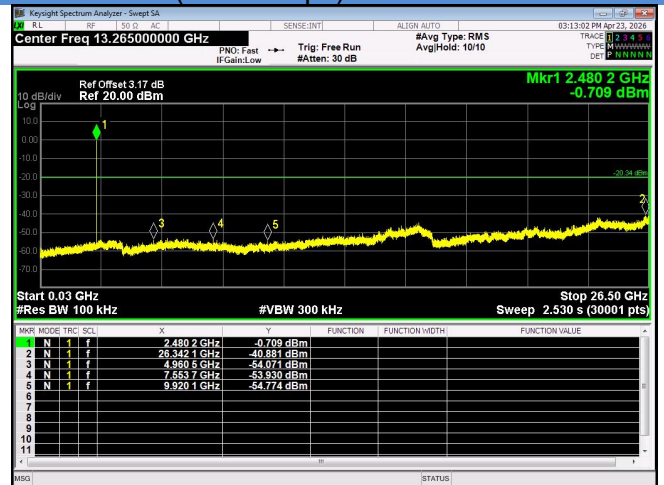

5. EUT TEST PHOTOS

Note: Refer to the attached test photos

6. PHOTOGRAPHS OF EUT CONSTRUCTIONAL

Note: Refer to the attached exterior and interior photos

*****THE END*****