


|               |                            |                |           |
|---------------|----------------------------|----------------|-----------|
| Test_Mode     | $\pi$ /4DQPSK Transmitting | Test_Frequency | 2480MHz   |
| Tset_Engineer | \                          | Test_Date      | 2026/7/24 |


Test Graph

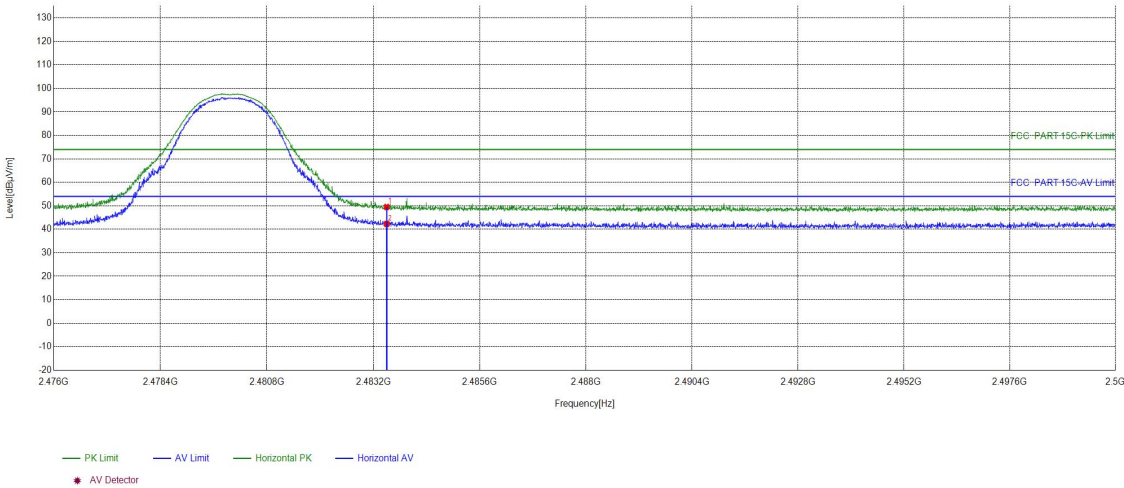

| Suspected List |             |             |                |                |                |             |        |            |        |
|----------------|-------------|-------------|----------------|----------------|----------------|-------------|--------|------------|--------|
| NO             | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity   | Remark |
| 1              | 2483.5      | 16.29       | 33.20          | 49.49          | 74.00          | 24.51       | PASS   | Horizontal | PK     |
| 2              | 2483.5      | 16.29       | 26.00          | 42.29          | 54.00          | 11.71       | PASS   | Horizontal | AV     |

|               |                            |                |           |
|---------------|----------------------------|----------------|-----------|
| Test_Mode     | $\pi$ /4DQPSK Transmitting | Test_Frequency | 2480MHz   |
| Tset_Engineer | \                          | Test_Date      | 2026/7/24 |


Test Graph

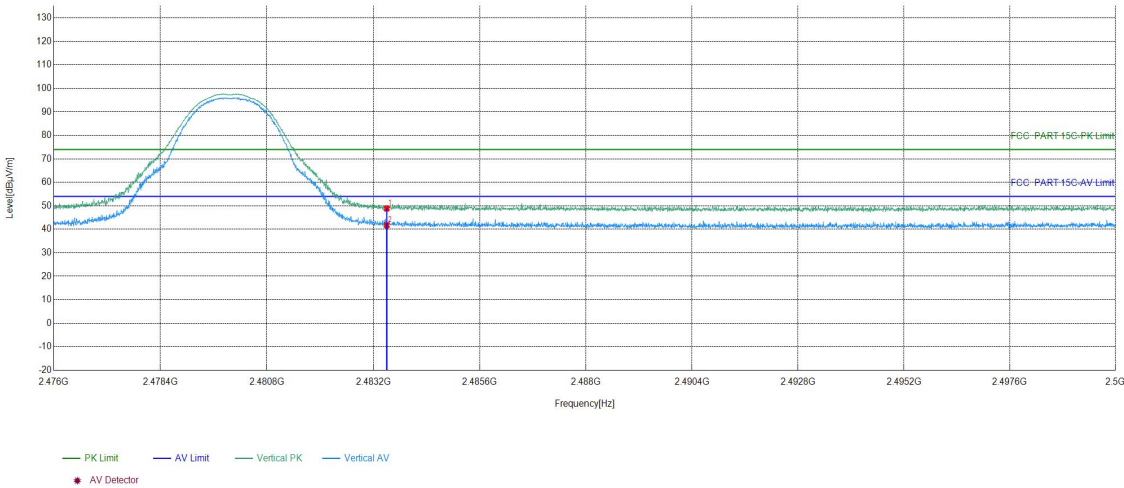

| Suspected List |             |             |                |                |                |             |        |          |        |
|----------------|-------------|-------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO             | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1              | 2483.5      | 16.29       | 32.57          | 48.86          | 74.00          | 25.14       | PASS   | Vertical | PK     |
| 2              | 2483.5      | 16.29       | 25.41          | 41.70          | 54.00          | 12.30       | PASS   | Vertical | AV     |

|               |                    |                |           |
|---------------|--------------------|----------------|-----------|
| Test_Mode     | 8DPSK Transmitting | Test_Frequency | 2402MHz   |
| Tset_Engineer | \                  | Test_Date      | 2026/7/24 |


Test Graph

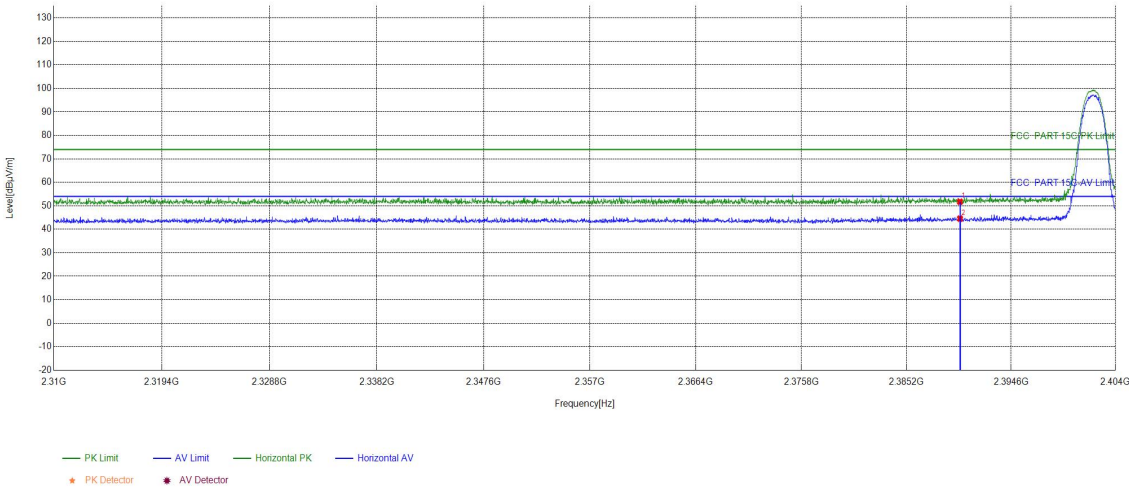

| Suspected List |             |             |                |                |                |             |        |            |        |
|----------------|-------------|-------------|----------------|----------------|----------------|-------------|--------|------------|--------|
| NO             | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity   | Remark |
| 1              | 2390        | 15.96       | 35.78          | 51.74          | 74.00          | 22.26       | PASS   | Horizontal | PK     |
| 2              | 2390        | 15.96       | 28.58          | 44.54          | 54.00          | 9.46        | PASS   | Horizontal | AV     |

|               |                    |                |           |
|---------------|--------------------|----------------|-----------|
| Test_Mode     | 8DPSK Transmitting | Test_Frequency | 2402MHz   |
| Tset_Engineer | \                  | Test_Date      | 2026/7/24 |


Test Graph

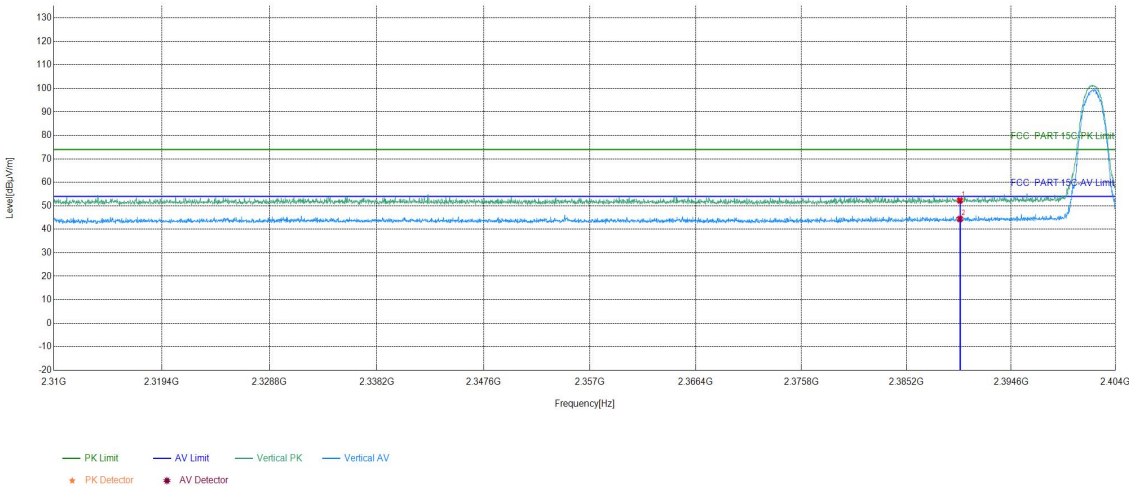

| Suspected List |             |             |                |                |                |             |        |          |        |
|----------------|-------------|-------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO             | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1              | 2390        | 15.96       | 36.32          | 52.28          | 74.00          | 21.72       | PASS   | Vertical | PK     |
| 2              | 2390        | 15.96       | 28.43          | 44.39          | 54.00          | 9.61        | PASS   | Vertical | AV     |

|               |                    |                |           |
|---------------|--------------------|----------------|-----------|
| Test_Mode     | 8DPSK Transmitting | Test_Frequency | 2480MHz   |
| Tset_Engineer | \                  | Test_Date      | 2026/7/24 |


Test Graph

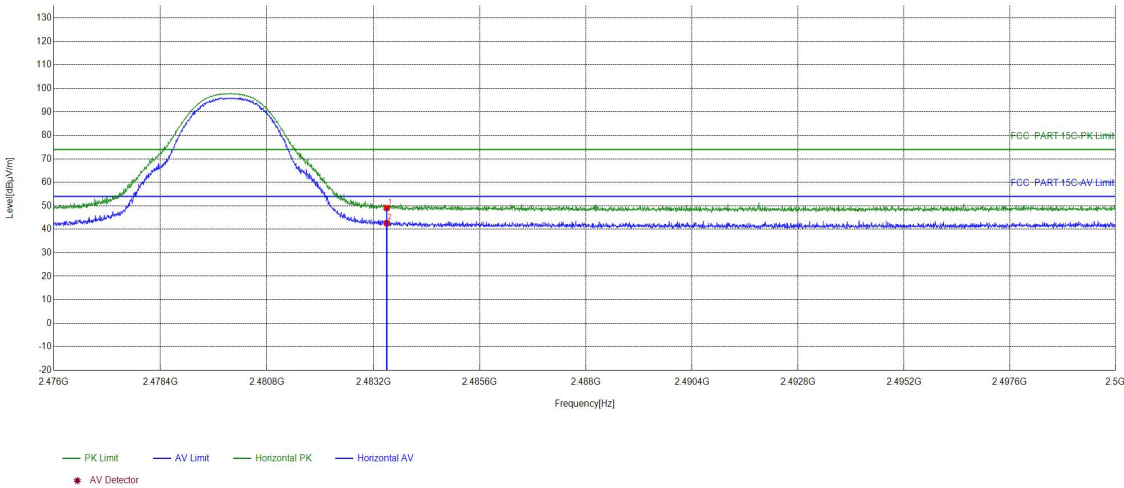

| Suspected List |             |             |                |                |                |             |        |            |        |
|----------------|-------------|-------------|----------------|----------------|----------------|-------------|--------|------------|--------|
| NO             | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity   | Remark |
| 1              | 2483.5      | 16.29       | 32.81          | 49.10          | 74.00          | 24.90       | PASS   | Horizontal | PK     |
| 2              | 2483.5      | 16.29       | 26.31          | 42.60          | 54.00          | 11.40       | PASS   | Horizontal | AV     |

|               |                    |                |           |
|---------------|--------------------|----------------|-----------|
| Test_Mode     | 8DPSK Transmitting | Test_Frequency | 2480MHz   |
| Tset_Engineer | \                  | Test_Date      | 2026/7/24 |

Test Graph

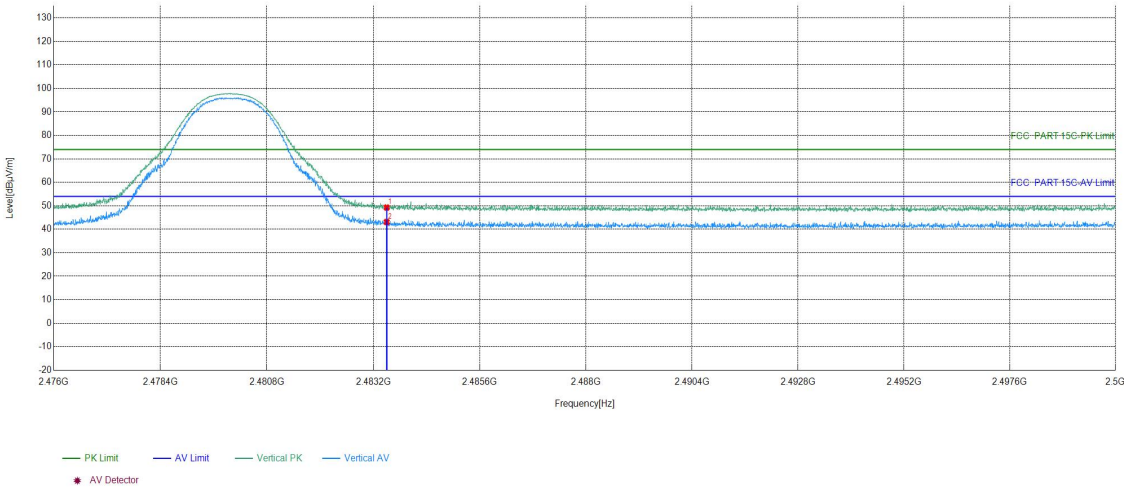

| Suspected List |             |             |                |                |                |             |        |          |        |
|----------------|-------------|-------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO             | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1              | 2483.5      | 16.29       | 32.97          | 49.26          | 74.00          | 24.74       | PASS   | Vertical | PK     |
| 2              | 2483.5      | 16.29       | 26.80          | 43.09          | 54.00          | 10.91       | PASS   | Vertical | AV     |

Note:  
The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
Final Test Level =Receiver Reading - Correct Factor  
Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor

## 5 Appendix A

Refer to Appendix: Bluetooth Classic of EED32S815579

## 6 PHOTOGRAPHS

Refer to Appendix Photographs of Report No. EED32S815573.

## Statement

1. This report is considered invalid without approved signature, special seal and the seal on the perforation;
2. The Company Name shown on Report and Address, the sample(s) and sample information was/were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified;
3. The result(s) shown in this report refer(s) only to the sample(s) tested;
4. Unless otherwise stated, the decision rule for conformity reporting is based on Binary Statement for Simple Acceptance Rule stated in ILAC-G8:09/2019/CNAS-GL015:2022;
5. Without written approval of CTI, this report can't be reproduced except in full;

\*\*\* End of Report \*\*\*