


Test_Mode	802.11 ax(HE40) Transmitting	Test_Frequency	2452MHz
Tset_Engineer	\	Test_Date	2026/7/24


Test Graph

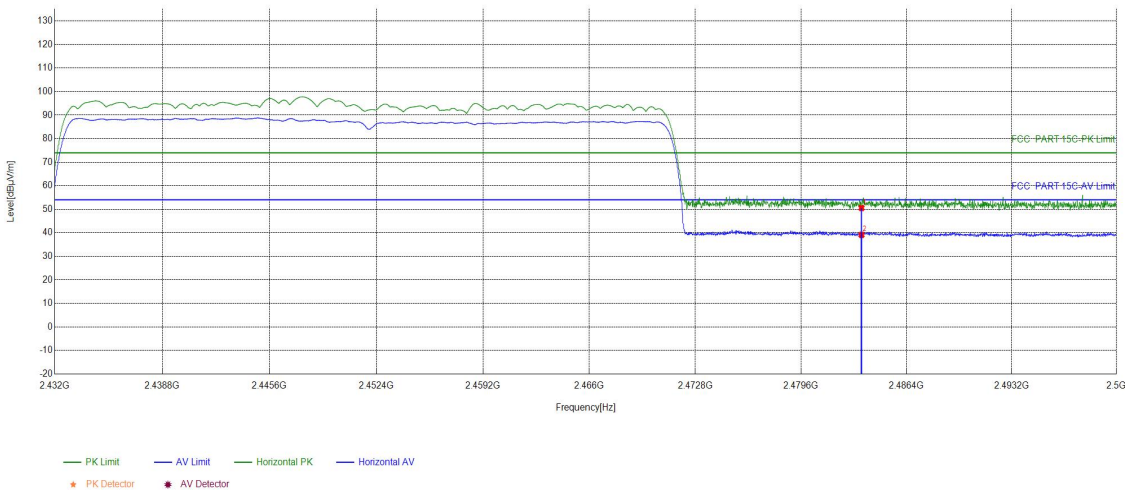

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	34.27	50.56	74.00	23.44	PASS	Horizontal	PK
2	2483.5	16.29	22.81	39.10	54.00	14.90	PASS	Horizontal	AV

Test_Mode	802.11 ax(HE40) Transmitting	Test_Frequency	2452MHz
Tset_Engineer	\	Test_Date	2026/7/24

Test Graph

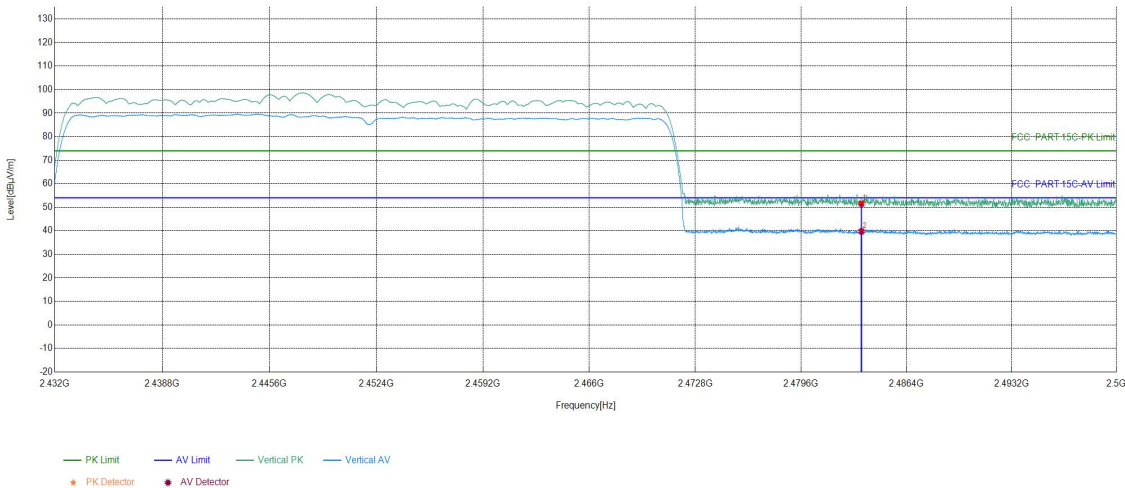

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	35.25	51.54	74.00	22.46	PASS	Vertical	PK
2	2483.5	16.29	23.45	39.74	54.00	14.26	PASS	Vertical	AV

Note:
The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level =Receiver Reading - Correct Factor
Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor

6 Appendix A

Refer to Appendix: 2.4G Wi-Fi of EED32S815573.

7 PHOTOGRAPHS

Refer to Appendix Photographs of Report No. EED32S815573.

Statement

1. This report is considered invalid without approved signature, special seal and the seal on the perforation;
2. The Company Name shown on Report and Address, the sample(s) and sample information was/were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified;
3. The result(s) shown in this report refer(s) only to the sample(s) tested;
4. Unless otherwise stated, the decision rule for conformity reporting is based on Binary Statement for Simple Acceptance Rule stated in ILAC-G8:09/2019/CNAS-GL015:2022;
5. Without written approval of CTI, this report can't be reproduced except in full;

*** End of Report ***