


Duty Cycle


Condition	Mode	Frequency (MHz)	On Time (ms)	Period (ms)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)	Max Variation (%)
NVNT	a	5180	0.788	0.836	94.26	0.26	1.27	0.20
NVNT	a	5200	0.788	0.836	94.26	0.26	1.27	0.21
NVNT	a	5240	0.79	0.836	94.5	0.25	1.27	0.19


Test Graphs

Duty Cycle NVNT a 5180MHz

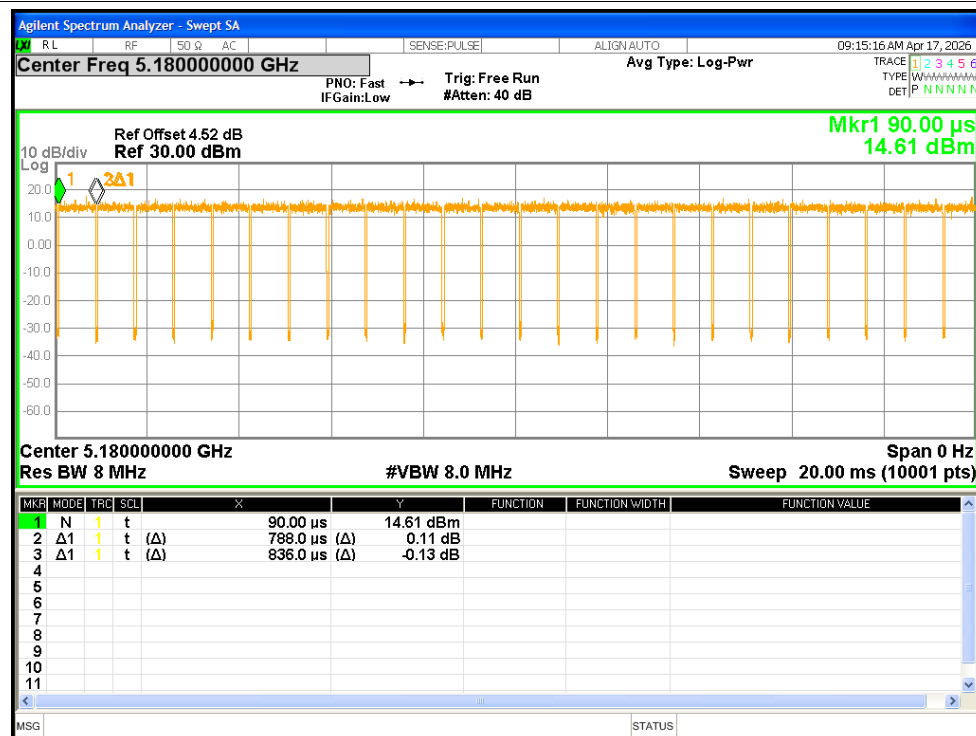



Duty Cycle NVNT a 5200MHz

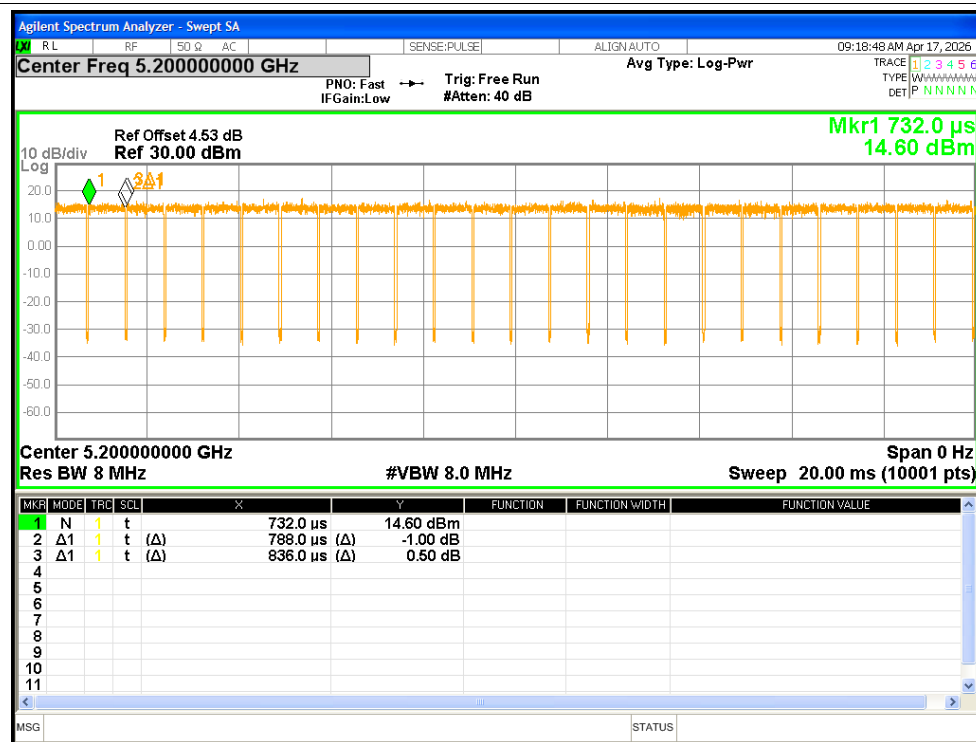


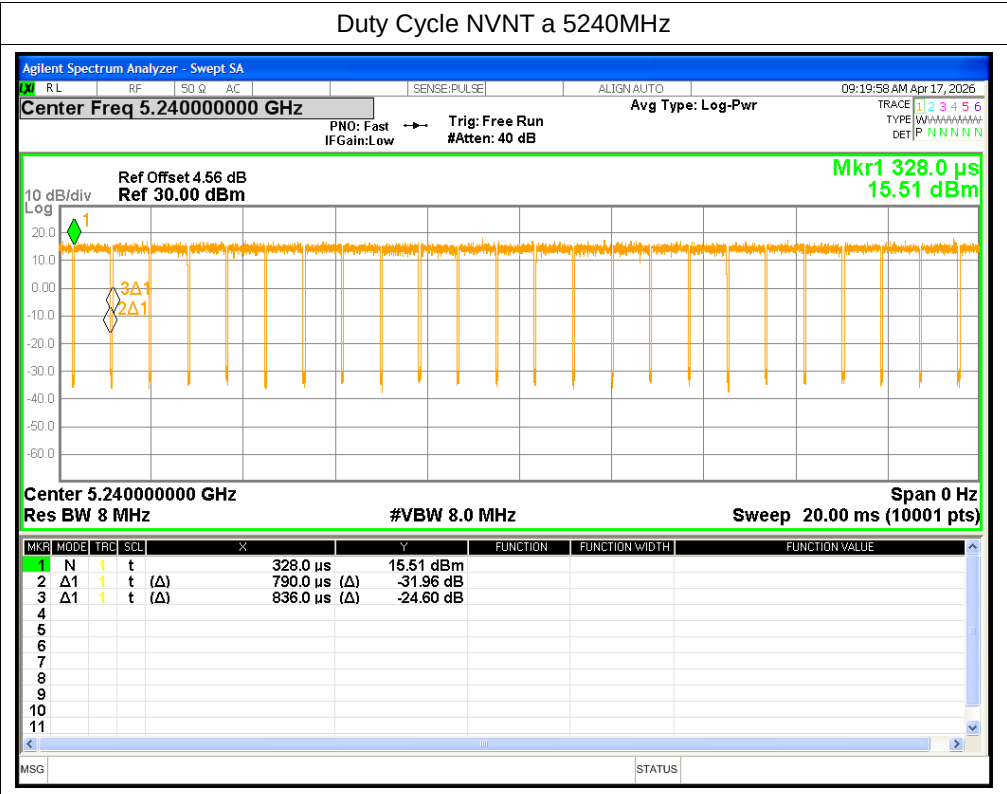

Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	11.24	0.26	11.5	<=24	Pass
NVNT	a	5200	11.32	0.26	11.58	<=24	Pass
NVNT	a	5240	12.01	0.25	12.26	<=24	Pass

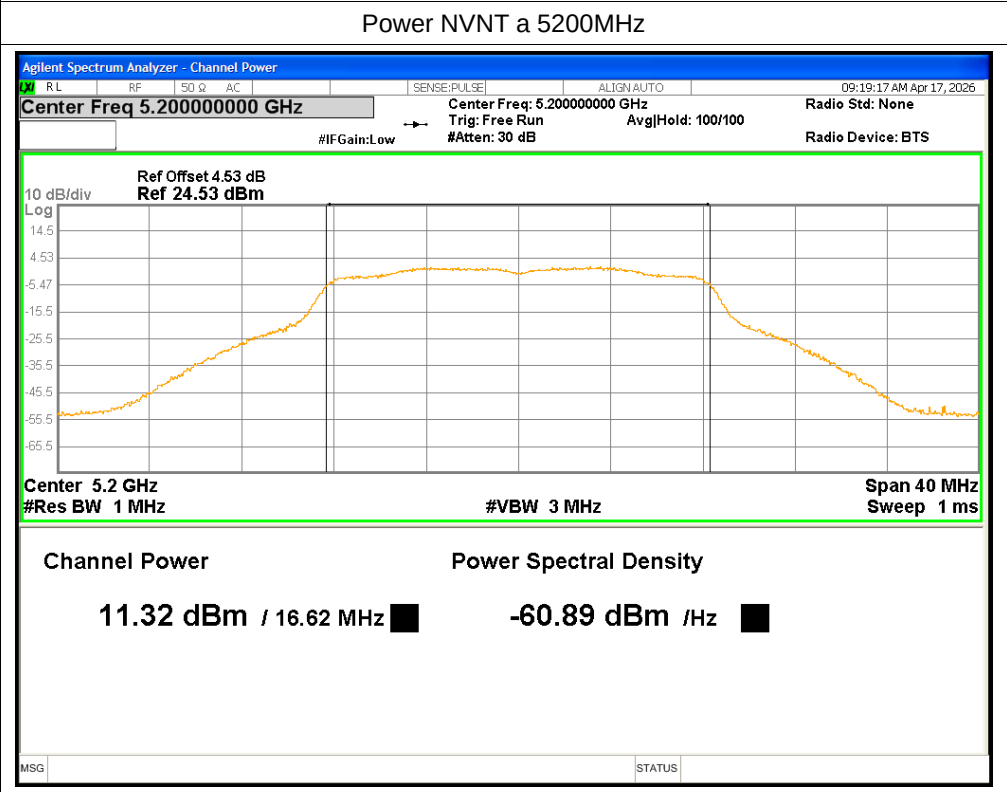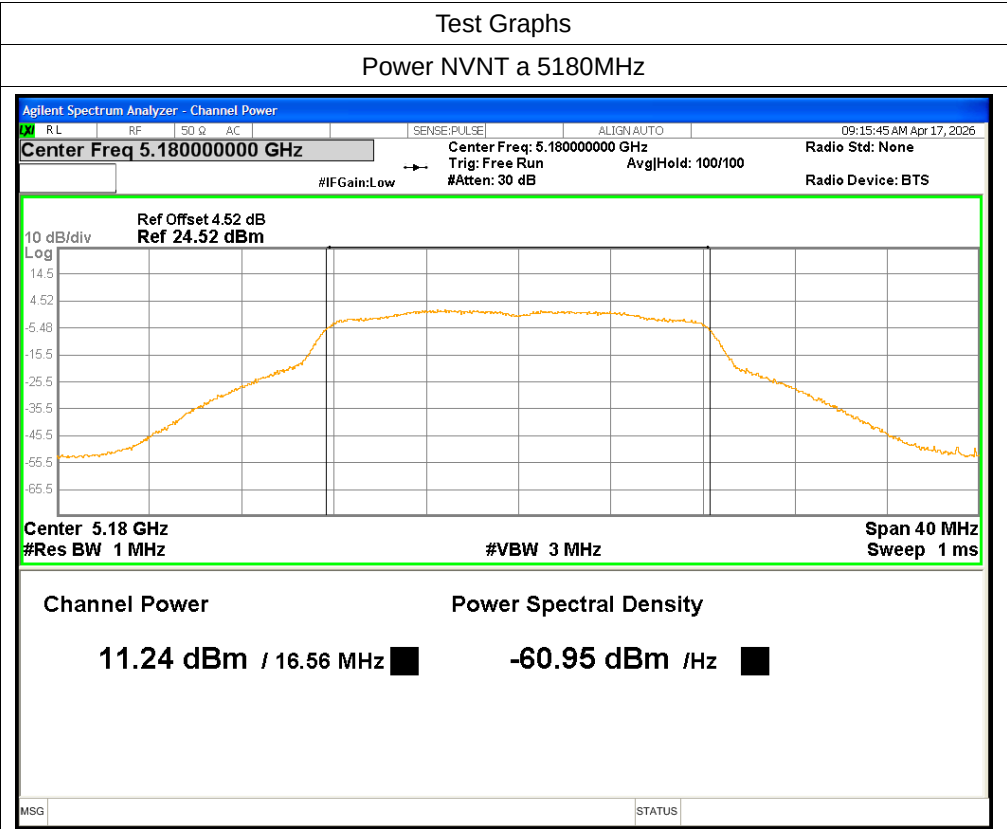

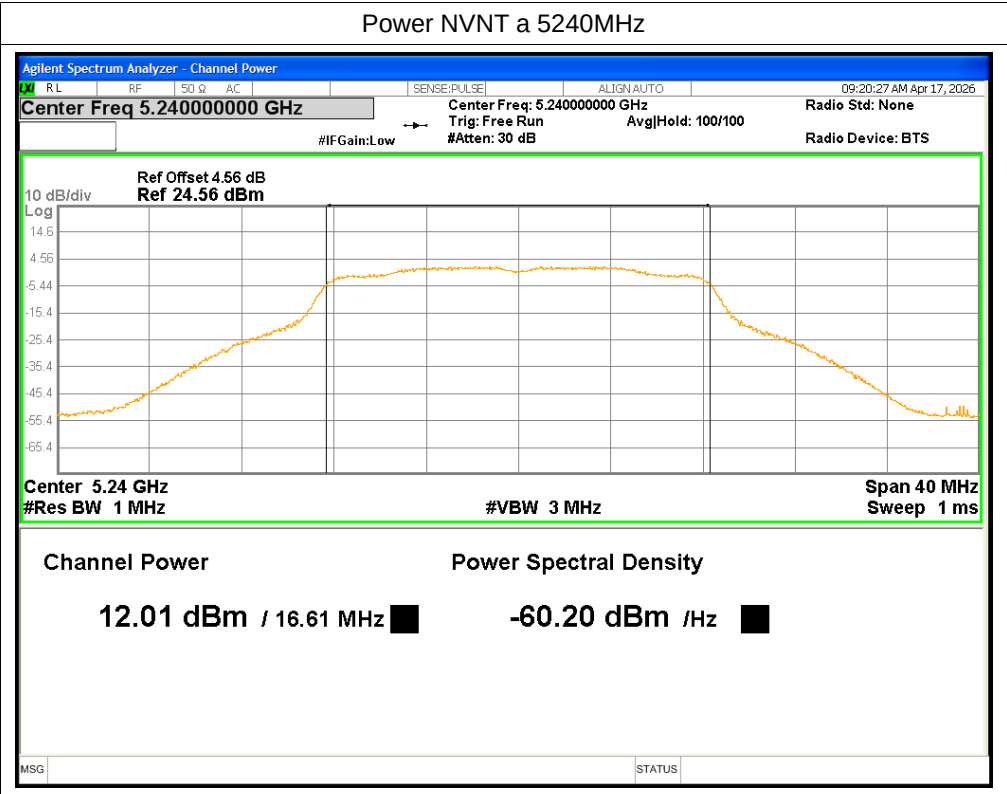


-26dB Bandwidth


Condition	Mode	Frequency (MHz)	-26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	23.51	Pass
NVNT	a	5200	23.8	Pass
NVNT	a	5240	23.96	Pass


Test Graphs

-26dB Bandwidth NVNT a 5180MHz

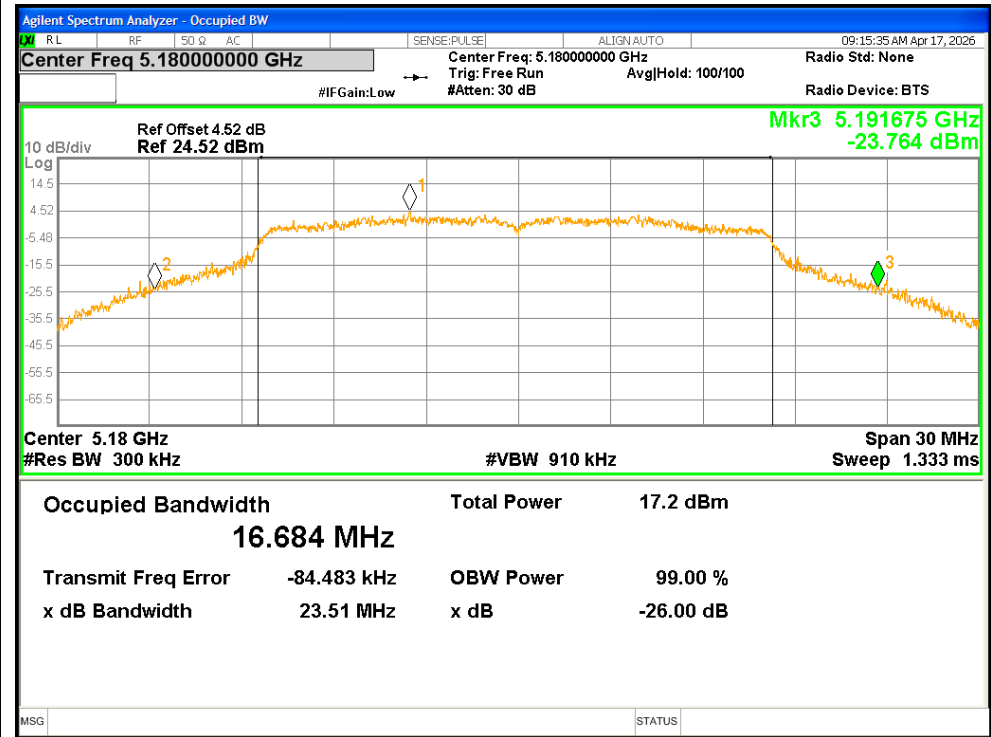

-26dB Bandwidth NVNT a 5200MHz

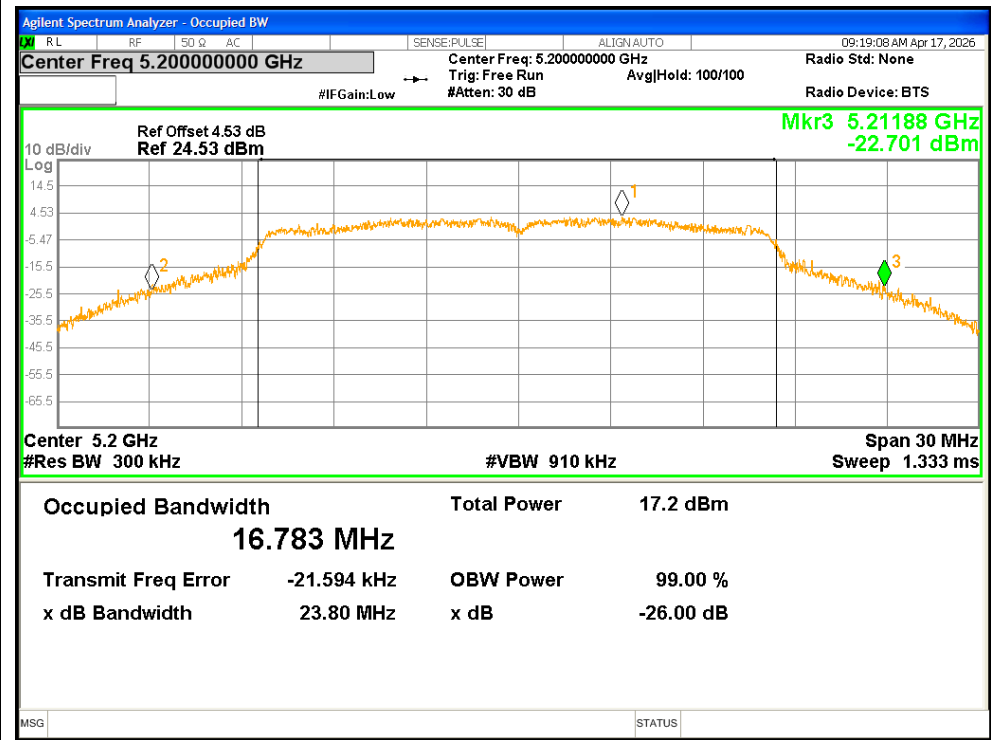

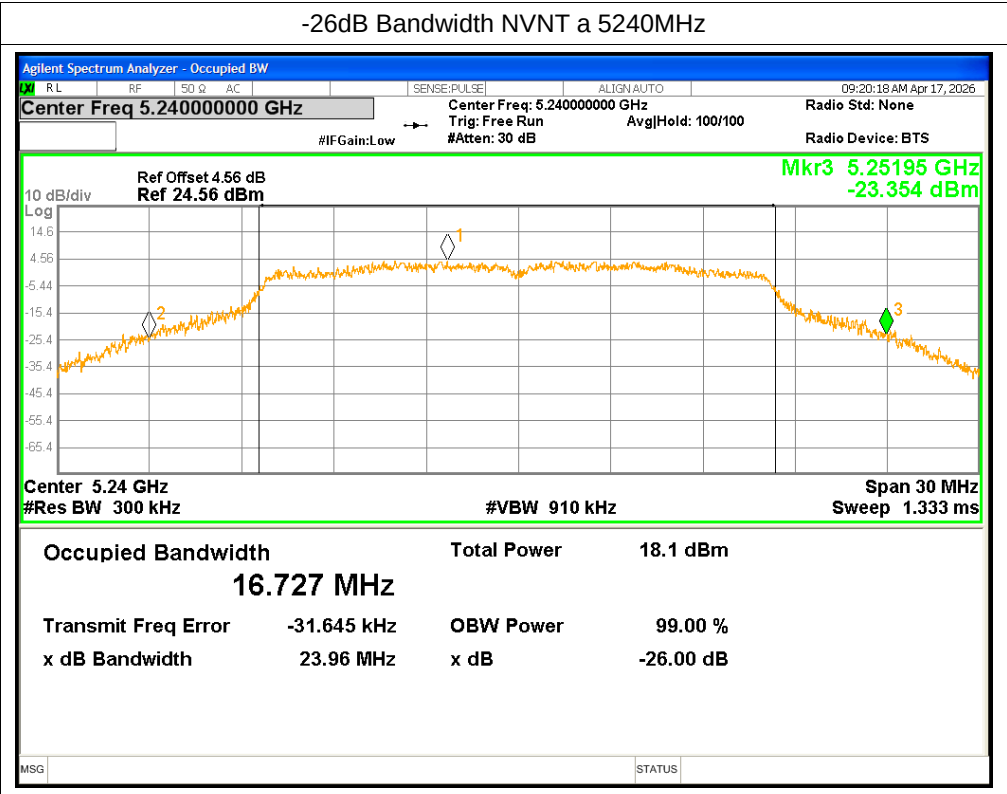


Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	99% OBW (MHz)
NVNT	a	5180	16.558
NVNT	a	5200	16.622
NVNT	a	5240	16.606


Test Graphs

OBW NVNT a 5180MHz

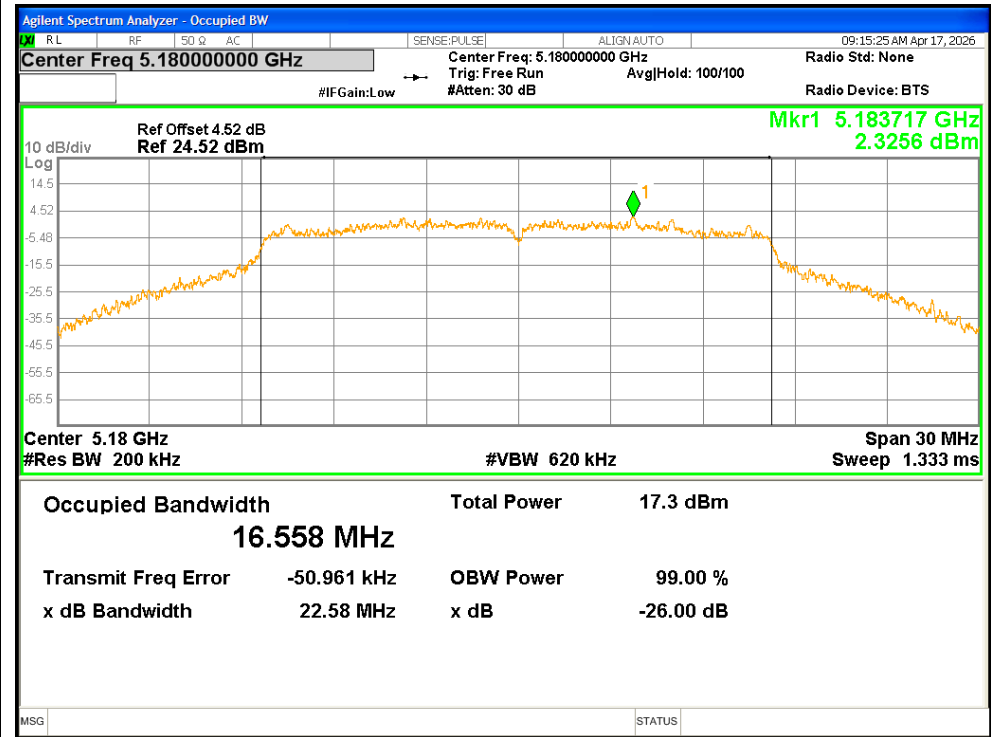

OBW NVNT a 5200MHz

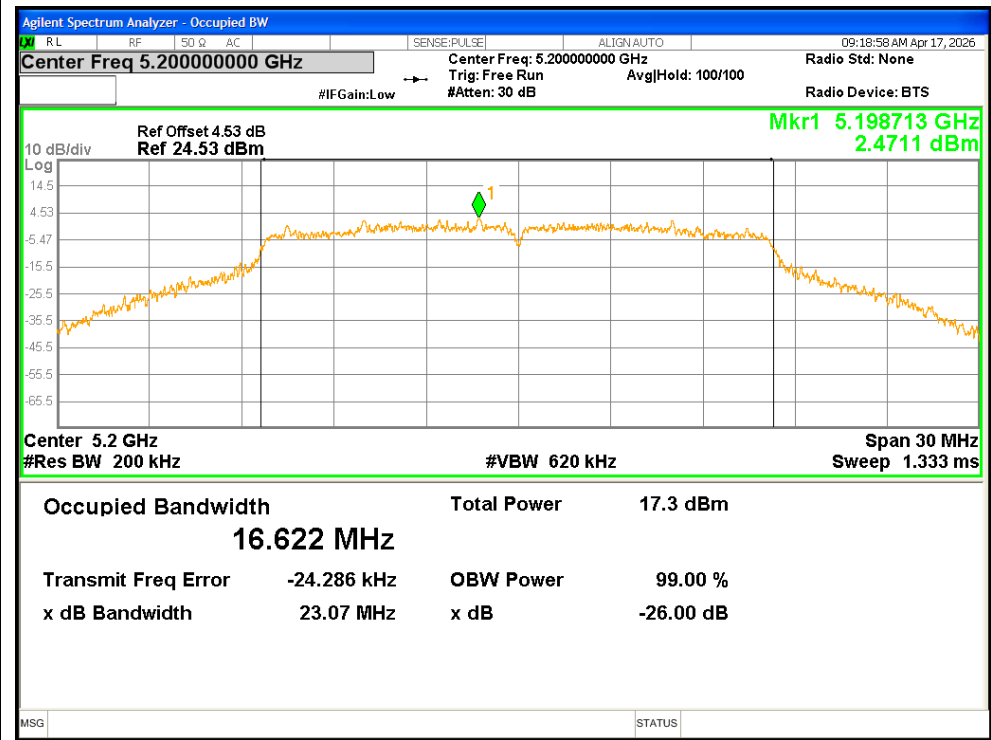

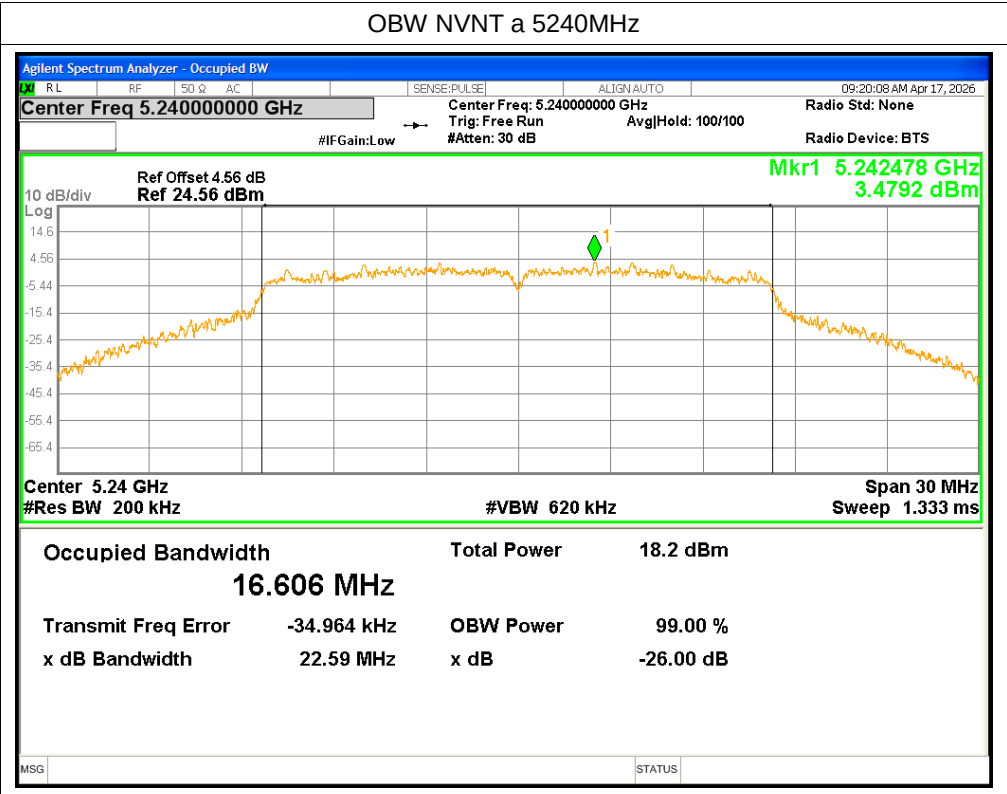

Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	1.386	0.26	1.646	<=11	Pass
NVNT	a	5200	1.381	0.26	1.641	<=11	Pass
NVNT	a	5240	2.182	0.25	2.432	<=11	Pass

