




Duty Cycle


Condition	Mode	Frequency (MHz)	On Time (ms)	Period (ms)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)	Max Variation (%)
NVNT	a	5745	0.788	0.836	94.26	0.26	1.27	0.17
NVNT	a	5785	0.788	0.836	94.26	0.26	1.27	0.16
NVNT	a	5825	0.788	0.836	94.26	0.26	1.27	0.17

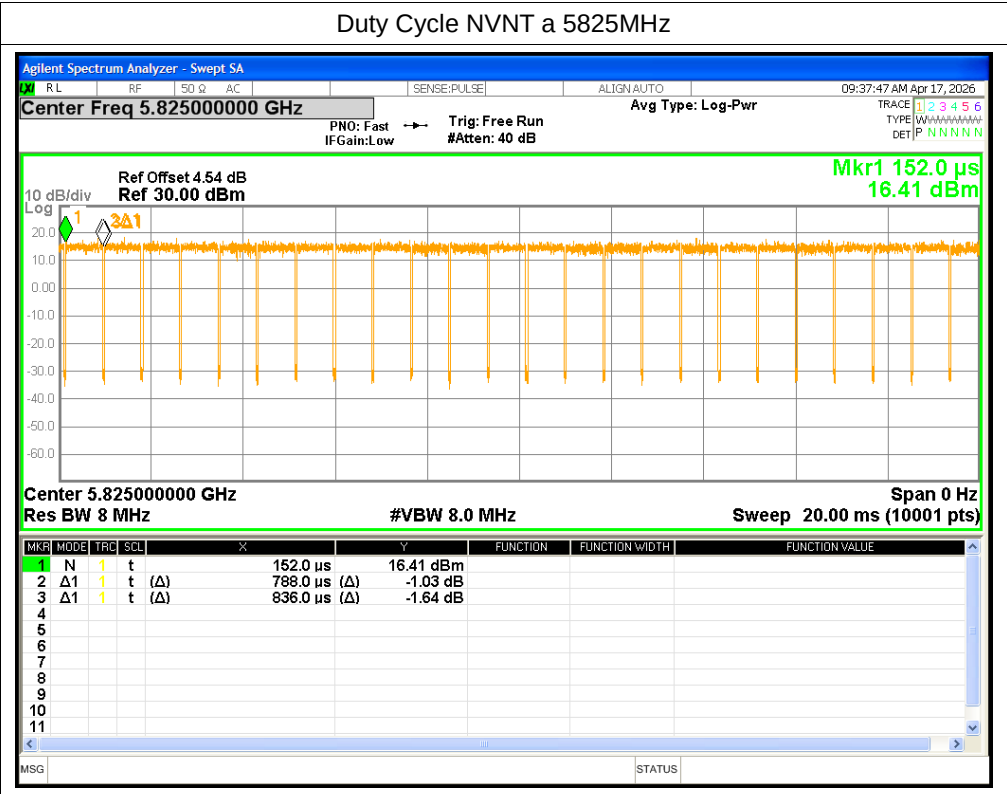

Maximum Conducted Output Power


Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	11.18	0.26	11.44	<=30	Pass
NVNT	a	5785	11.51	0.26	11.77	<=30	Pass
NVNT	a	5825	12.26	0.26	12.52	<=30	Pass

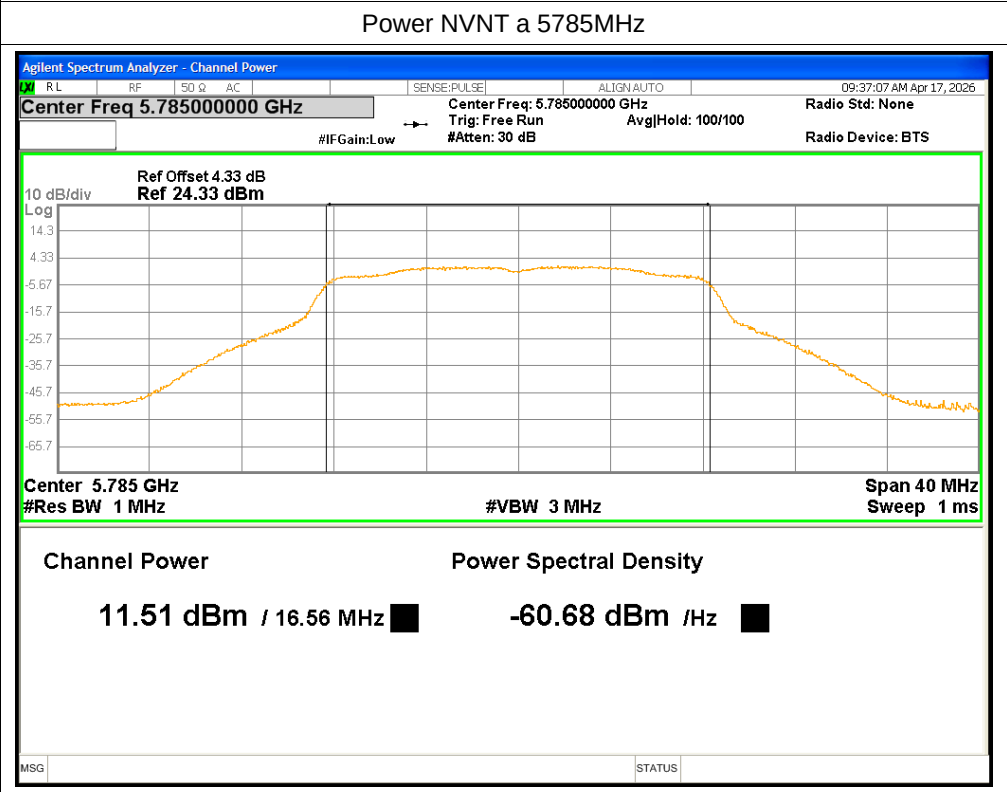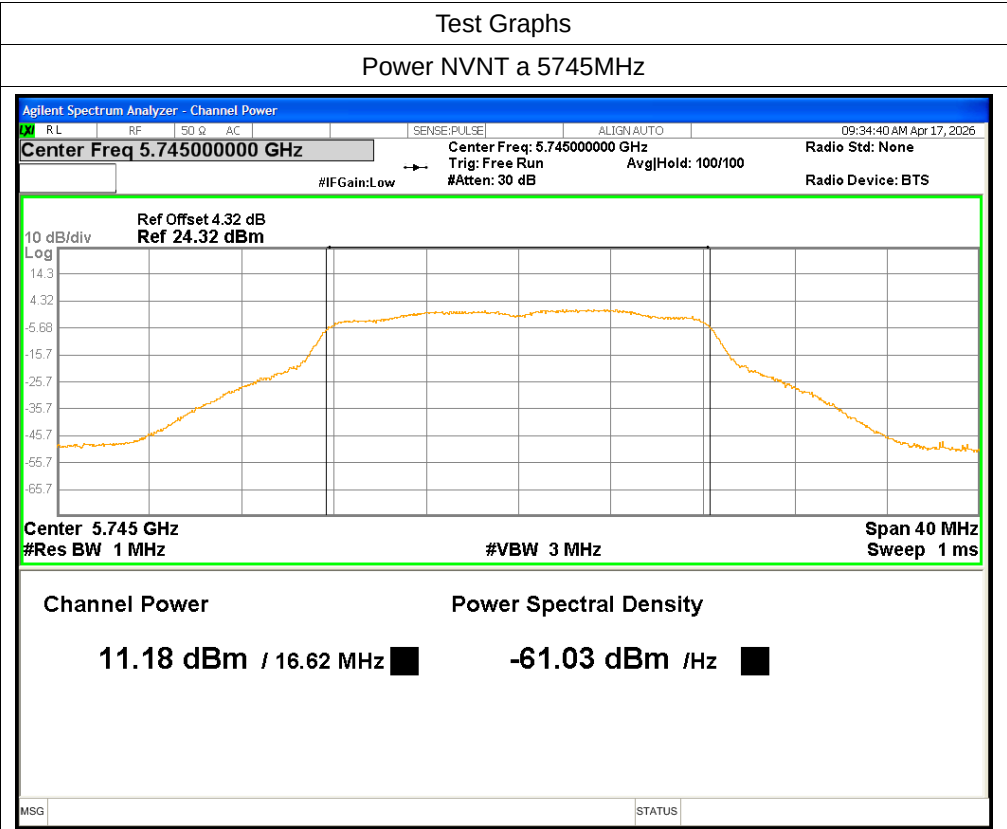


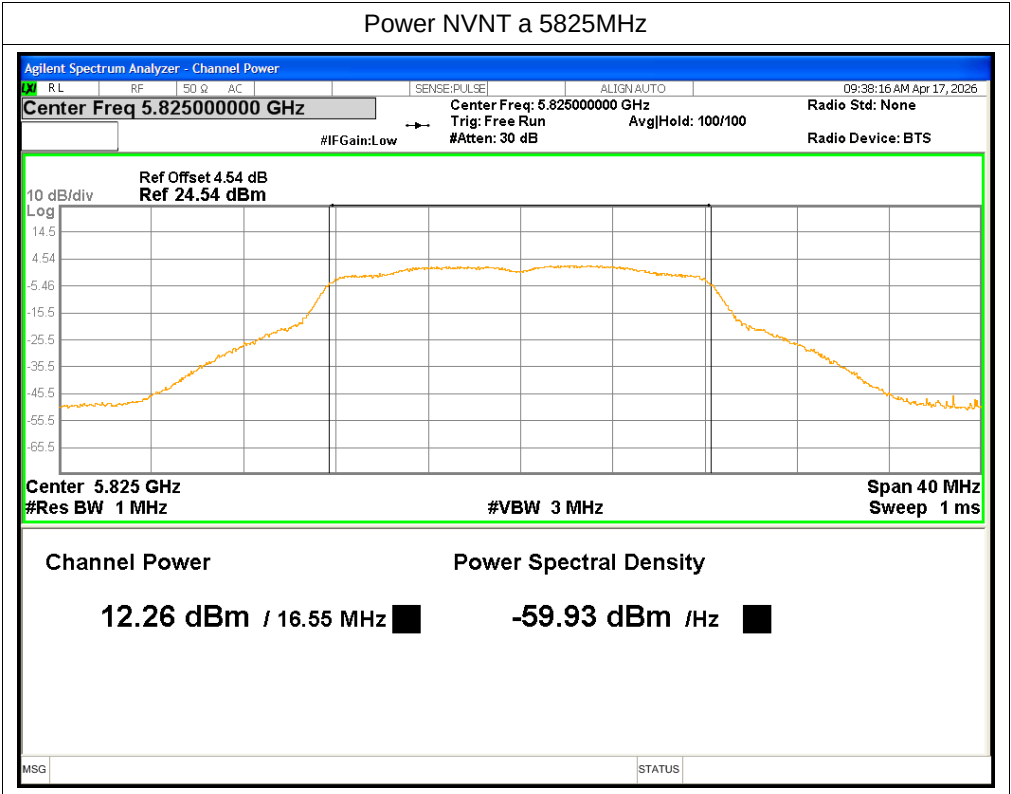

-6dB Bandwidth


Condition	Mode	Frequency (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	a	5745	15.07	≥ 0.5	Pass
NVNT	a	5785	15.08	≥ 0.5	Pass
NVNT	a	5825	15.09	≥ 0.5	Pass

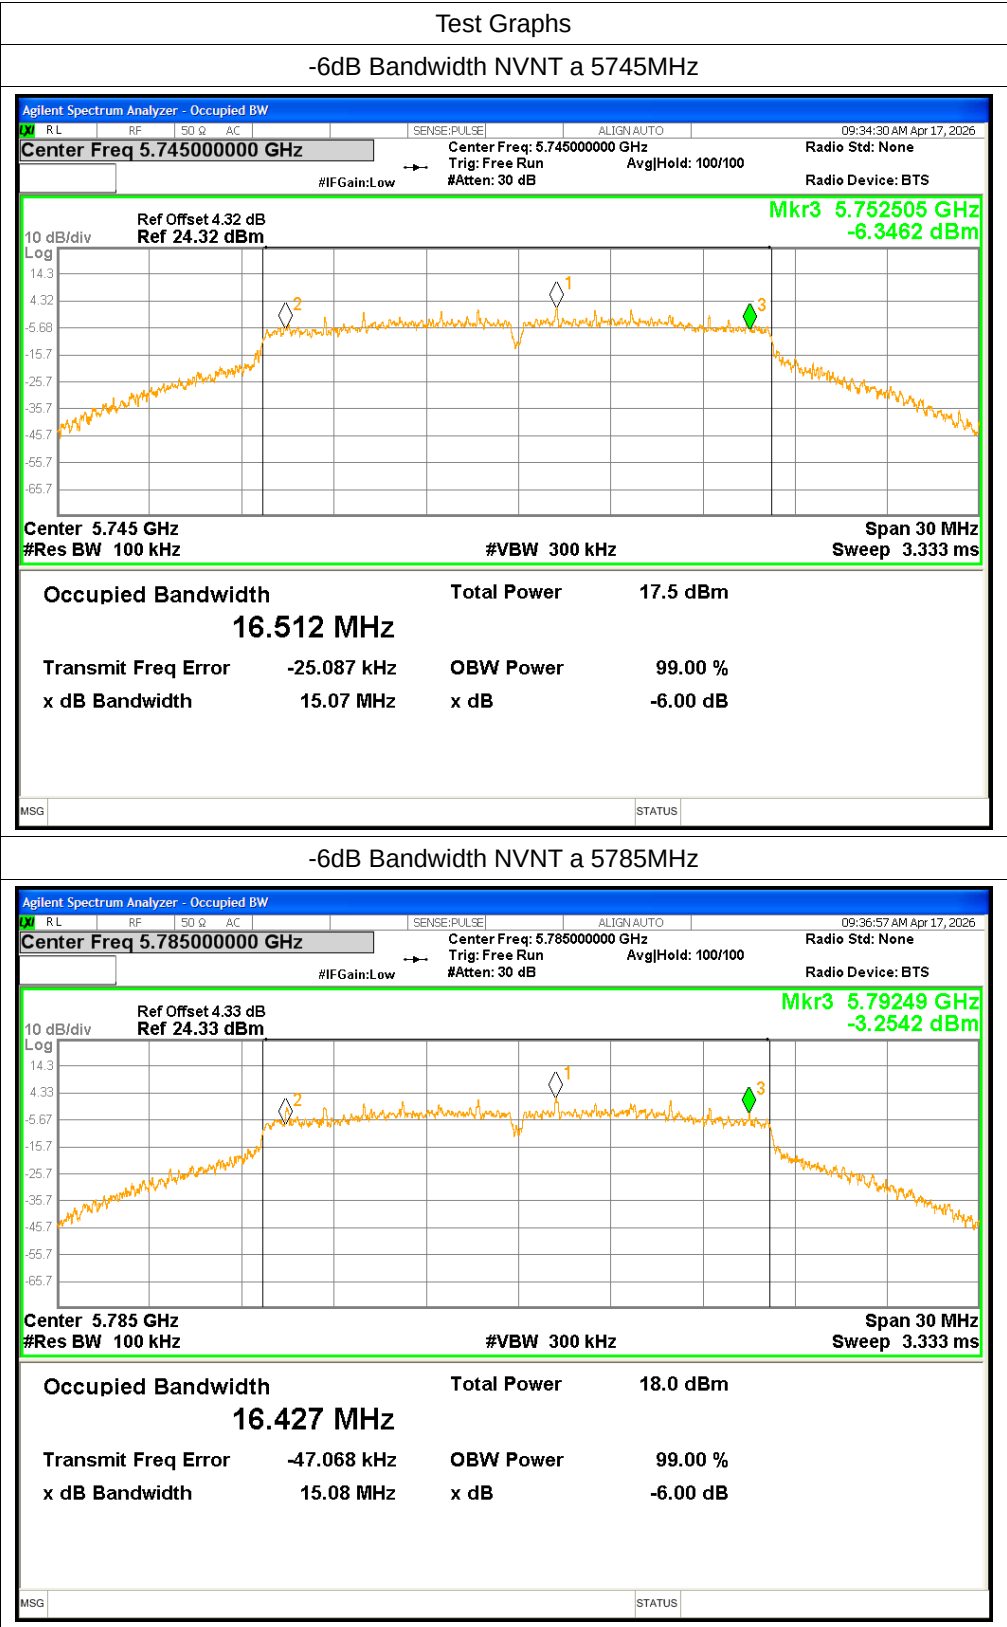


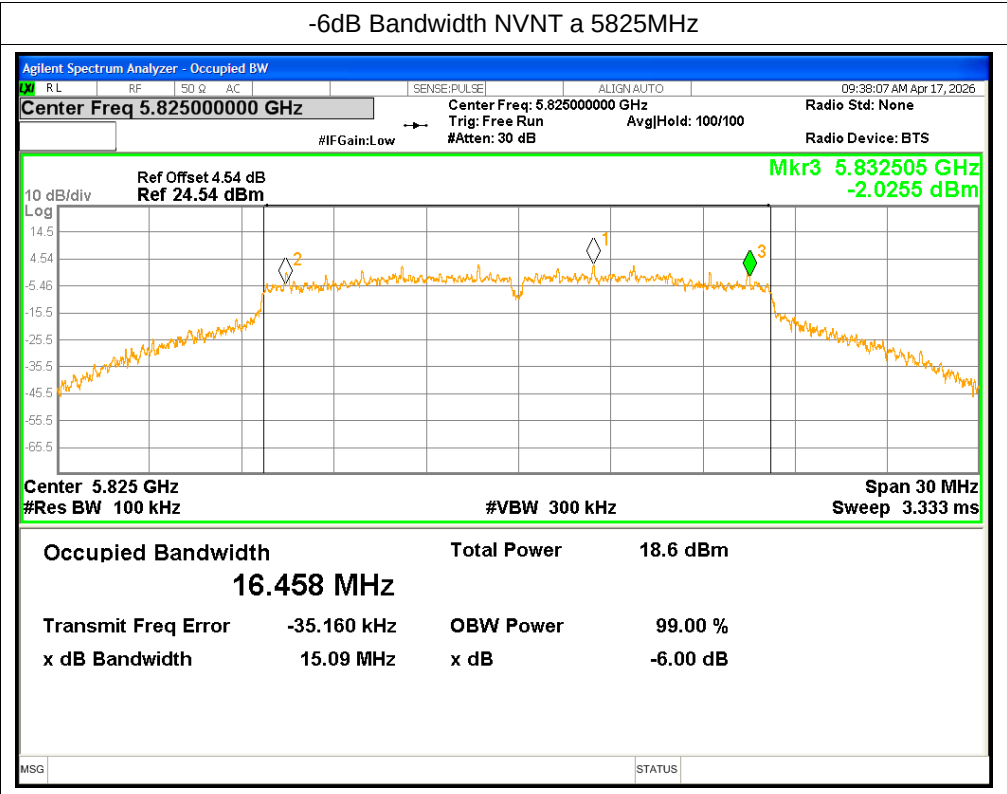

Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	99% OBW (MHz)
NVNT	a	5745	16.622
NVNT	a	5785	16.555
NVNT	a	5825	16.545

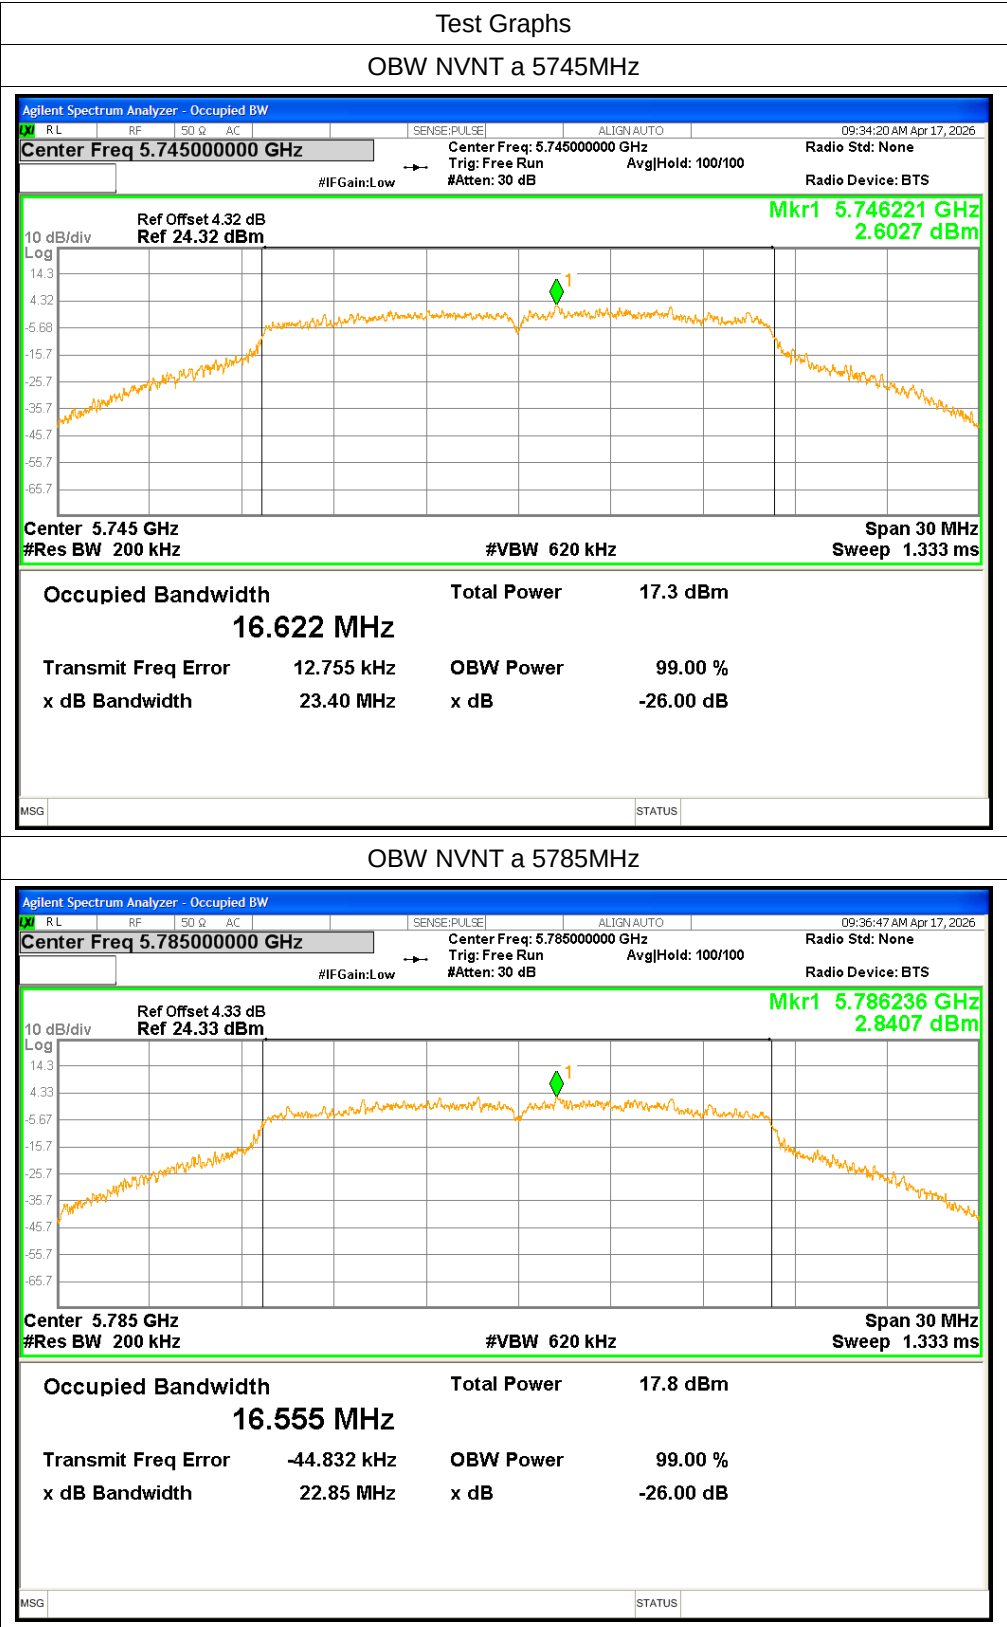

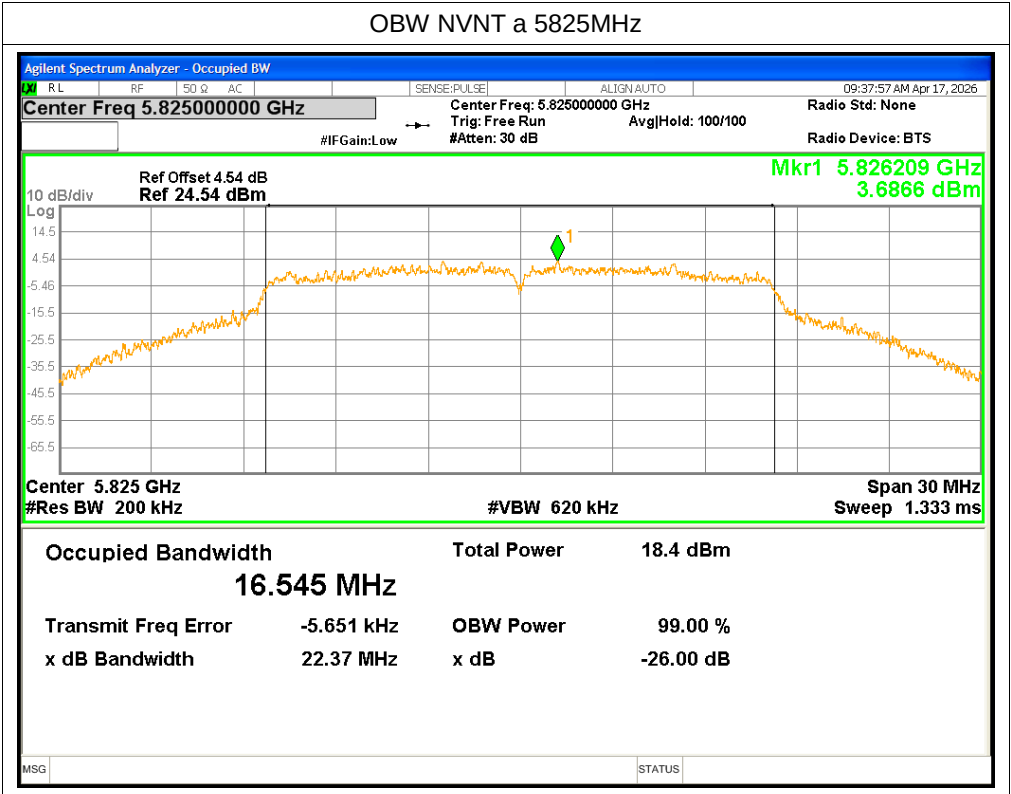

Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Conducted PSD (dBm/510kHz)	Duty Factor (dB)	Total PSD (dBm/510kHz)	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Verdict
NVNT	a	5745	-1.314	0.26	-1.054	-1.14	<=30	Pass
NVNT	a	5785	-1.268	0.26	-1.008	-1.09	<=30	Pass
NVNT	a	5825	-0.386	0.26	-0.126	-0.21	<=30	Pass

