



Shenzhen GUOREN Certification Technology Service Co., Ltd.

101#, Building K & Building T, The Second Industrial Zone, Jiazitang Community,
Fenghuang Street, Guangming District, Shenzhen, China

FCC PART 15 SUBPART C TEST REPORT

FCC PART 15 SUBPART E 15.407

Report Reference No..... : GRCTR260402007.X1-04

FCC ID..... : 2BVUS-G127D

Compiled by

(position+printed name+signature)..: File administrators Zhibiao Zeng

Zhibiao Zeng

Supervised by

(position+printed name+signature)..: Project Engineer Selly.Yang

Selly.Yang

Approved by

(position+printed name+signature)..: Manager ZhiHui Deng

ZhiHui Deng

Date of issue.....: May. 14, 2026

Testing Laboratory Name.....: **Shenzhen GUOREN Certification Technology Service Co., Ltd.**

Address.....: 101#, Building K & Building T, The Second Industrial Zone,
Jiazitang Community, Fenghuang Street, Guangming District,
Shenzhen, China

Applicant's name.....: **Shenzhen Shijing Technology Co., Ltd.**

Address.....: 301C, Huixin Ind Zone, Yonghe Rd, Heping, Fuhai, Bao'an,
Shenzhen, Guangdong, China

Test specification.....:

Standard.....: **FCC Part 15 Subpart E 15.407**

Shenzhen GUOREN Certification Technology Service Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen GUOREN Certification Technology Service Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen GUOREN Certification Technology Service Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description.....: Tablet PC

Trade Mark.....: /

Manufacturer.....: Shenzhen Shijing Technology Co., Ltd.

Model/Type reference.....: Npad X1

Listed Models: G****, G****, G****, N****, N**** (* represents numbers 0-9,
letters A-Z, a-z,-or space, indicating different customers and shell
colors, the differences do not affect the product's safety and
electromagnetic compatibility performance)

Firmware Version.....: V1.0

Hardware Version.....: V1.0

Modulation: OFDM

Frequency.....: From 5180MHz-5240MHz, 5745MHz-5825MHz

Ratings.....: DC 9V Powered by adapter or
3.85V ---10000mAh (By Li-ion rechargeable battery)

Result.....: **PASS**

TEST REPORT

Equipment under Test : Tablet PC

Model /Type : Npad X1

Listed Models : G****, G*****, G*****, N*****, N***** (* represents numbers 0-9, letters A-Z, a-z,-or space,indicating different customers and shell colors, the differences do not affect the product's safety and electromagnetic compatibility performance)

Applicant : Shenzhen Shijing Technology Co., Ltd.

Address : 301C, Huixin Ind Zone, Yonghe Rd, Heping, Fuhai, Bao'an, Shenzhen, Guangdong, China

Manufacturer : Shenzhen Shijing Technology Co., Ltd.

Address : 301C, Huixin Ind Zone, Yonghe Rd, Heping, Fuhai, Bao'an, Shenzhen, Guangdong, China

Test Result:	PASS
--------------	------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Revision History

Revision	Issue Date	Revisions	Revised By
000	2026/05/14	Initial Issue	Zhihui Deng
001	2026/10/13	Increase a new battery	Zhihui Deng

Contents

1 TEST STANDARDS	5
2 SUMMARY	6
2.1 General Remarks	6
2.2 Product Description	6
2.3 Equipment Under Test	7
2.4 Short description of the Equipment under Test (EUT)	7
2.5 EUT configuration	7
2.6 EUT operation mode	7
2.7 Block Diagram of Test Setup	8
2.8 Related Submittal(s) / Grant (s)	8
2.9 Modifications	8
3 TEST ENVIRONMENT	9
3.1 Address of the test laboratory	9
3.2 Test Facility	9
3.3 Environmental conditions	9
3.4 Test Description	9
3.5 Statement of the measurement uncertainty	10
3.6 Equipments Used during the Test	11
4 TEST CONDITIONS AND RESULTS	12
4.1 AC Power Conducted Emission	12
4.2 Radiated Emissions	15
5 TEST SETUP PHOTOS OF THE EUT	20
6 PHOTOS OF THE EUT	20

1 TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.407](#): UNLICENSED NATIONAL INFORMATION INFRASTRUCTURE DEVICES.

[ANSI C63.10-2020+COR. 1-2023+C63.10A-2024 + ERRATA TO C63.10A-2024](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB 789033 D02](#): GUIDELINES FOR COMPLIANCE TESTING OF UNLICENSED NATIONAL INFORMATION INFRASTRUCTURE (U-NII) DEVICES PART 15, SUBPART E

2 SUMMARY

2.1 General Remarks

The initial issue

Date of receipt of test sample	:	Apr. 27, 2026
Testing commenced on	:	Apr. 27, 2026
Testing concluded on	:	May. 14, 2026

The final issue

Date of receipt of test sample	:	Sep. 17, 2026
Testing commenced on	:	Sep. 17, 2026
Testing concluded on	:	Oct. 13, 2026

2.2 Product Description

Product Name:	Tablet PC
Model/Type reference:	Npad X1
Listed Models:	G****, G*****, G*****, N*****, N***** (* represents numbers 0-9, letters A-Z, a-z,-or space, indicating different customers and shell colors, the differences do not affect the product's safety and electromagnetic compatibility performance)
Power supply:	DC 9V Powered by adapter or 3.85V  10000mAh (By Li-ion rechargeable battery)
Sample ID:	GRCTR260402007.X1-1# (Engineer sample), GRCTR260402007.X1-2# (Normal sample)
WIFI 5G	
Supported type	Supported 802.11 a/n/ac
Modulation Type	IEEE 802.11a: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK,BPSK) IEEE 802.11n HT40: OFDM (64QAM, 16QAM, QPSK,BPSK) IEEE 802.11acVHT20/VHT40/VHT80: OFDM(256QAM, 64QAM, 16QAM, QPSK, BPSK)
Operation frequency	IEEE 802.11a:5180-5240MHz,5745-5825MHz IEEE 802.11n HT20: 5180-5240MHz,5745-5825MHz IEEE 802.11n HT40: 5190-5230MHz,5755-5795MHz IEEE 802.11acVHT20: 5180-5240MHz,5745-5825MHz IEEE 802.11acVHT40: 5190-5230MHz,5755-5795MHz IEEE 802.11acVHT80:5210MHz,5775MHz
Channel number	4 Channels for 20MHz bandwidth(5180-5240MHz) 5 channels for 20MHz bandwidth(5745-5825MHz) 2 channels for 40MHz bandwidth(5190~5230MHz) 2 channels for 40MHz bandwidth(5755~5795MHz) 1 channel for 80MHz bandwidth(5210MHz) 1 channel for 80MHz bandwidth(5775MHz)
Antenna type:	FPC antenna
Antenna gain*(Supplied by the customer):	2.88 dBi
Remark:*When the information provided by the customer was used to calculate test results, if the information provided by the customer is not accurate, shenzhen GUOREN Certification Technology Service Co., Ltd. does	

not assume any responsibility.

Remark: The product are identical in interior structure, electrical circuits and components, and that comes in two battery models (the specifications are the same), both have been tested AC Power Conducted Emission & Radiated Emissions (below 1GHz)

2.3 Equipment Under Test

Power supply system utilised

Power supply voltage	:	☐ 230V / 50 Hz	☐ 120V / 60Hz
		☐ 12 V DC	☐ 24 V DC
		☒ Other (specified in blank below)	

DC 9V Powered by adapter

2.4 Short description of the Equipment under Test (EUT)

This is a Tablet PC.

For more details, refer to the user's manual of the EUT.

2.5 EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

● - supplied by the manufacturer

○ - supplied by the lab

● Adapter	M/N:	TD-203G200150CF01
	Manufacturer:	Tianyin

2.6 EUT operation mode

The Applicant provides communication tools software (Engineering password: ***3646633***) to control the EUT for staying in continuous transmitting for testing meet KDB558074 test requirement.


Operation Frequency List WIFI on 5G Band:

Operating band	20MHz		40MHz		80MHz	
	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
U-NII 1 (5150MHz-5250MHz)	36	5180	38	5190	42	5210
	40	5200				
	44	5220	46	5230		
	48	5240				
U-NII 3 (5725MHz-5850MHz)	149	5745	151	5755	155	5775
	153	5765				
	157	5785	159	5795		
	161	5805				
	165	5825	--	--	--	--


Note: The line display in gray is those Channels/Frequencies select to test in this report for each operation mode.

2.7 Block Diagram of Test Setup

AC Power Conducted Emission & Radiated Emissions(below 1GHz&above1GHz)&Band Edge(Radiated)

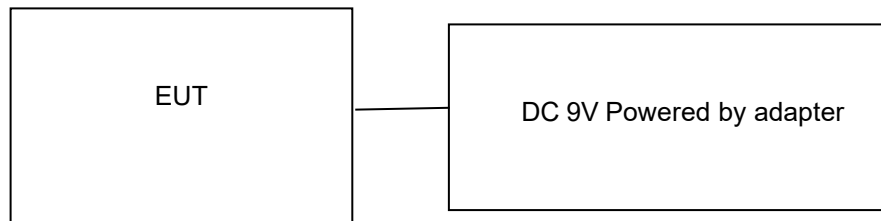

RF Measurement

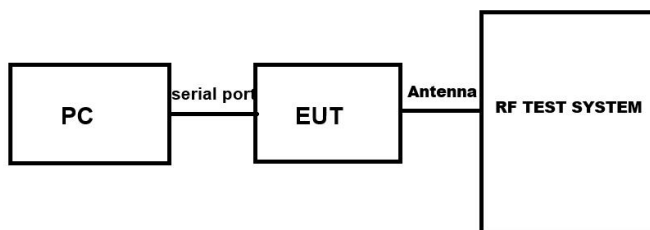

2.8 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended to comply with Section 15.407 of the FCC Part 15, Subpart E Rules.

2.9 Modifications

No modifications were implemented to meet testing criteria.

3 TEST ENVIRONMENT

3.1 Address of the test laboratory

Shenzhen GUOREN Certification Technology Service Co., Ltd.

101#, Building K & Building T, The Second Industrial Zone, Jiazitang Community, Fenghuang Street, Guangming District, Shenzhen, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 920798 Designation Number: CN1304

Shenzhen GUOREN Certification Technology Service Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA-Lab Cert. No.: 6202.01

Shenzhen GUOREN Certification Technology Service Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

ISED#: 27264 CAB identifier: CN0115

Shenzhen GUOREN Certification Technology Service Co., Ltd. has been listed by Innovation, Science and Economic Development Canada to perform electromagnetic emission measurement.

CNAS-Lab Code: L15631

Shenzhen GUOREN Certification Technology Service Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories for the Competence of Testing and Calibration Laboratories.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010.

3.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature	15-35 °C
Relative Humidity	30-60 %
Air Pressure	950-1050mbar

3.4 Test Description

FCC Requirement		
FCC Part 15.207	AC Power Conducted Emission	PASS
FCC Part 15.407(b)/15.205/15.209	Radiated Emissions	PASS

Note 1: Apply to U-NII 1, U-NII 2A, and U-NII 2C band.

Note 2: Apply to U-NII 3 band only.

Note 3: This device not work in DFS band.

Note 4: N/A means "not applicable".

Data Rate Used:

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate
Maximum Conducted Output Power Power Spectral Density Emission Bandwidth(26dBm Bandwidth) Minimum Emission Bandwidth(6dBm Bandwidth) Undesirable emission Frequency Stability	11a/OFDM	6 Mbps
	11n(20MHz),11ac(20MHz)/OFDM	7.2 Mbps
	11n(40MHz),11ac(40MHz)/OFDM	15.0Mbps
	11ac(80MHz)/OFDM	65.0Mbps

3.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 2 " and is documented in the Shenzhen GUOREN Certification Technology Service Co., Ltd.quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen GUOREN Certification Technology Service Co., Ltd.:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.06 dB	(1)
Radiated Emission	1~18GHz	5.14 dB	(1)
Radiated Emission	18-40GHz	5.38 dB	(1)
Conducted Disturbance	0.15~30MHz	2.14 dB	(1)
Max output power	30MHz~18GHz	0.54 dB	(1)
Power spectral density	/	0.56 dB	(1)
Spectrum bandwidth	/	1.2%	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.6 Equipments Used during the Test


Radiated Emission						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due
1	EMI Test Receiver	ROHDE & SCHWARZ	ESPI	GRCTEE017	2026/09/10	2027/09/09
2	ULTRA-BROADBAND ANTENNA	Schwarzbeck	VULB9163	GRCTEE018	2026/09/12	2029/09/11
3	Horn Antenna	Schwarzbeck	BBHA 9120D	GRCTEE019	2026/09/12	2029/09/11
4	Loop Antenna	Zhinan	ZN30900C	GRCTEE020	2026/09/12	2029/09/11
5	Horn Antenna	Beijing Hangwei Dayang	OBH100400	GRCTEE049	2026/09/10	2027/09/09
6	Pre-Amplifier	Schwarzbeck	BBV 9743	GRCTEE021	2026/09/10	2027/09/09
7	Pre-Amplifier	Taiwan chengyi	EMC051845B	GRCTEE022	2026/09/10	2027/09/09
8	EMI Test Software	Fera	EZ-EMC	GRCTEE061	N/A	N/A

Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due
1	EMI Test Receiver	R&S	ESCI	GRCTEE008	2026/09/08	2027/09/07
2	LISN	R&S	ENV216	GRCTEE009	2026/09/10	2027/09/09
3	EMI Test Software	R&S	ESK1-V1.71	GRCTEE060	N/A	N/A

4 TEST CONDITIONS AND RESULTS

4.1 AC Power Conducted Emission

TEST CONFIGURATION

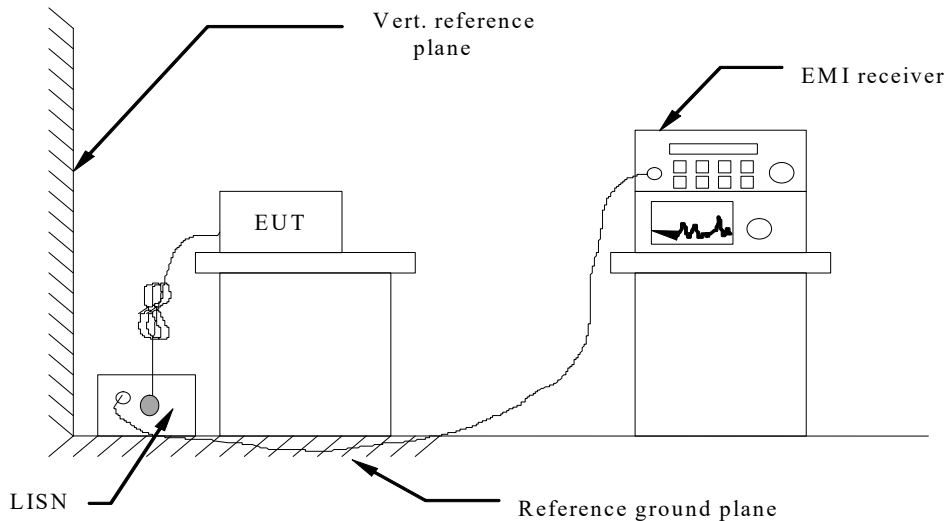

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2020+COR. 1-2023+C63.10A-2024 + ERRATA TO C63.10A-2024.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2020+COR. 1-2023+C63.10A-2024 + ERRATA TO C63.10A-2024.
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2020+COR. 1-2023+C63.10A-2024 + ERRATA TO C63.10A-2024.
- 4 The EUT received power from variable frequency power supply, the AC 120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following:

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50


* Decreases with the logarithm of the frequency.

TEST RESULTS

Remark:

1. All 802.11a/ 802.11ac(VHT20) /802.11ac(VHT40) /802.11ac(VHT80)/ 802.11n (HT20) / 802.11n (HT40) modes have been tested at low, middle, and high channel, only the worst case 802.11n (HT20) low channel of U-NII 1 band was recorded.

2. Both 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz power supply have been tested, only the worst result of 120 VAC, 60 Hz was reported as below:

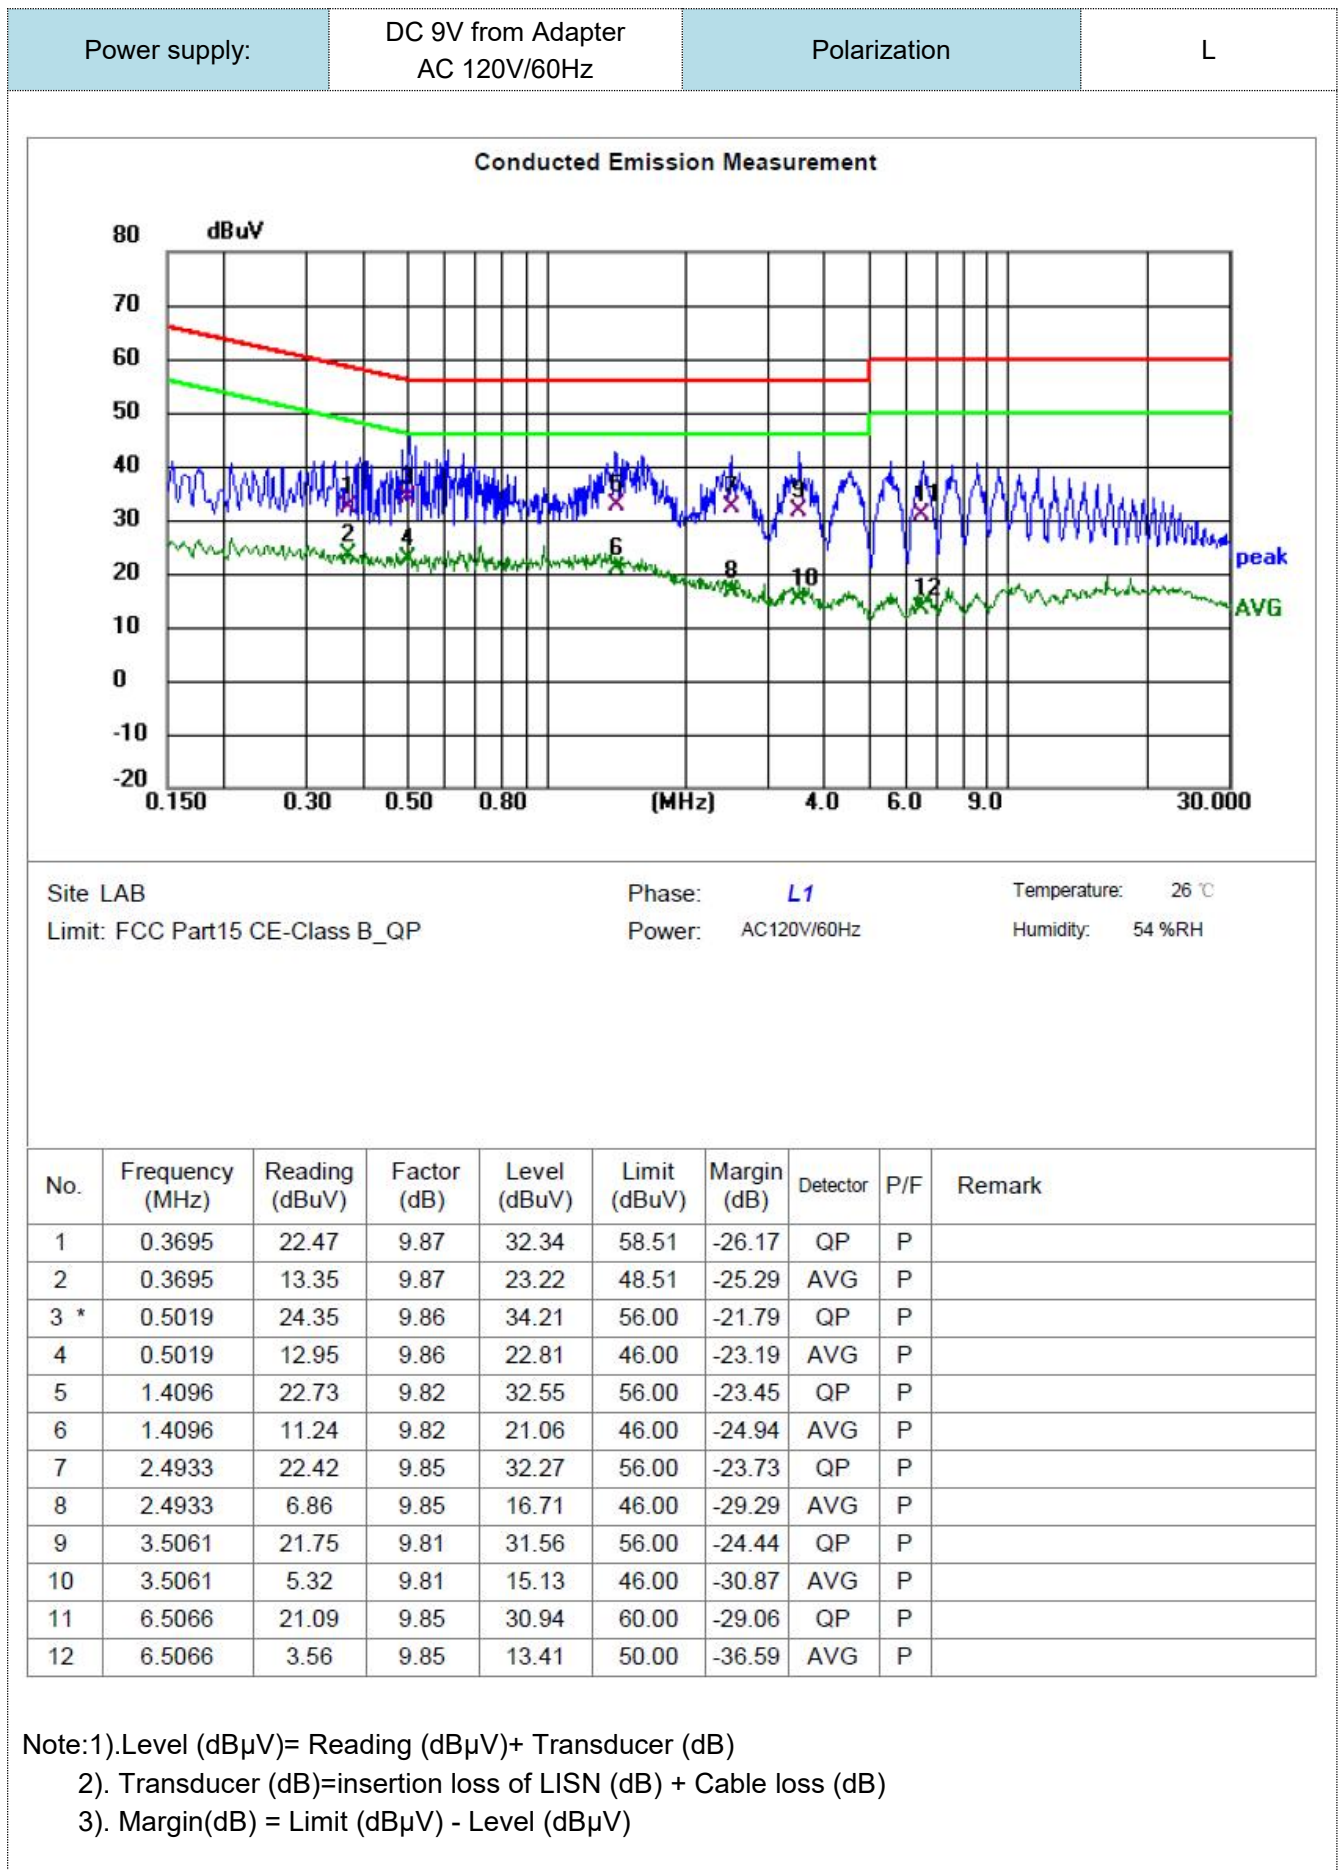


Power supply:

DC 9V from Adapter
AC 120V/60Hz

Polarization

N

Conducted Emission Measurement

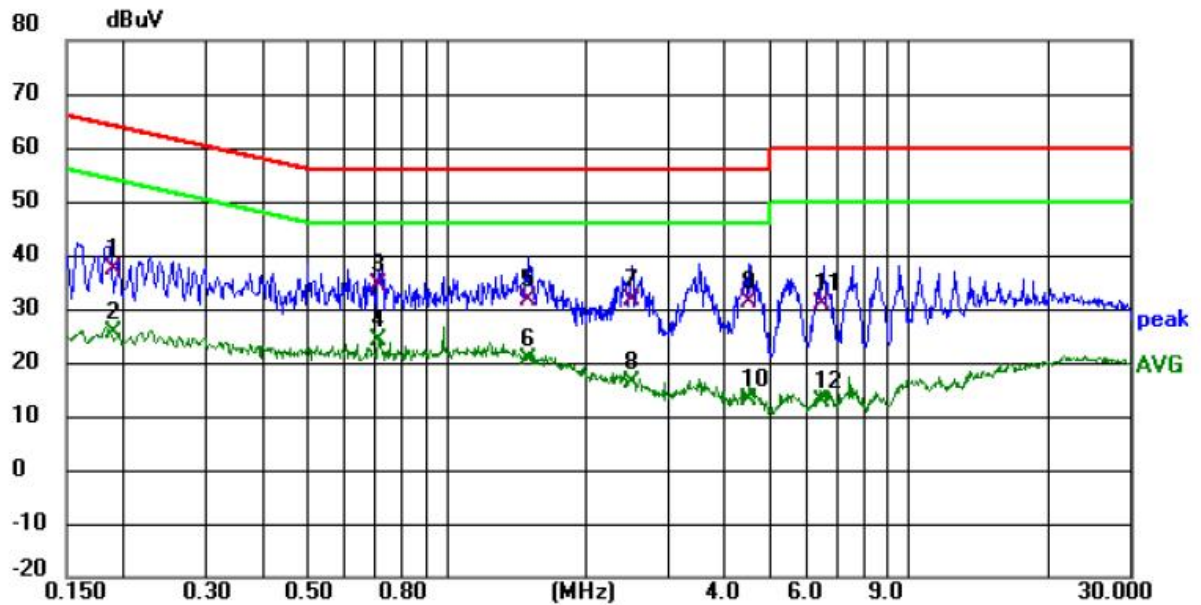

Site LAB

Phase: N

Temperature: 26 °C

Limit: FCC Part15 CE-Class B_QP

Power: AC120V/60Hz

Humidity: 54 %RH

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1898	27.46	9.87	37.33	64.05	-26.72	QP	P	
2	0.1898	15.66	9.87	25.53	54.05	-28.52	AVG	P	
3 *	0.7087	24.66	9.87	34.53	56.00	-21.47	QP	P	
4	0.7087	14.28	9.87	24.15	46.00	-21.85	AVG	P	
5	1.5017	21.59	9.87	31.46	56.00	-24.54	QP	P	
6	1.5017	10.78	9.87	20.65	46.00	-25.35	AVG	P	
7	2.4928	21.74	9.87	31.61	56.00	-24.39	QP	P	
8	2.4928	6.27	9.87	16.14	46.00	-29.86	AVG	P	
9	4.5066	21.41	9.85	31.26	56.00	-24.74	QP	P	
10	4.5066	3.35	9.85	13.20	46.00	-32.80	AVG	P	
11	6.5064	20.93	9.87	30.80	60.00	-29.20	QP	P	
12	6.5064	2.98	9.87	12.85	50.00	-37.15	AVG	P	

Note:1).Level (dBuV)= Reading (dBuV)+ Transducer (dB)

2). Transducer (dB)=insertion loss of LISN (dB) + Cable loss (dB)

3). Margin(dB) = Limit (dBuV) - Level (dBuV)

4.2 Radiated Emissions

Limit

The maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Undesirable emission limits

Requirement	Limit(EIRP)	Limit (Field strength at 3m) ^{Note1}
15.407(b)(1)	PK:-27(dBm/MHz)	PK:68.2(dBμV/m)
15.407(b)(2)		
15.407(b)(3)		
15.407(b)(4)		

Note1: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$


- (5) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209
- (6) In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

Radiated emission limits


Frequency (MHz)	Distance (Meters)	Radiated (dBμV/m)	Radiated (μV/m)
0.009-0.49	3	20log(2400/F(KHz))+40log(300/3)	2400/F(KHz)
0.49-1.705	3	20log(24000/F(KHz))+ 40log(30/3)	24000/F(KHz)
1.705-30	3	20log(30)+ 40log(30/3)	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

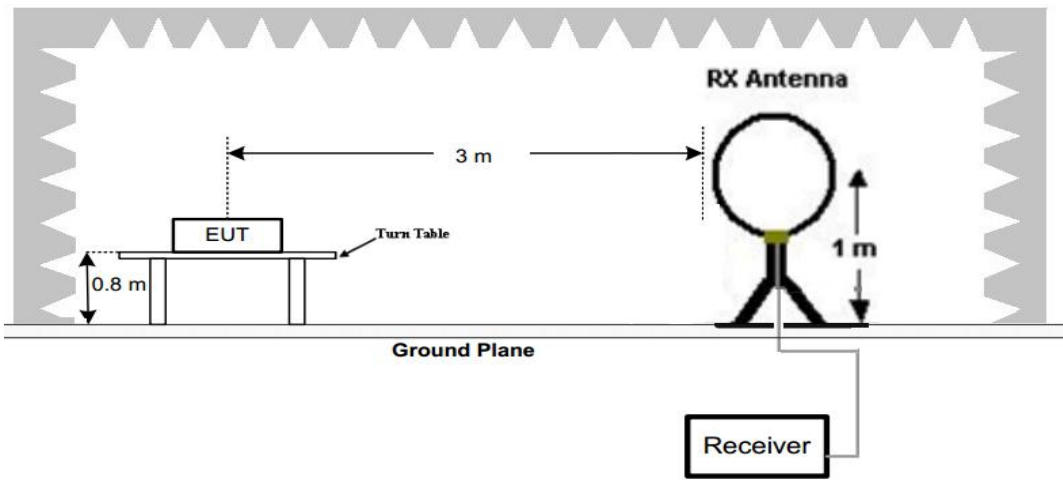

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

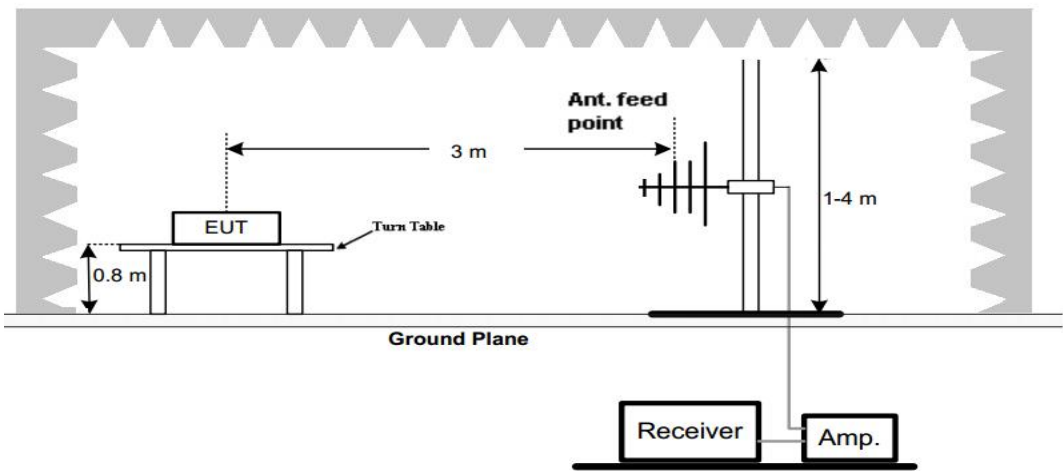

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

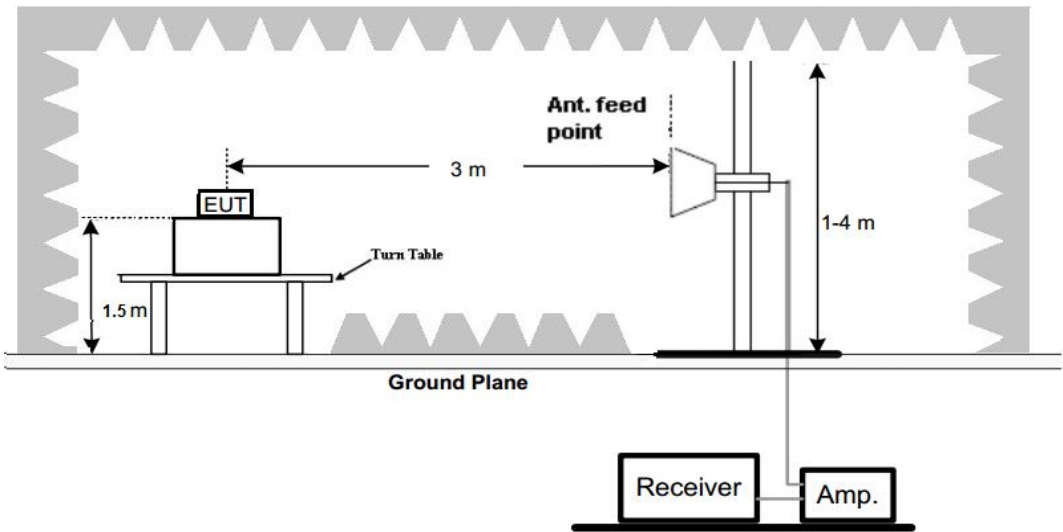

Test Procedure

- Below 1GHz measurement the EUT is placed on a turntable which is 0.8m above ground plane, and above 1GHz measurement EUT was placed on a low permittivity and low loss tangent turn table which is 1.5m above ground plane.
- Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT
- And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- Repeat above procedures until all frequency measurements have been completed.
- Radiated emission test frequency band from 9KHz to 40GHz.
- The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Bilog Antenna	3
1GHz-18GHz	Horn Antenna	3
18GHz-40GHz	Horn Antenna	1

- Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz, Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz, Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz, Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

TEST RESULTS


Remark:

- This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position. All 802.11a/ 802.11ac(VHT20) /802.11ac(VHT40) /802.11ac(VHT80)/ 802.11n (HT20) / 802.11n (HT40) modes have been tested for below 1GHz test, only the worst case 802.11n (HT20) low channel of U-NII 1 band was recorded.
- All 802.11a/ 802.11ac(VHT20) /802.11ac(VHT40) /802.11ac(VHT80)/ 802.11n (HT20) / 802.11n (HT40) modes have been tested for above 1GHz test, only the worst case 802.11n (HT20) was recorded.
- Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.

For 30MHz-1GHz

Horizontal

Radiated Emission Measurement

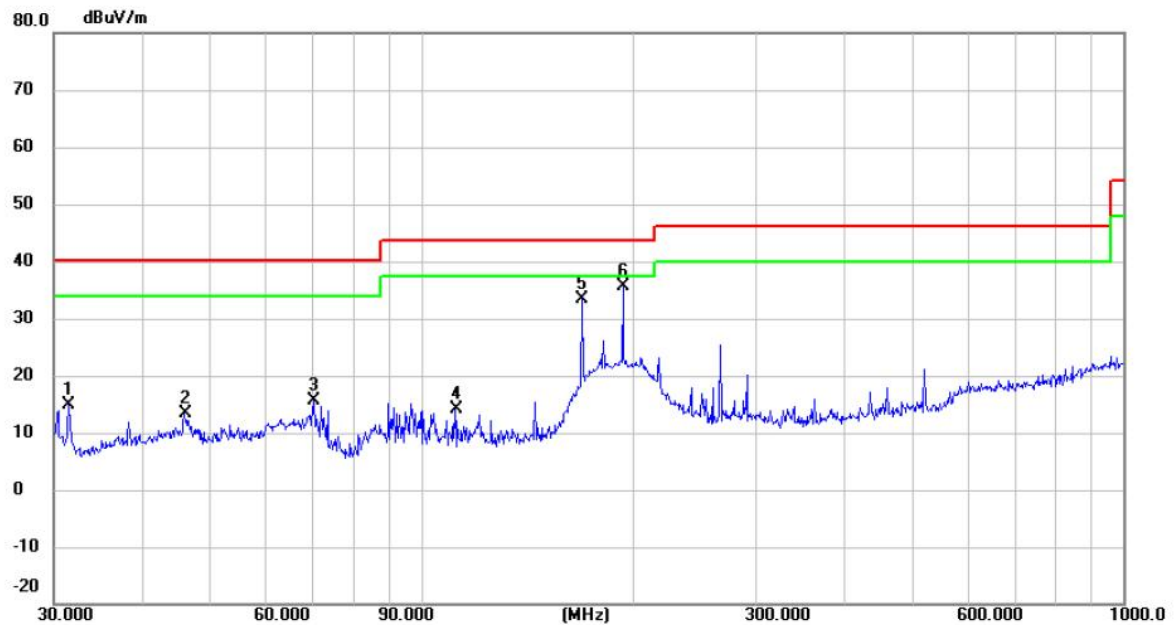

Site

Polarization: **Horizontal**

Temperature: 25.5 (C)

Limit: FCC Part15 RE-Class B_30-1000MHz

Power: AC120V/60Hz

Humidity: 56 %RH

Distance: 3m

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	31.5095	34.67	-19.80	14.87	40.00	-25.13	peak	100	168	P	
2	46.0164	30.81	-17.54	13.27	40.00	-26.73	peak	199	355	P	
3	70.3365	36.12	-20.57	15.55	40.00	-24.45	peak	100	5	P	
4	111.7380	33.58	-19.54	14.04	43.50	-29.46	peak	100	5	P	
5	169.5990	54.75	-21.26	33.49	43.50	-10.01	peak	199	82	P	
6 *	193.7728	55.14	-19.49	35.65	43.50	-7.85	peak	100	78	P	

Note:1).Level (dBuV/m)= Reading (dBuV)+ Factor (dB/m)

2). Factor(dB/m)=Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)

3). Margin(dB) = Level (dBuV/m) - Limit (dBuV/m)

Vertical

Radiated Emission Measurement



Site

Polarization: *Vertical*

Temperature: 25.5 (C)

Limit: FCC Part15 RE-Class B_30-1000MHz

Power: AC120V/60Hz

Humidity: 56 %RH

Distance: 3m

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	30.4238	52.69	-19.87	32.82	40.00	-7.18	peak	100	239	P	
2	47.6586	40.00	-17.50	22.50	40.00	-17.50	peak	100	146	P	
3	66.0342	43.27	-20.06	23.21	40.00	-16.79	peak	100	139	P	
4	92.4624	42.75	-20.31	22.44	43.50	-21.06	peak	100	22	P	
5	119.4361	39.56	-19.92	19.64	43.50	-23.86	peak	100	22	P	
6	193.7728	50.89	-19.49	31.40	43.50	-12.10	peak	100	196	P	

Note:1).Level (dBuV/m)= Reading (dBuV)+ Factor (dB/m)

2). Factor(dB/m)=Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)

3). Margin(dB) = Level (dBuV/m) - Limit (dBuV/m)

5 Test Setup Photos of the EUT



6 Photos of the EUT

Reference to the test report No. GRCTR260402007.X1-01.

***** End of Report *****