

Appendix B

WIFI 2.4G
WIFI 5G

Device Under Test Properties

Model	Dimensions [mm]
Device	81.0 x 38.0 x 8.0

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	BACK, 10.00	WLAN 2.4GHz	WLAN, 10012-CAB	2437.000, 6	7.24	1.80	39.9

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) – 2173	HSL2450	EX3DV4 – SN7812, 2026-01-19	DAE4ip Sn1847, 2026-03-17

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	72.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-05-12, 19:10	2026-05-12, 19:15
psSAR1g [W/Kg]	1.21	1.30
psSAR10g [W/Kg]	0.634	0.660
Power Drift [dB]	-0.07	-0.12
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		51.4
Dist 3dB Peak [mm]		12.0

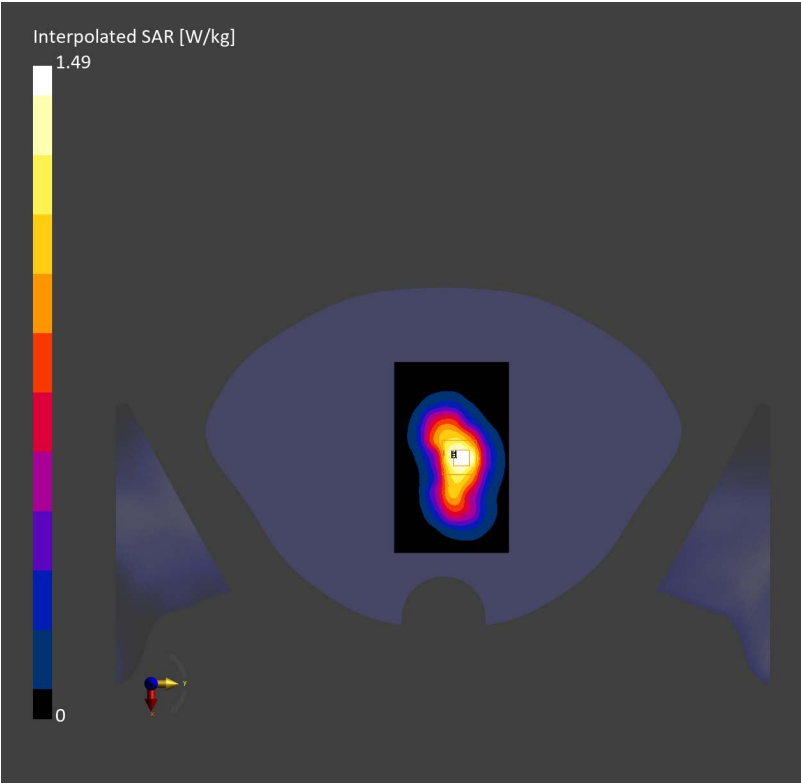

Device Under Test Properties

Model	Dimensions [mm]
Device	81.0 x 38.0 x 8.0

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	BACK, 10.00	WLAN 2.4GHz	WLAN, 10012-CAB	2412.000, 1	7.24	1.78	40.6

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) – 2173	HSL2450	EX3DV4 – SN7812, 2026-01-19	DAE4ip Sn1847, 2026-03-17

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	74.0 x 108.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-05-12, 12:08	2026-05-12, 12:14
psSAR1g [W/Kg]	0.691	0.721
psSAR10g [W/Kg]	0.362	0.397
Power Drift [dB]	0.05	0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		56.3
Dist 3dB Peak [mm]		12.2

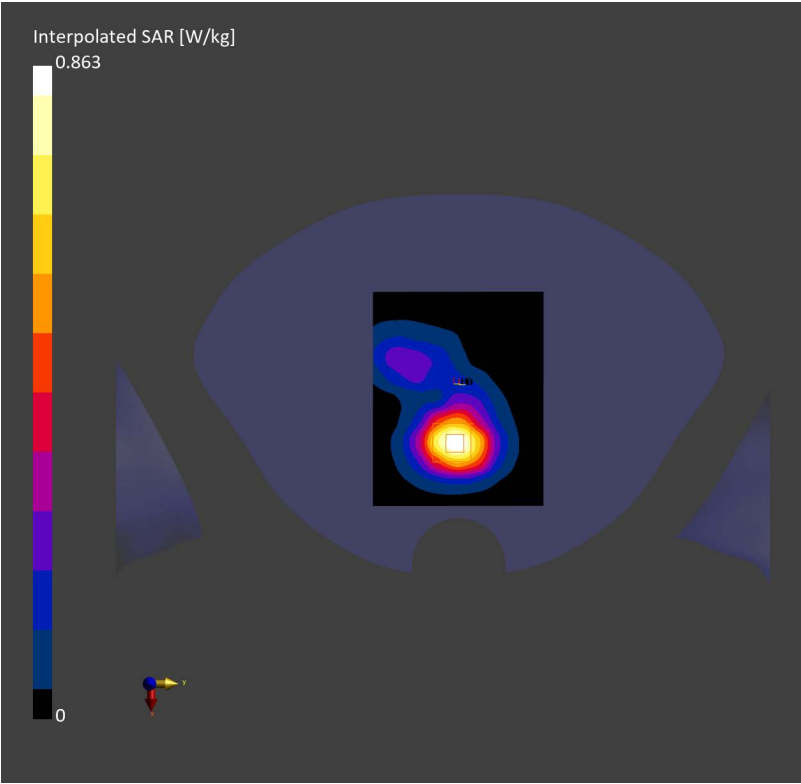

Device Under Test Properties

Model	Dimensions [mm]
Device	81.0 x 38.0 x 8.0

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	BACK, 10.00	WLAN 2.4GHz	WLAN, 10591-AAD	2462.000, 11	7.24	1.83	40.5

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) – 2173	HSL2450	EX3DV4 – SN7812, 2026-01-19	DAE4ip Sn1847, 2026-03-17

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	72.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-05-12, 12:21	2026-05-12, 12:27
psSAR1g [W/Kg]	0.418	0.458
psSAR10g [W/Kg]	0.227	0.252
Power Drift [dB]	0.07	-0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		53.0
Dist 3dB Peak [mm]		12.4

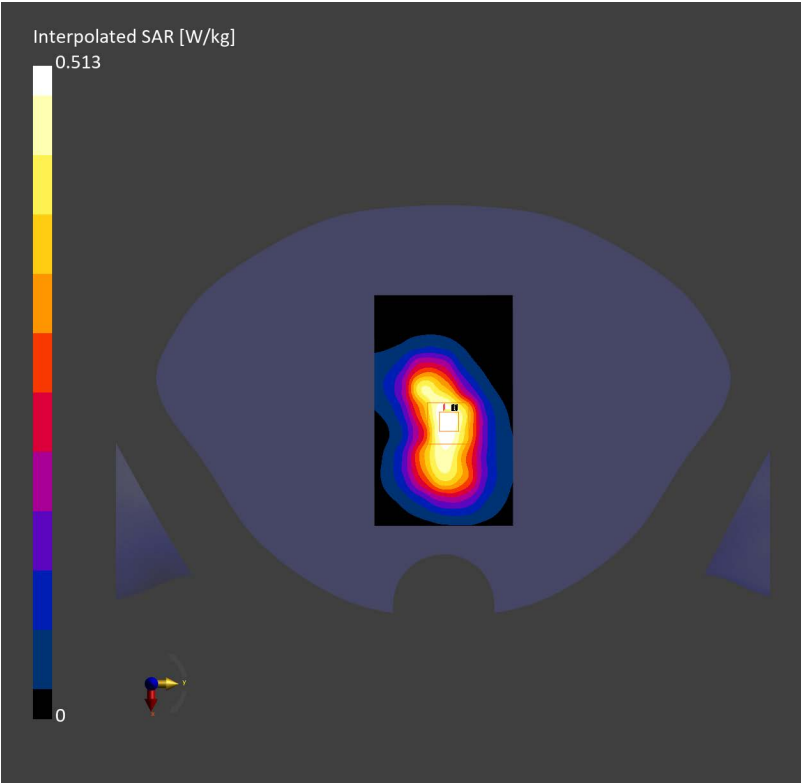

Device Under Test Properties

Model	Dimensions [mm]
Device	81.0 x 38.0 x 8.0

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	BACK, 10.00	WLAN 5GHz	WLAN, 10062-CAE	5320.000, 64	5.05	4.82	36.5

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) – 2173	HSL5GHz	EX3DV4 – SN7812, 2026-01-19	DAE4ip Sn1847, 2026-03-17

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 120.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-05-25, 11:48	2026-05-25, 11:54
psSAR1g [W/Kg]	0.292	0.312
psSAR10g [W/Kg]	0.106	0.130
Power Drift [dB]	0.14	0.12
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		60.7
Dist 3dB Peak [mm]		9.7

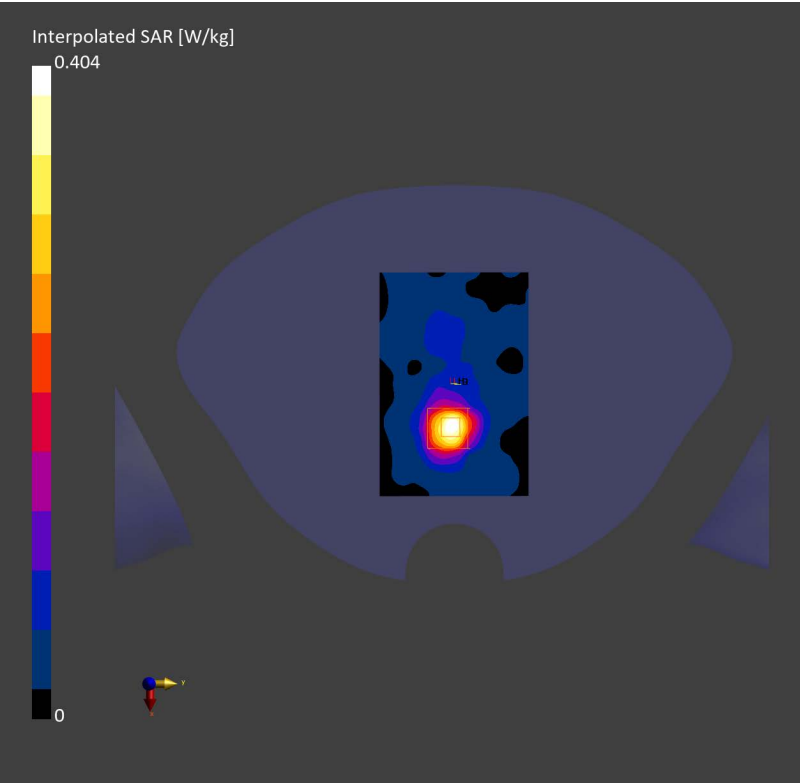

Device Under Test Properties

Model	Dimensions [mm]
Device	81.0 x 38.0 x 8.0

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	BACK, 10.00	WLAN 5GHz	WLAN, 10062-CAE	5700.000, 140	4.52	5.29	35.6

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) – 2173	HSL5GHz	EX3DV4 – SN7812, 2026-01-19	DAE4ip Sn1847, 2026-03-17

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 90.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-05-25, 14:02	2026-05-25, 14:08
psSAR1g [W/Kg]	0.320	0.336
psSAR10g [W/Kg]	0.122	0.151
Power Drift [dB]	0.17	-0.06
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		60.3
Dist 3dB Peak [mm]		11.4

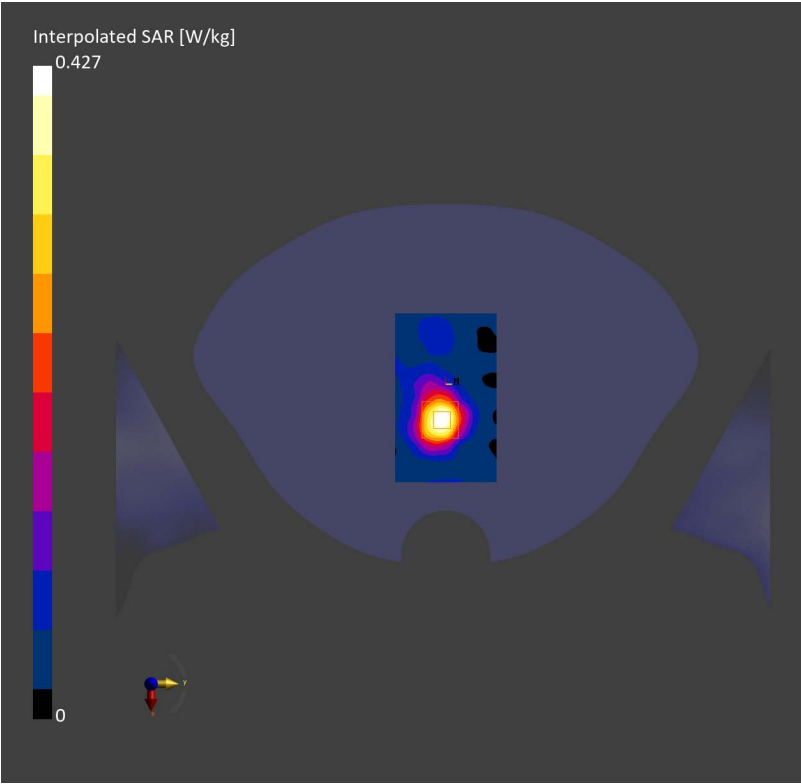

Device Under Test Properties

Model	Dimensions [mm]
Device	81.0 x 38.0 x 8.0

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	BACK, 10.00	WLAN 5GHz	WLAN, 10062-CAE	5785.000, 157	4.52	5.43	35.4

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) – 2173	HSL5GHz	EX3DV4 – SN7812, 2026-01-19	DAE4ip Sn1847, 2026-03-17

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 90.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-05-25, 16:12	2026-05-25, 16:19
psSAR1g [W/Kg]	0.254	0.265
psSAR10g [W/Kg]	0.095	0.122
Power Drift [dB]	0.04	-0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		56.9
Dist 3dB Peak [mm]		10.9

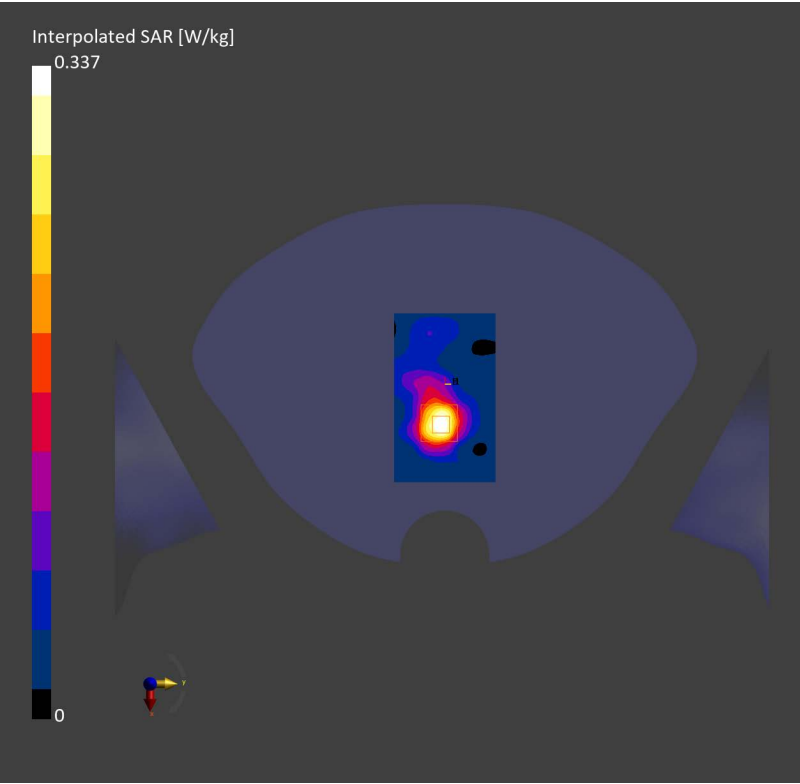

Device Under Test Properties

Model	Dimensions [mm]
Device	81.0 x 38.0 x 8.0

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	BACK, 10.00	WLAN 5GHz	WLAN, 10062-CAE	5280.000, 56	5.05	4.80	36.6

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) – 2173	HSL5GHz	EX3DV4 – SN7812, 2026-01-19	DAE4ip Sn1847, 2026-03-17

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 100.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-05-25, 18:27	2026-05-25, 18:33
psSAR1g [W/Kg]	0.291	0.294
psSAR10g [W/Kg]	0.114	0.124
Power Drift [dB]	-0.09	0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		61.1
Dist 3dB Peak [mm]		10.8

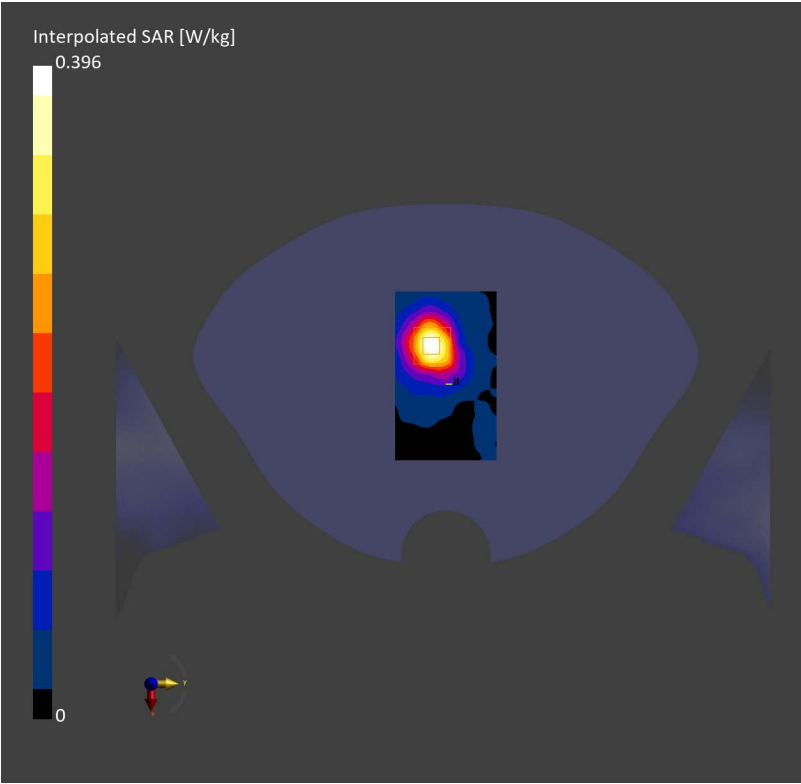

Device Under Test Properties

Model	Dimensions [mm]
Device	81.0 x 38.0 x 8.0

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	BACK, 10.00	WLAN 5GHz	WLAN, 10062-CAE	5580.000, 116	4.46	5.17	35.7

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) – 2173	HSL5GHz	EX3DV4 – SN7812, 2026-01-19	DAE4ip Sn1847, 2026-03-17

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 100.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-05-25, 21:58	2026-05-25, 22:04
psSAR1g [W/Kg]	0.360	0.386
psSAR10g [W/Kg]	0.138	0.168
Power Drift [dB]	0.04	-0.11
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		59.0
Dist 3dB Peak [mm]		10.3

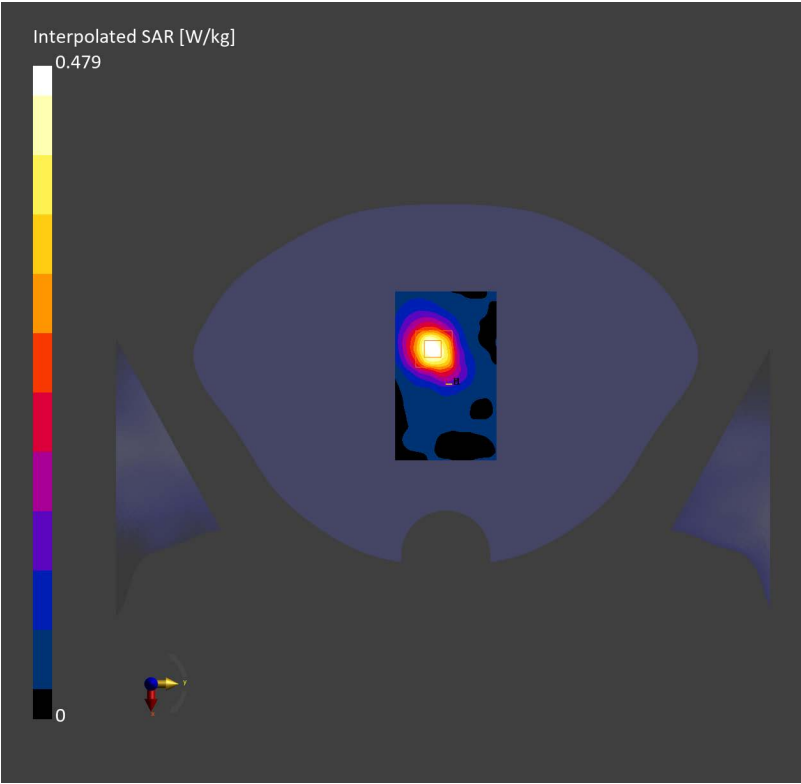

Device Under Test Properties

Model	Dimensions [mm]
Device	81.0 x 38.0 x 8.0

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	BACK, 10.00	WLAN 5GHz	WLAN, 10062-CAE	5745.000, 149	4.52	5.44	35.3

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) – 2173	HSL5GHz	EX3DV4 – SN7812, 2026-01-19	DAE4ip Sn1847, 2026-03-17

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 100.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-05-26, 00:10	2026-05-26, 00:17
psSAR1g [W/Kg]	0.391	0.396
psSAR10g [W/Kg]	0.150	0.166
Power Drift [dB]	0.13	0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		57.4
Dist 3dB Peak [mm]		10.8

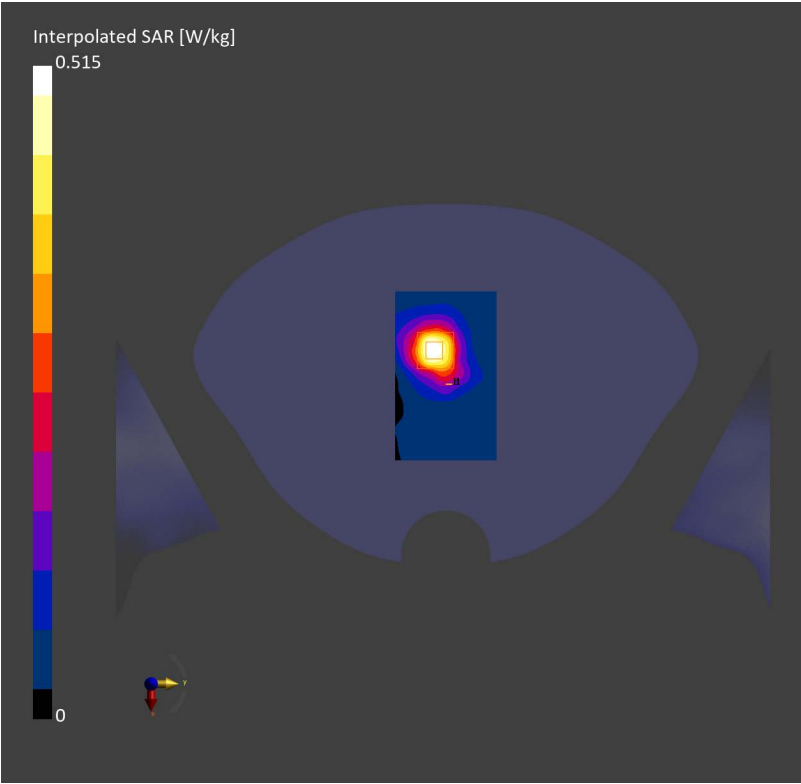

Device Under Test Properties

Model	Dimensions [mm]
Device	81.0 x 38.0 x 8.0

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	BACK, 10.00	WLAN 5GHz	WLAN, 10591-CAE	5200.000, 40	5.05	4.70	36.6

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL5GHz	EX3DV4 - SN7812, 2026-01-19	DAE4ip Sn1847, 2026-03-17

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 120.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-05-26, 02:28	2026-05-26, 02:35
psSAR1g [W/Kg]	0.086	0.091
psSAR10g [W/Kg]	0.034	0.054
Power Drift [dB]	-0.01	0.08
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		72.4
Dist 3dB Peak [mm]		11.5

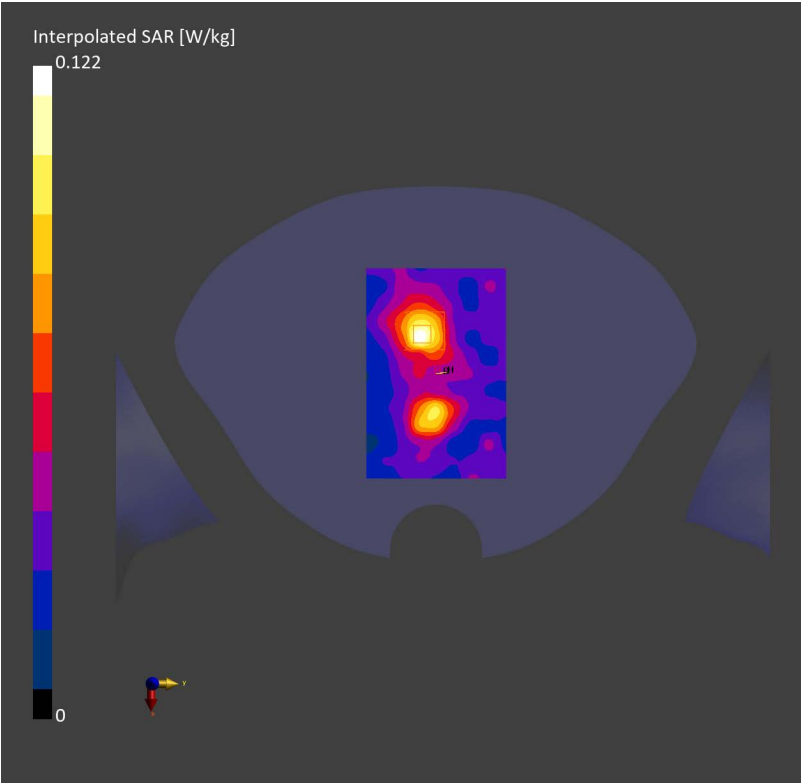

Device Under Test Properties

Model	Dimensions [mm]
Device	81.0 x 38.0 x 8.0

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	BACK, 10.00	WLAN 5GHz	WLAN, 10591-AAD	5500.000, 100	4.46	5.01	36.0

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) – 2173	HSL5GHz	EX3DV4 – SN7812, 2026-01-19	DAE4ip Sn1847, 2026-03-17

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 120.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-05-26, 04:35	2026-05-26, 04:44
psSAR1g [W/Kg]	0.096	0.110
psSAR10g [W/Kg]	0.038	0.064
Power Drift [dB]	-0.06	-0.09
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		65.6
Dist 3dB Peak [mm]		10.2

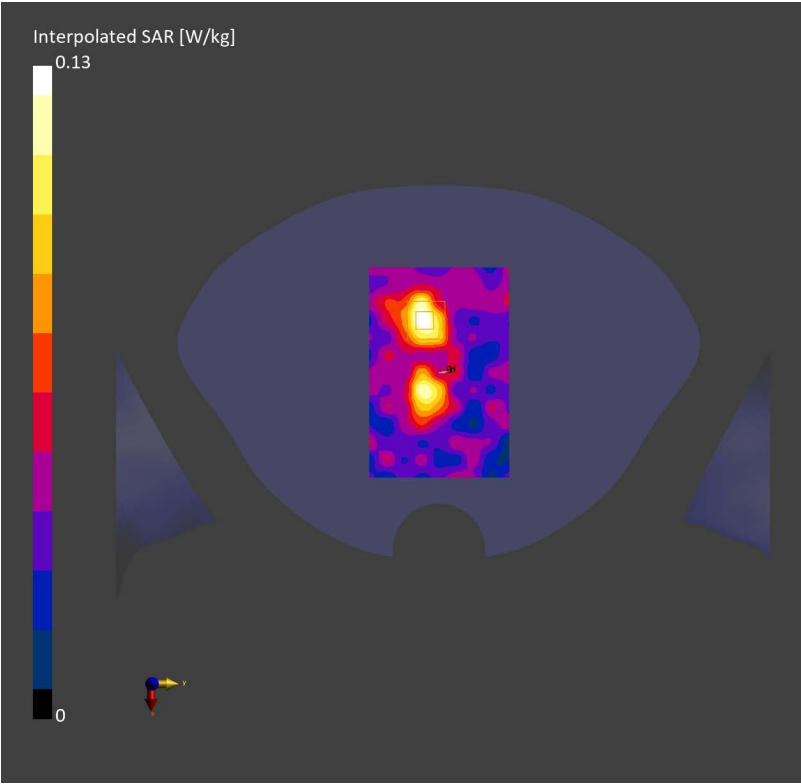

Device Under Test Properties

Model	Dimensions [mm]
Device	81.0 x 38.0 x 8.0

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	BACK, 10.00	WLAN 5GHz	WLAN, 10591-AAD	5785.000, 157	4.52	5.43	35.4

Hardware Setup

Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) – 2173	HSL5GHz	EX3DV4 – SN7812, 2026-01-19	DAE4ip Sn1847, 2026-03-17

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 120.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-05-26, 06:48	2026-05-26, 06:55
psSAR1g [W/Kg]	0.118	0.128
psSAR10g [W/Kg]	0.046	0.078
Power Drift [dB]	-0.06	-0.05
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		64.2
Dist 3dB Peak [mm]		10.5

