


Test Report

Project Information			
Customer:			
EUT:			
Model:	XPMALL-WIFI-01	SN:	
Mode:	11AC80_MCS0_5290	Voltage:	DC 5V
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:	Beamforming on		

Start of Test:2026-06-13 17:26:22

Test Graph

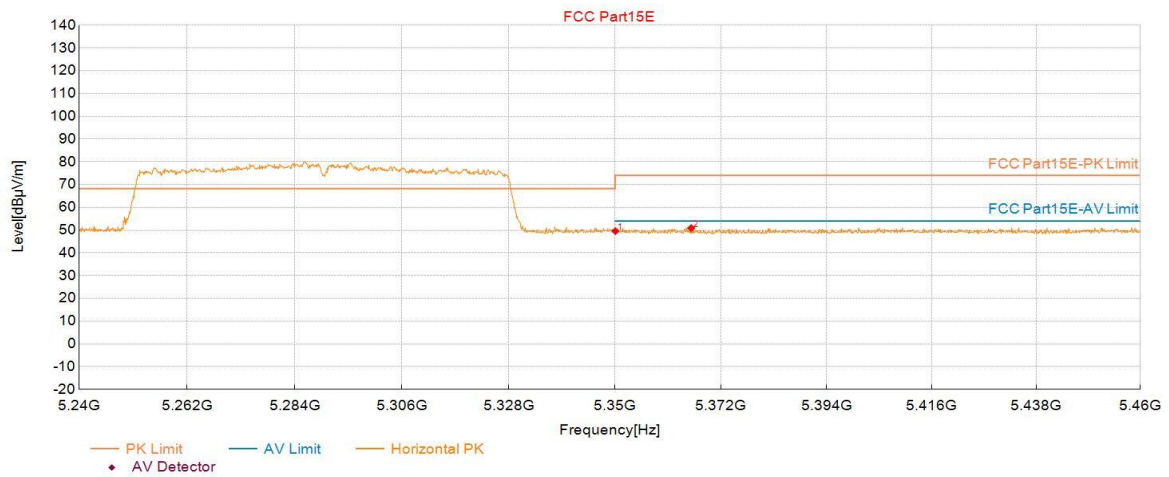

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.06	31.48	49.56	18.08	74.00	24.44	150	18	Horizontal
2	5365.79	32.74	50.90	18.16	74.00	23.10	150	4	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	XPMALL-WIFI-01	SN:	
Mode:	11AC80_MCS0_5290	Voltage:	DC 5V
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:	Beamforming on		

Start of Test:2026-06-13 17:27:02

Test Graph

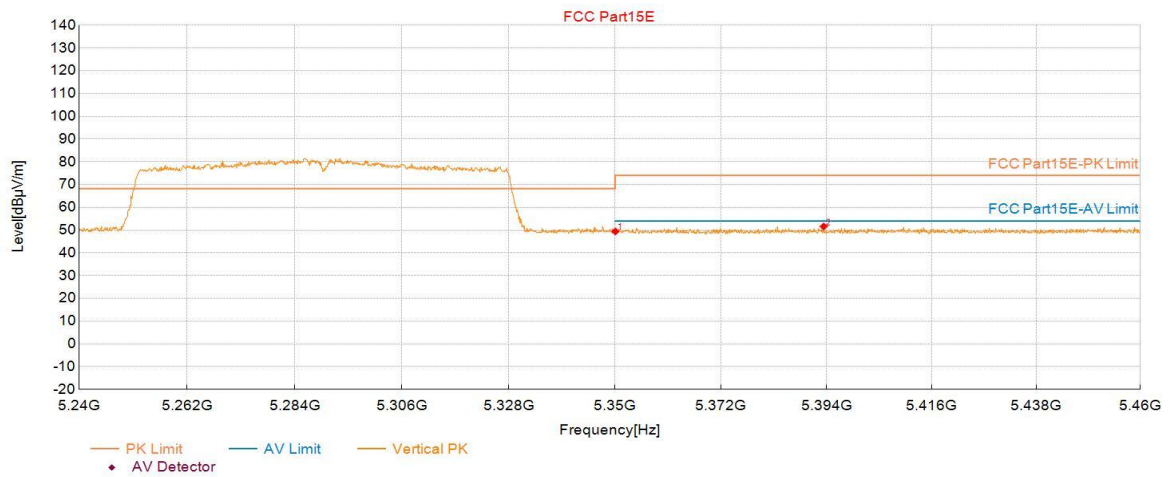

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.06	31.33	49.41	18.08	74.00	24.59	150	199	Vertical
2	5393.42	33.32	51.61	18.29	74.00	22.39	150	98	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	XPMALL-WIFI-01	SN:	
Mode:	11AC80_MCS0_5530	Voltage:	DC 5V
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:	Beamforming on		

Start of Test:2026-06-13 17:28:31

Test Graph

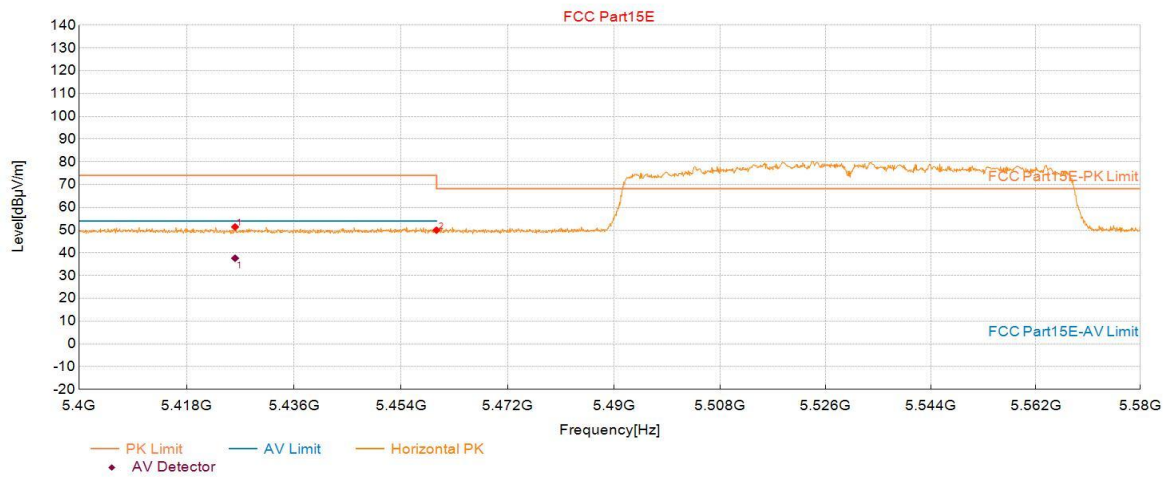

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5426.11	33.04	51.40	18.36	74.00	22.60	150	266	Horizontal
2	5459.97	31.57	49.96	18.39	74.00	24.04	150	28	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5426.11	19.29	18.36	37.65	54.00	16.35	150	266	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	XPMALL-WIFI-01	SN:	
Mode:	11AC80_MCS0_5530	Voltage:	DC 5V
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:	Beamforming on		

Start of Test:2026-06-13 17:29:11

Test Graph

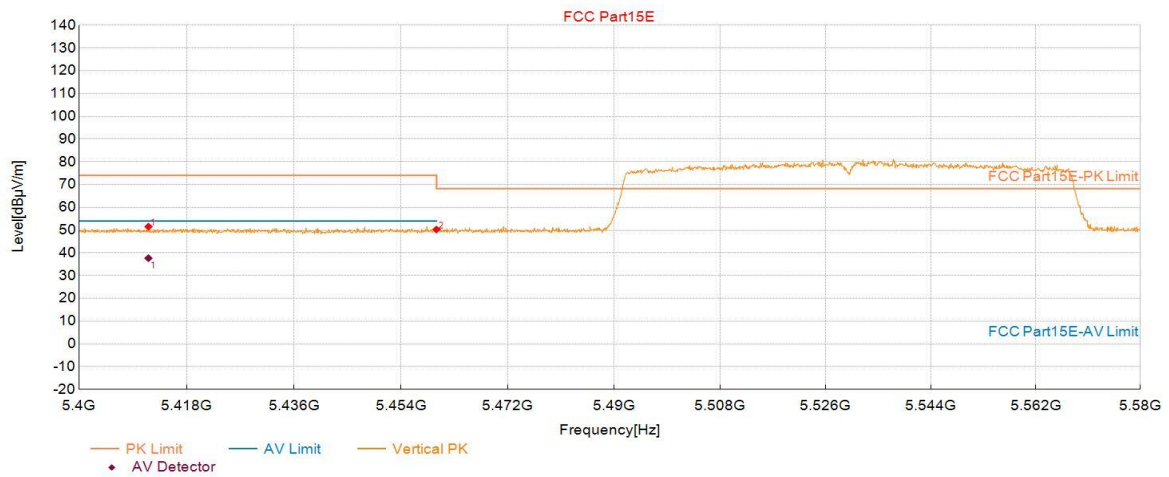

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5411.62	33.18	51.52	18.34	74.00	22.48	150	155	Vertical
2	5459.97	31.87	50.26	18.39	74.00	23.74	150	6	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5411.62	19.32	18.34	37.66	54.00	16.34	150	155	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	XPMALL-WIFI-01	SN:	
Mode:	11AC80_MCS0_5610	Voltage:	DC 5V
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:	Beamforming on		

Start of Test:2026-06-13 17:30:57

Test Graph

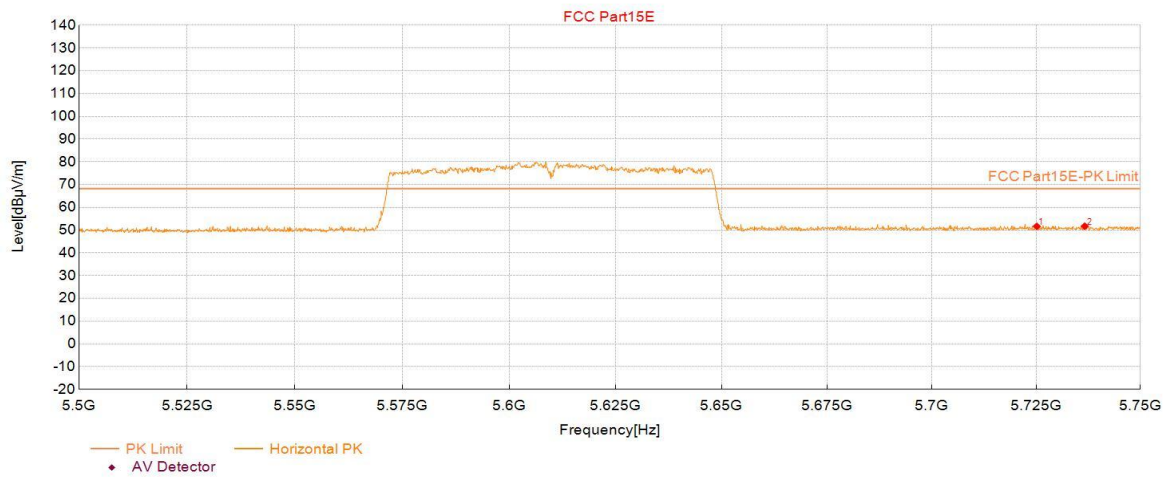

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.11	32.07	51.66	19.59	68.20	16.54	150	260	Horizontal
2	5736.62	32.05	51.70	19.65	68.20	16.50	150	15	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	XPMALL-WIFI-01	SN:	
Mode:	11AC80_MCS0_5610	Voltage:	DC 5V
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:	Beamforming on		

Start of Test:2026-06-13 17:31:37

Test Graph

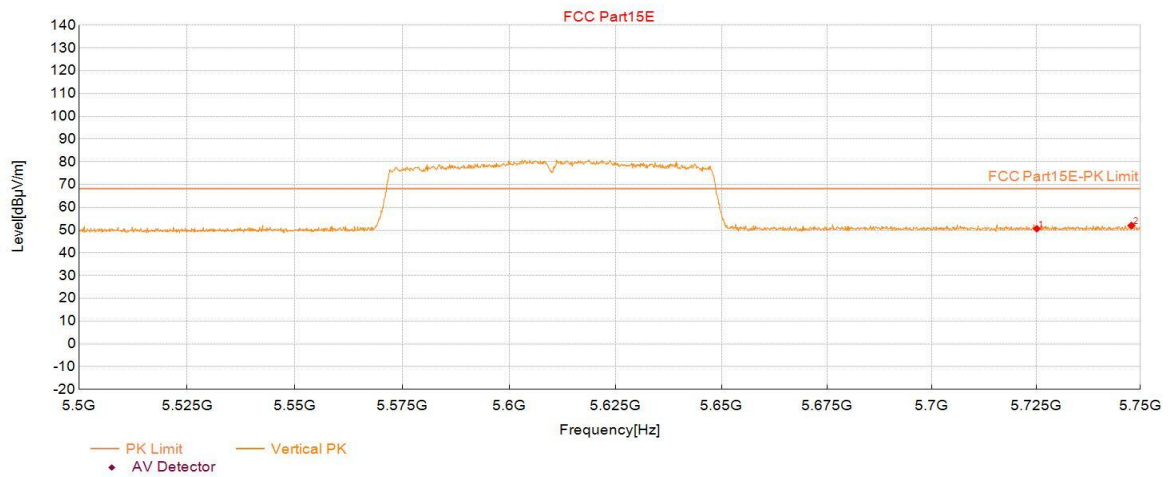

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.11	31.02	50.61	19.59	68.20	17.59	150	8	Vertical
2	5747.87	32.30	52.01	19.71	68.20	16.19	150	0	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	XPMALL-WIFI-01	SN:	
Mode:	11AC80_MCS0_5775	Voltage:	DC 5V
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:	Beamforming on		

Start of Test:2026-06-13 17:35:03

Test Graph

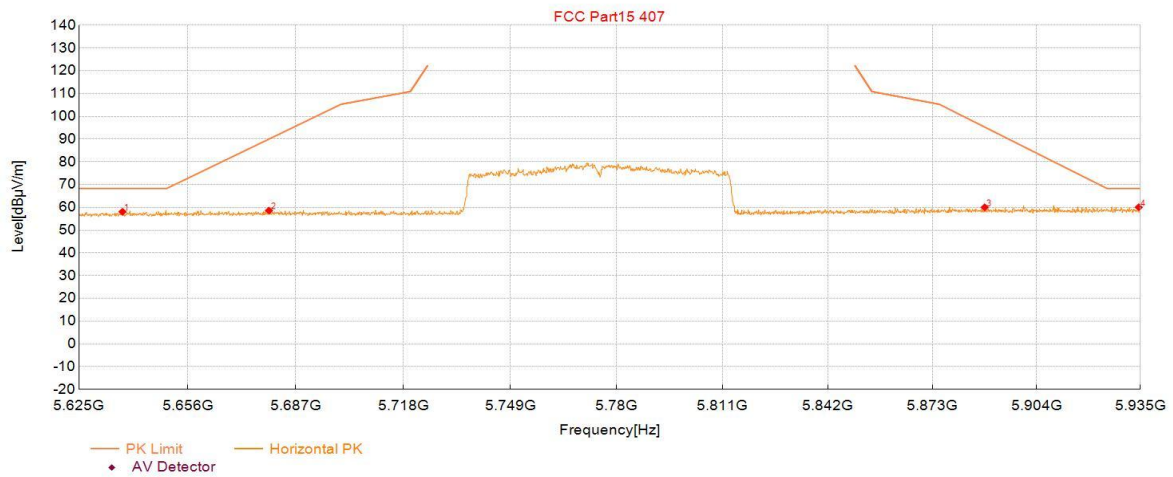

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5637.41	39.08	58.09	19.01	68.30	10.21	150	230	Horizontal
2	5679.28	39.26	58.57	19.31	90.00	31.43	150	70	Horizontal
3	5888.48	39.16	60.02	20.86	95.30	35.28	150	50	Horizontal
4	5934.53	39.05	60.05	21.00	68.30	8.25	150	224	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	XPMALL-WIFI-01	SN:	
Mode:	11AC80_MCS0_5775	Voltage:	DC 5V
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:	Beamforming on		

Start of Test:2026-06-13 17:35:39

Test Graph

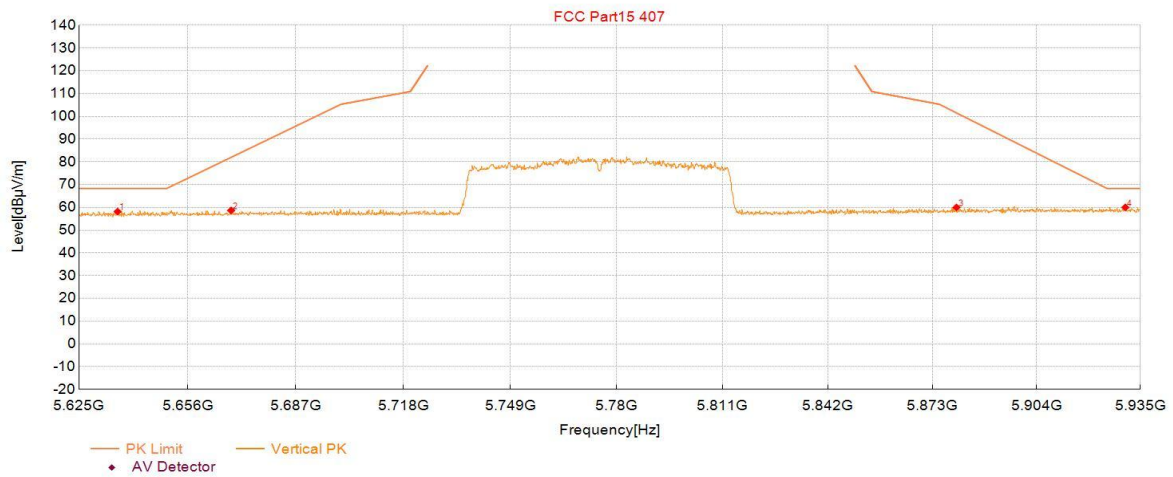

Suspected Data List

NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5636.01	39.14	58.14	19.00	68.30	10.16	150	258	Vertical
2	5668.42	39.41	58.65	19.24	81.97	23.32	150	0	Vertical
3	5880.10	39.20	59.97	20.77	101.51	41.54	150	357	Vertical
4	5930.50	39.00	59.99	20.99	68.30	8.31	150	200	Vertical

Note1: Level=Reading+Factor, Margin=Limit - Level

END OF REPORT