

TEST REPORT

Applicant: ASIOT Co., Ltd.
Address: Toranomon Hills Business Tower 15F, 1-17-1,
Toranomon, Minato-ku, Tokyo
Equipment Type: VeriReader
Model Name: FALCON 201
Brand Name: /
FCC ID: 2BVV8-FALCON201
Test Standard: 47 CFR Part 2
(Others refer to chapter 3.1)
Sample Arrival Date: Mar. 13, 2026
Test Date: Mar. 15, 2026 - Jul. 22, 2026
Date of Issue: Aug. 20, 2026

ISSUED BY:

Shenzhen BALUN Technology Co., Ltd.

Tested by: Liu Juren

Checked by: Huang
Jinsheng

Approved by: Liao Jianming
(Technical Director)

Liu Juren

Huang Jinsheng

Jim Liao

Revision History

Version	Issue Date	Revisions Content
Rev. 01	Aug. 20, 2026	Initial Issue

TABLE OF CONTENTS

1 GENERAL INFORMATION..... 4

1.1 Test Laboratory 4

1.2 Test Location 4

2 PRODUCT INFORMATION 5

2.1 Applicant Information 5

2.2 Manufacturer Information..... 5

2.3 General Description for Equipment under Test (EUT)..... 5

2.4 Technical Information 6

3 SUMMARY OF TEST RESULTS 9

3.1 Test Standards 9

3.2 Test Verdict 10

3.3 Measurement Uncertainty..... 11

4 GENERAL TEST CONFIGURATIONS 12

4.1 Test Environments..... 12

4.2 Test Equipment List 12

4.3 Test Configurations..... 14

4.4 Test Setup 23

5 TEST ITEMS 25

5.1 Transmitter Radiated Power (EIRP/ERP) 25

5.2 Peak to Average Ratio 29

5.3 Occupied Bandwidth..... 31

5.4 Frequency Stability 33

5.5 Spurious Emission at Antenna Terminals 35

5.6 Band Edge..... 40

5.7 Field Strength of Spurious Radiation 45

ANNEX A	TEST RESULTS	51
A.1	Transmitter Radiated Power (EIRP/ERP)	51
A.2	Peak to Average Ratio	80
A.3	Occupied Bandwidth	87
A.4	Frequency Stability	95
A.5	Spurious Emission at Antenna Terminals	166
A.6	Band Edge	181
A.7	Field Strength of Spurious Radiation	199
ANNEX B	TEST SETUP PHOTOS	201
ANNEX C	EUT EXTERNAL PHOTOS	201
ANNEX D	EUT INTERNAL PHOTOS	201

1 GENERAL INFORMATION

1.1 Test Laboratory

Name	Shenzhen BALUN Technology Co., Ltd.
Address	601, Building 2, Intelligent Connected Vehicle Industrial Park, No.55, Xiangshan Road, Luotian Community, Yanluo Sub-district, Bao'an District, Shenzhen
Phone Number	+86 755 6685 0100

1.2 Test Location

Name	Shenzhen BALUN Technology Co., Ltd.
Location	☐ Building 2, Intelligent Connected Vehicle Industrial Park, No.55, Xiangshan Road, Luotian Community, Yanluo Sub-district, Bao'an District, Shenzhen, Guangdong
	☒ 1/F., Building B, Ganghongji High-Tech Intelligent Industrial Park, No.1008, Songbai Road, Yangguang Community, Xili Subdistrict, Nanshan District, Shenzhen, Guangdong
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	ASIOT Co., Ltd.
Address	Toranomon Hills Business Tower 15F, 1-17-1, Toranomon, Minato-ku, Tokyo

2.2 Manufacturer Information

Manufacturer	ASIOT Co., Ltd.
Address	Toranomon Hills Business Tower 15F, 1-17-1, Toranomon, Minato-ku, Tokyo

2.3 General Description for Equipment under Test (EUT)

EUT Name	VeriReader
Model Name Under Test	FALCON 201
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	N/A
Software Version	N/A
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.4 Technical Information

All Network and Wireless connectivity for EUT	4G Network FDD LTE-M1 Band 2/4/5/12/13/18/19/26/66 FDD NB-IoT Band 2/4/5/12/13/18/19/26/66/71
About the Product	The equipment is ASIOT, intended for used with information technology equipment.

The following is the technical information of the EUT tested frequency bands in this report.

Operating Bands	FDD LTE-M1 Band 2/4/5/12/13/18/19/26/66 FDD NB-IoT Band 2/4/5/12/13/18/19/26/66/71	
Modulation Type	LTE-M1	QPSK
		16QAM
	NB-IoT	BPSK
		QPSK
Antenna Type	Internal Antenna	
UE Category	M1/NB2	
Antenna Gain	CAT.M Band 2: 0.62dBi CAT.M Band 4: 0.52 dBi CAT.M Band 5: 0.68 dBi CAT.M Band 12: 0.09 dBi CAT.M Band 13: 0.18 dBi CAT.M Band 18(part22): 0.29 dBi CAT.M Band 18(part90): 0.29 dBi CAT.M Band 19: 0.68 dBi CAT.M Band 26(part22): 0.68 dBi CAT.M Band 26(part90): 0.29 dBi CAT.M Band 66: 0.52 dBi NB-IoT Band 2: 0.62 dBi NB-IoT Band 4: 0.52 dBi NB-IoT Band 5: 0.68 dBi NB-IoT Band 12: 0.09 dBi NB-IoT Band 13: 0.18 dBi NB-IoT Band 18(part22): 0.29 dBi NB-IoT Band 18(part90): 0.29 dBi NB-IoT Band 19: 0.68 dBi NB-IoT Band 26(part90): 0.29 dBi NB-IoT Band 26(part22): 0.68 dBi NB-IoT Band 66: 0.52 dBi NB-IoT Band 71: 0.04 dBi	
The Max RF Output Power (EIRP/ERP)	CAT.M Band 2: 21.11 dBm CAT.M Band 4: 21.47 dBm CAT.M Band 5: 20.21 dBm	

		CAT.M Band 12: 19.73 dBm CAT.M Band 13: 19.80 dBm CAT.M Band 18(part22): 19.37 dBm CAT.M Band 18(part90): 19.54 dBm CAT.M Band 19: 19.83 dBm CAT.M Band 26(part22): 19.40 dBm CAT.M Band 26(part90): 19.13 dBm CAT.M Band 66: 20.91 dBm NB-IoT Band 2: 20.83 dBm NB-IoT Band 4: 20.65 dBm NB-IoT Band 5: 20.02 dBm NB-IoT Band 12: 19.51 dBm NB-IoT Band 13: 19.43 dBm NB-IoT Band 18(part22): 19.76 dBm NB-IoT Band 18(part90): 19.95 dBm NB-IoT Band 19: 20.33 dBm NB-IoT Band 26(part22): 20.37 dBm NB-IoT Band 26(part90): 19.99 dBm NB-IoT Band 66: 20.16 dBm NB-IoT Band 71: 20.27 dBm	
SCS and Channel Bandwidths		CAT.M Band 2: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20MHz CAT.M Band 4: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20MHz CAT.M Band 5: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz CAT.M Band 12: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz CAT.M Band 13: 5 MHz, 10 MHz CAT.M Band 18: 5 MHz CAT.M Band 19: 5 MHz, 10 MHz, 15 MHz CAT.M Band 26: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz CAT.M Band 66: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20MHz NB-IoT Band 2: 3.75kHz, 15 kHz NB-IoT Band 4: 3.75kHz, 15 kHz NB-IoT Band 5: 3.75kHz, 15 kHz NB-IoT Band 12: 3.75kHz, 15 kHz NB-IoT Band 13: 3.75kHz, 15 kHz NB-IoT Band 18: 3.75kHz, 15 kHz NB-IoT Band 19: 3.75kHz, 15 kHz NB-IoT Band 26: 3.75kHz, 15 kHz NB-IoT Band 66: 3.75kHz, 15 kHz NB-IoT Band 71: 3.75kHz, 15 kHz	
Band	Power Class	Tx Frequency Range	Rx Frequency Range
LTE B2	3	1850 MHz ~ 1910 MHz	1930 MHz ~ 1990 MHz
LTE B4	3	1710 MHz ~ 1755 MHz	2110 MHz ~ 2155 MHz
LTE B5	3	824 MHz ~ 849 MHz	869 MHz ~ 894 MHz

LTE B12	3	699 MHz ~ 716 MHz	729 MHz ~ 746 MHz
LTE B13	3	777 MHz ~ 787MHz	746 MHz ~ 756 MHz
LTE B18	3	815 MHz ~ 824MHz	860 MHz ~ 869 MHz
		824 MHz ~ 830MHz	869 MHz ~ 875 MHz
LTE B19	3	830 MHz ~ 845 MHz	875 MHz ~ 890 MHz
LTE B26	3	814 MHz ~ 824 MHz	859 MHz ~ 869 MHz
		824 MHz ~ 849 MHz	869 MHz ~ 894 MHz
LTE B66	3	1710 MHz ~ 1780 MHz	2110 MHz ~ 2180 MHz
LTE B71	3	663 MHz ~ 698 MHz	617 MHz ~ 652 MHz

Note1: The EUT information provided by the applicant, except for The Max RF Conducted Power. For more detailed band specifications and features description, please refer to the manufacturer's specifications or user's manual.

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 2	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	47 CFR Part 22 Subpart H	Cellular Radiotelephone Service
3	47 CFR Part 24 Subpart E	Broadband PCS
4	47 CFR Part 27	Miscellaneous Wireless Communications Services
5	47 CFR Part 90 Subpart S	Regulations Governing Licensing and Use of Frequencies in the 806-824, 851-869, 896-901, and 935-940 MHz Bands
6	ANSI C63.26-2015	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services
7	KDB 971168 D01 v03	Measurement Guidance for Certification of Licensed Digital Transmitters

3.2 Test Verdict

No.	Test Description	FCC Part No.	Test Result	Test Verdict
1	Conducted RF Output Power	2.1046	Reporting only (ANNEX A.1)	Pass
2	Effective (Isotropic) Radiated Power	2.1046 22.913 24.232 27.50 90.635(b)	ANNEX A.1	Pass
3	Peak to Average Ratio	2.1046 24.232(d) 27.50(d)	ANNEX A.2	Pass
4	Occupied Bandwidth	2.1049 22.917 24.238 27.53 90.209	ANNEX A.3	Pass
5	Frequency Stability	2.1055 22.355 24.235 27.54 90.213	ANNEX A.4	Pass
6	Spurious Emission at Antenna Terminals	2.1051 22.917 24.238 27.53 90.691	ANNEX A.5	Pass
7	Band Edge	2.1051 22.917 24.238 27.53 90.691	ANNEX A.6	Pass
8	Field Strength of Spurious Radiation	2.1053 22.917 24.238 27.53 90.691	ANNEX A.7	Pass

3.3 Measurement Uncertainty

Test Case	Uncertainty
Conducted RF Output Power	0.68dB
Effective (Isotropic) Radiated Power	2.50dB
Peak to Average Ratio	0.015%
Occupied Bandwidth	1.4/3MHz: 30kHz 5/10MHz: 100kHz 15/20MHz: 300kHz
Frequency Stability	12Hz
Spurious Emission at Antenna Terminals	2.56dB
Band Edge	1.48dB
Field Strength of Spurious Radiation	4.55dB

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the environmental conditions were within the listed ranges:

Relative Humidity		20% to 75%
Atmospheric Pressure		98 kPa to 102 kPa
Test Voltage of the EUT	NV (Normal Voltage)	3V
	LV (Low Voltage)	2.6V
	HV (High Voltage)	3.4V
Test Temperature of the EUT	NT (Normal Temperature)	15 °C to 35 °C
	LT (Low Temperature)	-30 °C
	HT (High Temperature)	+65 °C

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Version	Cal. Date	Cal. Due
2/3/4/5G RF Test System						
BL410 Test Software	BALUN	BL410R	N/A	3.0.536	N/A	N/A
Temperature Chamber	OK	OK-TH-100C	OK2022110401	N/A	2025-09-15	2026-09-14
Wideband Radio Communication Tester	R&S	CMW 500	100854	V3.7.172	2025-12-25	2026-12-24
DC Power Supply	ITECH	IT6863A	800014020757 120008	N/A	2025-07-28	2026-07-27
Spectrum Analyzer	Agilent	E4440A	MY46181663	A.11.21	2025-07-15	2026-07-14
					2026-06-22	2027-06-21
Radiated Test System						
Radiated Test System Test Software	BALUN	BL410-E	N/A	V22.4	N/A	N/A
Wideband Radio Communication Tester	R&S	CMW 500	100854	V3.7.172	2025-12-25	2026-12-24
Test Antenna-Bi-Log(30 MHz-3 GHz)	Schwarzbeck	VULB 9163	01414	N/A	2023-11-03	2026-11-02
Test Antenna-Horn(1-18 GHz)	Schwarzbeck	BBHA 9120D	02459	N/A	2023-10-26	2026-10-25
Anechoic Chamber	YIHENG	C8-966	N/A	N/A	2024-05-15	2027-05-11
EMI Receiver	Keysight	N9038A	MY55330121	A.20.03	2025-12-26	2026-12-25

Test Antenna-Horn(18-40 GHz)	A-INFO	LB-180400KF	J211060273	N/A	2024-06-15	2027-06-14
Test Antenna-Loop	Schwar zbeck	FMZB 1513-60	00015	N/A	2024-05-14	2026-05-13
					2026-05-12	2028-05-11

4.3 Test Configurations

Note 1: The mark “v” means that this configuration is chosen for testing.

Note 2: The mark “n” means that this bandwidth is not supported.

LTE-M1 Band	Bandwidth (MHz)						Modulation Type		RB#			Test Channel		
	1.4	3	5	10	15	20	QPSK	16-QAM	1	Half	Full	LCH	MC H	H C H
Effective (Isotropic) Radiated Power														
2	v	v	v	v	v	v	v	v	v	--	v	v	v	v
4	v	v	v	v	v	v	v	v	v	--	v	v	v	v
5	v	v	v	v	n	n	v	v	v	--	v	v	v	v
12	v	v	v	v	n	n	v	v	v	--	v	v	v	v
13	n	n	v	v	n	n	v	v	v	--	v	v	v	v
18(Part22)	n	n	v	n	n	n	v	v	v	--	v	v	v	v
18(Part90)	n	n	v	n	n	n	v	v	v	--	v	v	v	v
19	n	n	v	v	v	n	v	v	v	--	v	v	v	v
26(Part22)	v	v	v	v	v	n	v	v	v	--	v	v	v	v
26(Part90)	v	v	v	v	--	n	v	v	v	--	v	v	v	v
66	v	v	v	v	v	v	v	v	v	--	v	v	v	v
Peak to Average Ratio														
2	--	--	--	--	--	v	v	v	--	--	v	v	v	v
4	--	--	--	--	--	v	v	v	--	--	v	v	v	v
5	--	--	--	v	n	n	v	v	--	--	v	v	v	v
12	--	--	--	v	n	n	v	v	--	--	v	v	v	v
13	n	n	--	v	n	n	v	v	--	--	v	v	v	v
18(Part22)	n	n	v	n	n	n	v	v	--	--	v	v	v	v
18(Part90)	n	n	v	n	n	n	v	v	--	--	v	v	v	v
19	n	n	--	--	v	n	v	v	--	--	v	v	v	v
26(Part22)	--	--	--	--	v	n	v	v	--	--	v	v	v	v
26(Part90)	--	--	--	v	--	n	v	v	--	--	v	v	v	v
66	--	--	--	--	--	v	v	v	--	--	v	v	v	v
Occupied Bandwidth														
2	v	v	v	v	v	v	v	v	--	--	v	--	v	--
4	v	v	v	v	v	v	v	v	--	--	v	--	v	--
5	v	v	v	v	n	n	v	v	--	--	v	--	v	--
12	v	v	v	v	n	n	v	v	--	--	v	--	v	--
13	n	n	v	v	n	n	v	v	--	--	v	--	v	--
18(Part22)	n	n	v	n	n	n	v	v	--	--	v	--	v	--
18(Part90)	n	n	v	n	n	n	v	v	--	--	v	--	v	--
19	n	n	v	v	v	n	v	v	--	--	v	--	v	--
26(Part22)	v	v	v	v	v	n	v	v	--	--	v	--	v	--

LTE-M1 Band	Bandwidth (MHz)						Modulation Type		RB#			Test Channel		
	1.4	3	5	10	15	20	QPSK	16-QAM	1	Half	Full	LCH	MC H	H C H
26(Part90)	v	v	v	v	--	n	v	v	--	--	v	--	v	--
66	v	v	v	v	v	v	v	v	--	--	v	--	v	--
Frequency Stability														
2	--	--	--	--	--	v	v	v	--	--	v	--	v	--
4	--	--	--	--	--	v	v	v	--	--	v	--	v	--
5	--	--	--	v	n	n	v	v	--	--	v	--	v	--
12	--	--	--	v	n	n	v	v	--	--	v	--	v	--
13	n	n	--	v	n	n	v	v	--	--	v	--	v	--
18(Part22)	n	n	v	n	n	n	v	v	--	--	v	--	v	--
18(Part90)	n	n	v	n	n	n	v	v	--	--	v	--	v	--
19	n	n	--	--	v	n	v	v	--	--	v	--	v	--
26(Part22)	--	--	--	--	v	n	v	v	--	--	v	--	v	--
26(Part90)	--	--	--	v	--	n	v	v	--	--	v	--	v	--
66	--	--	--	--	--	v	v	v	--	--	v	--	v	--
Spurious Emission at Antenna Terminals														
2	v	v	v	v	v	v	v	v	v	--	--	v	v	v
4	v	v	v	v	v	v	v	v	v	--	--	v	v	v
5	v	v	v	v	n	n	v	v	v	--	--	v	v	v
12	v	v	v	v	n	n	v	v	v	--	--	v	v	v
13	n	n	v	v	n	n	v	v	v	--	--	v	v	v
18(Part22)	n	n	v	n	n	n	v	v	v	--	--	v	v	v
18(Part90)	n	n	v	n	n	n	v	v	v	--	--	v	v	v
19	n	n	v	v	v	n	v	v	v	--	--	v	v	v
26(Part22)	v	v	v	v	v	n	v	v	v	--	--	v	v	v
26(Part90)	v	v	v	v	--	n	v	v	v	--	--	v	v	v
66	v	v	v	v	v	v	v	v	v	--	--	v	v	v
Band Edge														
2	v	v	v	v	v	v	v	v	v	--	v	v	--	v
4	v	v	v	v	v	v	v	v	v	--	v	v	--	v
5	v	v	v	v	n	n	v	v	v	--	v	v	--	v
12	v	v	v	v	n	n	v	v	v	--	v	v	--	v
13	n	n	v	v	n	n	v	v	v	--	v	v	--	v
18(Part22)	n	n	v	n	n	n	v	v	v	--	v	v	--	v
18(Part90)	n	n	v	n	n	n	v	v	v	--	v	v	--	v
19	n	n	v	v	v	n	v	v	v	--	v	v	--	v
26(Part22)	v	v	v	v	v	n	v	v	v	--	v	v	--	v
26(Part90)	v	v	v	v	--	n	v	v	v	--	v	v	--	v
66	v	v	v	v	v	v	v	v	v	--	v	v	--	v
Field Strength of Spurious Radiation														

LTE-M1 Band	Bandwidth (MHz)						Modulation Type		RB#			Test Channel		
	1.4	3	5	10	15	20	QPSK	16- QAM	1	Half	Full	LCH	MC H	H C H
2	Worst case													
4	Worst case													
5	Worst case													
12	Worst case													
13	Worst case													
18(Part22)	Worst case													
18(Part90)	Worst case													
19	Worst case													
26(Part22)	Worst case													
26(Part90)	Worst case													
66	Worst case													
Note 1: The mark “v” means that this configuration is chosen for testing.														
Note 2: The mark “n” means that this bandwidth is not supported.														

LTE NB- IoT Band	Bandwidth (KHz)		Modulation Type		RB#			Test Channel		
	3.75	15	QPSK	BPSK	1	Half	Full	LCH	MCH	HCH
Effective (Isotropic) Radiated Power										
2	v	v	v	v	v	--	v	v	v	v
4	v	v	v	v	v	--	v	v	v	v
5	v	v	v	v	v	--	v	v	v	v
12	v	v	v	v	v	--	v	v	v	v
13	v	v	v	v	v	--	v	v	v	v
18(Part22)	v	v	v	v	v	--	v	v	v	v
18(Part90)	v	v	v	v	v	--	v	v	v	v
19	v	v	v	v	v	--	v	v	v	v
26(Part22)	v	v	v	v	v	--	v	v	v	v
26(Part90)	v	v	v	v	v	--	v	v	v	v
66	v	v	v	v	v	--	v	v	v	v
71	v	v	v	v	v	--	v	v	v	v
Peak to Average Ratio										
2	v	v	v	v	v	--	--	v	v	v
4	v	v	v	v	v	--	--	v	v	v
5	v	v	v	v	v	--	--	v	v	v
12	v	v	v	v	v	--	--	v	v	v
13	v	v	v	v	v	--	--	v	v	v
18(Part22)	v	v	v	v	v	--	--	v	v	v
18(Part90)	v	v	v	v	v	--	--	v	v	v
19	v	v	v	v	v	--	--	v	v	v

LTE NB-IoT Band	Bandwidth (KHz)		Modulation Type		RB#			Test Channel		
	3.75	15	QPSK	BPSK	1	Half	Full	LCH	MCH	HCH
26(Part22)	v	v	v	v	v	--	--	v	v	v
26(Part90)	v	v	v	v	v	--	--	v	v	v
66	v	v	v	v	v	--	--	v	v	v
71	v	v	v	v	v	--	--	v	v	v
Occupied Bandwidth										
2	v	v	v	v	v	--	v	v	v	v
4	v	v	v	v	v	--	v	v	v	v
5	v	v	v	v	v	--	v	v	v	v
12	v	v	v	v	v	--	v	v	v	v
13	v	v	v	v	v	--	v	v	v	v
18(Part22)	v	v	v	v	v	--	v	v	v	v
18(Part90)	v	v	v	v	v	--	v	v	v	v
19	v	v	v	v	v	--	v	v	v	v
26(Part22)	v	v	v	v	v	--	v	v	v	v
26(Part90)	v	v	v	v	v	--	v	v	v	v
66	v	v	v	v	v	--	v	v	v	v
71	v	v	v	v	v	--	v	v	v	v
Frequency Stability										
2	v	v	v	v	v	--	--	--	v	--
4	v	v	v	v	v	--	--	--	v	--
5	v	v	v	v	v	--	--	--	v	--
12	v	v	v	v	v	--	--	--	v	--
13	v	v	v	v	v	--	--	--	v	--
18(Part22)	v	v	v	v	v	--	--	--	v	--
18(Part90)	v	v	v	v	v	--	--	--	v	--
19	v	v	v	v	v	--	--	--	v	--
26(Part22)	v	v	v	v	v	--	--	--	v	--
26(Part90)	v	v	v	v	v	--	--	--	v	--
66	v	v	v	v	v	--	--	--	v	--
71	v	v	v	v	v	--	--	--	v	--
Spurious Emission at Antenna Terminals										
2	v	v	v	v	v	--	--	v	v	v
4	v	v	v	v	v	--	--	v	v	v
5	v	v	v	v	v	--	--	v	v	v
12	v	v	v	v	v	--	--	v	v	v
13	v	v	v	v	v	--	--	v	v	v
18(Part22)	v	v	v	v	v	--	--	v	v	v
18(Part90)	v	v	v	v	v	--	--	v	v	v
19	v	v	v	v	v	--	--	v	v	v
26(Part22)	v	v	v	v	v	--	--	v	v	v

LTE NB-IoT Band	Bandwidth (KHz)		Modulation Type		RB#			Test Channel		
	3.75	15	QPSK	BPSK	1	Half	Full	LCH	MCH	HCH
26(Part90)	v	v	v	v	v	--	--	v	v	v
66	v	v	v	v	v	--	--	v	v	v
71	v	v	v	v	v	--	--	v	v	v
Band Edge										
2	v	v	v	v	v	--	v	v	--	v
4	v	v	v	v	v	--	v	v	--	v
5	v	v	v	v	v	--	v	v	--	v
12	v	v	v	v	v	--	v	v	--	v
13	v	v	v	v	v	--	v	v	--	v
18(Part22)	v	v	v	v	v	--	v	v	--	v
18(Part90)	v	v	v	v	v	--	v	v	--	v
19	v	v	v	v	v	--	v	v	--	v
26(Part22)	v	v	v	v	v	--	v	v	--	v
26(Part90)	v	v	v	v	v	--	v	v	--	v
66	v	v	v	v	v	--	v	v	--	v
71	v	v	v	v	v	--	v	v	--	v
Field Strength of Spurious Radiation										
2	Worst Case									
4	Worst Case									
5	Worst Case									
12	Worst Case									
13	Worst Case									
18(Part22)	Worst Case									
18(Part90)	Worst Case									
19	Worst Case									
26(Part22)	Worst Case									
26(Part90)	Worst Case									
66	Worst Case									
71	Worst Case									
Note 1: The mark “v” means that this configuration is chosen for testing.										
Note 2: The mark “n” means that this bandwidth is not supported.										

Test Mode	UL Channel	Channel Bandwidth (MHz)	UL Channel No.	UL Frequency (MHz)
CAT.M Band 18(Part 22)	Low Range	5	23965	826.5
	Middle Range	5	23970	827
	High Range	5	23975	827.5
CAT.M Band 18(Part 90)	Low Range	5	23875	817.5
	Middle Range	5	23895	819.5

Test Mode	UL Channel	Channel Bandwidth (MHz)	UL Channel No.	UL Frequency (MHz)
	High Range	5	23915	821.5
CAT.M Band 19	Low Range	5	24025	832.5
		10	24050	835
		15	24075	837.5
	Middle Range	5/10/15	24075	837.5
	High Range	5	24125	837.5
		10	24100	832.5
		15	24075	837.5
CAT.M Band 26(Part 22)	Low Range	1.4	26797	824.7
		3	26805	825.5
		5	26815	826.5
		10	26840	829
		15	26865	831.5
	Middle Range	1.4/3/5/10	26915	836.5
	High Range	1.4	27033	848.3
		3	27025	847.5
		5	27015	846.5
		10	26990	844
		15	26965	841.5
CAT.M Band 26(Part 90)	Low Range	1.4	26697	814.7
		3	26705	815.5
		5	26715	816.5
		10	26740	819
	Middle Range	1.4/3/5/10	26740	819
	High Range	1.4	26783	823.3
		3	26775	822.5
		5	26765	821.5
		10	26740	819

Test Mode	UL Channel	Channel Bandwidth (MHz)	UL Channel No.	UL Frequency (MHz)
CAT.M Band 2	Low Range	1.4	18607	1850.7
		3	18615	1851.5
		5	18625	1852.5
		10	18650	1855
		15	18675	1857.5
		20	18700	1860
	Middle Range	1.4/3/5/10/15/20	18900	1880
	High Range	1.4	19193	1909.3
		3	19185	1908.5
		5	19175	1907.5

Test Mode	UL Channel	Channel Bandwidth (MHz)	UL Channel No.	UL Frequency (MHz)
		10	19150	1905
		15	19125	1902.5
		20	19100	1900
CAT.M Band 4	Low Range	1.4	19957	1710.7
		3	19965	1711.5
		5	19975	1712.5
		10	20000	1715
		15	20025	1717.5
		20	20050	1720
	Middle Range	1.4/3/5/10/15/20	20175	1732.5
	High Range	1.4	20393	1754.3
		3	20385	1753.5
		5	20375	1752.5
		10	20350	1750
		15	20325	1747.5
		20	20300	1745
CAT.M Band 5	Low Range	1.4	20407	824.7
		3	20415	825.5
		5	20425	826.5
		10	20450	829
	Middle Range	1.4/3/5/10	20525	836.5
	High Range	1.4	20643	848.3
		3	20635	847.5
		5	20625	846.5
		10	20600	844
CAT.M Band 12	Low Range	1.4	23017	699.7
		3	23025	700.5
		5	23035	701.5
		10	23060	704
	Middle Range	1.4/3/5/10	23095	707.5
	High Range	1.4	23173	715.3
		3	23165	714.5
		5	23155	713.5
		10	23130	711
CAT.M Band 13	Low Range	5	23205	779.5
		10	23230	782
	Middle Range	5/10	23230	782
	High Range	5	23255	784.5
		10	23230	782
CAT.M Band 66	Low Range	1.4	131979	1710.7
		3	131987	1711.5


Test Mode	UL Channel	Channel Bandwidth (MHz)	UL Channel No.	UL Frequency (MHz)
		5	131997	1712.5
		10	132022	1715
		15	132047	1717.5
		20	132072	1720
	Middle Range	1.4/3/5/10/15/20	132322	1745
	High Range	1.4	132665	1779.3
		3	132657	1778.5
		5	132647	1777.5
		10	132622	1775
		15	132597	1772.5
		20	132572	1770

Test Mode	UL Channel	UL Channel No.	UL Frequency (MHz)
NB-IoT Band 2	Low Range	18601	1850.1
	Middle Range	18900	1880.0
	High Range	19199	1909.9
NB-IoT Band 4	Low Range	19951	1710.1
	Middle Range	20175	1732.5
	High Range	20399	1754.9
NB-IoT Band 5	Low Range	20401	824.1
	Middle Range	20525	836.5
	High Range	20649	848.9
NB-IoT Band 12	Low Range	23011	699.1
	Middle Range	23095	707.5
	High Range	23179	715.9
NB-IoT Band 13	Low Range	23181	777.1
	Middle Range	23230	782.0
	High Range	23279	786.9
NB-IoT Band 18(Part 22)	Low Range	23941	824.1
	Middle Range	23970	827
	High Range	23999	829.9
NB-IoT Band 18(Part 90)	Low Range	23851	815.1
	Middle Range	23895	819.5
	High Range	23939	823.9
NB-IoT Band 19	Low Range	24001	830.1
	Middle Range	24075	837.5
	High Range	24149	844.9
NB-IoT Band 26(Part 22)	Low Range	26791	824.1
	Middle Range	26915	836.5
	High Range	27039	848.9

Test Mode	UL Channel	UL Channel No.	UL Frequency (MHz)
NB-IoT Band 26(Part 90)	Low Range	26691	814.1
	Middle Range	26740	819
	High Range	26789	823.9
NB-IoT Band 66	Low Range	131973	1710.1
	Middle Range	132322	1745.0
	High Range	132671	1779.9
NB-IoT Band 71	Low Range	133123	663.1
	Middle Range	133297	680.5
	High Range	133471	697.9


4.4 Test Setup

4.4.1 For Antenna Port Test

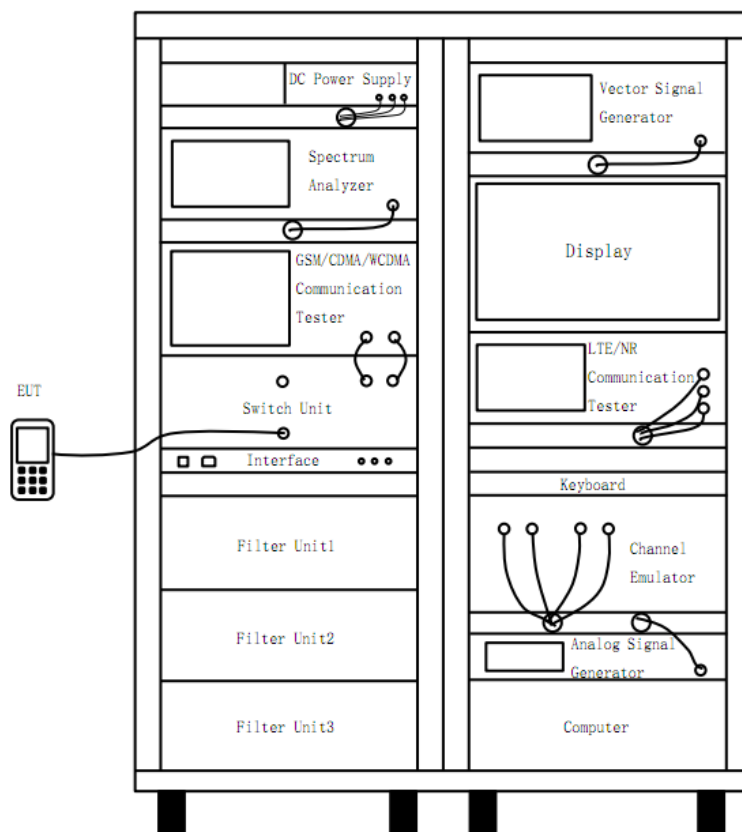


(Diagram 1)

4.4.2 For Frequency Stability Test

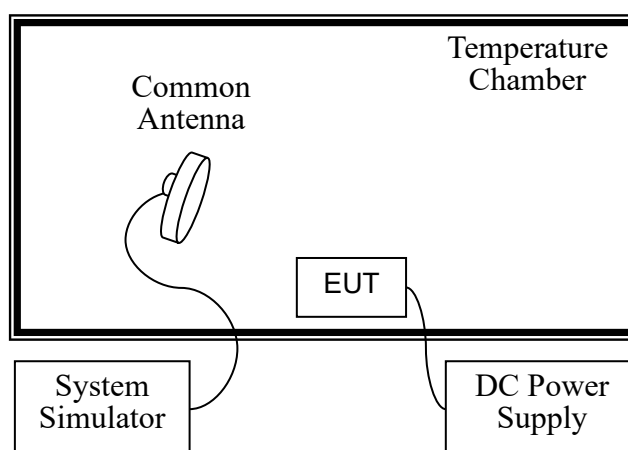


(Diagram 2)

4.4.3 For Radiated Test (30 MHz ~ 1 GHz)

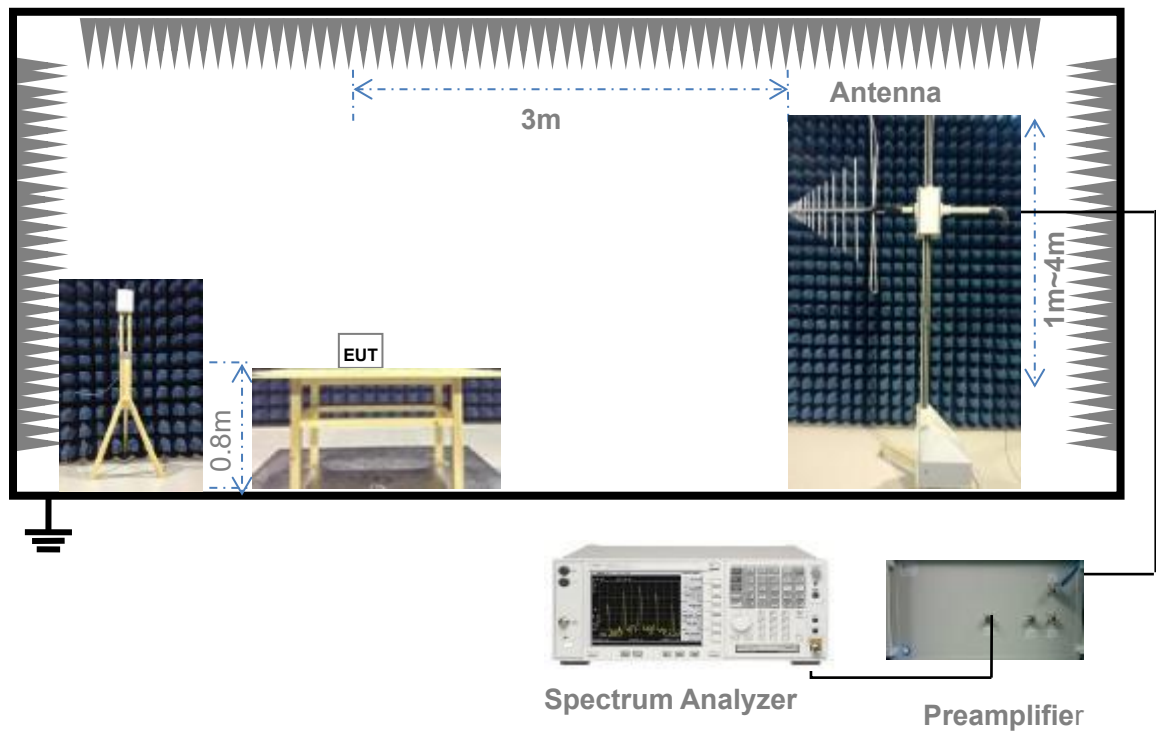

(Diagram 3)

4.4.4 For Radiated Test (Above 1 GHz)

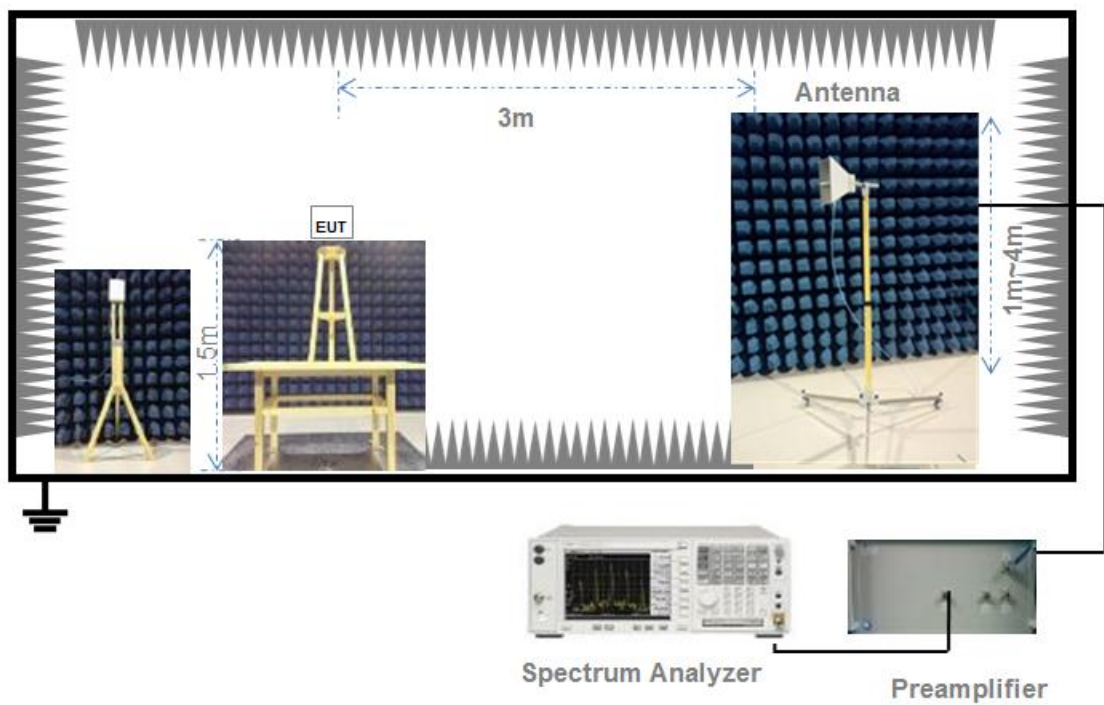

(Diagram 4)

5 TEST ITEMS

5.1 Transmitter Radiated Power (EIRP/ERP)

5.1.1 Limit

FCC § 2.1046 & 22.913(a) & 24.232(c) & 27.50(a) & 27.50(b) & 27.50(c) & 27.50(d) & 27.50(h) & 27.50(j) & 27.50(k) & 90.635(b) & 90.542(a) & 96.41(b)

According to FCC section 22.913(a) (5), the Effective Radiated Power (ERP) of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC section 24.232(c), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

According to FCC section 27.50(a) (3), for mobile and portable stations transmitting in the 2305-2315MHz band or the 2350-2360MHz band, the average EIRP must not exceed 50 milliwatts within any 1 megahertz of authorized bandwidth, except that for mobile and portable stations compliant with 3GPP LTE standards or another advanced mobile broadband protocol that avoids concentrating energy at the edge of the operating band the average EIRP must not exceed 250 milliwatts within any 5 megahertz of authorized bandwidth but may exceed 50 milliwatts within any 1 megahertz of authorized bandwidth. For mobile and portable stations using time division duplexing (TDD) technology, the duty cycle must not exceed 38 percent in the 2305-2315 MHz and 2350-2360 MHz bands.

FCC section 27.50(b) (10), portable stations (hand-held devices) transmitting in the 746-757MHz, 776-788MHz, and 805-806MHz bands are limited to 3 watts ERP.

FCC section 27.50(c) (10), portable stations (hand-held devices) in the 600MHz uplink band and the 698-746MHz band, and fixed and mobile stations in the 600MHz uplink band are limited to 3 watts ERP.

FCC section 27.50(d) (4), fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP. Fixed stations operating in the 1710-1755 MHz band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in these bands must employ a means for limiting power to the minimum necessary for successful communications.

(7) Fixed, mobile, and portable (hand-held) stations operating in the 2000-2020 MHz band are limited to 2 watts EIRP.

And FCC section 27.50(h) (2), for mobile and other user stations, mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

FCC section 27.50(j) (3), for mobile, and portable (hand-held) stations operating in the 3700-3980 MHz band are limited to 1 watt EIRP.

FCC section 27.50(k) (3), Mobile devices are limited to 1Watt (30 dBm) EIRP in the 3450-3550 MHz band.

According to FCC section 90.635(b), the maximum output power of the transmitter for mobile stations is 100 watts (20dBW).

According to FCC section 90.542(a) (7), portable stations (hand-held devices) transmitting in the 758-768 MHz band and the 788-798 MHz band are limited to 3 watts ERP.

FCC section 96.41(b), the maximum effective isotropic radiated power (EIRP) and maximum Power Spectral Density (PSD) of any CBSD and End User Device must comply with the limits shown in the table in this paragraph below:

Device	Maximum EIRP (dBm/10 megahertz)	Maximum PSD (dBm/MHz)
End User Device	23	N/A
Category A CBSD	30	20
Category B CBSD ^{note1}	47	37

Note1: Category B CBSDs will only be authorized for use after an ESC is approved and commercially deployed consistent with §§ 96.15 and 96.67.

5.1.2 Test Setup

The section 4.4.1 (Diagram 1) test setup description is used for conducted test, and the section 4.4.3 and 4.4.4 (Diagram 3, 4) test setup description is used for radiated test. The photo of test setup please refer to ANNEX B.

5.1.3 Test Procedure

Description of the Conducted Output Power Measurement

The EUT is coupled to the SS with attenuator through power splitter; the RF load attached to EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. A system simulator is used to establish communication with the EUT, and its parameters are set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The relevant equation for determining the conducted measured value is:

$$\text{Conducted Output Power Value (dBm)} = \text{Measured Value (dBm)} + \text{Path Loss (dB)}$$

where:

Conducted Output Power Value = final conducted measured value in the conducted power test, in dBm;
 Measured Value = measured conducted power received by spectrum analyzer or power meter, in dBm;
 Path Loss = signal attenuation in the connecting cable between the transmitter and spectrum analyzer or power meter, including external cable loss, in dB;

During the test, the data of Path Loss (dB) is added in the spectrum analyzer or power meter, so Measured Value (dBm) is the final values which contains the data of Path Loss (dB).

For example:

In the conducted output power test, when measured value for GSM850 is 24.7 dBm, and path loss is 8.5 dB, then final conducted output power value is:

$$\text{Conducted Output Power Value (dBm)} = 24.7 \text{ dBm} + 8.5 \text{ dB} = 33.2 \text{ dBm}$$

Description of the Transmitter Radiated Power Measurement

In many cases, the RF output power limits for licensed digital transmission devices is specified in terms of effective radiated power (ERP) or equivalent isotropic radiated power (EIRP). Typically, ERP is specified when the operating frequency is less than or equal to 1 GHz and EIRP is specified when the operating frequency is greater than 1 GHz. Both are determined by adding the transmit antenna gain to the conducted RF output power with the primary difference between the two being that when determining the ERP, the transmit antenna gain is referenced to a dipole antenna (i.e., dBd) whereas when determining the EIRP, the transmit antenna gain is referenced to an isotropic antenna (dBi).

Final measurement calculation as below:

The relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP/EIRP} = P_{\text{Meas}} + \text{GT} - \text{LC}$$

where:

ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as P_{Meas} , typically dBW or dBm);

P_{Meas} = measured transmitter output power or PSD, in dBm or dBW;

GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

dBd (ERP)=dBi (EIRP) -2.15 dB

LC = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

For devices utilizing multiple antennas, KDB 662911 provides guidance for determining the effective array transmit antenna gain term to be used in the above equation.

For example:

In the EIRP test, when P_{Meas} value for GSM1900 is 30.2 dBm, LC is 0.6 dB, and GT is -3.4 dB, then final EIRP value is:

$$\text{EIRP for GSM1900} = 30.2 \text{ dBm} - 3.4 \text{ dBi} - 0.6 \text{ dB} = 26.2 \text{ dBm}$$

The relevant equation for determining the ERP/EIRP from the radiated RF output power is:

$$\text{ERP/EIRP (dBm)} = \text{SA Read Value (dBm)} + \text{Correction Factor (dB)}$$

where:

ERP/EIRP = effective or equivalent radiated power, in dBm;

SA Read Value = measured transmitter power received by EMI receiver or spectrum analyzer, in dBm;

Correction Factor = total correction factor including cable loss, in dB;

During the test, the data of Correction Factor (dB) is added in the EMI receiver or spectrum analyzer, so SA Read Value (dBm) is the final values which contains the data of Correction Factor (dB).

For example:

In the ERP test, when SA read value for GSM850 is 21dBm, and correction factor is 8dB, then final ERP value for GSM850 is:

$$\text{ERP (dBm)} = 21\text{dBm} + 8\text{dB} = 29\text{dBm}$$

5.1.4 Test Result

Please refer to ANNEX A.1.

5.2 Peak to Average Ratio

5.2.1 Limit

FCC § 2.1046 & 24.232(d) & 27.50(d) & 27.50(j) & 27.50(k)

In addition, when the transmitter power is measured in terms of average value, the peak-to-average power ratio (PAPR) of the transmitter shall not exceed 13 dB for more than 0.1% of the time using a signal corresponding to the highest PAPR during periods of continuous transmission.

According to FCC section 24.232(d), power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with 24.232 (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of § 24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

FCC section 24.232(e), peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms equivalent voltage. The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true peak measurement for the emission in question over the full bandwidth of the channel.

According to FCC section 27.50(d) (5) & 27.50(j) & 27.50(k), in measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13dB.

5.2.2 Test Setup

The section 4.4.1 (Diagram 1) test setup description is used for this test. The photo of test setup please refer to ANNEX B.

5.2.3 Test Procedure

Here the lowest, middle and highest channels are selected to perform testing to verify the peak-to-average ratio.

According to KDB 971168 D01, there is CCDF procedure for PAPR:

- a) Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
- b) Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
- c) Set the number of counts to a value that stabilizes the measured CCDF curve;
- d) Set the measurement interval as follows:
 - 1) for continuous transmissions, set to 1 ms,

2) for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.

e) Record the maximum PAPR level associated with a probability of 0.1%.

Alternate procedure for PAPR:

Use one of the procedures presented in 4.1 to measure the total peak power and record as P_{Pk} . Use one of the applicable procedures presented 4.2 to measure the total average power and record as P_{Avg} . Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$PAPR (dB) = P_{Pk} (dBm) - P_{Avg} (dBm).$$

5.2.4 Test Result

Please refer to ANNEX A.2.

5.3 Occupied Bandwidth

5.3.1 Limit

FCC § 2.1049

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission.

Many of the individual rule parts specify a relative OBW in lieu of the 99% OBW. In such cases, the OBW is defined as the width of the signal between two points, one below the carrier center frequency and on above the carrier center frequency, outside of which all emissions are attenuated by at least X dB below the transmitter power, where the value of X is typically specified as 26.

5.3.2 Test Setup

The section 4.4.1 (Diagram 1) test setup description is used for this test. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

The following procedure shall be used for measuring power bandwidth.

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (i.e., two to five times the anticipated OBW).
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
- c) Set the reference level of the instrument as required to keep the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope must be at least 10log (OBW / RBW) below the reference level.
- d) NOTE—Steps a) through c) may require iteration to adjust within the specified tolerances.
- e) For -26 dB OBW, the dynamic range of the spectrum analyzer at the selected RBW shall be at least 10dB below the target “-X dB down” requirement, e.g. -26 dB OBW, the spectrum analyzer noise floor at the selected RBW shall be 36dB below the reference value.
- f) Set the detection mode to peak, and the trace mode to max hold.
- g) For 99% OBW, use the 99 % power bandwidth function of the spectrum analyzer (if available) and report the measured bandwidth.

If the instrument does not have a 99 % power bandwidth function, the trace data points are to be recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is

recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99 % power bandwidth is the difference between these two frequencies.

h) For -26 dB OBW, determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).

Determine the “-X dB down amplitude” as equal to (reference value -X). Alternatively, this calculation can be performed by the analyzer by using the marker-delta function.

Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below “-X dB down amplitude” determined in step g). If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.

i) The OBW shall be reported by providing plot(s) of the measuring instrument display. The frequency and amplitude axes and scale shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

j) Change variable modulations, coding, or channel bandwidth settings, then repeat above test procedures.

5.3.4 Test Result

Please refer to ANNEX A.3.

5.4 Frequency Stability

5.4.1 Limit

FCC § 2.1055 & 22.355 & 24.235 & 27.54 & 90.213

FCC § 2.1055

The frequency stability shall be measured with variation of ambient temperature as follows:

- (1) The temperature is varied from -30°C to +50°C.
- (2) Frequency measurements shall be made at the extremes of the specified temperature range and at intervals of not more than 10°C through the range.

The frequency stability shall be measured with variation of primary supply voltage as follows:

- (1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than carried battery equipment.
- (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating and point which shall be specified by the manufacture.
- (3) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

FCC § 22.355

Except as otherwise provided in this part, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table C-1 of this section.

Table C-1—Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency range (MHz)	Base, fixed (ppm)	Mobile > 3 watts (ppm)	Mobile ≤ 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929	5.0	n/a	n/a
929 to 960	1.5	n/a	n/a
2110 to 2220	10.0	n/a	n/a

FCC § 24.235

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

FCC § 27.54

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

FCC § 90.213

The frequency stability shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

5.4.2 Test Setup

The section 4.4.2 (Diagram 2) test setup description is used for this test. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

1. The EUT is placed in a temperature chamber.
2. The temperature is set to 25°C and allowed to stabilize. After sufficient soak time, the transmitting frequency error is measured.
3. The temperature is increased by not more than 10 degrees, allowed to stabilize and soak, and then repeat the frequency error measurement.
4. Repeat procedure 3 until +50°C and -30°C is reached.
5. Change supply voltage, and repeat measurement until extreme voltage is reached.

5.4.4 Test Result

Please refer to ANNEX A.4.

5.5 Spurious Emission at Antenna Terminals

5.5.1 Limit

FCC § 2.1051 & 22.917(a) & 24.238(a) & 27.53(a) & 27.53(c) & 27.53(f) & 27.53(g) & 27.53(h) & 27.53(l) & 27.53(m) & 27.53(n) & 90.691 & 90.543 & 96.41(e)

In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

FCC § 22.917(a) & 24.238(a)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. This is calculated to be -13 dBm.

FCC § 27.53(a) (4)

For mobile and portable stations operating in the 2305-2315MHz and 2350-2360MHz bands:

(1) By a factor of not less than: $43 + 10 \log(P)$ dB on all frequencies between 2305 and 2320MHz and on all frequencies between 2345 and 2360MHz that are outside the licensed band(s) of operation, not less than $55 + 10 \log(P)$ dB on all frequencies between 2320 and 2324MHz and on all frequencies between 2341 and 2345MHz, not less than $61 + 10 \log(P)$ dB on all frequencies between 2324 and 2328MHz and on all frequencies between 2337 and 2341MHz, and not less than $67 + 10 \log(P)$ dB on all frequencies between 2328 and 2337MHz.

(2) By a factor of not less than $43 + 10 \log(P)$ dB on all frequencies between 2300 and 2305MHz, $55 + 10 \log(P)$ dB on all frequencies between 2296 and 2300MHz, $61 + 10 \log(P)$ dB on all frequencies between 2292 and 2296MHz, $67 + 10 \log(P)$ dB on all frequencies between 2288 and 2292MHz, and $70 + 10 \log(P)$ dB below 2288MHz.

(3) By a factor of not less than $43 + 10 \log(P)$ dB on all frequencies between 2360 and 2365MHz, and not less than $70 + 10 \log(P)$ dB above 2365MHz.

FCC § 27.53(c)

For operations in the 746–758 MHz band and the 776–788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On any frequency outside the 746–758 MHz band, the power of any emission shall be attenuated outside the

band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;

(2) On any frequency outside the 776–788 MHz band, the power of any emission shall be attenuated outside the

band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

(3) On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations;

(4) On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;

(5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater.

However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth

of at least 30 kHz may be employed;

(6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

FCC § 27.53(f)

For operations in the 746–758 MHz, 775–788 MHz, and 805–806 MHz bands, emissions in the band 1559–1610 MHz shall be limited to - 70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

FCC § 27.53(g)

For operations in the 600MHz band and the 698-746MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43+10*\log(P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

FCC § 27.53(h) (1)

Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10} (P)$ dB.

FCC § 27.53(l) (2)

For mobile operations in the 3700-3980 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.

FCC § 27.53(m) (4)

For mobile digital stations (BRS and EBS stations), the attenuation factor shall be not less than:

- $40 + 10 \log P$ dB (-10 dBm, 100 nW) on all frequencies between the channel edge and 5 MHz from the channel edge.
- $43 + 10 \log P$ dB (-13 dBm, 50 nW) on all frequencies between 5 MHz and X MHz from the channel edge,
- $55 + 10 \log P$ dB (-25 dBm, 3 nW) on all frequencies more than X MHz from the channel edge, where X is the greater of 6 MHz or the actual emission bandwidth (26 dB).

In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

FCC § 27.53(n) (2)

For mobile operations in the 3450 - 3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.

FCC § 90.691

(a) Out-of-band emission requirement shall apply only to the "outer" channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \log_{10}(f/6.1)$ decibels or $50 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

(b) When an emission outside of the authorized bandwidth causes harmful interference, the Commission may, at its discretion, require greater attenuation than specified in this section.

FCC § 90.543

(e) For operations in the 758 – 768 MHz and the 788 – 798 MHz bands, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On all frequencies between 769 – 775 MHz and 799 – 805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations.

(2) On all frequencies between 769 – 775 MHz and 799 – 805 MHz, by a factor not less than $65 + 10 \log (P)$

dB in a 6.25 kHz band segment, for mobile and portable stations.

(3) On any frequency between 775–788 MHz, above 805 MHz, and below 758 MHz, by at least $43 + 10 \log (P)$ dB.

(4) Compliance with the provisions of paragraphs (e)(1) and (2) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

(f) For operations in the 758–775 MHz and 788–805 MHz bands, all emissions including harmonics in the band 1559–1610 MHz shall be limited to -70 dBW/ MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

FCC § 96.41(e)

The conducted power of any emission outside the fundamental emission (whether in or outside of the authorized band) shall not exceed -13 dBm/MHz within 0-10 megahertz above the upper SAS-assigned channel edge and within 0-10 megahertz below the lower SAS-assigned channel edge. At all frequencies greater than 10 megahertz above the upper SAS assigned channel edge and less than 10 MHz below the lower SAS assigned channel edge, the conducted power of any emission shall not exceed -25 dBm/MHz. The conducted power of any emissions below 3530 MHz or above 3720 MHz shall not exceed -40 dBm/MHz.

Compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for frequencies less than 1 GHz and 1 MHz or greater for frequencies greater than 1 GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

5.5.2 Test Setup

The section 4.4.1 (Diagram 1) test setup description was used for this test. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside

and adjacent to the frequency blocks a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

1. The EUT is coupled to the system simulator and spectrum analyzer; the RF load attached to EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.
2. Base Station is used to establish communication with the EUT, and its parameters are set to force the EUT transmitting at maximum output power.
3. The RF output of the transmitter is connected to the input of the spectrum analyzer through sufficient attenuation.
4. Spurious emissions are tested with 0.001MHz RBW for frequency less than 150kHz, 0.01MHz RBW for frequency less than 30MHz, 0.1MHz RBW for frequency less than 1GHz, and 1MHz RBW for frequency above 1GHz. And sweep point number are at least 401, referring to following formula.

Sweep point number = Span/RBW

VBW=3*RBW

Detector Mode=mean or average power

5. Record the frequencies and levels of spurious emissions.

5.5.4 Test Result

Please refer to ANNEX A.5.

5.6 Band Edge

5.6.1 Limit

FCC § 2.1051 & 22.917(a) & 24.238(a) & 27.53(a) & 27.53(c) & 27.53(f) & 27.53(g) & 27.53(h) & 27.53(l) & 27.53(m) & 27.53(n) & 90.691 & 90.543 & 96.41(e)

In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

FCC § 22.917(a) & 24.238(a)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. This is calculated to be -13 dBm.

FCC § 27.53(a) (4)

For mobile and portable stations operating in the 2305-2315MHz and 2350-2360MHz bands:

(1) By a factor of not less than: $43 + 10 \log(P)$ dB on all frequencies between 2305 and 2320MHz and on all frequencies between 2345 and 2360MHz that are outside the licensed band(s) of operation, not less than $55 + 10 \log(P)$ dB on all frequencies between 2320 and 2324MHz and on all frequencies between 2341 and 2345MHz, not less than $61 + 10 \log(P)$ dB on all frequencies between 2324 and 2328MHz and on all frequencies between 2337 and 2341MHz, and not less than $67 + 10 \log(P)$ dB on all frequencies between 2328 and 2337MHz.

(2) By a factor of not less than $43 + 10 \log(P)$ dB on all frequencies between 2300 and 2305MHz, $55 + 10 \log(P)$ dB on all frequencies between 2296 and 2300MHz, $61 + 10 \log(P)$ dB on all frequencies between 2292 and 2296MHz, $67 + 10 \log(P)$ dB on all frequencies between 2288 and 2292MHz, and $70 + 10 \log(P)$ dB below 2288MHz.

(3) By a factor of not less than $43 + 10 \log(P)$ dB on all frequencies between 2360 and 2365MHz, and not less than $70 + 10 \log(P)$ dB above 2365MHz.

FCC § 27.53(c)

For operations in the 746–758 MHz band and the 776–788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On any frequency outside the 746–758 MHz band, the power of any emission shall be attenuated outside the

band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;

(2) On any frequency outside the 776–788 MHz band, the power of any emission shall be attenuated outside the

band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

(3) On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations;

(4) On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;

(5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater.

However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth

of at least 30 kHz may be employed;

(6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

FCC § 27.53(f)

For operations in the 746–758 MHz, 775–788 MHz, and 805–806 MHz bands, emissions in the band 1559–1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

FCC § 27.53(g)

For operations in the 600MHz band and the 698-746MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43+10*\log(P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

FCC § 27.53(h) (1)

Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10} (P)$ dB.

FCC § 27.53(l) (2)

For mobile operations in the 3700-3980 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.

FCC § 27.53(m) (4)

For mobile digital stations (BRS and EBS stations), the attenuation factor shall be not less than:

- $40 + 10 \log P$ dB (–10 dBm, 100 nW) on all frequencies between the channel edge and 5 MHz from the channel edge.
- $43 + 10 \log P$ dB (–13 dBm, 50 nW) on all frequencies between 5 MHz and X MHz from the channel edge,
- $55 + 10 \log P$ dB (–25 dBm, 3 nW) on all frequencies more than X MHz from the channel edge, where X is the greater of 6 MHz or the actual emission bandwidth (26 dB).

In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

FCC § 27.53(n) (2)

For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed –13 dBm/MHz.

FCC § 90.691

(a) Out-of-band emission requirement shall apply only to the “outer” channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \log_{10}(f/6.1)$ decibels or $50 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

(b) When an emission outside of the authorized bandwidth causes harmful interference, the Commission may, at its discretion, require greater attenuation than specified in this section.

FCC § 90.543

(e) For operations in the 758–768 MHz and the 788–798 MHz bands, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On all frequencies between 769–775 MHz and 799–805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations.

(2) On all frequencies between 769–775 MHz and 799–805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations.

(3) On any frequency between 775–788 MHz, above 805 MHz, and below 758 MHz, by at least $43 + 10 \log(P)$ dB.

(4) Compliance with the provisions of paragraphs (e)(1) and (2) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

FCC § 96.41(e)

The conducted power of any emission outside the fundamental emission (whether in or outside of the authorized band) shall not exceed -13 dBm/MHz within 0-10 megahertz above the upper SAS-assigned channel edge and within 0-10 megahertz below the lower SAS-assigned channel edge. At all frequencies greater than 10 megahertz above the upper SAS assigned channel edge and less than 10 MHz below the lower SAS assigned channel edge, the conducted power of any emission shall not exceed -25 dBm/MHz. The conducted power of any emissions below 3530 MHz or above 3720 MHz shall not exceed -40 dBm/MHz.

Compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for frequencies less than 1 GHz and 1 MHz or greater for frequencies greater than 1 GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

5.6.2 Test Setup

The section 4.4.1 (Diagram 1) test setup description was used for this test. The photo of test setup please refer to ANNEX B.

5.6.3 Test Procedure

The EUT, which is powered by the Battery, is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50 Ohm; the path loss as the factor is calibrated to correct the reading.

1. The EUT is coupled to the system simulator and spectrum analyzer; the RF load attached to EUT antenna terminal is 50 Ohm; the path loss as the factor is calibrated to correct the reading.

2. Base Station is used to establish communication with the EUT, and its parameters are set to force the EUT transmitting at maximum output power.

3. The RF output of the transmitter is connected to the input of the spectrum analyzer through sufficient attenuation.

4. The center of the spectrum analyzer was set to block edge frequency.

5. Band edge are tested with $1\% \cdot \text{cBW}$ (RBW), and sweep point number referred to following formula.

$$\text{Sweep point number} = 2 \cdot \text{Span} / \text{RBW}$$

VBW=3RBW

6. Record the frequencies and levels of spurious emissions.

For mobile and portable stations, on all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment. Since it was not possible to set the resolution bandwidth to 6.25 kHz with the available equipment, a bandwidth of 10 kHz was used instead to show compliance. By using a 10 kHz bandwidth on the spectrum analyzer.

$$10 \cdot \log(10 \text{ kHz} / 6.25 \text{ kHz}) = 2.04 \text{ dB}$$

$$\text{Limit Line} = -35 \text{ dBm} + 2.04 \text{ dB} = -32.96 \text{ dBm}$$

5.6.4 Test Result

Please refer to ANNEX A.6.

5.7 Field Strength of Spurious Radiation

5.7.1 Limit

FCC § 2.1053 & 22.917(a) & 24.238(a) & 27.53(a) & 27.53(c) & 27.53(f) & 27.53(g) & 27.53(h) & 27.53(l) & 27.53(m) & 27.53(n) & 90.691 & 90.543 & 96.41(e)

FCC § 22.917(a) & 24.238(a)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. This is calculated to be -13 dBm.

FCC § 27.53(a) (4)

For mobile and portable stations operating in the 2305-2315MHz and 2350-2360MHz bands:

(1) By a factor of not less than: $43 + 10 \log(P)$ dB on all frequencies between 2305 and 2320MHz and on all frequencies between 2345 and 2360MHz that are outside the licensed band(s) of operation, not less than $55 + 10 \log(P)$ dB on all frequencies between 2320 and 2324MHz and on all frequencies between 2341 and 2345MHz, not less than $61 + 10 \log(P)$ dB on all frequencies between 2324 and 2328MHz and on all frequencies between 2337 and 2341MHz, and not less than $67 + 10 \log(P)$ dB on all frequencies between 2328 and 2337MHz.

(2) By a factor of not less than $43 + 10 \log(P)$ dB on all frequencies between 2300 and 2305MHz, $55 + 10 \log(P)$ dB on all frequencies between 2296 and 2300MHz, $61 + 10 \log(P)$ dB on all frequencies between 2292 and 2296MHz, $67 + 10 \log(P)$ dB on all frequencies between 2288 and 2292MHz, and $70 + 10 \log(P)$ dB below 2288MHz.

(3) By a factor of not less than $43 + 10 \log(P)$ dB on all frequencies between 2360 and 2365MHz, and not less than $70 + 10 \log(P)$ dB above 2365MHz.

FCC § 27.53(c)

For operations in the 746–758 MHz band and the 776–788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On any frequency outside the 746–758 MHz band, the power of any emission shall be attenuated outside the

band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;

(2) On any frequency outside the 776–788 MHz band, the power of any emission shall be attenuated outside the

band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;

(3) On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than $76 + 10 \log(P)$ dB in a 6.25 kHz band segment, for base and fixed stations;

(4) On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than $65 + 10 \log(P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;

(5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of

measurement instrumentation employing a resolution bandwidth of 100 kHz or greater.

However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth

of at least 30 kHz may be employed;

(6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

FCC § 27.53(f)

For operations in the 746–758 MHz, 775–788 MHz, and 805–806 MHz bands, emissions in the band 1559–1610 MHz shall be limited to - 70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

FCC § 27.53(g)

For operations in the 600MHz band and the 698-746MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43+10\log(P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

FCC § 27.53(h) (1)

Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.

FCC § 27.53(l) (2)

For mobile operations in the 3700-3980 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.

FCC § 27.53(m) (4)

For mobile digital stations (BRS and EBS stations), the attenuation factor shall be not less than:

- $40+10\log P$ dB (-10 dBm, 100 nW) on all frequencies between the channel edge and 5 MHz from the channel edge.
- $43+10\log P$ dB (-13 dBm, 50 nW) on all frequencies between 5 MHz and X MHz from the channel edge,
- $55+10\log P$ dB (-25 dBm, 3 nW) on all frequencies more than X MHz from the channel edge, where X is the greater of 6 MHz or the actual emission bandwidth (26 dB).

In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service

licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

FCC § 27.53(n) (2)

For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.

FCC § 90.691

(a) Out-of-band emission requirement shall apply only to the "outer" channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \log_{10}(f/6.1)$ decibels or $50 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

(b) When an emission outside of the authorized bandwidth causes harmful interference, the Commission may, at its discretion, require greater attenuation than specified in this section.

FCC § 90.543

(e) For operations in the 758–768 MHz and the 788–798 MHz bands, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On all frequencies between 769–775 MHz and 799–805 MHz, by a factor not less than $76 + 10 \log(P)$ dB in a 6.25 kHz band segment, for base and fixed stations.

(2) On all frequencies between 769–775 MHz and 799–805 MHz, by a factor not less than $65 + 10 \log(P)$ dB in a 6.25 kHz band segment, for mobile and portable stations.

(3) On any frequency between 775–788 MHz, above 805 MHz, and below 758 MHz, by at least $43 + 10 \log(P)$ dB.

(4) Compliance with the provisions of paragraphs (e)(1) and (2) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

(f) For operations in the 758–775 MHz and 788–805 MHz bands, all emissions including harmonics in the band 1559–1610 MHz shall be limited to -70 dBW/ MHz equivalent isotropically radiated power (EIRP) for

wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

FCC § 96.41(e)

The conducted power of any emission outside the fundamental emission (whether in or outside of the authorized band) shall not exceed -13 dBm/MHz within 0-10 megahertz above the upper SAS-assigned channel edge and within 0-10 megahertz below the lower SAS-assigned channel edge. At all frequencies greater than 10 megahertz above the upper SAS assigned channel edge and less than 10 MHz below the lower SAS assigned channel edge, the conducted power of any emission shall not exceed -25 dBm/MHz. The conducted power of any emissions below 3530 MHz or above 3720 MHz shall not exceed -40 dBm/MHz.

Compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for frequencies less than 1 GHz and 1 MHz or greater for frequencies greater than 1 GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

5.7.2 Test Setup

The section 4.4.3 and 4.4.4 (Diagram 3, 4) test setup description was used for this test. The photo of test setup please refer to ANNEX B.

5.7.3 Test Procedure

1. On a test site, the EUT shall be placed at 80cm height on a turn table, and in the position close to normal use as declared by the applicant.
2. The test antenna shall be oriented initially for vertical polarization located 3 m from EUT to correspond to the fundamental frequency of the transmitter.
3. The output of the test antenna shall be connected to the measuring receiver and the peak detector is used for the measurement.
4. During the measurement of the EUT, the resolution bandwidth was to 1 MHz and the average bandwidth was set to 1 MHz.
5. The transmitter shall be switched on; the measuring receiver shall be tuned to the frequency of the transmitter under test.
6. The test antenna shall be raised and lowered through the specified range of height until the maximum signal level is detected by the measuring receiver.

7. The transmitter shall be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
8. The test antenna shall be raised and lowered again through the specified range of height until the maximum signal level is detected by the measuring receiver.
9. The maximum signal level detected by the measuring receiver shall be noted.
10. The EUT was replaced by half-wave dipole (824 ~ 849 MHz) or horn antenna (1 850 ~ 1 910 MHz) connected to a signal generator.
11. In necessary, the input attenuator setting on the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
12. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
13. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring received, which is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
14. The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
15. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.

Final measurement calculation as below:

The relevant equation for determining the ERP/EIRP from the radiated RF output power is:

$$\text{ERP/EIRP (dBm)} = \text{SA Read Value (dBm)} + \text{Correction Factor (dB)}$$

where:

ERP/EIRP = effective or equivalent radiated power, in dBm;

SA Read Value = measured transmitter power received by EMI receiver or spectrum analyzer, in dBm;

Correction Factor = total correction factor including cable loss, in dB;

During the test, the data of Correction Factor (dB) is added in the EMI receiver or spectrum analyzer, so SA Read Value (dBm) is the final values which contains the data of Correction Factor (dB).

For example:

In the ERP test, when SA read value for GSM850 is 21dBm, and correction factor is 8dB, then final ERP value for GSM850 is:

$$\text{ERP (dBm)} = 21\text{dBm} + 8\text{dB} = 29\text{dBm}$$

5.7.4 Test Result

Please refer to ANNEX A.7.

ANNEX A TEST RESULTS

A.1 Transmitter Radiated Power (EIRP/ERP)

CAT.M Mode Test Data

Bandwidth (MHz)	UL Channel	UL Modulation	UL RB Number	UL RB Position	Narrow Band	Conducted Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Limit (W)
CAT.M Band 2										
1.4	LCH	QPSK	1	0	0	20	0.62	20.62	0.115	2.000
			6	0	0	17.37	0.62	17.99	0.063	2.000
		16QAM	1	0	0	18.71	0.62	19.33	0.086	2.000
			5	0	0	17.41	0.62	18.03	0.064	2.000
	MCH	QPSK	1	0	0	19.67	0.62	20.29	0.107	2.000
			6	0	0	17.56	0.62	18.18	0.066	2.000
		16QAM	1	0	0	18.84	0.62	19.46	0.088	2.000
			5	0	0	17.59	0.62	18.21	0.066	2.000
	HCH	QPSK	1	0	0	19.33	0.62	19.95	0.099	2.000
			6	0	0	17.07	0.62	17.69	0.059	2.000
		16QAM	1	0	0	18.71	0.62	19.33	0.086	2.000
			5	0	0	17.41	0.62	18.03	0.064	2.000
3	LCH	QPSK	1	0	0	19.51	0.62	20.13	0.103	2.000
			6	0	0	17.5	0.62	18.12	0.065	2.000
		16QAM	1	0	0	18.63	0.62	19.25	0.084	2.000
			5	0	0	17.42	0.62	18.04	0.064	2.000
	MCH	QPSK	1	0	0	19.72	0.62	20.34	0.108	2.000
			6	0	0	17.55	0.62	18.17	0.066	2.000
		16QAM	1	0	0	18.51	0.62	19.13	0.082	2.000
			5	0	0	17.68	0.62	18.30	0.068	2.000
	HCH	QPSK	1	0	0	19.39	0.62	20.01	0.100	2.000
			6	0	0	17.18	0.62	17.80	0.060	2.000
		16QAM	1	0	0	18.43	0.62	19.05	0.080	2.000
			5	0	0	17.37	0.62	17.99	0.063	2.000
5	LCH	QPSK	1	0	0	19.35	0.62	19.97	0.099	2.000
			6	0	0	18.4	0.62	19.02	0.080	2.000
		16QAM	1	0	0	20.2	0.62	20.82	0.121	2.000
			5	0	0	18.33	0.62	18.95	0.079	2.000
	MCH	QPSK	1	0	0	19.55	0.62	20.17	0.104	2.000
			6	0	0	18.46	0.62	19.08	0.081	2.000
		16QAM	1	0	0	20.49	0.62	21.11	0.129	2.000
			5	0	0	18.48	0.62	19.10	0.081	2.000

	HCH	QPSK	1	0	0	19.45	0.62	20.07	0.102	2.000
			6	0	0	18.42	0.62	19.04	0.080	2.000
		16QAM	1	0	0	19.98	0.62	20.60	0.115	2.000
			5	0	0	18.57	0.62	19.19	0.083	2.000
10	LCH	QPSK	1	0	0	19.43	0.62	20.05	0.101	2.000
			6	0	0	18.68	0.62	19.30	0.085	2.000
		16QAM	1	0	0	20.10	0.62	20.72	0.118	2.000
			5	0	0	19.94	0.62	20.56	0.114	2.000
	MCH	QPSK	1	0	0	19.47	0.62	20.09	0.102	2.000
			6	0	0	18.71	0.62	19.33	0.086	2.000
		16QAM	1	0	0	20.16	0.62	20.78	0.120	2.000
			5	0	0	19.75	0.62	20.37	0.109	2.000
	HCH	QPSK	1	0	0	19.61	0.62	20.09	0.102	2.000
			6	0	0	18.55	0.62	19.33	0.086	2.000
		16QAM	1	0	0	20.09	0.62	20.71	0.118	2.000
			5	0	0	19.76	0.62	20.38	0.109	2.000
15	LCH	QPSK	1	0	0	19.38	0.62	20.00	0.100	2.000
			6	0	0	19.69	0.62	20.31	0.107	2.000
		16QAM	1	0	0	20.05	0.62	20.67	0.117	2.000
			5	0	0	20.01	0.62	20.63	0.116	2.000
	MCH	QPSK	1	0	0	19.54	0.62	20.16	0.104	2.000
			6	0	0	19.71	0.62	20.33	0.108	2.000
		16QAM	1	0	0	20.06	0.62	20.68	0.117	2.000
			5	0	0	19.8	0.62	20.42	0.110	2.000
	HCH	QPSK	1	0	0	19.61	0.62	20.23	0.105	2.000
			6	0	0	19.67	0.62	20.29	0.107	2.000
		16QAM	1	0	0	20.15	0.62	20.77	0.119	2.000
			5	0	0	19.99	0.62	20.61	0.115	2.000
20	LCH	QPSK	1	0	0	19.52	0.62	20.14	0.103	2.000
			6	0	0	19.82	0.62	20.44	0.111	2.000
		16QAM	1	0	0	20.02	0.62	20.64	0.116	2.000
			5	0	0	19.67	0.62	20.29	0.107	2.000
	MCH	QPSK	1	0	0	19.55	0.62	20.17	0.104	2.000
			6	0	0	19.7	0.62	20.32	0.108	2.000
		16QAM	1	0	0	20.15	0.62	20.77	0.119	2.000
			5	0	0	19.61	0.62	20.23	0.105	2.000
	HCH	QPSK	1	0	0	19.57	0.62	20.19	0.104	2.000
			6	0	0	19.69	0.62	20.31	0.107	2.000
		16QAM	1	0	0	20.02	0.62	20.64	0.116	2.000
			5	0	0	19.9	0.62	20.52	0.113	2.000

Bandwidth (MHz)	UL Channel	UL Modulation	UL RB Number	UL RB Position	Narrow Band	Conducted Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Limit (W)
CAT.M Band 4										
1.4	LCH	QPSK	1	0	0	20.23	0.52	20.75	0.119	1.000
			6	0	0	18.06	0.52	18.58	0.072	1.000
		16QAM	1	0	0	19.49	0.52	20.01	0.100	1.000
			5	0	0	18.25	0.52	18.77	0.075	1.000
	MCH	QPSK	1	0	0	20.67	0.52	21.19	0.132	1.000
			6	0	0	18.19	0.52	18.71	0.074	1.000
		16QAM	1	0	0	19.97	0.52	20.49	0.112	1.000
			5	0	0	18.77	0.52	19.29	0.085	1.000
	HCH	QPSK	1	0	0	20.32	0.52	20.84	0.121	1.000
			6	0	0	17.97	0.52	18.49	0.071	1.000
		16QAM	1	0	0	19.69	0.52	20.21	0.105	1.000
			5	0	0	18.54	0.52	19.06	0.081	1.000
3	LCH	QPSK	1	0	0	20.24	0.52	20.76	0.119	1.000
			6	0	0	18.01	0.52	18.53	0.071	1.000
		16QAM	1	0	0	19.55	0.52	20.07	0.102	1.000
			5	0	0	18.4	0.52	18.92	0.078	1.000
	MCH	QPSK	1	0	0	20.72	0.52	21.24	0.133	1.000
			6	0	0	18.29	0.52	18.81	0.076	1.000
		16QAM	1	0	0	19.88	0.52	20.40	0.110	1.000
			5	0	0	18.74	0.52	19.26	0.084	1.000
	HCH	QPSK	1	0	0	20.24	0.52	20.76	0.119	1.000
			6	0	0	17.96	0.52	18.48	0.070	1.000
		16QAM	1	0	0	19.69	0.52	20.21	0.105	1.000
			5	0	0	18.31	0.52	18.83	0.076	1.000
5	LCH	QPSK	1	0	0	20.26	0.52	20.78	0.120	1.000
			6	0	0	19.41	0.52	19.93	0.098	1.000
		16QAM	1	0	0	20.83	0.52	21.35	0.136	1.000
			5	0	0	19.19	0.52	19.71	0.094	1.000
	MCH	QPSK	1	0	0	20.24	0.52	20.76	0.119	1.000
			6	0	0	19.41	0.52	19.93	0.098	1.000
		16QAM	1	0	0	20.95	0.52	21.47	0.140	1.000
			5	0	0	19.79	0.52	20.31	0.107	1.000
	HCH	QPSK	1	0	0	20.15	0.52	20.67	0.117	1.000
			6	0	0	19.23	0.52	19.75	0.094	1.000
		16QAM	1	0	0	20.86	0.52	21.38	0.137	1.000
			5	0	0	19.4	0.52	19.92	0.098	1.000
10	LCH	QPSK	1	0	0	20.38	0.52	20.90	0.123	1.000

		16QAM	6	0	0	19.11	0.52	19.63	0.092	1.000
			1	0	0	20.56	0.52	21.08	0.128	1.000
			5	0	0	20.23	0.52	20.75	0.119	1.000
	MCH	QPSK	1	0	0	20.15	0.52	20.67	0.117	1.000
			6	0	0	19.38	0.52	19.90	0.098	1.000
		16QAM	1	0	0	20.67	0.52	21.19	0.132	1.000
			5	0	0	20.35	0.52	20.87	0.122	1.000
	HCH	QPSK	1	0	0	20.16	0.52	20.68	0.117	1.000
			6	0	0	19.24	0.52	19.76	0.095	1.000
		16QAM	1	0	0	20.66	0.52	21.18	0.131	1.000
			5	0	0	20.39	0.52	20.91	0.123	1.000
15	LCH	QPSK	1	0	0	20.1	0.52	20.62	0.115	1.000
			6	0	0	20.17	0.52	20.69	0.117	1.000
		16QAM	1	0	0	20.62	0.52	21.14	0.130	1.000
			5	0	0	20.26	0.52	20.78	0.120	1.000
	MCH	QPSK	1	0	0	20.04	0.52	20.56	0.114	1.000
			6	0	0	20.51	0.52	21.03	0.127	1.000
		16QAM	1	0	0	20.64	0.52	21.16	0.131	1.000
			5	0	0	20.35	0.52	20.87	0.122	1.000
	HCH	QPSK	1	0	0	20.24	0.52	20.76	0.119	1.000
			6	0	0	20.54	0.52	21.06	0.128	1.000
		16QAM	1	0	0	20.68	0.52	21.20	0.132	1.000
			5	0	0	20.52	0.52	21.04	0.127	1.000
20	LCH	QPSK	1	0	0	20.12	0.52	20.64	0.116	1.000
			6	0	0	20.22	0.52	20.74	0.119	1.000
		16QAM	1	0	0	20.43	0.52	20.95	0.124	1.000
			5	0	0	20.21	0.52	20.73	0.118	1.000
	MCH	QPSK	1	0	0	20.03	0.52	20.55	0.114	1.000
			6	0	0	20.2	0.52	20.72	0.118	1.000
		16QAM	1	0	0	20.57	0.52	21.09	0.129	1.000
			5	0	0	20.27	0.52	20.79	0.120	1.000
	HCH	QPSK	1	0	0	20.3	0.52	20.82	0.121	1.000
			6	0	0	20.65	0.52	21.17	0.131	1.000
		16QAM	1	0	0	20.66	0.52	21.18	0.131	1.000
			5	0	0	20.48	0.52	21.00	0.126	1.000

Bandwidth (MHz)	UL Channel	UL Modulation	UL RB Number	UL RB Position	Narrow Band	Conducted Output Power (dBm)	Antenna Gain (dBi)	Antenna Gain (dBd)	ERP (dBm)	ERP (W)	Limit (W)
CAT.M Band5											
1.4	LCH	QPSK	1	0	0	21.21	0.68	-1.47	19.74	0.094	7.000
			6	0	0	19.14	0.68	-1.47	17.67	0.058	7.000
		16QAM	1	0	0	20.37	0.68	-1.47	18.90	0.078	7.000
			5	0	0	19.24	0.68	-1.47	17.77	0.060	7.000
	MCH	QPSK	1	0	0	21.29	0.68	-1.47	19.82	0.096	7.000
			6	0	0	19.22	0.68	-1.47	17.75	0.060	7.000
		16QAM	1	0	0	20.49	0.68	-1.47	19.02	0.080	7.000
			5	0	0	19.37	0.68	-1.47	17.90	0.062	7.000
	HCH	QPSK	1	0	0	21.13	0.68	-1.47	19.66	0.092	7.000
			6	0	0	19.07	0.68	-1.47	17.60	0.058	7.000
		16QAM	1	0	0	20.38	0.68	-1.47	18.91	0.078	7.000
			5	0	0	19.32	0.68	-1.47	17.85	0.061	7.000
3	LCH	QPSK	1	0	0	21.26	0.68	-1.47	19.79	0.095	7.000
			6	0	0	19.1	0.68	-1.47	17.63	0.058	7.000
		16QAM	1	0	0	20.32	0.68	-1.47	18.85	0.077	7.000
			5	0	0	19.18	0.68	-1.47	17.71	0.059	7.000
	MCH	QPSK	1	0	0	21.35	0.68	-1.47	19.88	0.097	7.000
			6	0	0	19.17	0.68	-1.47	17.70	0.059	7.000
		16QAM	1	0	0	20.25	0.68	-1.47	18.78	0.076	7.000
			5	0	0	19.33	0.68	-1.47	17.86	0.061	7.000
	HCH	QPSK	1	0	0	21.19	0.68	-1.47	19.72	0.094	7.000
			6	0	0	19.02	0.68	-1.47	17.55	0.057	7.000
		16QAM	1	0	0	20.39	0.68	-1.47	18.92	0.078	7.000
			5	0	0	19.3	0.68	-1.47	17.83	0.061	7.000
5	LCH	QPSK	1	0	0	21.19	0.68	-1.47	19.72	0.094	7.000
			6	0	0	20.16	0.68	-1.47	18.69	0.074	7.000
		16QAM	1	0	0	21.68	0.68	-1.47	20.21	0.105	7.000
			5	0	0	20.07	0.68	-1.47	18.60	0.072	7.000
	MCH	QPSK	1	0	0	21.14	0.68	-1.47	19.67	0.093	7.000
			6	0	0	20.04	0.68	-1.47	18.57	0.072	7.000
		16QAM	1	0	0	21.4	0.68	-1.47	19.93	0.098	7.000
			5	0	0	19.89	0.68	-1.47	18.42	0.070	7.000
	HCH	QPSK	1	0	0	21.22	0.68	-1.47	19.75	0.094	7.000
			6	0	0	20.18	0.68	-1.47	18.71	0.074	7.000
		16QAM	1	0	0	21.48	0.68	-1.47	20.01	0.100	7.000
			5	0	0	20.19	0.68	-1.47	18.72	0.074	7.000
10	LCH	QPSK	1	0	0	21.11	0.68	-1.47	19.64	0.092	7.000

		16QAM	6	0	0	20.05	0.68	-1.47	18.58	0.072	7.000
			1	0	0	21.29	0.68	-1.47	19.82	0.096	7.000
			5	0	0	20.91	0.68	-1.47	19.44	0.088	7.000
	MCH	QPSK	1	0	0	21.05	0.68	-1.47	19.58	0.091	7.000
			6	0	0	20	0.68	-1.47	18.53	0.071	7.000
		16QAM	1	0	0	21.27	0.68	-1.47	19.80	0.095	7.000
			5	0	0	20.95	0.68	-1.47	19.48	0.089	7.000
	HCH	QPSK	1	0	0	21.19	0.68	-1.47	19.72	0.094	7.000
			6	0	0	20.21	0.68	-1.47	18.74	0.075	7.000
		16QAM	1	0	0	21.37	0.68	-1.47	19.90	0.098	7.000
			5	0	0	21.02	0.68	-1.47	19.55	0.090	7.000

Bandwidth (MHz)	UL Channel	UL Modulation	UL RB Number	UL RB Position	Narrow Band	Conducted Output Power (dBm)	Antenna Gain (dBi)	Antenna Gain (dBd)	ERP (dBm)	ERP (W)	Limit (W)
CAT.M Band12											
1.4	LCH	QPSK	1	0	0	21.03	0.09	-2.06	18.97	0.079	3.000
			6	0	0	18.76	0.09	-2.06	16.70	0.047	3.000
		16QAM	1	0	0	20.39	0.09	-2.06	18.33	0.068	3.000
			5	0	0	19.11	0.09	-2.06	17.05	0.051	3.000
	MCH	QPSK	1	0	0	21.24	0.09	-2.06	19.18	0.083	3.000
			6	0	0	19.05	0.09	-2.06	16.99	0.050	3.000
		16QAM	1	0	0	20.52	0.09	-2.06	18.46	0.070	3.000
			5	0	0	19.21	0.09	-2.06	17.15	0.052	3.000
	HCH	QPSK	1	0	0	21.05	0.09	-2.06	18.99	0.079	3.000
			6	0	0	18.75	0.09	-2.06	16.69	0.047	3.000
		16QAM	1	0	0	20.2	0.09	-2.06	18.14	0.065	3.000
			5	0	0	18.99	0.09	-2.06	16.93	0.049	3.000
3	LCH	QPSK	1	0	0	21.33	0.09	-2.06	19.27	0.085	3.000
			6	0	0	18.89	0.09	-2.06	16.83	0.048	3.000
		16QAM	1	0	0	20.27	0.09	-2.06	18.21	0.066	3.000
			5	0	0	19.05	0.09	-2.06	16.99	0.050	3.000
	MCH	QPSK	1	0	0	21.37	0.09	-2.06	19.31	0.085	3.000
			6	0	0	19.07	0.09	-2.06	17.01	0.050	3.000
		16QAM	1	0	0	20.54	0.09	-2.06	18.48	0.070	3.000
			5	0	0	19.13	0.09	-2.06	17.07	0.051	3.000
	HCH	QPSK	1	0	0	21.19	0.09	-2.06	19.13	0.082	3.000
			6	0	0	18.85	0.09	-2.06	16.79	0.048	3.000
		16QAM	1	0	0	20.32	0.09	-2.06	18.26	0.067	3.000
			5	0	0	19.14	0.09	-2.06	17.08	0.051	3.000
5	LCH	QPSK	1	0	0	21.34	0.09	-2.06	19.28	0.085	3.000
			6	0	0	19.93	0.09	-2.06	17.87	0.061	3.000
		16QAM	1	0	0	21.76	0.09	-2.06	19.70	0.093	3.000
			5	0	0	20	0.09	-2.06	17.94	0.062	3.000
	MCH	QPSK	1	0	0	21.15	0.09	-2.06	19.09	0.081	3.000
			6	0	0	19.97	0.09	-2.06	17.91	0.062	3.000
		16QAM	1	0	0	21.73	0.09	-2.06	19.67	0.093	3.000
			5	0	0	20.11	0.09	-2.06	18.05	0.064	3.000
	HCH	QPSK	1	0	0	21.11	0.09	-2.06	19.05	0.080	3.000
			6	0	0	20.01	0.09	-2.06	17.95	0.062	3.000
		16QAM	1	0	0	21.79	0.09	-2.06	19.73	0.094	3.000
			5	0	0	20.19	0.09	-2.06	18.13	0.065	3.000
10	LCH	QPSK	1	0	0	21	0.09	-2.06	18.94	0.078	3.000

			6	0	0	19.99	0.09	-2.06	17.93	0.062	3.000
		16QAM	1	0	0	21.69	0.09	-2.06	19.63	0.092	3.000
			5	0	0	21.08	0.09	-2.06	19.02	0.080	3.000
	MCH	QPSK	1	0	0	21.11	0.09	-2.06	19.05	0.080	3.000
			6	0	0	20	0.09	-2.06	17.94	0.062	3.000
		16QAM	1	0	0	21.72	0.09	-2.06	19.66	0.092	3.000
			5	0	0	21.14	0.09	-2.06	19.08	0.081	3.000
	HCH	QPSK	1	0	0	21.17	0.09	-2.06	19.11	0.081	3.000
			6	0	0	20.05	0.09	-2.06	17.99	0.063	3.000
		16QAM	1	0	0	21.79	0.09	-2.06	19.73	0.094	3.000
			5	0	0	21.25	0.09	-2.06	19.19	0.083	3.000

Bandwidth (MHz)	UL Channel	UL Modulation	UL RB Number	UL RB Position	Narrow Band	Conducted Output Power (dBm)	Antenna Gain (dBi)	Antenna Gain (dBd)	ERP (dBm)	ERP (W)	Limit (W)
CAT.M Band 13											
5	LCH	QPSK	1	0	0	21.72	0.18	-1.97	19.75	0.094	3.000
			6	0	0	20.38	0.18	-1.97	18.41	0.069	3.000
		16QAM	1	0	0	21.37	0.18	-1.97	19.40	0.087	3.000
			5	0	0	20.12	0.18	-1.97	18.15	0.065	3.000
	MCH	QPSK	1	0	0	21.08	0.18	-1.97	19.11	0.081	3.000
			6	0	0	19.97	0.18	-1.97	18.00	0.063	3.000
		16QAM	1	0	0	21.7	0.18	-1.97	19.73	0.094	3.000
			5	0	0	20.02	0.18	-1.97	18.05	0.064	3.000
	HCH	QPSK	1	0	0	21.19	0.18	-1.97	19.22	0.084	3.000
			6	0	0	20.34	0.18	-1.97	18.37	0.069	3.000
		16QAM	1	0	0	21.77	0.18	-1.97	19.80	0.095	3.000
			5	0	0	20.06	0.18	-1.97	18.09	0.064	3.000
10	MCH	QPSK	1	0	0	21.19	0.18	-1.97	19.22	0.084	3.000
			6	0	0	20.24	0.18	-1.97	18.27	0.067	3.000
		16QAM	1	0	0	21.43	0.18	-1.97	19.46	0.088	3.000
			5	0	0	21.05	0.18	-1.97	19.08	0.081	3.000

Bandwidth (MHz)	UL Channel	UL Modulation	UL RB Number	UL RB Position	Narrow Band	Conducted Output Power (dBm)	Antenna Gain (dBi)	Antenna Gain (dBd)	ERP (dBm)	ERP (W)	Limit (W)	Verdict
CAT.M Band 18 (part22)												
5	LCH	QPSK	1	0	0	21.04	0.29	-1.86	19.18	0.083	7.000	Pass
			6	0	0	19.94	0.29	-1.86	18.08	0.064	7.000	Pass
		16QAM	1	0	0	20.17	0.29	-1.86	18.31	0.068	7.000	Pass
			5	0	0	20.02	0.29	-1.86	18.16	0.065	7.000	Pass
	MCH	QPSK	1	0	0	20.92	0.29	-1.86	19.06	0.081	7.000	Pass
			6	0	0	19.89	0.29	-1.86	18.03	0.064	7.000	Pass
		16QAM	1	0	0	20.13	0.29	-1.86	18.27	0.067	7.000	Pass
			5	0	0	19.56	0.29	-1.86	17.70	0.059	7.000	Pass
	HCH	QPSK	1	0	0	20.54	0.29	-1.86	18.68	0.074	7.000	Pass
			6	0	0	19.66	0.29	-1.86	17.80	0.060	7.000	Pass
		16QAM	1	0	0	21.23	0.29	-1.86	19.37	0.086	7.000	Pass
			5	0	0	20.07	0.29	-1.86	18.21	0.066	7.000	Pass

Bandwidth (MHz)	UL Channel	UL Modulation	UL RB Number	UL RB Position	Narrow Band	Conducted Output Power (dBm)	Antenna Gain (dBi)	Antenna Gain (dBd)	ERP (dBm)	ERP (W)	Limit (W)	Verdict
CAT.M Band 18 (part90)												
5	LCH	QPSK	1	0	0	20.91	0.29	-1.86	19.05	0.080	100.000	Pass
			6	0	0	19.92	0.29	-1.86	18.06	0.064	100.000	Pass
		16QAM	1	0	0	20.19	0.29	-1.86	18.33	0.068	100.000	Pass
			5	0	0	20.08	0.29	-1.86	18.22	0.066	100.000	Pass
	MCH	QPSK	1	0	0	20.92	0.29	-1.86	19.06	0.081	100.000	Pass
			6	0	0	20.01	0.29	-1.86	18.15	0.065	100.000	Pass
		16QAM	1	0	0	21.4	0.29	-1.86	19.54	0.090	100.000	Pass
			5	0	0	19.6	0.29	-1.86	17.74	0.059	100.000	Pass
	HCH	QPSK	1	0	0	20.98	0.29	-1.86	19.12	0.082	100.000	Pass
			6	0	0	19.8	0.29	-1.86	17.94	0.062	100.000	Pass
		16QAM	1	0	0	21.34	0.29	-1.86	19.48	0.089	100.000	Pass
			5	0	0	20	0.29	-1.86	18.14	0.065	100.000	Pass

Bandwidth (MHz)	UL Channel	UL Modulation	UL RB Number	UL RB Position	Narrow Band	Conducted Output Power (dBm)	Antenna Gain (dBi)	Antenna Gain (dBd)	ERP (dBm)	ERP (W)	Limit (W)	Verdict
CAT.M Band 19												
5	LCH	QPSK	1	0	0	20.88	0.68	-1.47	19.41	0.087	7.000	Pass
			6	0	0	19.84	0.68	-1.47	18.37	0.069	7.000	Pass
		16QAM	1	0	0	21.16	0.68	-1.47	19.69	0.093	7.000	Pass
			5	0	0	19.4	0.68	-1.47	17.93	0.062	7.000	Pass
	MCH	QPSK	1	0	0	20.61	0.68	-1.47	19.14	0.082	7.000	Pass
			6	0	0	19.56	0.68	-1.47	18.09	0.064	7.000	Pass
		16QAM	1	0	0	21.3	0.68	-1.47	19.83	0.096	7.000	Pass
			5	0	0	19.76	0.68	-1.47	18.29	0.067	7.000	Pass
	HCH	QPSK	1	0	0	21	0.68	-1.47	19.53	0.090	7.000	Pass
			6	0	0	20.01	0.68	-1.47	18.54	0.071	7.000	Pass
		16QAM	1	0	0	21.22	0.68	-1.47	19.75	0.094	7.000	Pass
			5	0	0	19.43	0.68	-1.47	17.96	0.063	7.000	Pass
10	LCH	QPSK	1	0	0	20.8	0.68	-1.47	19.33	0.086	7.000	Pass
			6	0	0	19.83	0.68	-1.47	18.36	0.069	7.000	Pass
		16QAM	1	0	0	21.03	0.68	-1.47	19.56	0.090	7.000	Pass
			5	0	0	20.77	0.68	-1.47	19.30	0.085	7.000	Pass
	MCH	QPSK	1	0	0	20.98	0.68	-1.47	19.51	0.089	7.000	Pass
			6	0	0	19.97	0.68	-1.47	18.50	0.071	7.000	Pass
		16QAM	1	0	0	21.17	0.68	-1.47	19.70	0.093	7.000	Pass
			5	0	0	20.96	0.68	-1.47	19.49	0.089	7.000	Pass
	HCH	QPSK	1	0	0	21.17	0.68	-1.47	19.70	0.093	7.000	Pass
			6	0	0	20.09	0.68	-1.47	18.62	0.073	7.000	Pass
		16QAM	1	0	0	21.28	0.68	-1.47	19.81	0.096	7.000	Pass
			5	0	0	20.86	0.68	-1.47	19.39	0.087	7.000	Pass
15	MCH	QPSK	1	0	0	20.8	0.68	-1.47	19.33	0.086	7.000	Pass
			6	0	0	20.81	0.68	-1.47	19.34	0.086	7.000	Pass
		16QAM	1	0	0	20.56	0.68	-1.47	19.09	0.081	7.000	Pass
			5	0	0	20.97	0.68	-1.47	19.50	0.089	7.000	Pass

Bandwidth (MHz)	UL Channel	UL Modulation	UL RB Number	UL RB Position	Narrow Band	Conducted Output Power (dBm)	Antenna Gain (dBi)	Antenna Gain (dBd)	ERP (dBm)	ERP (W)	Limit (W)	Verdict
CAT.M Band 26(part22)												
1.4	LCH	QPSK	1	0	0	20.82	0.68	-1.47	19.35	0.086	7.000	Pass
			6	0	0	18.75	0.68	-1.47	17.28	0.053	7.000	Pass
		16QAM	1	0	0	19.91	0.68	-1.47	18.44	0.070	7.000	Pass
			5	0	0	18.68	0.68	-1.47	17.21	0.053	7.000	Pass
	MCH	QPSK	1	0	0	20.57	0.68	-1.47	19.10	0.081	7.000	Pass
			6	0	0	18.55	0.68	-1.47	17.08	0.051	7.000	Pass
		16QAM	1	0	0	19.71	0.68	-1.47	18.24	0.067	7.000	Pass
			5	0	0	18.63	0.68	-1.47	17.16	0.052	7.000	Pass
	HCH	QPSK	1	0	0	20.63	0.68	-1.47	19.16	0.082	7.000	Pass
			6	0	0	18.58	0.68	-1.47	17.11	0.051	7.000	Pass
		16QAM	1	0	0	19.78	0.68	-1.47	18.31	0.068	7.000	Pass
			5	0	0	18.62	0.68	-1.47	17.15	0.052	7.000	Pass
3	LCH	QPSK	1	0	0	18.58	0.68	-1.47	17.11	0.051	7.000	Pass
			6	0	0	14.77	0.68	-1.47	13.30	0.021	7.000	Pass
		16QAM	1	0	0	19.94	0.68	-1.47	18.47	0.070	7.000	Pass
			5	0	0	18.26	0.68	-1.47	16.79	0.048	7.000	Pass
	MCH	QPSK	1	0	0	20.58	0.68	-1.47	19.11	0.081	7.000	Pass
			6	0	0	18.59	0.68	-1.47	17.12	0.052	7.000	Pass
		16QAM	1	0	0	19.78	0.68	-1.47	18.31	0.068	7.000	Pass
			5	0	0	18.43	0.68	-1.47	16.96	0.050	7.000	Pass
	HCH	QPSK	1	0	0	20.74	0.68	-1.47	19.27	0.085	7.000	Pass
			6	0	0	16.35	0.68	-1.47	14.88	0.031	7.000	Pass
		16QAM	1	0	0	19.73	0.68	-1.47	18.26	0.067	7.000	Pass
			5	0	0	18.6	0.68	-1.47	17.13	0.052	7.000	Pass
5	LCH	QPSK	1	0	0	20.76	0.68	-1.47	19.29	0.085	7.000	Pass
			6	0	0	19.75	0.68	-1.47	18.28	0.067	7.000	Pass
		16QAM	1	0	0	20.48	0.68	-1.47	19.01	0.080	7.000	Pass
			5	0	0	19.23	0.68	-1.47	17.76	0.060	7.000	Pass
	MCH	QPSK	1	0	0	19.76	0.68	-1.47	18.29	0.067	7.000	Pass
			6	0	0	19.26	0.68	-1.47	17.79	0.060	7.000	Pass
		16QAM	1	0	0	19.79	0.68	-1.47	18.32	0.068	7.000	Pass
			5	0	0	19.68	0.68	-1.47	18.21	0.066	7.000	Pass
	HCH	QPSK	1	0	0	20.79	0.68	-1.47	19.32	0.086	7.000	Pass
			6	0	0	19.66	0.68	-1.47	18.19	0.066	7.000	Pass
		16QAM	1	0	0	20.83	0.68	-1.47	19.36	0.086	7.000	Pass
			5	0	0	19.73	0.68	-1.47	18.26	0.067	7.000	Pass
10	LCH	QPSK	1	0	0	20.81	0.68	-1.47	19.34	0.086	7.000	Pass

		16QAM	6	0	0	19.71	0.68	-1.47	18.24	0.067	7.000	Pass
			1	0	0	20.69	0.68	-1.47	19.22	0.084	7.000	Pass
			5	0	0	20.67	0.68	-1.47	19.20	0.083	7.000	Pass
	MCH	QPSK	1	0	0	20.77	0.68	-1.47	19.30	0.085	7.000	Pass
			6	0	0	19.69	0.68	-1.47	18.22	0.066	7.000	Pass
		16QAM	1	0	0	20.79	0.68	-1.47	19.32	0.086	7.000	Pass
			5	0	0	20.53	0.68	-1.47	19.06	0.081	7.000	Pass
	HCH	QPSK	1	0	0	20.81	0.68	-1.47	19.34	0.086	7.000	Pass
			6	0	0	19.64	0.68	-1.47	18.17	0.066	7.000	Pass
		16QAM	1	0	0	20.83	0.68	-1.47	19.36	0.086	7.000	Pass
			5	0	0	20.46	0.68	-1.47	18.99	0.079	7.000	Pass
15	LCH	QPSK	1	0	0	20.87	0.68	-1.47	19.40	0.087	7.000	Pass
			6	0	0	19.82	0.68	-1.47	18.35	0.068	7.000	Pass
		16QAM	1	0	0	19.91	0.68	-1.47	18.44	0.070	7.000	Pass
			5	0	0	19.67	0.68	-1.47	18.20	0.066	7.000	Pass
	MCH	QPSK	1	0	0	20.86	0.68	-1.47	19.39	0.087	7.000	Pass
			6	0	0	19.76	0.68	-1.47	18.29	0.067	7.000	Pass
		16QAM	1	0	0	19.92	0.68	-1.47	18.45	0.070	7.000	Pass
			5	0	0	20.83	0.68	-1.47	19.36	0.086	7.000	Pass
	HCH	QPSK	1	0	0	19.79	0.68	-1.47	18.32	0.068	7.000	Pass
			6	0	0	19.71	0.68	-1.47	18.24	0.067	7.000	Pass
		16QAM	1	0	0	20.44	0.68	-1.47	18.97	0.079	7.000	Pass
			5	0	0	20.86	0.68	-1.47	19.39	0.087	7.000	Pass

Bandwidth (MHz)	UL Channel	UL Modulation	UL RB Number	UL RB Position	Narrow Band	Conducted Output Power (dBm)	Antenna Gain (dBi)	Antenna Gain (dBd)	ERP (dBm)	ERP (W)	Limit (W)	Verdict
CAT.M Band 26(part90)												
1.4	LCH	QPSK	1	0	0	20.76	0.29	-1.86	18.90	0.078	100.000	Pass
			6	0	0	18.67	0.29	-1.86	16.81	0.048	100.000	Pass
		16QAM	1	0	0	19.76	0.29	-1.86	17.90	0.062	100.000	Pass
			5	0	0	18.68	0.29	-1.86	16.82	0.048	100.000	Pass
	MCH	QPSK	1	0	0	20.86	0.29	-1.86	19.00	0.079	100.000	Pass
			6	0	0	18.76	0.29	-1.86	16.90	0.049	100.000	Pass
		16QAM	1	0	0	19.9	0.29	-1.86	18.04	0.064	100.000	Pass
			5	0	0	18.56	0.29	-1.86	16.70	0.047	100.000	Pass
	HCH	QPSK	1	0	0	20.81	0.29	-1.86	18.95	0.079	100.000	Pass
			6	0	0	18.76	0.29	-1.86	16.90	0.049	100.000	Pass
		16QAM	1	0	0	19.87	0.29	-1.86	18.01	0.063	100.000	Pass
			5	0	0	18.66	0.29	-1.86	16.80	0.048	100.000	Pass
3	LCH	QPSK	1	0	0	20.55	0.29	-1.86	18.69	0.074	100.000	Pass
			6	0	0	18.67	0.29	-1.86	16.81	0.048	100.000	Pass
		16QAM	1	0	0	15.92	0.29	-1.86	14.06	0.025	100.000	Pass
			5	0	0	16.48	0.29	-1.86	14.62	0.029	100.000	Pass
	MCH	QPSK	1	0	0	18.48	0.29	-1.86	16.62	0.046	100.000	Pass
			6	0	0	16.49	0.29	-1.86	14.63	0.029	100.000	Pass
		16QAM	1	0	0	15.95	0.29	-1.86	14.09	0.026	100.000	Pass
			5	0	0	17.09	0.29	-1.86	15.23	0.033	100.000	Pass
	HCH	QPSK	1	0	0	18.54	0.29	-1.86	16.68	0.047	100.000	Pass
			6	0	0	14.69	0.29	-1.86	12.83	0.019	100.000	Pass
		16QAM	1	0	0	15.91	0.29	-1.86	14.05	0.025	100.000	Pass
			5	0	0	16.42	0.29	-1.86	14.56	0.029	100.000	Pass
5	LCH	QPSK	1	0	0	20.35	0.29	-1.86	18.49	0.071	100.000	Pass
			6	0	0	19.63	0.29	-1.86	17.77	0.060	100.000	Pass
		16QAM	1	0	0	19.87	0.29	-1.86	18.01	0.063	100.000	Pass
			5	0	0	19.85	0.29	-1.86	17.99	0.063	100.000	Pass
	MCH	QPSK	1	0	0	20.42	0.29	-1.86	18.56	0.072	100.000	Pass
			6	0	0	19.71	0.29	-1.86	17.85	0.061	100.000	Pass
		16QAM	1	0	0	19.95	0.29	-1.86	18.09	0.064	100.000	Pass
			5	0	0	19.93	0.29	-1.86	18.07	0.064	100.000	Pass
	HCH	QPSK	1	0	0	19.87	0.29	-1.86	18.01	0.063	100.000	Pass
			6	0	0	19.57	0.29	-1.86	17.71	0.059	100.000	Pass
		16QAM	1	0	0	20.98	0.29	-1.86	19.12	0.082	100.000	Pass
			5	0	0	19.71	0.29	-1.86	17.85	0.061	100.000	Pass
10	MCH	QPSK	1	0	0	20.79	0.29	-1.86	18.93	0.078	100.000	Pass

			6	0	0	19.72	0.29	-1.86	17.86	0.061	100.000	Pass
		16QAM	1	0	0	20.99	0.29	-1.86	19.13	0.082	100.000	Pass
			5	0	0	20.7	0.29	-1.86	18.84	0.077	100.000	Pass

Bandwidth (MHz)	UL Channel	UL Modulation	UL RB Number	UL RB Position	Narrow Band	Conducted Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Limit (W)
CAT.M Band 66										
1.4	LCH	QPSK	1	0	0	20.19	0.52	20.71	0.118	1.000
			6	0	0	18.07	0.52	18.59	0.072	1.000
		16QAM	1	0	0	18.93	0.52	19.45	0.088	1.000
			5	0	0	17.85	0.52	18.37	0.069	1.000
	MCH	QPSK	1	0	0	19.92	0.52	20.44	0.111	1.000
			6	0	0	18.08	0.52	18.60	0.072	1.000
		16QAM	1	0	0	19.11	0.52	19.63	0.092	1.000
			5	0	0	17.84	0.52	18.36	0.069	1.000
	HCH	QPSK	1	0	0	19.53	0.52	20.05	0.101	1.000
			6	0	0	17.59	0.52	18.11	0.065	1.000
		16QAM	1	0	0	18.82	0.52	19.34	0.086	1.000
			5	0	0	17.34	0.52	17.86	0.061	1.000
3	LCH	QPSK	1	0	0	19.95	0.52	20.47	0.111	1.000
			6	0	0	17.81	0.52	18.33	0.068	1.000
		16QAM	1	0	0	17.15	0.52	17.67	0.058	1.000
			5	0	0	17.95	0.52	18.47	0.070	1.000
	MCH	QPSK	1	0	0	19.99	0.52	20.51	0.112	1.000
			6	0	0	17.92	0.52	18.44	0.070	1.000
		16QAM	1	0	0	18.64	0.52	19.16	0.082	1.000
			5	0	0	17.88	0.52	18.40	0.069	1.000
	HCH	QPSK	1	0	0	19.65	0.52	20.17	0.104	1.000
			6	0	0	17.53	0.52	18.05	0.064	1.000
		16QAM	1	0	0	18.6	0.52	19.12	0.082	1.000
			5	0	0	17.41	0.52	17.93	0.062	1.000
5	LCH	QPSK	1	0	0	19.99	0.52	20.51	0.112	1.000
			6	0	0	18.95	0.52	19.47	0.089	1.000
		16QAM	1	0	0	20.32	0.52	20.84	0.121	1.000
			5	0	0	18.91	0.52	19.43	0.088	1.000
	MCH	QPSK	1	0	0	19.76	0.52	20.28	0.107	1.000
			6	0	0	19.02	0.52	19.54	0.090	1.000
		16QAM	1	0	0	20.29	0.52	20.81	0.121	1.000
			5	0	0	18.78	0.52	19.30	0.085	1.000
	HCH	QPSK	1	0	0	19.38	0.52	19.90	0.098	1.000
			6	0	0	18.48	0.52	19.00	0.079	1.000
		16QAM	1	0	0	19.98	0.52	20.50	0.112	1.000
			5	0	0	18.34	0.52	18.86	0.077	1.000
10	LCH	QPSK	1	0	0	19.83	0.52	20.35	0.108	1.000

		16QAM	6	0	0	18.86	0.52	19.38	0.087	1.000
			1	0	0	20.28	0.52	20.80	0.120	1.000
			5	0	0	19.95	0.52	20.47	0.111	1.000
	MCH	QPSK	1	0	0	19.75	0.52	20.27	0.106	1.000
			6	0	0	18.94	0.52	19.46	0.088	1.000
		16QAM	1	0	0	20.26	0.52	20.78	0.120	1.000
			5	0	0	20.02	0.52	20.54	0.113	1.000
	HCH	QPSK	1	0	0	19.23	0.52	19.75	0.094	1.000
			6	0	0	18.28	0.52	18.80	0.076	1.000
		16QAM	1	0	0	19.68	0.52	20.20	0.105	1.000
			5	0	0	19.37	0.52	19.89	0.097	1.000
15	LCH	QPSK	1	0	0	19.68	0.52	20.20	0.105	1.000
			6	0	0	19.82	0.52	20.34	0.108	1.000
		16QAM	1	0	0	20.14	0.52	20.66	0.116	1.000
			5	0	0	19.83	0.52	20.35	0.108	1.000
	MCH	QPSK	1	0	0	19.95	0.52	20.47	0.111	1.000
			6	0	0	20.05	0.52	20.57	0.114	1.000
		16QAM	1	0	0	20.39	0.52	20.91	0.123	1.000
			5	0	0	20.16	0.52	20.68	0.117	1.000
	HCH	QPSK	1	0	0	19.38	0.52	19.90	0.098	1.000
			6	0	0	19.44	0.52	19.96	0.099	1.000
		16QAM	1	0	0	19.74	0.52	20.26	0.106	1.000
			5	0	0	19.45	0.52	19.97	0.099	1.000
20	LCH	QPSK	1	0	0	19.67	0.52	20.19	0.104	1.000
			6	0	0	19.8	0.52	20.32	0.108	1.000
		16QAM	1	0	0	20.18	0.52	20.70	0.117	1.000
			5	0	0	19.81	0.52	20.33	0.108	1.000
	MCH	QPSK	1	0	0	19.92	0.52	20.44	0.111	1.000
			6	0	0	20.1	0.52	20.62	0.115	1.000
		16QAM	1	0	0	20.32	0.52	20.84	0.121	1.000
			5	0	0	20.01	0.52	20.53	0.113	1.000
	HCH	QPSK	1	0	0	19.41	0.52	19.93	0.098	1.000
			6	0	0	19.52	0.52	20.04	0.101	1.000
		16QAM	1	0	0	19.68	0.52	20.20	0.105	1.000
			5	0	0	19.47	0.52	19.99	0.100	1.000

Bandwidth (KHz)	UL Channel	UL Modulation	UL RB Number	UL RB Position	Conducted Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
NB-IOT Band 2										
3.75	LCH	QPSK	1	0	20.07	0.62	20.69	0.117	2.000	Pass
			1	47	20.15	0.62	20.77	0.119	2.000	Pass
		BPSK	1	0	20.11	0.62	20.73	0.118	2.000	Pass
			1	47	20.21	0.62	20.83	0.121	2.000	Pass
	MCH	QPSK	1	0	19.32	0.62	19.94	0.099	2.000	Pass
			1	47	19.26	0.62	19.88	0.097	2.000	Pass
		BPSK	1	0	19.28	0.62	19.90	0.098	2.000	Pass
			1	47	19.34	0.62	19.96	0.099	2.000	Pass
	HCH	QPSK	1	0	19.87	0.62	20.49	0.112	2.000	Pass
			1	47	19.86	0.62	20.48	0.112	2.000	Pass
		BPSK	1	0	19.66	0.62	20.28	0.107	2.000	Pass
			1	47	19.71	0.62	20.33	0.108	2.000	Pass
15	LCH	QPSK	1	0	20.08	0.62	20.70	0.117	2.000	Pass
			1	11	20.02	0.62	20.64	0.116	2.000	Pass
			12	0	17.39	0.62	18.01	0.063	2.000	Pass
		BPSK	1	0	20.1	0.62	20.72	0.118	2.000	Pass
			1	11	20.03	0.62	20.65	0.116	2.000	Pass
	MCH	QPSK	1	0	18.52	0.62	19.14	0.082	2.000	Pass
			1	11	18.51	0.62	19.13	0.082	2.000	Pass
			12	0	16.35	0.62	16.97	0.050	2.000	Pass
		BPSK	1	0	18.64	0.62	19.26	0.084	2.000	Pass
			1	11	18.54	0.62	19.16	0.082	2.000	Pass
			12	0	16.64	0.62	17.26	0.053	2.000	Pass
	HCH	QPSK	1	0	19.18	0.62	19.80	0.095	2.000	Pass
			1	11	19.06	0.62	19.68	0.093	2.000	Pass
			12	0	16.64	0.62	17.26	0.053	2.000	Pass
		BPSK	1	0	19.17	0.62	19.79	0.095	2.000	Pass
			1	11	19.07	0.62	19.69	0.093	2.000	Pass

Bandwidth (KHz)	UL Channel	UL Modulation	UL RB Number	UL RB Position	Conducted Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
NB-IOT Band 4										
3.75	LCH	QPSK	1	0	19.1	0.52	19.62	0.092	1.000	Pass
			1	47	18.63	0.52	19.15	0.082	1.000	Pass
		BPSK	1	0	18.89	0.52	19.41	0.087	1.000	Pass
			1	47	18.95	0.52	19.47	0.089	1.000	Pass
	MCH	QPSK	1	0	19.4	0.52	19.92	0.098	1.000	Pass
			1	47	19.25	0.52	19.77	0.095	1.000	Pass
		BPSK	1	0	20.13	0.52	20.65	0.116	1.000	Pass
			1	47	19.24	0.52	19.76	0.095	1.000	Pass
	HCH	QPSK	1	0	18.64	0.52	19.16	0.082	1.000	Pass
			1	47	18.44	0.52	18.96	0.079	1.000	Pass
		BPSK	1	0	18.51	0.52	19.03	0.080	1.000	Pass
			1	47	18.42	0.52	18.94	0.078	1.000	Pass
15	LCH	QPSK	1	0	18.32	0.52	18.84	0.077	1.000	Pass
			1	11	18.16	0.52	18.68	0.074	1.000	Pass
			12	0	16.15	0.52	16.67	0.046	1.000	Pass
		BPSK	1	0	18.45	0.52	18.97	0.079	1.000	Pass
			1	11	18.32	0.52	18.84	0.077	1.000	Pass
	MCH	QPSK	1	0	18.46	0.52	18.98	0.079	1.000	Pass
			1	11	18.58	0.52	19.10	0.081	1.000	Pass
			12	0	16.4	0.52	16.92	0.049	1.000	Pass
		BPSK	1	0	18.33	0.52	18.85	0.077	1.000	Pass
			1	11	18.47	0.52	18.99	0.079	1.000	Pass
	HCH	QPSK	1	0	18.32	0.52	18.84	0.077	1.000	Pass
			1	11	18.37	0.52	18.89	0.077	1.000	Pass
			12	0	15.51	0.52	16.03	0.040	1.000	Pass
		BPSK	1	0	18.38	0.52	18.90	0.078	1.000	Pass
			1	11	18.41	0.52	18.93	0.078	1.000	Pass

Bandwidth (KHz)	UL Channel	UL Modulation	UL RB Number	UL RB Position	Conducted Output Power (dBm)	Antenna Gain (dBi)	Antenna Gain (dBd)	ERP (dBm)	ERP (W)	Limit (W)	Verdict
NB-IOT Band 5											
3.75	LCH	QPSK	1	0	21.36	0.68	-1.47	19.89	0.097	7.000	Pass
			1	47	21.39	0.68	-1.47	19.92	0.098	7.000	Pass
		BPSK	1	0	21.45	0.68	-1.47	19.98	0.100	7.000	Pass
			1	47	21.4	0.68	-1.47	19.93	0.098	7.000	Pass
	MCH	QPSK	1	0	21.38	0.68	-1.47	19.91	0.098	7.000	Pass
			1	47	21.26	0.68	-1.47	19.79	0.095	7.000	Pass
		BPSK	1	0	21.27	0.68	-1.47	19.80	0.095	7.000	Pass
			1	47	21.34	0.68	-1.47	19.87	0.097	7.000	Pass
	HCH	QPSK	1	0	21.31	0.68	-1.47	19.84	0.096	7.000	Pass
			1	47	21.24	0.68	-1.47	19.77	0.095	7.000	Pass
		BPSK	1	0	21.27	0.68	-1.47	19.80	0.095	7.000	Pass
			1	47	21.29	0.68	-1.47	19.82	0.096	7.000	Pass
15	LCH	QPSK	1	0	21.39	0.68	-1.47	19.92	0.098	7.000	Pass
			1	11	21.41	0.68	-1.47	19.94	0.099	7.000	Pass
			12	0	19.28	0.68	-1.47	17.81	0.060	7.000	Pass
		BPSK	1	0	21.49	0.68	-1.47	20.02	0.100	7.000	Pass
			1	11	21.39	0.68	-1.47	19.92	0.098	7.000	Pass
	MCH	QPSK	1	0	21.13	0.68	-1.47	19.66	0.092	7.000	Pass
			1	11	21.08	0.68	-1.47	19.61	0.091	7.000	Pass
			12	0	18.92	0.68	-1.47	17.45	0.056	7.000	Pass
		BPSK	1	0	21.21	0.68	-1.47	19.74	0.094	7.000	Pass
			1	11	21.1	0.68	-1.47	19.63	0.092	7.000	Pass
			12	0	18.79	0.68	-1.47	17.32	0.054	7.000	Pass
	HCH	QPSK	1	0	21.03	0.68	-1.47	19.56	0.090	7.000	Pass
			1	11	20.93	0.68	-1.47	19.46	0.088	7.000	Pass
			12	0	18.79	0.68	-1.47	17.32	0.054	7.000	Pass
		BPSK	1	0	21.03	0.68	-1.47	19.56	0.090	7.000	Pass
			1	11	20.92	0.68	-1.47	19.45	0.088	7.000	Pass

Bandwidth (KHz)	UL Channel	UL Modulation	UL RB Number	UL RB Position	Conducted Output Power (dBm)	Antenna Gain (dBi)	Antenna Gain (dBd)	ERP (dBm)	ERP (W)	Limit (W)	Verdict
NB-IOT Band 12											
3.75	LCH	QPSK	1	0	21.57	0.09	-2.06	19.51	0.089	3.000	Pass
			1	47	21.45	0.09	-2.06	19.39	0.087	3.000	Pass
		BPSK	1	0	21.45	0.09	-2.06	19.39	0.087	3.000	Pass
			1	47	21.4	0.09	-2.06	19.34	0.086	3.000	Pass
	MCH	QPSK	1	0	21.21	0.09	-2.06	19.15	0.082	3.000	Pass
			1	47	21.18	0.09	-2.06	19.12	0.082	3.000	Pass
		BPSK	1	0	21.2	0.09	-2.06	19.14	0.082	3.000	Pass
			1	47	21.26	0.09	-2.06	19.20	0.083	3.000	Pass
	HCH	QPSK	1	0	21.14	0.09	-2.06	19.08	0.081	3.000	Pass
			1	47	21.06	0.09	-2.06	19.00	0.079	3.000	Pass
		BPSK	1	0	21.15	0.09	-2.06	19.09	0.081	3.000	Pass
			1	47	21.03	0.09	-2.06	18.97	0.079	3.000	Pass
15	LCH	QPSK	1	0	21.22	0.09	-2.06	19.16	0.082	3.000	Pass
			1	11	21.09	0.09	-2.06	19.03	0.080	3.000	Pass
			12	0	18.84	0.09	-2.06	16.78	0.048	3.000	Pass
		BPSK	1	0	21.19	0.09	-2.06	19.13	0.082	3.000	Pass
			1	11	21.08	0.09	-2.06	19.02	0.080	3.000	Pass
	MCH	QPSK	1	0	20.51	0.09	-2.06	18.45	0.070	3.000	Pass
			1	11	20.54	0.09	-2.06	18.48	0.070	3.000	Pass
			12	0	18.34	0.09	-2.06	16.28	0.042	3.000	Pass
		BPSK	1	0	20.63	0.09	-2.06	18.57	0.072	3.000	Pass
			1	11	20.52	0.09	-2.06	18.46	0.070	3.000	Pass
	HCH	QPSK	1	0	20.47	0.09	-2.06	18.41	0.069	3.000	Pass
			1	11	20.4	0.09	-2.06	18.34	0.068	3.000	Pass
			12	0	18.27	0.09	-2.06	16.21	0.042	3.000	Pass
		BPSK	1	0	20.51	0.09	-2.06	18.45	0.070	3.000	Pass
			1	11	20.41	0.09	-2.06	18.35	0.068	3.000	Pass

Bandwidth (KHz)	UL Channel	UL Modulation	UL RB Number	UL RB Position	Conducted Output Power (dBm)	Antenna Gain (dBi)	Antenna Gain (dBd)	ERP (dBm)	ERP (W)	Limit (W)	Verdict
NB-IOT Band 13											
3.75	LCH	QPSK	1	0	21.35	0.18	-1.97	19.38	0.087	3.000	Pass
			1	47	21.22	0.18	-1.97	19.25	0.084	3.000	Pass
		BPSK	1	0	21.4	0.18	-1.97	19.43	0.088	3.000	Pass
			1	47	21.33	0.18	-1.97	19.36	0.086	3.000	Pass
	MCH	QPSK	1	0	21	0.18	-1.97	19.03	0.080	3.000	Pass
			1	47	20.91	0.18	-1.97	18.94	0.078	3.000	Pass
		BPSK	1	0	21.09	0.18	-1.97	19.12	0.082	3.000	Pass
			1	47	20.93	0.18	-1.97	18.96	0.079	3.000	Pass
	HCH	QPSK	1	0	21.11	0.18	-1.97	19.14	0.082	3.000	Pass
			1	47	20.95	0.18	-1.97	18.98	0.079	3.000	Pass
		BPSK	1	0	20.94	0.18	-1.97	18.97	0.079	3.000	Pass
			1	47	20.91	0.18	-1.97	18.94	0.078	3.000	Pass
15	LCH	QPSK	1	0	21	0.18	-1.97	19.03	0.080	3.000	Pass
			1	11	20.86	0.18	-1.97	18.89	0.077	3.000	Pass
			12	0	18.64	0.18	-1.97	16.67	0.046	3.000	Pass
		BPSK	1	0	21.01	0.18	-1.97	19.04	0.080	3.000	Pass
			1	11	20.91	0.18	-1.97	18.94	0.078	3.000	Pass
	MCH	QPSK	1	0	20.45	0.18	-1.97	18.48	0.070	3.000	Pass
			1	11	20.41	0.18	-1.97	18.44	0.070	3.000	Pass
			12	0	18.25	0.18	-1.97	16.28	0.042	3.000	Pass
		BPSK	1	0	20.53	0.18	-1.97	18.56	0.072	3.000	Pass
			1	11	20.43	0.18	-1.97	18.46	0.070	3.000	Pass
	HCH	QPSK	1	0	20.46	0.18	-1.97	18.49	0.071	3.000	Pass
			1	11	20.4	0.18	-1.97	18.43	0.070	3.000	Pass
			12	0	18.13	0.18	-1.97	16.16	0.041	3.000	Pass
		BPSK	1	0	20.55	0.18	-1.97	18.58	0.072	3.000	Pass
			1	11	20.42	0.18	-1.97	18.45	0.070	3.000	Pass

Bandwidth (KHz)	UL Channel	UL Modulation	UL RB Number	UL RB Position	Conducted Output Power (dBm)	Antenna Gain (dBi)	Antenna Gain (dBd)	ERP (dBm)	ERP (W)	Limit (W)	Verdict
NB-IOT Band 18(part90)											
3.75	LCH	QPSK	1	0	21.8	0.29	-1.86	19.94	0.099	100.000	Pass
			1	47	21.61	0.29	-1.86	19.75	0.094	100.000	Pass
		BPSK	1	0	21.81	0.29	-1.86	19.95	0.099	100.000	Pass
			1	47	21.71	0.29	-1.86	19.85	0.097	100.000	Pass
	MCH	QPSK	1	0	21.72	0.29	-1.86	19.86	0.097	100.000	Pass
			1	47	21.6	0.29	-1.86	19.74	0.094	100.000	Pass
		BPSK	1	0	21.74	0.29	-1.86	19.88	0.097	100.000	Pass
			1	47	21.57	0.29	-1.86	19.71	0.094	100.000	Pass
	HCH	QPSK	1	0	21.61	0.29	-1.86	19.75	0.094	100.000	Pass
			1	47	21.49	0.29	-1.86	19.63	0.092	100.000	Pass
		BPSK	1	0	21.71	0.29	-1.86	19.85	0.097	100.000	Pass
			1	47	21.45	0.29	-1.86	19.59	0.091	100.000	Pass
15	LCH	QPSK	1	0	21.47	0.29	-1.86	19.61	0.091	100.000	Pass
			1	11	21.54	0.29	-1.86	19.68	0.093	100.000	Pass
			12	0	19.38	0.29	-1.86	17.52	0.056	100.000	Pass
		BPSK	1	0	21.64	0.29	-1.86	19.78	0.095	100.000	Pass
			1	11	21.62	0.29	-1.86	19.76	0.095	100.000	Pass
	MCH	QPSK	1	0	21.5	0.29	-1.86	19.64	0.092	100.000	Pass
			1	11	21.43	0.29	-1.86	19.57	0.091	100.000	Pass
			12	0	19.37	0.29	-1.86	17.51	0.056	100.000	Pass
		BPSK	1	0	21.53	0.29	-1.86	19.67	0.093	100.000	Pass
			1	11	21.43	0.29	-1.86	19.57	0.091	100.000	Pass
	HCH	QPSK	1	0	21.47	0.29	-1.86	19.61	0.091	100.000	Pass
			1	11	21.35	0.29	-1.86	19.49	0.089	100.000	Pass
			12	0	19.36	0.29	-1.86	17.50	0.056	100.000	Pass
		BPSK	1	0	21.45	0.29	-1.86	19.59	0.091	100.000	Pass
			1	11	21.43	0.29	-1.86	19.57	0.091	100.000	Pass

Bandwidth (KHz)	UL Channel	UL Modulation	UL RB Number	UL RB Position	Conducted Output Power (dBm)	Antenna Gain (dBi)	Antenna Gain (dBd)	ERP (dBm)	ERP (W)	Limit (W)	Verdict
NB-IOT Band 18(part22)											
3.75	LCH	QPSK	1	0	21.62	0.29	-1.86	19.76	0.095	7.000	Pass
			1	47	21.49	0.29	-1.86	19.63	0.092	7.000	Pass
		BPSK	1	0	21.55	0.29	-1.86	19.69	0.093	7.000	Pass
			1	47	21.52	0.29	-1.86	19.66	0.092	7.000	Pass
	MCH	QPSK	1	0	21.56	0.29	-1.86	19.70	0.093	7.000	Pass
			1	47	21.41	0.29	-1.86	19.55	0.090	7.000	Pass
		BPSK	1	0	21.6	0.29	-1.86	19.74	0.094	7.000	Pass
			1	47	21.5	0.29	-1.86	19.64	0.092	7.000	Pass
	HCH	QPSK	1	0	21.56	0.29	-1.86	19.70	0.093	7.000	Pass
			1	47	21.42	0.29	-1.86	19.56	0.090	7.000	Pass
		BPSK	1	0	21.61	0.29	-1.86	19.75	0.094	7.000	Pass
			1	47	21.44	0.29	-1.86	19.58	0.091	7.000	Pass
15	LCH	QPSK	1	0	21.51	0.29	-1.86	19.65	0.092	7.000	Pass
			1	11	21.36	0.29	-1.86	19.50	0.089	7.000	Pass
			12	0	19.33	0.29	-1.86	17.47	0.056	7.000	Pass
		BPSK	1	0	21.53	0.29	-1.86	19.67	0.093	7.000	Pass
			1	11	21.40	0.29	-1.86	19.54	0.090	7.000	Pass
	MCH	QPSK	1	0	21.51	0.29	-1.86	19.65	0.092	7.000	Pass
			1	11	21.38	0.29	-1.86	19.52	0.090	7.000	Pass
			12	0	19.35	0.29	-1.86	17.49	0.056	7.000	Pass
		BPSK	1	0	21.42	0.29	-1.86	19.56	0.090	7.000	Pass
			1	11	21.43	0.29	-1.86	19.57	0.091	7.000	Pass
	HCH	QPSK	1	0	21.43	0.29	-1.86	19.57	0.091	7.000	Pass
			1	11	21.39	0.29	-1.86	19.53	0.090	7.000	Pass
			12	0	19.38	0.29	-1.86	17.52	0.056	7.000	Pass
		BPSK	1	0	21.5	0.29	-1.86	19.64	0.092	7.000	Pass
			1	11	21.45	0.29	-1.86	19.59	0.091	7.000	Pass

Bandwidth (KHz)	UL Channel	UL Modulation	UL RB Number	UL RB Position	Conducted Output Power (dBm)	Antenna Gain (dBi)	Antenna Gain (dBd)	ERP (dBm)	ERP (W)	Limit (W)	Verdict
NB-IOT Band 19											
3.75	LCH	QPSK	1	0	21.61	0.68	-1.47	20.14	0.103	7.000	Pass
			1	47	21.51	0.68	-1.47	20.04	0.101	7.000	Pass
		BPSK	1	0	21.73	0.68	-1.47	20.26	0.106	7.000	Pass
			1	47	21.4	0.68	-1.47	19.93	0.098	7.000	Pass
	MCH	QPSK	1	0	21.77	0.68	-1.47	20.30	0.107	7.000	Pass
			1	47	21.63	0.68	-1.47	20.16	0.104	7.000	Pass
		BPSK	1	0	21.8	0.68	-1.47	20.33	0.108	7.000	Pass
			1	47	21.7	0.68	-1.47	20.23	0.105	7.000	Pass
	HCH	QPSK	1	0	21.51	0.68	-1.47	20.04	0.101	7.000	Pass
			1	47	21.3	0.68	-1.47	19.83	0.096	7.000	Pass
		BPSK	1	0	21.45	0.68	-1.47	19.98	0.100	7.000	Pass
			1	47	21.37	0.68	-1.47	19.90	0.098	7.000	Pass
15	LCH	QPSK	1	0	21.51	0.68	-1.47	20.04	0.101	7.000	Pass
			1	11	21.37	0.68	-1.47	19.90	0.098	7.000	Pass
			12	0	19.37	0.68	-1.47	17.90	0.062	7.000	Pass
		BPSK	1	0	21.51	0.68	-1.47	20.04	0.101	7.000	Pass
			1	11	21.46	0.68	-1.47	19.99	0.100	7.000	Pass
	MCH	QPSK	1	0	21.67	0.68	-1.47	20.20	0.105	7.000	Pass
			1	11	21.53	0.68	-1.47	20.06	0.101	7.000	Pass
			12	0	19.57	0.68	-1.47	18.10	0.065	7.000	Pass
		BPSK	1	0	21.69	0.68	-1.47	20.22	0.105	7.000	Pass
			1	11	21.54	0.68	-1.47	20.07	0.102	7.000	Pass
	HCH	QPSK	1	0	21.28	0.68	-1.47	19.81	0.096	7.000	Pass
			1	11	21.24	0.68	-1.47	19.77	0.095	7.000	Pass
			12	0	19.27	0.68	-1.47	17.80	0.060	7.000	Pass
		BPSK	1	0	21.35	0.68	-1.47	19.88	0.097	7.000	Pass
			1	11	21.26	0.68	-1.47	19.79	0.095	7.000	Pass

Bandwidth (KHz)	UL Channel	UL Modulation	UL RB Number	UL RB Position	Conducted Output Power (dBm)	Antenna Gain (dBi)	Antenna Gain (dBd)	ERP (dBm)	ERP (W)	Limit (W)	Verdict
NB-IOT Band 26(part90)											
3.75	LCH	QPSK	1	0	21.81	0.29	-1.86	19.95	0.099	100.000	Pass
			1	47	21.7	0.29	-1.86	19.84	0.096	100.000	Pass
		BPSK	1	0	21.77	0.29	-1.86	19.91	0.098	100.000	Pass
			1	47	21.64	0.29	-1.86	19.78	0.095	100.000	Pass
	MCH	QPSK	1	0	21.85	0.29	-1.86	19.99	0.100	100.000	Pass
			1	47	21.69	0.29	-1.86	19.83	0.096	100.000	Pass
		BPSK	1	0	21.83	0.29	-1.86	19.97	0.099	100.000	Pass
			1	47	21.77	0.29	-1.86	19.91	0.098	100.000	Pass
	HCH	QPSK	1	0	21.72	0.29	-1.86	19.86	0.097	100.000	Pass
			1	47	21.68	0.29	-1.86	19.82	0.096	100.000	Pass
		BPSK	1	0	21.73	0.29	-1.86	19.87	0.097	100.000	Pass
			1	47	21.61	0.29	-1.86	19.75	0.094	100.000	Pass
15	LCH	QPSK	1	0	21.62	0.29	-1.86	19.76	0.095	100.000	Pass
			1	11	21.48	0.29	-1.86	19.62	0.092	100.000	Pass
			12	0	19.36	0.29	-1.86	17.50	0.056	100.000	Pass
		BPSK	1	0	21.51	0.29	-1.86	19.65	0.092	100.000	Pass
			1	11	21.75	0.29	-1.86	19.89	0.097	100.000	Pass
	MCH	QPSK	1	0	21.60	0.29	-1.86	19.74	0.094	100.000	Pass
			1	11	21.57	0.29	-1.86	19.71	0.094	100.000	Pass
			12	0	19.54	0.29	-1.86	17.68	0.059	100.000	Pass
		BPSK	1	0	21.67	0.29	-1.86	19.81	0.096	100.000	Pass
			1	11	21.63	0.29	-1.86	19.77	0.095	100.000	Pass
	HCH	QPSK	1	0	21.71	0.29	-1.86	19.85	0.097	100.000	Pass
			1	11	21.58	0.29	-1.86	19.72	0.094	100.000	Pass
			12	0	19.48	0.29	-1.86	17.62	0.058	100.000	Pass
		BPSK	1	0	21.67	0.29	-1.86	19.81	0.096	100.000	Pass
			1	11	21.64	0.29	-1.86	19.78	0.095	100.000	Pass

Bandwidth (KHz)	UL Channel	UL Modulation	UL RB Number	UL RB Position	Conducted Output Power (dBm)	Antenna Gain (dBi)	Antenna Gain (dBd)	ERP (dBm)	ERP (W)	Limit (W)	Verdict
NB-IOT Band 26(part22)											
3.75	LCH	QPSK	1	0	21.83	0.68	-1.47	20.36	0.109	7.000	Pass
			1	47	21.61	0.68	-1.47	20.14	0.103	7.000	Pass
		BPSK	1	0	21.84	0.68	-1.47	20.37	0.109	7.000	Pass
			1	47	21.6	0.68	-1.47	20.13	0.103	7.000	Pass
	MCH	QPSK	1	0	21.57	0.68	-1.47	20.10	0.102	7.000	Pass
			1	47	21.39	0.68	-1.47	19.92	0.098	7.000	Pass
		BPSK	1	0	21.71	0.68	-1.47	20.24	0.106	7.000	Pass
			1	47	21.42	0.68	-1.47	19.95	0.099	7.000	Pass
	HCH	QPSK	1	0	21.41	0.68	-1.47	19.94	0.099	7.000	Pass
			1	47	21.28	0.68	-1.47	19.81	0.096	7.000	Pass
		BPSK	1	0	21.57	0.68	-1.47	20.10	0.102	7.000	Pass
			1	47	21.34	0.68	-1.47	19.87	0.097	7.000	Pass
15	LCH	QPSK	1	0	21.59	0.68	-1.47	20.12	0.103	7.000	Pass
			1	11	21.56	0.68	-1.47	20.09	0.102	7.000	Pass
			12	0	19.57	0.68	-1.47	18.10	0.065	7.000	Pass
		BPSK	1	0	21.71	0.68	-1.47	20.24	0.106	7.000	Pass
			1	11	21.66	0.68	-1.47	20.19	0.104	7.000	Pass
	MCH	QPSK	1	0	21.52	0.68	-1.47	20.05	0.101	7.000	Pass
			1	11	21.38	0.68	-1.47	19.91	0.098	7.000	Pass
			12	0	19.47	0.68	-1.47	18.00	0.063	7.000	Pass
		BPSK	1	0	21.58	0.68	-1.47	20.11	0.103	7.000	Pass
			1	11	21.53	0.68	-1.47	20.06	0.101	7.000	Pass
	HCH	QPSK	1	0	21.4	0.68	-1.47	19.93	0.098	7.000	Pass
			1	11	21.26	0.68	-1.47	19.79	0.095	7.000	Pass
			12	0	19.31	0.68	-1.47	17.84	0.061	7.000	Pass
		BPSK	1	0	21.38	0.68	-1.47	19.91	0.098	7.000	Pass
			1	11	21.32	0.68	-1.47	19.85	0.097	7.000	Pass

Bandwidth (KHz)	UL Channel	UL Modulation	UL RB Number	UL RB Position	Conducted Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
NB-IOT Band 66										
3.75	LCH	QPSK	1	0	19.63	0.52	20.15	0.104	1.000	Pass
			1	47	19.55	0.52	20.07	0.102	1.000	Pass
		BPSK	1	0	19.6	0.52	20.12	0.103	1.000	Pass
			1	47	19.56	0.52	20.08	0.102	1.000	Pass
	MCH	QPSK	1	0	19.51	0.52	20.03	0.101	1.000	Pass
			1	47	19.53	0.52	20.05	0.101	1.000	Pass
		BPSK	1	0	19.64	0.52	20.16	0.104	1.000	Pass
			1	47	19.5	0.52	20.02	0.100	1.000	Pass
	HCH	QPSK	1	0	19.04	0.52	19.56	0.090	1.000	Pass
			1	47	18.81	0.52	19.33	0.086	1.000	Pass
		BPSK	1	0	18.87	0.52	19.39	0.087	1.000	Pass
			1	47	18.94	0.52	19.46	0.088	1.000	Pass
15	LCH	QPSK	1	0	19.11	0.52	19.63	0.092	1.000	Pass
			1	11	19.03	0.52	19.55	0.090	1.000	Pass
			12	0	17.01	0.52	17.53	0.057	1.000	Pass
		BPSK	1	0	19.11	0.52	19.63	0.092	1.000	Pass
			1	11	19.01	0.52	19.53	0.090	1.000	Pass
	MCH	QPSK	1	0	19.15	0.52	19.67	0.093	1.000	Pass
			1	11	19.12	0.52	19.64	0.092	1.000	Pass
			12	0	17.04	0.52	17.56	0.057	1.000	Pass
		BPSK	1	0	19.23	0.52	19.75	0.094	1.000	Pass
			1	11	19.13	0.52	19.65	0.092	1.000	Pass
			12	0	16.41	0.52	16.93	0.049	1.000	Pass
	HCH	QPSK	1	0	18.58	0.52	19.10	0.081	1.000	Pass
			1	11	18.49	0.52	19.01	0.080	1.000	Pass
			12	0	16.41	0.52	16.93	0.049	1.000	Pass
		BPSK	1	0	18.48	0.52	19.00	0.079	1.000	Pass
			1	11	18.37	0.52	18.89	0.077	1.000	Pass

Bandwidth (KHz)	UL Channel	UL Modulation	UL RB Number	UL RB Position	Conducted Output Power (dBm)	Antenna Gain (dBi)	Antenna Gain (dBd)	ERP (dBm)	ERP (W)	Limit (W)	Verdict
NB-IOT Band 71											
3.75	LCH	QPSK	1	0	22.38	0.04	-2.11	20.27	0.106	2.000	Pass
			1	47	22.2	0.04	-2.11	20.09	0.102	2.000	Pass
		BPSK	1	0	22.36	0.04	-2.11	20.25	0.106	2.000	Pass
			1	47	22.24	0.04	-2.11	20.13	0.103	2.000	Pass
	MCH	QPSK	1	0	20.91	0.04	-2.11	18.80	0.076	2.000	Pass
			1	47	20.82	0.04	-2.11	18.71	0.074	2.000	Pass
		BPSK	1	0	20.91	0.04	-2.11	18.80	0.076	2.000	Pass
			1	47	20.86	0.04	-2.11	18.75	0.075	2.000	Pass
	HCH	QPSK	1	0	20.36	0.04	-2.11	18.25	0.067	2.000	Pass
			1	47	20.25	0.04	-2.11	18.14	0.065	2.000	Pass
		BPSK	1	0	20.25	0.04	-2.11	18.14	0.065	2.000	Pass
			1	47	20.26	0.04	-2.11	18.15	0.065	2.000	Pass
15	LCH	QPSK	1	0	21.46	0.04	-2.11	19.35	0.086	2.000	Pass
			1	11	21.45	0.04	-2.11	19.34	0.086	2.000	Pass
			12	0	19.28	0.04	-2.11	17.17	0.052	2.000	Pass
		BPSK	1	0	21.56	0.04	-2.11	19.45	0.088	2.000	Pass
			1	11	21.47	0.04	-2.11	19.36	0.086	2.000	Pass
	MCH	QPSK	1	0	20.37	0.04	-2.11	18.26	0.067	2.000	Pass
			1	11	20.35	0.04	-2.11	18.24	0.067	2.000	Pass
			12	0	18.41	0.04	-2.11	16.30	0.043	2.000	Pass
		BPSK	1	0	20.5	0.04	-2.11	18.39	0.069	2.000	Pass
			1	11	20.41	0.04	-2.11	18.30	0.068	2.000	Pass
	HCH	QPSK	1	0	19.96	0.04	-2.11	17.85	0.061	2.000	Pass
			1	11	19.83	0.04	-2.11	17.72	0.059	2.000	Pass
			12	0	17.66	0.04	-2.11	15.55	0.036	2.000	Pass
		BPSK	1	0	19.93	0.04	-2.11	17.82	0.061	2.000	Pass
			1	11	19.82	0.04	-2.11	17.71	0.059	2.000	Pass

A.2 Peak to Average Ratio

Note 1: For average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB. For GSM, GPRS and EGPRS, there are peak power to demonstrate compliance, PAR measurements are not required.

Note 2: Test plots please refer to the document “Annex No.:Ti-CC26030157-501 Data Part 1.pdf”.

LTE Mode Test Data

Band	Bandwidth (MHz)	UL Channel	UL Modulation	UL RB Number	UL RB Position	Narrow Band	PAR (dB)	Verdict
B18(824-830)	5	LCH	QPSK	6	0	0	10.45	Pass
			16QAM	5	0	0	12.13	Pass
		MCH	QPSK	6	0	0	9.45	Pass
			16QAM	5	0	0	10.89	Pass
		HCH	QPSK	6	0	0	9.75	Pass
			16QAM	5	0	0	10.42	Pass
B18(815-824)	5	LCH	QPSK	6	0	0	10.08	Pass
			16QAM	5	0	0	10.24	Pass
		MCH	QPSK	6	0	0	9.86	Pass
			16QAM	5	0	0	11.07	Pass
		HCH	QPSK	6	0	0	9.95	Pass
			16QAM	5	0	0	10.17	Pass
B19	15	MCH	QPSK	6	0	0	9.03	Pass
			16QAM	5	0	0	10.59	Pass
B26(824-849)	15	LCH	QPSK	6	0	0	9.94	Pass
			16QAM	5	0	0	10.37	Pass
		MCH	QPSK	6	0	0	9.46	Pass
			16QAM	5	0	0	10.12	Pass
		HCH	QPSK	6	0	0	8.86	Pass
			16QAM	5	0	0	9.93	Pass
B26(814-824)	10	MCH	QPSK	6	0	0	9.21	Pass
			16QAM	5	0	0	10.08	Pass

Band	Bandwidth (MHz)	UL Channel	UL Modulation	UL RB Number	UL RB Position	Narrow Band	PAR (dB)	Verdict
B2	20	LCH	QPSK	6	0	0	10.12	Pass
			16QAM	5	0	0	10.93	Pass
		MCH	QPSK	6	0	0	9.72	Pass
			16QAM	5	0	0	10.05	Pass
		HCH	QPSK	6	0	0	10.25	Pass
			16QAM	5	0	0	11.19	Pass
B4	20	LCH	QPSK	6	0	0	10.93	Pass
			16QAM	5	0	0	11.31	Pass
		MCH	QPSK	6	0	0	10.79	Pass
			16QAM	5	0	0	10.28	Pass
		HCH	QPSK	6	0	0	10.33	Pass
			16QAM	5	0	0	11.15	Pass
B5	10	LCH	QPSK	6	0	0	10.41	Pass
			16QAM	5	0	0	10.31	Pass
		MCH	QPSK	6	0	0	10.87	Pass
			16QAM	5	0	0	11.44	Pass
		HCH	QPSK	6	0	0	10.83	Pass
			16QAM	5	0	0	10.99	Pass
B12	10	LCH	QPSK	6	0	0	10.87	Pass
			16QAM	5	0	0	10.46	Pass
		MCH	QPSK	6	0	0	11.23	Pass
			16QAM	5	0	0	11.1	Pass
		HCH	QPSK	6	0	0	10.6	Pass
			16QAM	5	0	0	10.7	Pass
B13	10	MCH	QPSK	6	0	0	10.32	Pass
			16QAM	5	0	0	11.19	Pass
B66	20	LCH	QPSK	6	0	0	10.52	Pass
			16QAM	5	0	0	10.83	Pass
		MCH	QPSK	6	0	0	9.84	Pass
			16QAM	5	0	0	11.28	Pass
		HCH	QPSK	6	0	0	10.28	Pass
			16QAM	5	0	0	10.59	Pass

Band	Bandwidth (KHz)	UL Channel	UL Modulation	UL RB Number	UL RB Position	PAR (dB)	Verdict
Band18(824-830)	3.75	LCH	QPSK	1	0	3.76	Pass
			BPSK	1	0	2.53	Pass
		MCH	QPSK	1	0	2.56	Pass
			BPSK	1	0	2.65	Pass
		HCH	QPSK	1	0	2.22	Pass
			BPSK	1	0	2.93	Pass
	15	LCH	QPSK	1	0	6.19	Pass
			BPSK	1	0	4.18	Pass
		MCH	QPSK	1	0	6.82	Pass
			BPSK	1	0	1.89	Pass
		HCH	QPSK	1	0	6.03	Pass
			BPSK	1	0	1.67	Pass
Band18(815-824)	3.75	LCH	QPSK	1	0	3.23	Pass
			BPSK	1	0	2.79	Pass
		MCH	QPSK	1	0	3.11	Pass
			BPSK	1	0	2.5	Pass
		HCH	QPSK	1	0	3.14	Pass
			BPSK	1	0	2.85	Pass
	15	LCH	QPSK	1	0	6.08	Pass
			BPSK	1	0	4.54	Pass
		MCH	QPSK	1	0	6.97	Pass
			BPSK	1	0	4.64	Pass
		HCH	QPSK	1	0	7.12	Pass
			BPSK	1	0	3.83	Pass
Band19	3.75	LCH	QPSK	1	0	2.18	Pass
			BPSK	1	0	3.17	Pass
		MCH	QPSK	1	0	3.17	Pass
			BPSK	1	0	2.52	Pass
		HCH	QPSK	1	0	1.92	Pass
			BPSK	1	0	2.74	Pass
	15	LCH	QPSK	1	0	7.05	Pass
			BPSK	1	0	4.54	Pass
		MCH	QPSK	1	0	6.72	Pass
			BPSK	1	0	3.44	Pass
		HCH	QPSK	1	0	5.74	Pass
			BPSK	1	0	6.9	Pass
Band26(824-849)	3.75	LCH	QPSK	1	0	3.2	Pass
			BPSK	1	0	3.03	Pass
		MCH	QPSK	1	0	3.11	Pass
			BPSK	1	0	3.64	Pass

		HCH	QPSK	1	0	3.27	Pass
			BPSK	1	0	2.91	Pass
	15	LCH	QPSK	1	0	5.89	Pass
			BPSK	1	0	4.21	Pass
		MCH	QPSK	1	0	7.02	Pass
			BPSK	1	0	4.43	Pass
		HCH	QPSK	1	0	6.22	Pass
			BPSK	1	0	3.83	Pass
Band26(814-824)	3.75	LCH	QPSK	1	0	3.38	Pass
			BPSK	1	0	2.73	Pass
		MCH	QPSK	1	0	3.11	Pass
			BPSK	1	0	2.72	Pass
		HCH	QPSK	1	0	3.56	Pass
			BPSK	1	0	2.45	Pass
	15	LCH	QPSK	1	0	4.22	Pass
			BPSK	1	0	4.44	Pass
		MCH	QPSK	1	0	4.21	Pass
			BPSK	1	0	4	Pass
		HCH	QPSK	1	0	6.38	Pass
			BPSK	1	0	4.32	Pass

Band	Bandwidth (KHz)	UL Channel	UL Modulation	UL RB Number	UL RB Position	PAR (dB)	Verdict
Band2	3.75	LCH	QPSK	1	0	3.27	Pass
			BPSK	1	0	2.98	Pass
		MCH	QPSK	1	0	3.15	Pass
			BPSK	1	0	2.74	Pass
		HCH	QPSK	1	0	3.2	Pass
			BPSK	1	0	2.88	Pass
	15	LCH	QPSK	1	0	6.39	Pass
			BPSK	1	0	4.17	Pass
		MCH	QPSK	1	0	5.81	Pass
			BPSK	1	0	4.2	Pass
		HCH	QPSK	1	0	6.03	Pass
			BPSK	1	0	4.63	Pass
Band4	3.75	LCH	QPSK	1	0	3.3	Pass
			BPSK	1	0	2.53	Pass
		MCH	QPSK	1	0	3.2	Pass
			BPSK	1	0	2.78	Pass
		HCH	QPSK	1	0	3.21	Pass
			BPSK	1	0	2.61	Pass
	15	LCH	QPSK	1	0	7.16	Pass
			BPSK	1	0	4.67	Pass
		MCH	QPSK	1	0	5.98	Pass
			BPSK	1	0	4.25	Pass
		HCH	QPSK	1	0	6.58	Pass
			BPSK	1	0	4.58	Pass
Band5	3.75	LCH	QPSK	1	0	3.57	Pass
			BPSK	1	0	2.88	Pass
		MCH	QPSK	1	0	3.09	Pass
			BPSK	1	0	2.77	Pass
		HCH	QPSK	1	0	3.25	Pass
			BPSK	1	0	2.73	Pass
	15	LCH	QPSK	1	0	5.82	Pass
			BPSK	1	0	4.42	Pass
		MCH	QPSK	1	0	6.24	Pass
			BPSK	1	0	4.15	Pass
		HCH	QPSK	1	0	6.05	Pass
			BPSK	1	0	4.19	Pass
Band12	3.75	LCH	QPSK	1	0	3.22	Pass
			BPSK	1	0	2.77	Pass
		MCH	QPSK	1	0	3.11	Pass
			BPSK	1	0	2.75	Pass

		HCH	QPSK	1	0	3.13	Pass
			BPSK	1	0	2.86	Pass
	15	LCH	QPSK	1	0	5.31	Pass
			BPSK	1	0	4.27	Pass
		MCH	QPSK	1	0	6.53	Pass
			BPSK	1	0	4.76	Pass
		HCH	QPSK	1	0	5.22	Pass
			BPSK	1	0	4.78	Pass
Band13	3.75	LCH	QPSK	1	0	3.01	Pass
			BPSK	1	0	2.7	Pass
		MCH	QPSK	1	0	3.68	Pass
			BPSK	1	0	2.73	Pass
		HCH	QPSK	1	0	3.34	Pass
			BPSK	1	0	2.76	Pass
	15	LCH	QPSK	1	0	6.57	Pass
			BPSK	1	0	4.03	Pass
		MCH	QPSK	1	0	5.55	Pass
			BPSK	1	0	3.65	Pass
		HCH	QPSK	1	0	5.8	Pass
			BPSK	1	0	4	Pass
Band66	3.75	LCH	QPSK	1	0	3.31	Pass
			BPSK	1	0	2.87	Pass
		MCH	QPSK	1	0	3.27	Pass
			BPSK	1	0	3.02	Pass
		HCH	QPSK	1	0	2.82	Pass
			BPSK	1	0	2.99	Pass
	15	LCH	QPSK	1	0	6.03	Pass
			BPSK	1	0	4.43	Pass
		MCH	QPSK	1	0	6.2	Pass
			BPSK	1	0	4.37	Pass
		HCH	QPSK	1	0	5.95	Pass
			BPSK	1	0	4.6	Pass
Band71	3.75	LCH	QPSK	1	0	2.86	Pass
			BPSK	1	0	2.46	Pass
		MCH	QPSK	1	0	3.41	Pass
			BPSK	1	0	2.45	Pass
		HCH	QPSK	1	0	3.28	Pass
			BPSK	1	0	3.01	Pass
	15	LCH	QPSK	1	0	5.28	Pass
			BPSK	1	0	4.67	Pass
		MCH	QPSK	1	0	6.94	Pass
			BPSK	1	0	3.6	Pass
		HCH	QPSK	1	0	5.95	Pass
			BPSK	1	0	5.95	Pass

			BPSK	1	0	4.36	Pass
--	--	--	------	---	---	------	------

A.3 Occupied Bandwidth

Note 1: All modes were tested, but only the typical data were reported in this report.

Note 2: Test plots please refer to the document “Annex No.: Ti-CC26030157-501 Data Part 2.pdf”.

LTE-M1 Mode Test Data

Band	Bandwidth (MHz)	UL Channel	UL Modulation	UL RB Number	UL RB Position	Narrow Band	OBW (MHz)	XdB BandWidth (MHz)	Verdict
Band2	1.4	MCH	QPSK	6	0	0	1.103	1.253	Pass
			16QAM	5	0	0	0.91	1.135	Pass
	3	MCH	QPSK	6	0	0	1.117	1.241	Pass
			16QAM	5	0	0	0.925	1.105	Pass
	5	MCH	QPSK	6	0	0	1.103	1.394	Pass
			16QAM	5	0	0	0.936	1.073	Pass
	10	MCH	QPSK	6	0	0	1.11	1.299	Pass
			16QAM	5	0	0	0.966	1.235	Pass
	15	MCH	QPSK	6	0	0	1.111	1.26	Pass
			16QAM	5	0	0	0.943	1.098	Pass
	20	MCH	QPSK	6	0	0	1.102	1.28	Pass
			16QAM	5	0	0	0.958	1.305	Pass
Band4	1.4	MCH	QPSK	6	0	0	1.123	1.301	Pass
			16QAM	5	0	0	0.926	1.103	Pass
	3	MCH	QPSK	6	0	0	1.094	1.281	Pass
			16QAM	5	0	0	0.925	1.104	Pass
	5	MCH	QPSK	6	0	0	1.107	1.255	Pass
			16QAM	5	0	0	0.948	1.116	Pass
	10	MCH	QPSK	6	0	0	1.105	1.269	Pass
			16QAM	5	0	0	0.937	1.152	Pass
	15	MCH	QPSK	6	0	0	1.125	1.265	Pass
			16QAM	5	0	0	0.942	1.142	Pass
	20	MCH	QPSK	6	0	0	1.106	1.34	Pass
			16QAM	5	0	0	0.975	1.12	Pass
Band5	1.4	MCH	QPSK	6	0	0	1.104	1.278	Pass
			16QAM	5	0	0	0.939	1.153	Pass
	3	MCH	QPSK	6	0	0	1.093	1.258	Pass
			16QAM	5	0	0	0.931	1.072	Pass
	5	MCH	QPSK	6	0	0	1.104	1.297	Pass
			16QAM	5	0	0	0.94	1.103	Pass
	10	MCH	QPSK	6	0	0	1.117	1.261	Pass
			16QAM	5	0	0	0.939	1.181	Pass
Band12	1.4	MCH	QPSK	6	0	0	1.174	1.398	Pass
			16QAM	5	0	0	0.976	1.131	Pass

	3	MCH	QPSK	6	0	0	1.144	1.302	Pass
			16QAM	5	0	0	1.053	1.221	Pass
	5	MCH	QPSK	6	0	0	1.174	1.349	Pass
			16QAM	5	0	0	0.958	1.128	Pass
	10	MCH	QPSK	6	0	0	1.145	1.295	Pass
			16QAM	5	0	0	0.915	1.109	Pass
Band13	5	MCH	QPSK	6	0	0	1.097	1.331	Pass
			16QAM	5	0	0	0.925	1.078	Pass
	10	MCH	QPSK	6	0	0	1.123	1.325	Pass
			16QAM	5	0	0	0.925	1.121	Pass
Band66	1.4	MCH	QPSK	6	0	0	1.104	1.238	Pass
			16QAM	5	0	0	0.947	1.087	Pass
	3	MCH	QPSK	6	0	0	1.097	1.265	Pass
			16QAM	5	0	0	0.951	1.081	Pass
	5	MCH	QPSK	6	0	0	1.118	1.296	Pass
			16QAM	5	0	0	0.947	1.134	Pass
	10	MCH	QPSK	6	0	0	1.091	1.278	Pass
			16QAM	5	0	0	0.93	1.171	Pass
	15	MCH	QPSK	6	0	0	1.115	1.436	Pass
			16QAM	5	0	0	0.926	1.083	Pass
	20	MCH	QPSK	6	0	0	1.117	1.254	Pass
			16QAM	5	0	0	0.963	1.132	Pass

Band	Bandwidth (MHz)	UL Channel	UL Modulation	Test RB (Size#Offset)	OBW (MHz)	XdB BandWidth (MHz)	Verdict
B18(824-830)	5	MCH	QPSK	RB6#0	1.116	1.309	Pass
			16QAM	RB5#0	0.925	1.061	Pass
B18(815-824)	5	MCH	QPSK	RB6#0	1.233	1.358	Pass
			16QAM	RB5#0	0.91	1.021	Pass
Band19	5	MCH	QPSK	RB6#0	1.153	1.296	Pass
			16QAM	RB5#0	1.071	1.175	Pass
	10	MCH	QPSK	RB6#0	1.221	1.29	Pass
			16QAM	RB5#0	0.94	1.124	Pass
	15	MCH	QPSK	RB6#0	1.183	1.35	Pass
			16QAM	RB5#0	0.786	0.925	Pass
Band26(824-849)	1.4	MCH	QPSK	RB6#0	1.021	1.133	Pass
			16QAM	RB5#0	0.996	1.08	Pass
	3	MCH	QPSK	RB6#0	1.084	1.251	Pass
			16QAM	RB5#0	0.96	1.087	Pass
	5	MCH	QPSK	RB6#0	1.202	1.348	Pass
			16QAM	RB5#0	0.899	1.049	Pass
	10	MCH	QPSK	RB6#0	1.157	1.288	Pass
			16QAM	RB5#0	0.983	1.131	Pass
	15	MCH	QPSK	RB6#0	1.044	1.191	Pass
			16QAM	RB5#0	0.931	1.033	Pass
Band26(814-824)	1.4	MCH	QPSK	RB6#0	1.173	1.329	Pass
			16QAM	RB5#0	1.143	1.097	Pass
	3	MCH	QPSK	RB6#0	1.235	1.356	Pass
			16QAM	RB5#0	1.205	1.36	Pass
	5	MCH	QPSK	RB6#0	1.149	1.29	Pass
			16QAM	RB5#0	1.012	1.114	Pass
	10	MCH	QPSK	RB6#0	1.107	1.291	Pass
			16QAM	RB5#0	1.128	1.27	Pass

LTE-IOT Mode Test Data

Band	Bandwidth (KHz)	UL Channel	UL Modulation	UL RB Number	UL RB Position	OBW (MHz)	XdB BandWidth (MHz)	Verdict
Band2	3.75	LCH	QPSK	1	0	0.071	0.039	Pass
			BPSK	1	0	0.062	0.041	Pass
		MCH	QPSK	1	0	0.069	0.043	Pass
			BPSK	1	0	0.064	0.04	Pass
		HCH	QPSK	1	0	0.068	0.04	Pass
			BPSK	1	0	0.063	0.041	Pass
	15	LCH	QPSK	1	0	0.119	0.117	Pass
				12	0	0.185	0.251	Pass
			BPSK	1	0	0.117	0.1	Pass
		MCH	QPSK	1	0	0.12	0.115	Pass
				12	0	0.185	0.247	Pass
			BPSK	1	0	0.116	0.103	Pass
		HCH	QPSK	1	0	0.121	0.129	Pass
				12	0	0.191	0.239	Pass
			BPSK	1	0	0.126	0.103	Pass
Band4	3.75	LCH	QPSK	1	0	0.07	0.043	Pass
			BPSK	1	0	0.062	0.04	Pass
		MCH	QPSK	1	0	0.068	0.039	Pass
			BPSK	1	0	0.063	0.041	Pass
		HCH	QPSK	1	0	0.07	0.04	Pass
			BPSK	1	0	0.063	0.041	Pass
	15	LCH	QPSK	1	0	0.122	0.119	Pass
				12	0	0.185	0.247	Pass
			BPSK	1	0	0.121	0.11	Pass
		MCH	QPSK	1	0	0.125	0.117	Pass
				12	0	0.184	0.249	Pass
			BPSK	1	0	0.117	0.099	Pass
		HCH	QPSK	1	0	0.125	0.104	Pass
				12	0	0.192	0.247	Pass
			BPSK	1	0	0.121	0.103	Pass
Band5	3.75	LCH	QPSK	1	0	0.065	0.039	Pass
			BPSK	1	0	0.058	0.041	Pass
		MCH	QPSK	1	0	0.068	0.042	Pass
			BPSK	1	0	0.058	0.041	Pass
		HCH	QPSK	1	0	0.066	0.04	Pass
			BPSK	1	0	0.059	0.041	Pass
	15	LCH	QPSK	1	0	0.115	0.115	Pass
				12	0	0.186	0.246	Pass
			BPSK	1	0	0.119	0.104	Pass

		MCH	QPSK	1	0	0.122	0.117	Pass
				12	0	0.186	0.246	Pass
			BPSK	1	0	0.12	0.104	Pass
		HCH	QPSK	1	0	0.12	0.13	Pass
				12	0	0.185	0.251	Pass
			BPSK	1	0	0.128	0.118	Pass
Band12	3.75	LCH	QPSK	1	0	0.065	0.04	Pass
			BPSK	1	0	0.059	0.041	Pass
		MCH	QPSK	1	0	0.066	0.04	Pass
			BPSK	1	0	0.058	0.041	Pass
		HCH	QPSK	1	0	0.066	0.039	Pass
			BPSK	1	0	0.058	0.04	Pass
	15	LCH	QPSK	1	0	0.128	0.128	Pass
				12	0	0.187	0.25	Pass
			BPSK	1	0	0.119	0.104	Pass
		MCH	QPSK	1	0	0.121	0.118	Pass
				12	0	0.184	0.247	Pass
			BPSK	1	0	0.118	0.101	Pass
		HCH	QPSK	1	0	0.118	0.132	Pass
				12	0	0.186	0.251	Pass
			BPSK	1	0	0.119	0.104	Pass
Band13	3.75	LCH	QPSK	1	0	0.066	0.041	Pass
			BPSK	1	0	0.058	0.041	Pass
		MCH	QPSK	1	0	0.068	0.041	Pass
			BPSK	1	0	0.058	0.041	Pass
		HCH	QPSK	1	0	0.066	0.042	Pass
			BPSK	1	0	0.059	0.041	Pass
	15	LCH	QPSK	1	0	0.128	0.118	Pass
				12	0	0.185	0.241	Pass
			BPSK	1	0	0.121	0.104	Pass
		MCH	QPSK	1	0	0.128	0.117	Pass
				12	0	0.185	0.245	Pass
			BPSK	1	0	0.124	0.117	Pass
		HCH	QPSK	1	0	0.12	0.104	Pass
				12	0	0.185	0.247	Pass
			BPSK	1	0	0.118	0.101	Pass
Band66	3.75	LCH	QPSK	1	0	0.068	0.04	Pass
			BPSK	1	0	0.06	0.04	Pass
		MCH	QPSK	1	0	0.068	0.039	Pass
			BPSK	1	0	0.061	0.041	Pass
		HCH	QPSK	1	0	0.068	0.04	Pass
			BPSK	1	0	0.059	0.039	Pass
	15	LCH	QPSK	1	0	0.119	0.103	Pass

				12	0	0.19	0.248	Pass
			BPSK	1	0	0.122	0.103	Pass
		MCH	QPSK	1	0	0.126	0.1	Pass
				12	0	0.187	0.236	Pass
		HCH	QPSK	1	0	0.116	0.102	Pass
				12	0	0.187	0.249	Pass
			BPSK	1	0	0.122	0.1	Pass
				1	0	0.117	0.104	Pass
Band71	3.75	LCH	QPSK	1	0	0.068	0.043	Pass
			BPSK	1	0	0.058	0.041	Pass
		MCH	QPSK	1	0	0.067	0.04	Pass
			BPSK	1	0	0.056	0.038	Pass
		HCH	QPSK	1	0	0.066	0.039	Pass
			BPSK	1	0	0.058	0.041	Pass
	15	LCH	QPSK	1	0	0.133	0.118	Pass
				12	0	0.185	0.246	Pass
			BPSK	1	0	0.124	0.12	Pass
		MCH	QPSK	1	0	0.12	0.103	Pass
				12	0	0.188	0.251	Pass
			BPSK	1	0	0.12	0.101	Pass
		HCH	QPSK	1	0	0.123	0.115	Pass
				12	0	0.185	0.237	Pass
			BPSK	1	0	0.119	0.114	Pass

Band	Bandwidth (KHz)	UL Channel	UL Modulation	UL RB Number	UL RB Position	OBW (MHz)	XdB BandWidth (MHz)	Verdict
Band18(824-830)	3.75	LCH	QPSK	1	0	0.063	0.041	Pass
			BPSK	1	0	0.058	0.045	Pass
		MCH	QPSK	1	0	0.062	0.04	Pass
			BPSK	1	0	0.054	0.041	Pass
		HCH	QPSK	1	0	0.072	0.053	Pass
			BPSK	1	0	0.057	0.042	Pass
	15	LCH	QPSK	1	0	0.123	0.116	Pass
				12	0	0.184	0.254	Pass
			BPSK	1	0	0.117	0.106	Pass
		MCH	QPSK	1	0	0.118	0.113	Pass
				12	0	0.183	0.248	Pass
			BPSK	1	0	0.119	0.116	Pass
		HCH	QPSK	1	0	0.122	0.123	Pass
				12	0	0.192	0.247	Pass
			BPSK	1	0	0.12	0.105	Pass

Band18(815-824)	3.75	LCH	QPSK	1	0	0.062	0.039	Pass
			BPSK	1	0	0.057	0.044	Pass
		MCH	QPSK	1	0	0.063	0.039	Pass
			BPSK	1	0	0.055	0.039	Pass
		HCH	QPSK	1	0	0.062	0.041	Pass
			BPSK	1	0	0.055	0.04	Pass
	15	LCH	QPSK	1	0	0.112	0.096	Pass
				12	0	0.185	0.235	Pass
			BPSK	1	0	0.12	0.106	Pass
		MCH	QPSK	1	0	0.132	0.131	Pass
				12	0	0.184	0.238	Pass
			BPSK	1	0	0.116	0.105	Pass
		HCH	QPSK	1	0	0.122	0.13	Pass
				12	0	0.188	0.24	Pass
			BPSK	1	0	0.12	0.107	Pass
Band19	3.75	LCH	QPSK	1	0	0.068	0.048	Pass
			BPSK	1	0	0.054	0.041	Pass
		MCH	QPSK	1	0	0.061	0.039	Pass
			BPSK	1	0	0.054	0.038	Pass
		HCH	QPSK	1	0	0.076	0.057	Pass
			BPSK	1	0	0.055	0.04	Pass
	15	LCH	QPSK	1	0	0.121	0.13	Pass
				12	0	0.185	0.242	Pass
			BPSK	1	0	0.118	0.103	Pass
		MCH	QPSK	1	0	0.112	0.111	Pass
				12	0	0.191	0.244	Pass
			BPSK	1	0	0.127	0.111	Pass
		HCH	QPSK	1	0	0.114	0.113	Pass
				12	0	0.185	0.249	Pass
			BPSK	1	0	0.121	0.107	Pass
Band26(824-849)	3.75	LCH	QPSK	1	0	0.062	0.039	Pass
			BPSK	1	0	0.056	0.039	Pass
		MCH	QPSK	1	0	0.085	0.067	Pass
			BPSK	1	0	0.057	0.041	Pass
		HCH	QPSK	1	0	0.063	0.042	Pass
			BPSK	1	0	0.055	0.039	Pass
	15	LCH	QPSK	1	0	0.122	0.116	Pass
				12	0	0.183	0.236	Pass
			BPSK	1	0	0.121	0.109	Pass
		MCH	QPSK	1	0	0.13	0.129	Pass
				12	0	0.187	0.235	Pass
			BPSK	1	0	0.125	0.128	Pass
		HCH	QPSK	1	0	0.116	0.116	Pass

Band26(814-824)				12	0	0.184	0.249	Pass
			BPSK	1	0	0.12	0.106	Pass
	3.75	LCH	QPSK	1	0	0.061	0.039	Pass
			BPSK	1	0	0.056	0.039	Pass
		MCH	QPSK	1	0	0.061	0.039	Pass
			BPSK	1	0	0.054	0.039	Pass
		HCH	QPSK	1	0	0.065	0.042	Pass
			BPSK	1	0	0.055	0.04	Pass
	15	LCH	QPSK	1	0	0.118	0.111	Pass
				12	0	0.192	0.246	Pass
			BPSK	1	0	0.12	0.099	Pass
		MCH	QPSK	1	0	0.124	0.113	Pass
				12	0	0.186	0.25	Pass
			BPSK	1	0	0.123	0.113	Pass
		HCH	QPSK	1	0	0.128	0.107	Pass
				12	0	0.185	0.248	Pass
			BPSK	1	0	0.125	0.116	Pass

A.4 Frequency Stability

LTE-M1 Band 2 QPSK 20 MHz

Test Conditions	Frequency Deviation			Verdict
Power (VDC)	Temperature (°C)	MCH 1880MHz		
		Value (Hz)	Limits (Hz)	
3	-30	4.76	±4700	Pass
	-20	1.03		
	-10	-8.92		
	0	9.84		
	10	8.15		
	20	-0.87		
	25	0.64		
	30	5.93		
	40	8.26		
	50	13.47		
	60	7.42		
	65	16.35		
3.4	25	11.93		
2.6	25	6.48		

LTE-M1 Band 2 16QAM 20 MHz

Test Conditions	Frequency Deviation			Verdict
Power (VDC)	Temperature (°C)	MCH 1880 MHz		
		Value (Hz)	Limits (Hz)	
3	-30	11.75	±4700	Pass
	-20	-5.94		
	-10	-1.86		
	0	17.26		
	10	1.08		
	20	-8.04		
	25	-6.37		
	30	-1.25		
	40	15.39		
	50	6.31		
	60	14.58		
	65	9.27		
3.4	25	19.14	±4700	Pass
2.6	25	13.69		

LTE-M1 Band 4 QPSK 20 MHz

Test Conditions	Frequency Deviation			Verdict
Power (VDC)	Temperature (°C)	MCH 1732.5 MHz		
		Value (Hz)	Limits (Hz)	
3	-30	6.04	±4331.25	Pass
	-20	-0.71		
	-10	-7.13		
	0	11.62		
	10	6.39		
	20	-2.76		
	25	-1.14		
	30	4.05		
	40	10.07		
	50	11.52		
	60	9.36		
	65	14.93		
3.4	25	13.42	±4331.25	Pass
2.6	25	8.35		

LTE-M1 Band 4 16QAM 20 MHz

Test Conditions	Frequency Deviation			Verdict
Power (VDC)	Temperature (°C)	MCH 1732.5 MHz		
		Value (Hz)	Limits (Hz)	
3	-30	10.58	±4331.25	Pass
	-20	-4.27		
	-10	-3.64		
	0	15.41		
	10	2.87		
	20	-6.29		
	25	-4.75		
	30	0.46		
	40	13.62		
	50	8.19		
	60	12.74		
	65	11.05		
3.4	25	17.36	±4331.25	Pass
2.6	25	11.92		

LTE-M1 Band 5 QPSK 10 MHz

Test Conditions	Frequency Deviation			Verdict
Power (VDC)	Temperature (°C)	MCH 836.5 MHz		
		Value (Hz)	Limits (Hz)	
3	-30	16.83	±2091.25	Pass
	-20	-7.94		
	-10	-5.12		
	0	18.26		
	10	4.39		
	20	-9.71		
	25	-6.48		
	30	1.25		
	40	15.77		
	50	9.63		
	60	13.95		
	65	12.41		
3.4	25	19.52	±2091.25	Pass
2.6	25	10.38		

LTE-M1 Band 5 16QAM 10 MHz

Test Conditions	Frequency Deviation			Verdict
Power (VDC)	Temperature (°C)	MCH 836.5 MHz		
		Value (Hz)	Limits (Hz)	
3	-30	9.74	±2091.25	Pass
	-20	-8.66		
	-10	-4.93		
	0	17.05		
	10	3.62		
	20	-10.14		
	25	-7.39		
	30	-0.83		
	40	14.28		
	50	11.56		
	60	15.31		
	65	13.07		
3.4	25	18.64	±2091.25	Pass
2.6	25	9.25		

LTE-M1 Band 12 QPSK 10 MHz

Test Conditions	Frequency Deviation			Verdict
Power (VDC)	Temperature (°C)	MCH 707.5 MHz		
		Value (Hz)	Limits (Hz)	
3	-30	13.47	±1768.75	Pass
	-20	-6.51		
	-10	-8.22		
	0	19.13		
	10	5.76		
	20	-7.88		
	25	-5.64		
	30	2.71		
	40	16.92		
	50	7.34		
	60	14.88		
	65	11.69		
3.4	25	20.15	±1768.75	Pass
2.6	25	12.53		

LTE-M1 Band 12 16QAM 10 MHz

Test Conditions	Frequency Deviation			Verdict
Power (VDC)	Temperature (°C)	MCH 707.5 MHz		
		Value (Hz)	Limits (Hz)	
3	-30	11.62	±1768.75	Pass
	-20	-9.37		
	-10	-6.85		
	0	16.44		
	10	1.93		
	20	-8.56		
	25	-7.91		
	30	-1.47		
	40	13.59		
	50	10.72		
	60	15.67		
	65	12.84		
3.4	25	18.91	±1768.75	Pass
2.6	25	11.26		

LTE-M1 Band 13 QPSK 10 MHz

Test Conditions	Frequency Deviation			Verdict
Power (VDC)	Temperature (°C)	MCH 782 MHz		
		Value (Hz)	Limits (Hz)	
3	-30	13.27	±1955	Pass
	-20	-7.64		
	-10	-5.33		
	0	18.72		
	10	3.48		
	20	-10.15		
	25	-9.26		
	30	0.64		
	40	15.13		
	50	9.45		
	60	17.28		
	65	13.96		
3.4	25	20.43	±1955	Pass
2.6	25	12.57		

LTE-M1 Band 13 16QAM10 MHz

Test Conditions	Frequency Deviation			Verdict
Power (VDC)	Temperature (°C)	MCH 782 MHz		
		Value (Hz)	Limits (Hz)	
3	-30	9.45	±1955	Pass
	-20	-11.28		
	-10	-8.74		
	0	14.16		
	10	0.82		
	20	-7.31		
	25	-6.04		
	30	-2.63		
	40	11.85		
	50	12.39		
	60	14.07		
	65	10.12		
3.4	25	17.35		
2.6	25	9.68		

CAT.M band 18 (part22) QPSK 5 MHz

Test Conditions	Frequency Deviation		Verdict	
Power (VDC)	Temperature (°C)	MCH 827 MHz		
		Value (Hz)		Limits (Hz)
3	-30	1.7	±2,067.5	Pass
	-20	-4.5		
	-10	-3.8		
	0	2.5		
	10	1.7		
	20	3.5		
	25	2.3		
	30	4.8		
	40	-3.7		
	50	1.9		
	60	-0.3		
	65	1.6		
3.4	25	2.8	±2,067.5	Pass
2.6	25	3.80		

CAT.M band 18 (part22) 16QAM 5 MHz

Test Conditions	Frequency Deviation			Verdict
Power (VDC)	Temperature (°C)	MCH 827 MHz		
		Value (Hz)	Limits (Hz)	
3	-30	1.8	±2,067.5	Pass
	-20	4		
	-10	2.3		
	0	-0.1		
	10	3.8		
	20	4.5		
	25	5.3		
	30	4.7		
	40	3.4		
	50	2.5		
	60	-0.4		
	65	3.5		
3.4	25	1.5		
2.6	25	-4.1		

CAT.M band 18 (part90) QPSK 5 MHz

Test Conditions	Frequency Deviation			Verdict
Power (VDC)	Temperature (°C)	MCH 819.5 MHz		
		Value (Hz)	Limits (Hz)	
3	-30	-7.2	±2,048.75	Pass
	-20	-6.1		
	-10	0.4		
	0	-8.4		
	10	-2.5		
	20	-6.4		
	25	-2.1		
	30	-8.6		
	40	-8.2		
	50	-6.9		
	60	-3.1		
	65	-5.1		
3.4	25	-7.3	±2,048.75	Pass
2.6	25	-1.4		

CAT.M band 18 (part90) 16QAM 5 MHz

Test Conditions	Frequency Deviation			Verdict
Power (VDC)	Temperature (°C)	MCH 819.5 MHz		
		Value (Hz)	Limits (Hz)	
3	-30	0.5	±2,048.75	Pass
	-20	-6.4		
	-10	-5.2		
	0	-3.9		
	10	-5.5		
	20	-6.2		
	25	-4.6		
	30	-2.5		
	40	-3.7		
	50	-7.5		
	60	-11.4		
	65	-4.6		
3.4	25	-6.2		
2.6	25	-5.4		

CAT.M band 19 QPSK 15 MHz

Test Conditions	Frequency Deviation			Verdict
Power (VDC)	Temperature (°C)	MCH 837.5 MHz		
		Value (Hz)	Limits (Hz)	
3	-30	-14.1	±2093.75	Pass
	-20	-3.7		
	-10	-7.3		
	0	-14.2		
	10	-3.5		
	20	0.3		
	25	-13.5		
	30	-11.5		
	40	-3		
	50	0.2		
	60	-2.6		
	65	-3.5		
3.4	25	-4.6	±2093.75	Pass
2.6	25	-1.5		

CAT.M band 19 16QAM 15 MHz

Test Conditions	Frequency Deviation			Verdict
Power (VDC)	Temperature (°C)	MCH 837.5 MHz		
		Value (Hz)	Limits (Hz)	
3	-30	-16.1	±2093.75	Pass
	-20	-21.5		
	-10	-3.5		
	0	-6.4		
	10	1.6		
	20	-6.7		
	25	-7.3		
	30	-2.5		
	40	-4.7		
	50	-2.5		
	60	-29.5		
	65	-17.3		
3.4	25	-3.9		
2.6	25	-2.5		

CAT.M band 26 (part22) QPSK 15 MHz

Test Conditions	Frequency Deviation		Verdict	
Power (VDC)	Temperature (°C)	MCH 836.5 MHz		
		Value (Hz)		Limits (Hz)
3	-30	-22.3	±2091.25	Pass
	-20	-11.8		
	-10	-5.6		
	0	-9.4		
	10	-13.3		
	20	-10.8		
	25	-10.2		
	30	-11		
	40	-8.4		
	50	-7.3		
	60	-10.2		
	65	-11.7		
3.4	25	-19.2	±2091.25	Pass
2.6	25	-14.1		

CAT.M band 26(part22) 16QAM 15 MHz

Test Conditions	Frequency Deviation			Verdict
Power (VDC)	Temperature (°C)	MCH 836.5 MHz		
		Value (Hz)	Limits (Hz)	
3	-30	-0.53	±2091.25	Pass
	-20	-11.62		
	-10	-11.62		
	0	-10.37		
	10	-12.23		
	20	-14.91		
	25	-11.39		
	30	-12.33		
	40	-11.4		
	50	-10.97		
	60	-11.94		
	65	-13.16		
3.4	25	-12.2		
2.6	25	-11.8		

CAT.M band 26 (part90) QPSK 10 MHz

Test Conditions	Frequency Deviation			Verdict
Power (VDC)	Temperature (°C)	MCH 819 MHz		
		Value (Hz)	Limits (Hz)	
3	-30	-9.9	±2047.5	Pass
	-20	-10.5		
	-10	-21.4		
	0	-7.9		
	10	-6.7		
	20	-8.6		
	25	-7.4		
	30	-7.6		
	40	-21.9		
	50	-7.8		
	60	-9.1		
	65	-11.3		
3.4	25	-8.5		
2.6	25	-21.7		

CAT.M band 26(part90) 16QAM 10 MHz

Test Conditions	Frequency Deviation			Verdict
Power (VDC)	Temperature (°C)	MCH 819 MHz		
		Value (Hz)	Limits (Hz)	
3	-30	-11.2	±2047.5	Pass
	-20	-4.3		
	-10	-11.9		
	0	-6.6		
	10	-8.1		
	20	-10.8		
	25	-8.1		
	30	-5.1		
	40	-4.9		
	50	-7.2		
	60	-12.3		
	65	-5.5		
3.4	25	-13.4		
2.6	25	-12.9		

CAT.M band66 QPSK 20 MHz

Test Conditions	Frequency Deviation			Verdict
Power (VDC)	Temperature (°C)	MCH 1745 MHz		
		Value (Hz)	Limits (Hz)	
3	-30	12.36	±4362.5	Pass
	-20	-8.42		
	-10	-7.31		
	0	17.85		
	10	2.64		
	20	-9.73		
	25	-8.65		
	30	-0.52		
	40	14.77		
	50	11.34		
	60	16.29		
	65	13.51		
3.4	25	19.64	±4362.5	Pass
2.6	25	12.08		

CAT.M band 66 16QAM 20 MHz

Test Conditions	Frequency Deviation			Verdict
Power (VDC)	Temperature (°C)	MCH 1745 MHz		
		Value (Hz)	Limits (Hz)	
3	-30	10.17	±4362.5	Pass
	-20	-10.53		
	-10	-5.96		
	0	15.28		
	10	1.25		
	20	-7.84		
	25	-6.43		
	30	-2.16		
	40	12.43		
	50	9.67		
	60	14.82		
	65	11.35		
3.4	25	18.06		
2.6	25	10.41		

NB-IOT band2 QPSK 3.75 KHz

Test Conditions	Frequency Deviation			Verdict
Power (VDC)	Temperature (°C)	MCH 1880 MHz		
		Value (Hz)	Limits (Hz)	
3	-30	2.14	±4700	Pass
	-20	-7.63		
	-10	0.72		
	0	8.56		
	10	3.27		
	20	1.48		
	25	-9.35		
	30	6.82		
	40	6.41		
	50	15.23		
	60	6.55		
	65	11.04		
3.4	25	18.32	±4700	Pass
2.6	25	4.76		

NB-IOT band 2 BPSK 3.75 KHz

Test Conditions	Frequency Deviation			Verdict
Power (VDC)	Temperature (°C)	MCH 1880 MHz		
		Value (Hz)	Limits (Hz)	
3	-30	9.85	±4700	Pass
	-20	-0.36		
	-10	-7.18		
	0	15.94		
	10	10.39		
	20	-5.72		
	25	-1.86		
	30	-0.47		
	40	13.68		
	50	8.05		
	60	13.74		
	65	18.29		
3.4	25	11.25	±4700	Pass
2.6	25	11.93		

NB-IOT band2 QPSK 15 KHz

Test Conditions	Frequency Deviation			Verdict
Power (VDC)	Temperature (°C)	MCH 1880 MHz		
		Value (Hz)	Limits (Hz)	
3	-30	4.03	±4700	Pass
	-20	-6.27		
	-10	-1.19		
	0	9.71		
	10	8.96		
	20	0.84		
	25	-7.49		
	30	5.36		
	40	7.22		
	50	13.95		
	60	8.47		
	65	16.93		
3.4	25	12.51	±4700	Pass
2.6	25	6.18		

NB-IOT band 2 BPSK 15 KHz

Test Conditions	Frequency Deviation		Verdict	
Power (VDC)	Temperature (°C)	MCH 1880 MHz		
		Value (Hz)		Limits (Hz)
3	-30	8.61	±4700	Pass
	-20	-1.24		
	-10	-5.83		
	0	14.37		
	10	4.15		
	20	-4.66		
	25	-3.07		
	30	-2.29		
	40	12.85		
	50	9.34		
	60	11.62		
	65	12.46		
3.4	25	16.89		
2.6	25	10.75		

NB-IOT band 4 QPSK 3.75 KHz

Test Conditions	Frequency Deviation			Verdict
Power (VDC)	Temperature (°C)	MCH 1732.5 MHz		
		Value (Hz)	Limits (Hz)	
3	-30	4.33	±4,331.25	Pass
	-20	2.75		
	-10	-9.46		
	0	10.21		
	10	7.82		
	20	-0.93		
	25	0.64		
	30	-6.18		
	40	8.97		
	50	13.05		
	60	7.41		
	65	16.12		
3.4	25	12.58	±4,331.25	Pass
2.6	25	6.94		

NB-IOT band4 BPSK 3.75 KHz

Test Conditions	Frequency Deviation			Verdict
Power (VDC)	Temperature (°C)	MCH 1732.5 MHz		
		Value (Hz)	Limits (Hz)	
3	-30	12.07	±4,331.25	Pass
	-20	-4.81		
	-10	-2.15		
	0	18.04		
	10	0.36		
	20	-8.29		
	25	-6.73		
	30	1.47		
	40	16.32		
	50	5.68		
	60	15.17		
	65	8.73		
3.4	25	20.46	±4,331.25	Pass
2.6	25	14.21		

NB-IOT band 4 QPSK 15 KHz

Test Conditions	Frequency Deviation		Verdict	
Power (VDC)	Temperature (°C)	MCH 1732.5 MHz		
		Value (Hz)Limits (Hz)		
3	-30	6.19	±4,331.25	Pass
	-20	0.86		
	-10	-7.32		
	0	11.54		
	10	5.93		
	20	-2.05		
	25	-1.18		
	30	-4.77		
	40	10.49		
	50	11.63		
	60	9.25		
	65	14.88		
3.4	25	15.02	±4,331.25	Pass
2.6	25	8.16		

NB-IOT band4 BPSK 15 KHz

Test Conditions	Frequency Deviation			Verdict
Power (VDC)	Temperature (°C)	MCH 1732.5 MHz		
		Value (Hz)	Limits (Hz)	
3	-30	10.92	±4,331.25	Pass
	-20	-3.57		
	-10	-4.01		
	0	16.75		
	10	2.04		
	20	-6.84		
	25	-5.26		
	30	0.39		
	40	14.91		
	50	7.07		
	60	13.84		
	65	10.13		
3.4	25	18.95	±4,331.25	Pass
2.6	25	12.83		

NB-IOT band 5 QPSK 3.75 KHz

Test Conditions	Frequency Deviation			Verdict
Power (VDC)	Temperature (°C)	MCH 836.5 MHz		
		Value (Hz)	Limits (Hz)	
3	-30	6.47	±2091.25	Pass
	-20	0.25		
	-10	-7.93		
	0	12.36		
	10	5.88		
	20	-2.16		
	25	-1.04		
	30	4.12		
	40	10.45		
	50	11.29		
	60	9.47		
	65	14.68		
3.4	25	14.22	±2091.25	Pass
2.6	25	8.36		

NB-IOT band 5 BPSK 3.75 KHz

Test Conditions	Frequency Deviation			Verdict
Power (VDC)	Temperature (°C)	MCH 836.5 MHz		
		Value (Hz)	Limits (Hz)	
3	-30	14.38	±2091.25	Pass
	-20	-7.12		
	-10	-0.46		
	0	20.19		
	10	-1.63		
	20	-10.47		
	25	-8.95		
	30	-3.44		
	40	18.26		
	50	3.51		
	60	17.39		
	65	6.42		
3.4	25	22.47	±2091.25	Pass
2.6	25	16.15		

NB-IOT band 5 QPSK 15 KHz

Test Conditions	Frequency Deviation			Verdict
Power (VDC)	Temperature (°C)	MCH 836.5 MHz		
		Value (Hz)	Limits (Hz)	
3	-30	8.75	±2091.25	Pass
	-20	-1.29		
	-10	-5.64		
	0	14.03		
	10	3.96		
	20	-4.28		
	25	-3.17		
	30	2.68		
	40	12.08		
	50	9.64		
	60	11.32		
	65	12.79		
3.4	25	16.41	±2091.25	Pass
2.6	25	10.57		

NB-IOT band 5 BPSK 15 KHz

Test Conditions	Frequency Deviation			Verdict
Power (VDC)	Temperature (°C)	MCH 836.5 MHz		
		Value (Hz)	Limits (Hz)	
3	-30	12.64	±2091.25	Pass
	-20	-5.83		
	-10	-2.35		
	0	18.81		
	10	0.17		
	20	-8.92		
	25	-7.41		
	30	-1.96		
	40	16.73		
	50	5.14		
	60	15.97		
	65	8.26		
3.4	25	20.84	±2091.25	Pass
2.6	25	14.96		

NB-IOT band 12 QPSK 3.75 KHz

Test Conditions	Frequency Deviation		Verdict	
Power (VDC)	Temperature (°C)	MCH 707.5 MHz		
		Value (Hz)		Limits (Hz)
3	-30	8.15	±1768.75	Pass
	-20	-2.06		
	-10	-6.14		
	0	14.29		
	10	3.82		
	20	-4.37		
	25	-3.65		
	30	1.72		
	40	12.16		
	50	9.03		
	60	11.42		
	65	12.75		
3.4	25	16.38	±1768.75	Pass
2.6	25	10.41		

NB-IOT band 12 BPSK 3.75 KHz

Test Conditions		Frequency Deviation		Verdict
Power (VDC)	Temperature (°C)	MCH 707.5 MHz		
		Value (Hz)	Limits (Hz)	
3	-30	10.53	±1768.75	Pass
	-20	-4.12		
	-10	-3.97		
	0	16.04		
	10	2.39		
	20	-6.25		
	25	-5.18		
	30	0.44		
	40	14.05		
	50	7.66		
	60	13.28		
65	10.71			
3.4	25	18.13		
2.6	25	12.48		

NB-IOT band 12 QPSK 15 KHz

Test Conditions	Frequency Deviation		Verdict	
Power (VDC)	Temperature (°C)	MCH 707.5 MHz		
		Value (Hz)		Limits (Hz)
3	-30	14.89	±1768.75	Pass
	-20	-7.96		
	-10	-0.62		
	0	20.93		
	10	-1.85		
	20	-10.73		
	25	-9.36		
	30	-3.88		
	40	18.92		
	50	3.08		
	60	17.84		
	65	6.15		
3.4	25	22.76	±1768.75	Pass
2.6	25	16.93		

NB-IOT band 12 BPSK 15 KHz

Test Conditions	Frequency Deviation		Verdict	
Power (VDC)	Temperature (°C)	MCH 707.5 MHz		
		Value (Hz)		Limits (Hz)
3	-30	16.27	±1768.75	Pass
	-20	-9.41		
	-10	1.26		
	0	22.35		
	10	-3.49		
	20	-12.64		
	25	-11.08		
	30	-5.63		
	40	20.41		
	50	1.47		
	60	19.65		
	65	4.53		
3.4	25	24.29	±1768.75	Pass
2.6	25	18.62		

NB-IOT band 13 QPSK 3.75 KHz

Test Conditions	Frequency Deviation		Verdict	
Power (VDC)	Temperature (°C)	MCH 782 MHz		
		Value (Hz)		Limits (Hz)
3	-30	8.34	±1955	Pass
	-20	-2.29		
	-10	-5.63		
	0	14.11		
	10	4.47		
	20	-4.58		
	25	-3.04		
	30	2.15		
	40	12.27		
	50	9.83		
	60	11.46		
	65	12.94		
3.4	25	16.25	±1955	Pass
2.6	25	10.36		

NB-IOT band 13 BPSK 3.75 KHz

Test Conditions	Frequency Deviation		Verdict	
Power (VDC)	Temperature (°C)	MCH 782 MHz		
		Value (Hz)		Limits (Hz)
3	-30	8.34	±1955	Pass
	-20	-2.29		
	-10	-5.63		
	0	14.11		
	10	4.47		
	20	-4.58		
	25	-3.04		
	30	2.15		
	40	12.27		
	50	9.83		
	60	11.46		
	65	12.94		
3.4	25	16.25	±1955	Pass
2.6	25	10.36		

NB-IOT band 13 QPSK 15 KHz

Test Conditions	Frequency Deviation			Verdict
Power (VDC)	Temperature (°C)	MCH 782 MHz		
		Value (Hz)	Limits (Hz)	
3	-30	14.16	±1955	Pass
	-20	-7.84		
	-10	-0.31		
	0	19.72		
	10	-1.28		
	20	-9.87		
	25	-8.64		
	30	-3.17		
	40	17.63		
	50	3.92		
	60	16.91		
	65	7.05		
3.4	25	21.86	±1955	Pass
2.6	25	16.14		

NB-IOT band 13 BPSK 15KHz

Test Conditions	Frequency Deviation			Verdict
Power (VDC)	Temperature (°C)	MCH 782 MHz		
		Value (Hz)	Limits (Hz)	
3	-30	6.71	±1955	Pass
	-20	-0.55		
	-10	-7.42		
	0	12.28		
	10	6.05		
	20	-2.41		
	25	-1.33		
	30	4.06		
	40	10.19		
	50	11.35		
	60	9.54		
	65	14.26		
3.4	25	14.37	±1955	Pass
2.6	25	8.62		

NB-IOT band 18(part90) BPSK 3.75 KHz

Test Conditions	Frequency Deviation			Verdict
Power (VDC)	Temperature (°C)	MCH 819.5 MHz		
		Value (Hz)	Limits (Hz)	
3	-30	-3.8	±2,048.75	Pass
	-20	-7.9		
	-10	1.2		
	0	-5.3		
	10	-6.7		
	20	-2.2		
	25	-9.1		
	30	-4.5		
	40	-1.7		
	50	-7		
	60	-0.3		
	65	-5.8		
3.4	25	-2.9		
2.6	25	-0.9		

NB-IOT band 18(part90) QPSK 3.75 KHz

Test Conditions	Frequency Deviation			Verdict
Power (VDC)	Temperature (°C)	MCH 819.5 MHz		
		Value (Hz)	Limits (Hz)	
3	-30	-4.7	±2,048.75	Pass
	-20	-1.3		
	-10	2.1		
	0	-9		
	10	-0.8		
	20	-5.6		
	25	-3.9		
	30	-7.5		
	40	-6.4		
	50	-2.2		
	60	-4		
	65	-1.9		
3.4	25	-8.1	±2,048.75	Pass
2.6	25	0.6		

NB-IOT band 18(part90) BPSK 3.75 KHz

Test Conditions	Frequency Deviation			Verdict
Power (VDC)	Temperature (°C)	MCH 819.5 MHz		
		Value (Hz)	Limits (Hz)	
3	-30	-3.8	±2,048.75	Pass
	-20	-7.9		
	-10	1.2		
	0	-5.3		
	10	-6.7		
	20	-2.2		
	25	-9.1		
	30	-4.5		
	40	-1.7		
	50	-7		
	60	-0.3		
	65	-5.8		
3.4	25	-2.9		
2.6	25	-0.9		

NB-IOT band 18(part90) QPSK 15 KHz

Test Conditions	Frequency Deviation			Verdict
Power (VDC)	Temperature (°C)	MCH 819.5 MHz		
		Value (Hz)	Limits (Hz)	
3	-30	-8.3	±2,048.75	Pass
	-20	-2.7		
	-10	-5		
	0	-1.1		
	10	0.2		
	20	-6.2		
	25	-4.4		
	30	-7.6		
	40	-3.5		
	50	-9.2		
	60	-0.6		
	65	-5.9		
3.4	25	-1.8	±2,048.75	Pass
2.6	25	-4.1		

NB-IOT band 18(part90) BPSK 15 KHz

Test Conditions	Frequency Deviation		Verdict	
Power (VDC)	Temperature (°C)	MCH 819.5 MHz		
		Value (Hz)Limits (Hz)		
3	-30	-6.8	±2,048.75	Pass
	-20	-1.9		
	-10	-4.2		
	0	-7.5		
	10	-0.8		
	20	-3.7		
	25	-8.9		
	30	-2.4		
	40	-5.1		
	50	0.7		
	60	-9.4		
	65	-3.3		
3.4	25	-6.1	±2,048.75	Pass
2.6	25	-1.5		

NB-IOT band 18(part22) QPSK 3.75 KHz

Test Conditions	Frequency Deviation			Verdict
Power (VDC)	Temperature (°C)	MCH 827 MHz		
		Value (Hz)	Limits (Hz)	
3	-30	-2.3	±2,067.5	Pass
	-20	-7.1		
	-10	-5.8		
	0	-8.7		
	10	0.9		
	20	-3.6		
	25	-1.2		
	30	-4.9		
	40	-6.5		
	50	-0.4		
	60	-9		
	65	-2.8		
3.4	25	-5.3	±2,067.5	Pass
2.6	25	-1.7		

NB-IOT band 18(part22) BPSK 3.75 KHz

Test Conditions	Frequency Deviation			Verdict
Power (VDC)	Temperature (°C)	MCH 827 MHz		
		Value (Hz)	Limits (Hz)	
3	-30	-4.6	±2,067.5	Pass
	-20	-8.2		
	-10	-1.5		
	0	-6.9		
	10	-0.2		
	20	-5.4		
	25	-7.8		
	30	-3.1		
	40	-9.3		
	50	0.5		
	60	-2.7		
	65	-6		
3.4	25	-3.9		
2.6	25	-1.8		

NB-IOT band 18(part22) QPSK 15 KHz

Test Conditions	Frequency Deviation			Verdict
Power (VDC)	Temperature (°C)	MCH 827 MHz		
		Value (Hz)	Limits (Hz)	
3	-30	-7.2	±2,067.5	Pass
	-20	-3.8		
	-10	-5.5		
	0	-0.9		
	10	-2.1		
	20	-8.6		
	25	-4.3		
	30	-6.7		
	40	-1.4		
	50	0.3		
	60	-9.1		
	65	-5.2		
3.4	25	-2.9		
2.6	25	-3.4		

NB-IOT band 18(part22) BPSK 15 KHz

Test Conditions	Frequency Deviation			Verdict
Power (VDC)	Temperature (°C)	MCH 827 MHz		
		Value (Hz)	Limits (Hz)	
3	-30	-8.1	±2,067.5	Pass
	-20	-2.5		
	-10	-6.3		
	0	-4.7		
	10	-0.6		
	20	-9.2		
	25	-3.5		
	30	-7.4		
	40	-1.6		
	50	0.8		
	60	-5.9		
	65	-2.2		
3.4	25	-4	±2,067.5	Pass
2.6	25	-1.1		

NB-IOT band 19 QPSK 3.75 KHz

Test Conditions	Frequency Deviation			Verdict
Power (VDC)	Temperature (°C)	MCH 837.5 MHz		
		Value (Hz)	Limits (Hz)	
3	-30	-5.4	±2093.75	Pass
	-20	-1.8		
	-10	-7.6		
	0	-3.2		
	10	0.5		
	20	-8.9		
	25	-2.7		
	30	-6.1		
	40	-0.9		
	50	-4.3		
	60	-9.5		
	65	-1.2		
3.4	25	-5.8	±2093.75	Pass
2.6	25	-3		

NB-IOT band 19 BPSK 3.75 KHz

Test Conditions	Frequency Deviation		Verdict	
Power (VDC)	Temperature (°C)	MCH 837.5 MHz		
		Value (Hz)Limits (Hz)		
3	-30	-6.5	±2093.75	Pass
	-20	-3.9		
	-10	-8.2		
	0	-1.7		
	10	0.3		
	20	-5.4		
	25	-2.8		
	30	-7.1		
	40	-4.6		
	50	-0.5		
	60	-9.3		
	65	-3.2		
3.4	25	-6.8	±2093.75	Pass
2.6	25	-1.4		

NB-IOT band 19 QPSK 15 KHz

Test Conditions	Frequency Deviation			Verdict
Power (VDC)	Temperature (°C)	MCH 837.5 MHz		
		Value (Hz)	Limits (Hz)	
3	-30	-5.8	±2093.75	Pass
	-20	-4.2		
	-10	-7.9		
	0	-2.1		
	10	0.6		
	20	-6		
	25	-3.5		
	30	-8.3		
	40	-5.1		
	50	-1.2		
	60	-8.7		
	65	-2.9		
3.4	25	-7.4	±2093.75	Pass
2.6	25	-0.8		

NB-IOT band 19 BPSK 15 KHz

Test Conditions	Frequency Deviation		Verdict	
Power (VDC)	Temperature (°C)	MCH 837.5MHz		
		Value (Hz)		Limits (Hz)
3	-30	-6.1	±2093.75	Pass
	-20	-4		
	-10	-8.5		
	0	-1.2		
	10	0.8		
	20	-5.1		
	25	-2.3		
	30	-7.6		
	40	-4.9		
	50	-0.2		
	60	-9.7		
	65	-3.5		
3.4	25	-6.2	±2093.75	Pass
2.6	25	-1		

NB-IOT band 26(part90) QPSK 3.75 KHz

Test Conditions	Frequency Deviation			Verdict
Power (VDC)	Temperature (°C)	MCH 819 MHz		
		Value (Hz)	Limits (Hz)	
3	-30	-5.7	±2047.5	Pass
	-20	-4.4		
	-10	-7.8		
	0	-1.3		
	10	0.7		
	20	-4.8		
	25	-3.3		
	30	-6.9		
	40	-4.1		
	50	-0.8		
	60	-9.6		
	65	-2.8		
3.4	25	-7	±2047.5	Pass
2.6	25	-1.5		

NB-IOT band 26(part90) BPSK 3.75 KHz

Test Conditions	Frequency Deviation			Verdict
Power (VDC)	Temperature (°C)	MCH 819 MHz		
		Value (Hz)	Limits (Hz)	
3	-30	-6.7	±2047.5	Pass
	-20	-3.3		
	-10	-8.1		
	0	-1.9		
	10	0.4		
	20	-5.2		
	25	-2.6		
	30	-7.3		
	40	-4.8		
	50	-0.7		
	60	-9.1		
	65	-3		
3.4	25	-6.5	±2047.5	Pass
2.6	25	-1.2		

NB-IOT band 26(part90) QPSK 15 KHz

Test Conditions	Frequency Deviation			Verdict
Power (VDC)	Temperature (°C)	MCH 819 MHz		
		Value (Hz)	Limits (Hz)	
3	-30	-6.9	±2047.5	Pass
	-20	-3.1		
	-10	-8.8		
	0	-2		
	10	0.1		
	20	-5.9		
	25	-2.5		
	30	-7.4		
	40	-4.3		
	50	-0.9		
	60	-9		
	65	-3.7		
3.4	25	-6.3	±2047.5	Pass
2.6	25	-1.9		

NB-IOT band 26(part90) BPSK 15 KHz

Test Conditions	Frequency Deviation			Verdict
Power (VDC)	Temperature (°C)	MCH 819 MHz		
		Value (Hz)	Limits (Hz)	
3	-30	-3.6	±2047.5	Pass
	-20	-2.9		
	-10	-7.1		
	0	-1.4		
	10	-0.2		
	20	-4.5		
	25	-2.1		
	30	-6.7		
	40	-3.8		
	50	-0.9		
	60	-8.5		
	65	-2.4		
3.4	25	-5.9	±2047.5	Pass
2.6	25	-1.1		

NB-IOT band 26(part22) QPSK 3.75 KHz

Test Conditions	Frequency Deviation		Verdict	
Power (VDC)	Temperature (°C)	MCH 836.5 MHz		
		Value (Hz)		Limits (Hz)
3	-30	-2.8	±2091.25	Pass
	-20	-3.5		
	-10	-6.4		
	0	-1.7		
	10	-0.1		
	20	-4.2		
	25	-1.9		
	30	-7.3		
	40	-3.2		
	50	-0.6		
	60	-8.9		
	65	-2.5		
3.4	25	-6.1	±2091.25	Pass
2.6	25	-1.3		

NB-IOT band 26(part22) BPSK 3.75 KHz

Test Conditions	Frequency Deviation			Verdict
Power (VDC)	Temperature (°C)	MCH 836.5 MHz		
		Value (Hz)	Limits (Hz)	
3	-30	-3.5	±2091.25	Pass
	-20	-4.7		
	-10	-5.8		
	0	-2.1		
	10	-0.9		
	20	-3.6		
	25	-1.5		
	30	-6.9		
	40	-2.8		
	50	-0.4		
	60	-7.5		
	65	-3.1		
3.4	25	-5.3	±2091.25	Pass
2.6	25	-1.8		

NB-IOT band 26(part22) QPSK 15 KHz

Test Conditions	Frequency Deviation			Verdict
Power (VDC)	Temperature (°C)	MCH 836.5 MHz		
		Value (Hz)	Limits (Hz)	
3	-30	-4.1	±2091.25	Pass
	-20	-2.7		
	-10	-5.9		
	0	-1.3		
	10	-0.6		
	20	-3.8		
	25	-2.4		
	30	-6.2		
	40	-1.9		
	50	-0.8		
	60	-7.3		
	65	-4.5		
3.4	25	-2.6		
2.6	25	-3.1		

NB-IOT band 26(part22) BPSK 15 KHz

Test Conditions	Frequency Deviation			Verdict
Power (VDC)	Temperature (°C)	MCH 836.5 MHz		
		Value (Hz)	Limits (Hz)	
3	-30	-7.2	±2091.25	Pass
	-20	-3.9		
	-10	-1.4		
	0	-5.8		
	10	-0.3		
	20	-6.1		
	25	-2.5		
	30	-8.7		
	40	-4.2		
	50	-0.7		
	60	-9.1		
	65	-2.3		
3.4	25	-6.8	±2091.25	Pass
2.6	25	-1.6		

NB-IOT band 66 QPSK 3.75 KHz

Test Conditions	Frequency Deviation		Verdict	
Power (VDC)	Temperature (°C)	MCH 1745 MHz		
		Value (Hz)		Limits (Hz)
3	-30	8.62	±4362.5	Pass
	-20	-2.73		
	-10	-5.94		
	0	13.43		
	10	4.15		
	20	-4.38		
	25	-3.26		
	30	2.07		
	40	11.35		
	50	9.18		
	60	10.64		
	65	12.95		
3.4	25	15.36		
2.6	25	10.21		

NB-IOT band 66 BPSK 3.75 KHz

Test Conditions	Frequency Deviation			Verdict
Power (VDC)	Temperature (°C)	MCH 1745 MHz		
		Value (Hz)	Limits (Hz)	
3	-30	16.39	±4362.5	Pass
	-20	-9.87		
	-10	1.32		
	0	21.48		
	10	-3.24		
	20	-11.73		
	25	-10.45		
	30	-5.16		
	40	19.27		
	50	1.86		
	60	18.61		
	65	4.72		
3.4	25	23.41	±4362.5	Pass
2.6	25	18.26		

NB-IOT band 66 QPSK 15 KHz

Test Conditions	Frequency Deviation			Verdict
Power (VDC)	Temperature (°C)	MCH 1745 MHz		
		Value (Hz)	Limits (Hz)	
3	-30	10.48	±4362.5	Pass
	-20	-4.36		
	-10	-3.71		
	0	15.62		
	10	2.57		
	20	-6.22		
	25	-5.03		
	30	0.74		
	40	13.59		
	50	7.73		
	60	12.78		
	65	10.69		
3.4	25	17.44	±4362.5	Pass
2.6	25	12.33		

NB-IOT band 66 BPSK 15 KHz

Test Conditions	Frequency Deviation			Verdict
Power (VDC)	Temperature (°C)	MCH 1745 MHz		
		Value (Hz)	Limits (Hz)	
3	-30	14.95	±4362.5	Pass
	-20	-8.71		
	-10	-0.43		
	0	19.85		
	10	-1.79		
	20	-10.34		
	25	-8.87		
	30	-3.63		
	40	17.94		
	50	3.26		
	60	16.82		
	65	6.31		
3.4	25	21.75	±4362.5	Pass
2.6	25	16.88		

NB-IOT band 71 QPSK 3.75 KHz

Test Conditions	Frequency Deviation		Verdict	
Power (VDC)	Temperature (°C)	MCH 680.5 MHz		
		Value (Hz)		Limits (Hz)
3	-30	6.94	±1701.25	Pass
	-20	-0.68		
	-10	-7.25		
	0	11.86		
	10	6.33		
	20	-2.47		
	25	-1.26		
	30	4.31		
	40	9.72		
	50	11.46		
	60	9.15		
	65	14.37		
3.4	25	13.71	±1701.25	Pass
2.6	25	8.52		

NB-IOT band 71 BPSK 3.75 KHz

Test Conditions	Frequency Deviation			Verdict
Power (VDC)	Temperature (°C)	MCH 680.5 MHz		
		Value (Hz)	Limits (Hz)	
3	-30	14.05	±1701.25	Pass
	-20	-7.93		
	-10	-0.18		
	0	19.37		
	10	-1.16		
	20	-9.78		
	25	-8.54		
	30	-3.05		
	40	17.16		
	50	4.07		
	60	16.34		
	65	6.92		
3.4	25	21.09	±1701.25	Pass
2.6	25	15.87		

NB-IOT band 71 QPSK 15 KHz

Test Conditions	Frequency Deviation		Verdict	
Power (VDC)	Temperature (°C)	MCH 680.5 MHz		
		Value (Hz)		Limits (Hz)
3	-30	8.21	±1701.25	Pass
	-20	-2.45		
	-10	-5.49		
	0	13.75		
	10	4.61		
	20	-4.53		
	25	-2.91		
	30	2.38		
	40	11.84		
	50	9.95		
	60	11.03		
	65	12.81		
3.4	25	15.68		
2.6	25	10.14		

NB-IOT band 71 BPSK 15 KHz

Test Conditions	Frequency Deviation			Verdict
Power (VDC)	Temperature (°C)	MCH 680.5 MHz		
		Value (Hz)	Limits (Hz)	
3	-30	12.73	±1701.25	Pass
	-20	-6.68		
	-10	-1.94		
	0	17.49		
	10	0.58		
	20	-8.09		
	25	-6.77		
	30	-1.36		
	40	15.32		
	50	5.64		
	60	14.67		
	65	8.35		
3.4	25	19.26	±1701.25	Pass
2.6	25	14.41		

A.5 Spurious Emission at Antenna Terminals

Note 1: The frequencies of verdict which are marked by "N/A" should be ignored because they are UE carrier frequency.

Note 2: Test plots please refer to the document “Annex No.:Ti-CC26030157-501 Data Part 3.pdf”.

Note 3: The disturbance above 26.5GHz was very low, and the above harmonics were the highest point could be found when testing, so only the worst case data displayed in this report.

LTE Mode Test Verdict

Test Band	Test Bandwidth	Test Channel	Test Mode	Test RB (Size#Offset)	Verdict
Cat-M Band 2	1.4 MHz	LCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
	3 MHz	LCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
	5 MHz	LCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
	10 MHz	LCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
	15 MHz	LCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass

Test Band	Test Bandwidth	Test Channel	Test Mode	Test RB (Size#Offset)	Verdict
	20MHz	LCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass

Test Band	Test Bandwidth	Test Channel	Test Mode	Test RB (Size#Offset)	Verdict
Cat-M Band 4	1.4 MHz	LCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
	3 MHz	LCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
	5 MHz	LCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
	10 MHz	LCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
	15 MHz	LCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
	20MHz	LCH	QPSK	RB1#0	Pass

Test Band	Test Bandwidth	Test Channel	Test Mode	Test RB (Size#Offset)	Verdict
			16-QAM	RB1#0	Pass
			QPSK	RB1#0	Pass
		MCH	16-QAM	RB1#0	Pass
			QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass

Test Band	Test Bandwidth	Test Channel	Test Mode	Test RB (Size#Offset)	Verdict
Cat-M Band 5	1.4 MHz	LCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
	3 MHz	LCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
	5 MHz	LCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
	10 MHz	LCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass

Test Band	Test Bandwidth	Test Channel	Test Mode	Test RB (Size#Offset)	Verdict
Cat-M Band 12	1.4 MHz	LCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
	3 MHz	LCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
	5 MHz	LCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
	10 MHz	LCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass

Test Band	Test Bandwidth	Test Channel	Test Mode	Test RB (Size#Offset)	Verdict
Cat-M Band 13	5 MHz	LCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
	10 MHz	LCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass

Test Band	Test Bandwidth	Test Channel	Test Mode	Test RB (Size#Offset)	Verdict
Cat-M Band 18(part 22)	5 MHz	LCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass

Test Band	Test Bandwidth	Test Channel	Test Mode	Test RB (Size#Offset)	Verdict
Cat-M Band 18(part 90)	5 MHz	LCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass

Test Band	Test Bandwidth	Test Channel	Test Mode	Test RB (Size#Offset)	Verdict
Cat-M Band 19	5 MHz	LCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
	10 MHz	LCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
	15 MHz	LCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass

Test Band	Test Bandwidth	Test Channel	Test Mode	Test RB (Size#Offset)	Verdict
Cat-M Band 26 (Part22)	1.4 MHz	LCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
	3 MHz	LCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
	5 MHz	LCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
	10 MHz	LCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
	15 MHz	LCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass

Test Band	Test Bandwidth	Test Channel	Test Mode	Test RB (Size#Offset)	Verdict
Cat-M Band 26 (Part90)	1.4 MHz	LCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
	3 MHz	LCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
	5 MHz	LCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
	10 MHz	LCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass

Test Band	Test Bandwidth	Test Channel	Test Mode	Test RB (Size#Offset)	Verdict
Cat-M Band 66	1.4 MHz	LCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
	3 MHz	LCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
	5 MHz	LCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
	10 MHz	LCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
	15 MHz	LCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
	20MHz	LCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			16-QAM	RB1#0	Pass

NB-IoT Mode Test Data

Test Band	Test Sub-carrier spacing	Test Channel	Test Mode	Test RB (Size#Offset)	Verdict
NB-IoT Band 2	3.75kHz	LCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
	15kHz	LCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass

Test Band	Test Sub-carrier spacing	Test Channel	Test Mode	Test RB (Size#Offset)	Verdict
NB-IoT Band 4	3.75kHz	LCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
	15kHz	LCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass

Test Band	Test Sub-carrier spacing	Test Channel	Test Mode	Test RB (Size#Offset)	Verdict
NB-IoT Band 5	3.75kHz	LCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
	15kHz	LCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass

Test Band	Test Sub-carrier spacing	Test Channel	Test Mode	Test RB (Size#Offset)	Verdict
NB-IoT Band 12	3.75kHz	LCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
	15kHz	LCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass

Test Band	Test Sub-carrier spacing	Test Channel	Test Mode	Test RB (Size#Offset)	Verdict
NB-IoT Band 13	3.75kHz	LCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
	15kHz	LCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass

Test Band	Test Sub-carrier spacing	Test Channel	Test Mode	Test RB (Size#Offset)	Verdict
NB-IoT Band 18(Part 22)	3.75kHz	LCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
	15kHz	LCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass

Test Band	Test Sub-carrier spacing	Test Channel	Test Mode	Test RB (Size#Offset)	Verdict
NB-IoT Band 18(Part 90)	3.75kHz	LCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
	15kHz	LCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass

Test Band	Test Sub-carrier spacing	Test Channel	Test Mode	Test RB (Size#Offset)	Verdict
NB-IoT Band 19	3.75kHz	LCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
	15kHz	LCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass

Test Band	Test Sub-carrier spacing	Test Channel	Test Mode	Test RB (Size#Offset)	Verdict
NB-IoT Band 26(Part 22)	3.75kHz	LCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
	15kHz	LCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass

Test Band	Test Sub-carrier spacing	Test Channel	Test Mode	Test RB (Size#Offset)	Verdict
NB-IoT Band 26(Part 90)	3.75kHz	LCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
	15kHz	LCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass

Test Band	Test Sub-carrier spacing	Test Channel	Test Mode	Test RB (Size#Offset)	Verdict
NB-IoT Band 66	3.75kHz	LCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
	15kHz	LCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass

Test Band	Test Sub-carrier spacing	Test Channel	Test Mode	Test RB (Size#Offset)	Verdict
NB-IoT Band 71	3.75kHz	LCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
	15kHz	LCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		MCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		HCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass

A.6 Band Edge

Note 1: Test plots please refer to the document “Annex No.:Ti-CC26030157-501 Data Part 4.pdf”.

LTE Mode Test Verdict

Test Band	Test Bandwidth	Test Channel	Test Mode	Test RB (Size#Offset)	Verdict
Cat-M Band 2	1.4 MHz	LCH	QPSK	RB1#0	Pass
				RB6#0	Pass
			16-QAM	RB1#0	Pass
				RB5#0	Pass
		HCH	QPSK	RB1#5	Pass
				RB6#0	Pass
			16-QAM	RB1#5	Pass
				RB5#1	Pass
	3 MHz	LCH	QPSK	RB1#0	Pass
				RB6#0	Pass
			16-QAM	RB1#0	Pass
				RB5#0	Pass
		HCH	QPSK	RB1#5	Pass
				RB6#0	Pass
			16-QAM	RB1#5	Pass
				RB5#1	Pass
	5 MHz	LCH	QPSK	RB1#0	Pass
				RB6#0	Pass
			16-QAM	RB1#0	Pass
				RB5#0	Pass
		HCH	QPSK	RB1#5	Pass
				RB6#0	Pass
			16-QAM	RB1#5	Pass
				RB5#1	Pass
	10 MHz	LCH	QPSK	RB1#0	Pass
				RB6#0	Pass
			16-QAM	RB1#0	Pass
				RB5#0	Pass
		HCH	QPSK	RB1#5	Pass
				RB6#0	Pass
			16-QAM	RB1#5	Pass
				RB5#1	Pass
	15 MHz	LCH	QPSK	RB1#0	Pass
				RB6#0	Pass
			16-QAM	RB1#0	Pass

Test Band	Test Bandwidth	Test Channel	Test Mode	Test RB (Size#Offset)	Verdict
				RB5#0	Pass
		HCH	QPSK	RB1#5	Pass
				RB6#0	Pass
			16-QAM	RB1#5	Pass
				RB5#1	Pass
	20 MHz	LCH	QPSK	RB1#0	Pass
				RB6#0	Pass
			16-QAM	RB1#0	Pass
				RB5#0	Pass
		HCH	QPSK	RB1#5	Pass
				RB6#0	Pass
			16-QAM	RB1#5	Pass
				RB5#1	Pass

Test Band	Test Bandwidth	Test Channel	Test Mode	Test RB (Size#Offset)	Verdict
Cat-M Band 4	1.4 MHz	LCH	QPSK	RB1#0	Pass
				RB6#0	Pass
			16-QAM	RB1#0	Pass
				RB5#0	Pass
		HCH	QPSK	RB1#5	Pass
				RB6#0	Pass
			16-QAM	RB1#5	Pass
				RB5#1	Pass
	3 MHz	LCH	QPSK	RB1#0	Pass
				RB6#0	Pass
			16-QAM	RB1#0	Pass
				RB5#0	Pass
		HCH	QPSK	RB1#5	Pass
				RB6#0	Pass
			16-QAM	RB1#5	Pass
				RB5#1	Pass
	5 MHz	LCH	QPSK	RB1#0	Pass
				RB6#0	Pass
			16-QAM	RB1#0	Pass
				RB5#0	Pass
		HCH	QPSK	RB1#5	Pass
				RB6#0	Pass
			16-QAM	RB1#5	Pass
				RB5#1	Pass
	10 MHz	LCH	QPSK	RB1#0	Pass
				RB6#0	Pass
			16-QAM	RB1#0	Pass
				RB5#0	Pass
		HCH	QPSK	RB1#5	Pass
				RB6#0	Pass
			16-QAM	RB1#5	Pass
				RB5#1	Pass
	15 MHz	LCH	QPSK	RB1#0	Pass
				RB6#0	Pass
			16-QAM	RB1#0	Pass
				RB5#0	Pass
		HCH	QPSK	RB1#5	Pass
				RB6#0	Pass
			16-QAM	RB1#5	Pass
				RB1#5	Pass

Test Band	Test Bandwidth	Test Channel	Test Mode	Test RB (Size#Offset)	Verdict
				RB5#1	Pass
	20 MHz	LCH	QPSK	RB1#0	Pass
				RB6#0	Pass
			16-QAM	RB1#0	Pass
				RB5#0	Pass
		HCH	QPSK	RB1#5	Pass
				RB6#0	Pass
			16-QAM	RB1#5	Pass
				RB5#1	Pass

Test Band	Test Bandwidth	Test Channel	Test Mode	Test RB (Size#Offset)	Verdict
Cat-M Band 5	1.4 MHz	LCH	QPSK	RB1#0	Pass
				RB6#0	Pass
			16-QAM	RB1#0	Pass
				RB5#0	Pass
		HCH	QPSK	RB1#5	Pass
				RB6#0	Pass
			16-QAM	RB1#5	Pass
				RB5#1	Pass
	3 MHz	LCH	QPSK	RB1#0	Pass
				RB6#0	Pass
			16-QAM	RB1#0	Pass
				RB5#0	Pass
		HCH	QPSK	RB1#5	Pass
				RB6#0	Pass
			16-QAM	RB1#5	Pass
				RB5#1	Pass
	5 MHz	LCH	QPSK	RB1#0	Pass
				RB6#0	Pass
			16-QAM	RB1#0	Pass
				RB5#0	Pass
		HCH	QPSK	RB1#5	Pass
				RB6#0	Pass
			16-QAM	RB1#5	Pass
				RB5#1	Pass
	10 MHz	LCH	QPSK	RB1#0	Pass
				RB6#0	Pass
			16-QAM	RB1#0	Pass
				RB5#0	Pass
		HCH	QPSK	RB1#5	Pass
				RB6#0	Pass
			16-QAM	RB1#5	Pass
				RB5#1	Pass

Test Band	Test Bandwidth	Test Channel	Test Mode	Test RB (Size#Offset)	Verdict
Cat-M Band 12	1.4 MHz	LCH	QPSK	RB1#0	Pass
				RB6#0	Pass
			16-QAM	RB1#0	Pass
				RB5#0	Pass
		HCH	QPSK	RB1#5	Pass
				RB6#0	Pass
			16-QAM	RB1#5	Pass
				RB5#1	Pass
	3 MHz	LCH	QPSK	RB1#0	Pass
				RB6#0	Pass
			16-QAM	RB1#0	Pass
				RB5#0	Pass
		HCH	QPSK	RB1#5	Pass
				RB6#0	Pass
			16-QAM	RB1#5	Pass
				RB5#1	Pass
	5 MHz	LCH	QPSK	RB1#0	Pass
				RB6#0	Pass
			16-QAM	RB1#0	Pass
				RB5#0	Pass
		HCH	QPSK	RB1#5	Pass
				RB6#0	Pass
			16-QAM	RB1#5	Pass
				RB5#1	Pass
	10 MHz	LCH	QPSK	RB1#0	Pass
				RB6#0	Pass
			16-QAM	RB1#0	Pass
				RB5#0	Pass
		HCH	QPSK	RB1#5	Pass
				RB6#0	Pass
			16-QAM	RB1#5	Pass
				RB5#1	Pass

Test Band	Test Bandwidth	Test Channel	Test Mode	Test RB (Size#Offset)	Verdict
Cat-M Band 13	5 MHz	LCH	QPSK	RB1#0	Pass
				RB6#0	Pass
			16-QAM	RB1#0	Pass
				RB5#0	Pass
		HCH	QPSK	RB1#5	Pass
				RB6#0	Pass
			16-QAM	RB1#5	Pass
				RB5#1	Pass
	10 MHz	LCH	QPSK	RB1#0	Pass
				RB6#0	Pass
			16-QAM	RB1#0	Pass
				RB5#0	Pass
		HCH	QPSK	RB1#5	Pass
				RB6#0	Pass
			16-QAM	RB1#5	Pass
				RB5#1	Pass

Test Band	Test Bandwidth	Test Channel	Test Mode	Test RB (Size#Offset)	Verdict
Cat-M Band 18(part 22)	5 MHz	LCH	QPSK	RB1#0	Pass
				RB6#0	Pass
			16-QAM	RB1#0	Pass
				RB5#0	Pass
		HCH	QPSK	RB1#5	Pass
				RB6#0	Pass
			16-QAM	RB1#5	Pass
				RB5#1	Pass

Test Band	Test Bandwidth	Test Channel	Test Mode	Test RB (Size#Offset)	Verdict
Cat-M Band 18(part 90)	5 MHz	LCH	QPSK	RB1#0	Pass
				RB6#0	Pass
			16-QAM	RB1#0	Pass
				RB5#0	Pass
		HCH	QPSK	RB1#5	Pass
				RB6#0	Pass
			16-QAM	RB1#5	Pass
				RB5#1	Pass

Test Band	Test Bandwidth	Test Channel	Test Mode	Test RB (Size#Offset)	Verdict
Cat-M Band 19	5 MHz	LCH	QPSK	RB1#0	Pass
				RB6#0	Pass
			16-QAM	RB1#0	Pass
				RB5#0	Pass
		HCH	QPSK	RB1#5	Pass
				RB6#0	Pass
			16-QAM	RB1#5	Pass
				RB5#1	Pass
	10 MHz	LCH	QPSK	RB1#0	Pass
				RB6#0	Pass
			16-QAM	RB1#0	Pass
				RB5#0	Pass
		HCH	QPSK	RB1#5	Pass
				RB6#0	Pass
			16-QAM	RB1#5	Pass
				RB5#1	Pass
	15 MHz	LCH	QPSK	RB1#0	Pass
				RB6#0	Pass
			16-QAM	RB1#0	Pass
				RB5#0	Pass
		HCH	QPSK	RB1#5	Pass
				RB6#0	Pass
			16-QAM	RB1#5	Pass
				RB5#1	Pass
				RB1#5	Pass
				RB5#1	Pass

Test Band	Test Bandwidth	Test Channel	Test Mode	Test RB (Size#Offset)	Verdict
Cat-M Band 26 (Part22)	1.4 MHz	LCH	QPSK	RB1#0	Pass
				RB6#0	Pass
			16-QAM	RB1#0	Pass
				RB5#0	Pass
		HCH	QPSK	RB1#5	Pass
				RB6#0	Pass
			16-QAM	RB1#5	Pass
				RB5#1	Pass
	3 MHz	LCH	QPSK	RB1#0	Pass
				RB6#0	Pass
			16-QAM	RB1#0	Pass
				RB5#0	Pass
		HCH	QPSK	RB1#5	Pass
				RB6#0	Pass
			16-QAM	RB1#5	Pass
				RB5#1	Pass
	5 MHz	LCH	QPSK	RB1#0	Pass
				RB6#0	Pass
			16-QAM	RB1#0	Pass
				RB5#0	Pass
		HCH	QPSK	RB1#5	Pass
				RB6#0	Pass
			16-QAM	RB1#5	Pass
				RB5#1	Pass
	10 MHz	LCH	QPSK	RB1#0	Pass
				RB6#0	Pass
			16-QAM	RB1#0	Pass
				RB5#0	Pass
		HCH	QPSK	RB1#5	Pass
				RB6#0	Pass
			16-QAM	RB1#5	Pass
				RB5#1	Pass
	15 MHz	LCH	QPSK	RB1#0	Pass
				RB6#0	Pass
			16-QAM	RB1#0	Pass
				RB5#0	Pass
		HCH	QPSK	RB1#5	Pass
				RB6#0	Pass
			16-QAM	RB1#5	Pass
				RB5#1	Pass

Test Band	Test Bandwidth	Test Channel	Test Mode	Test RB (Size#Offset)	Verdict
Cat-M Band 26 (Part90)	1.4 MHz	LCH	QPSK	RB1#0	Pass
				RB6#0	Pass
			16-QAM	RB1#0	Pass
				RB5#0	Pass
		HCH	QPSK	RB1#5	Pass
				RB6#0	Pass
			16-QAM	RB1#5	Pass
				RB5#1	Pass
	3 MHz	LCH	QPSK	RB1#0	Pass
				RB6#0	Pass
			16-QAM	RB1#0	Pass
				RB5#0	Pass
		HCH	QPSK	RB1#5	Pass
				RB6#0	Pass
			16-QAM	RB1#5	Pass
				RB5#1	Pass
	5 MHz	LCH	QPSK	RB1#0	Pass
				RB6#0	Pass
			16-QAM	RB1#0	Pass
				RB5#0	Pass
		HCH	QPSK	RB1#5	Pass
				RB6#0	Pass
			16-QAM	RB1#5	Pass
				RB5#1	Pass
	10 MHz	LCH	QPSK	RB1#0	Pass
				RB6#0	Pass
			16-QAM	RB1#0	Pass
				RB5#0	Pass
		HCH	QPSK	RB1#5	Pass
				RB6#0	Pass
			16-QAM	RB1#5	Pass
				RB5#1	Pass

Test Band	Test Bandwidth	Test Channel	Test Mode	Test RB (Size#Offset)	Verdict
Cat-M Band 66	1.4 MHz	LCH	QPSK	RB1#0	Pass
				RB6#0	Pass
			16-QAM	RB1#0	Pass
				RB5#0	Pass
		HCH	QPSK	RB1#5	Pass
				RB6#0	Pass
			16-QAM	RB1#5	Pass
				RB5#1	Pass
	3 MHz	LCH	QPSK	RB1#0	Pass
				RB6#0	Pass
			16-QAM	RB1#0	Pass
				RB5#0	Pass
		HCH	QPSK	RB1#5	Pass
				RB6#0	Pass
			16-QAM	RB1#5	Pass
				RB5#1	Pass
	5 MHz	LCH	QPSK	RB1#0	Pass
				RB6#0	Pass
			16-QAM	RB1#0	Pass
				RB5#0	Pass
		HCH	QPSK	RB1#5	Pass
				RB6#0	Pass
			16-QAM	RB1#5	Pass
				RB5#1	Pass
	10 MHz	LCH	QPSK	RB1#0	Pass
				RB6#0	Pass
			16-QAM	RB1#0	Pass
				RB5#0	Pass
		HCH	QPSK	RB1#5	Pass
				RB6#0	Pass
			16-QAM	RB1#5	Pass
				RB5#1	Pass
	15 MHz	LCH	QPSK	RB1#0	Pass
				RB6#0	Pass
			16-QAM	RB1#0	Pass
				RB5#0	Pass
		HCH	QPSK	RB1#5	Pass
				RB6#0	Pass
			16-QAM	RB1#5	Pass
				RB5#1	Pass

Test Band	Test Bandwidth	Test Channel	Test Mode	Test RB (Size#Offset)	Verdict
	20 MHz	LCH	QPSK	RB1#0	Pass
				RB6#0	Pass
			16-QAM	RB1#0	Pass
				RB5#0	Pass
		HCH	QPSK	RB1#5	Pass
				RB6#0	Pass
			16-QAM	RB1#5	Pass
				RB5#1	Pass

NB-IoT Mode Test Data

Test Band	Test Sub-carrier spacing	Test Channel	Test Mode	Test RB (Size#Offset)	Verdict
NB-IoT Band 2	3.75kHz	LCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		HCH	QPSK	RB1#47	Pass
			BPSK	RB1#47	Pass
	15kHz	LCH	QPSK	RB1#0	Pass
				RB12#0	Pass
			BPSK	RB1#0	Pass
		HCH	QPSK	RB1#11	Pass
				RB12#0	Pass
			BPSK	RB1#11	Pass

Test Band	Test Sub-carrier spacing	Test Channel	Test Mode	Test RB (Size#Offset)	Verdict
NB-IoT Band 4	3.75kHz	LCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		HCH	QPSK	RB1#47	Pass
			BPSK	RB1#47	Pass
	15kHz	LCH	QPSK	RB1#0	Pass
				RB12#0	Pass
			BPSK	RB1#0	Pass
		HCH	QPSK	RB1#11	Pass
				RB12#0	Pass
			BPSK	RB1#11	Pass

Test Band	Test Sub-carrier spacing	Test Channel	Test Mode	Test RB (Size#Offset)	Verdict
NB-IoT Band 5	3.75kHz	LCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		HCH	QPSK	RB1#47	Pass
			BPSK	RB1#47	Pass
	15kHz	LCH	QPSK	RB1#0	Pass
				RB12#0	Pass
			BPSK	RB1#0	Pass
		HCH	QPSK	RB1#11	Pass
				RB12#0	Pass
			BPSK	RB1#11	Pass

Test Band	Test Sub-carrier spacing	Test Channel	Test Mode	Test RB (Size#Offset)	Verdict
NB-IoT Band 12	3.75kHz	LCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		HCH	QPSK	RB1#47	Pass
			BPSK	RB1#47	Pass
	15kHz	LCH	QPSK	RB1#0	Pass
				RB12#0	Pass
			BPSK	RB1#0	Pass
		HCH	QPSK	RB1#11	Pass
				RB12#0	Pass
			BPSK	RB1#11	Pass

Test Band	Test Sub-carrier spacing	Test Channel	Test Mode	Test RB (Size#Offset)	Verdict
NB-IoT Band 13	3.75kHz	LCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		HCH	QPSK	RB1#47	Pass
			BPSK	RB1#47	Pass
	15kHz	LCH	QPSK	RB1#0	Pass
				RB12#0	Pass
			BPSK	RB1#0	Pass
		HCH	QPSK	RB1#11	Pass
				RB12#0	Pass
			BPSK	RB1#11	Pass

Test Band	Test Sub-carrier spacing	Test Channel	Test Mode	Test RB (Size#Offset)	Verdict
NB-IoT Band 18(Part 22)	3.75kHz	LCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		HCH	QPSK	RB1#47	Pass
			BPSK	RB1#47	Pass
	15kHz	LCH	QPSK	RB1#0	Pass
				RB12#0	Pass
			BPSK	RB1#0	Pass
		HCH	QPSK	RB1#11	Pass
				RB12#0	Pass
			BPSK	RB1#11	Pass

Test Band	Test Sub-carrier spacing	Test Channel	Test Mode	Test RB (Size#Offset)	Verdict
NB-IoT Band 18(Part 90)	3.75kHz	LCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		HCH	QPSK	RB1#47	Pass
			BPSK	RB1#47	Pass
	15kHz	LCH	QPSK	RB1#0	Pass
				RB12#0	Pass
			BPSK	RB1#0	Pass
		HCH	QPSK	RB1#11	Pass
				RB12#0	Pass
			BPSK	RB1#11	Pass

Test Band	Test Sub-carrier spacing	Test Channel	Test Mode	Test RB (Size#Offset)	Verdict
NB-IoT Band 19	3.75kHz	LCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		HCH	QPSK	RB1#47	Pass
			BPSK	RB1#47	Pass
	15kHz	LCH	QPSK	RB1#0	Pass
				RB12#0	Pass
			BPSK	RB1#0	Pass
		HCH	QPSK	RB1#11	Pass
				RB12#0	Pass
			BPSK	RB1#11	Pass

Test Band	Test Sub-carrier spacing	Test Channel	Test Mode	Test RB (Size#Offset)	Verdict
NB-IoT Band 26(Part 22)	3.75kHz	LCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		HCH	QPSK	RB1#47	Pass
			BPSK	RB1#47	Pass
	15kHz	LCH	QPSK	RB1#0	Pass
				RB12#0	Pass
			BPSK	RB1#0	Pass
		HCH	QPSK	RB1#11	Pass
				RB12#0	Pass
			BPSK	RB1#11	Pass

Test Band	Test Sub-carrier spacing	Test Channel	Test Mode	Test RB (Size#Offset)	Verdict
NB-IoT Band 26(Part 90)	3.75kHz	LCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		HCH	QPSK	RB1#47	Pass
			BPSK	RB1#47	Pass
	15kHz	LCH	QPSK	RB1#0	Pass
				RB12#0	Pass
			BPSK	RB1#0	Pass
		HCH	QPSK	RB1#11	Pass
				RB12#0	Pass
			BPSK	RB1#11	Pass

Test Band	Test Sub-carrier spacing	Test Channel	Test Mode	Test RB (Size#Offset)	Verdict
NB-IoT Band 66	3.75kHz	LCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		HCH	QPSK	RB1#47	Pass
			BPSK	RB1#47	Pass
	15kHz	LCH	QPSK	RB1#0	Pass
				RB12#0	Pass
			BPSK	RB1#0	Pass
		HCH	QPSK	RB1#11	Pass
				RB12#0	Pass
			BPSK	RB1#11	Pass

Test Band	Test Sub-carrier spacing	Test Channel	Test Mode	Test RB (Size#Offset)	Verdict
NB-IoT Band 71	3.75kHz	LCH	QPSK	RB1#0	Pass
			BPSK	RB1#0	Pass
		HCH	QPSK	RB1#47	Pass
			BPSK	RB1#47	Pass
	15kHz	LCH	QPSK	RB1#0	Pass
				RB12#0	Pass
			BPSK	RB1#0	Pass
		HCH	QPSK	RB1#11	Pass
				RB12#0	Pass
			BPSK	RB1#11	Pass

A.7 Field Strength of Spurious Radiation

Note 1: All modes have been tested, and only the worst case data are shown here.

Note 2: The frequencies of verdict which are marked by "N/A" should be ignored because they are UE carrier frequency.

Note 3: Test plots please refer to the document "Annex No.:Ti-CC26030157-501 Data Part 5.pdf".

Note 4: The disturbance above 26.5GHz was very low, and the above harmonics were the highest point could be found when testing, so only the worst case data displayed in this report.

Note5 : The amplitude of spurious emissions attenuated more than 20 dB below the permissible value of frequency range 9 kHz ~ 30 MHz.

LTE BAND	Bandwidth (MHz)	UL Modulation	UL RB Number	UL RB Position	Narrow Band	Verdict
CAT.M B18 (P22)	5	16QAM	1	0	0	Pass
CAT.M B18 (P90)	5	QPSK	1	0	0	Pass
CAT.M B19	5	16QAM	1	0	0	Pass
CAT.M B26(P22)	15	16QAM	1	0	0	Pass
CAT.M B26(P90)	10	16QAM	1	0	0	Pass
CATM B2	5	16QAM	1	0	0	Pass
CATM B4	5	16QAM	1	0	0	Pass
CATM B5	5	16QAM	1	0	0	Pass
CATM B12	5	16QAM	1	0	0	Pass
CATM B13	5	16QAM	1	0	0	Pass
CATM B66	15	16QAM	1	0	0	Pass

LTE BAND	Bandwidth (MHz)	UL Modulation	UL RB Number	UL RB Position	Verdict
NB-IOTB18 (P90)	3.75	BPSK	1	0	Pass
NB-IOT B18 (P22)	3.75	QPSK	1	0	Pass
NB-IOT B19	3.75	BPSK	1	0	Pass
NB-IOT B26(P90)	3.75	QPSK	1	0	Pass
NB- IOTB26(P22)	3.75	BPSK	1	0	Pass
NB-IOT B2	3.75	BPSK	1	47	Pass
NB-IOT B4	3.75	BPSK	1	0	Pass
NB-IOT B5	15	BPSK	1	0	Pass
NB-IOT B12	3.75	QPSK	1	0	Pass
NB-IOT B13	3.75	BPSK	1	0	Pass
NB-IOT B66	3.75	BPSK	1	0	Pass
NB-IOT B71	3.75	QPSK	1	0	Pass

ANNEX B TEST SETUP PHOTOS

Please refer to the document “Ti-CC26030157-AR.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer to the document “Ti-CC26030157-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer to the document “Ti-CC26030157-AI.PDF”.

Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--