



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR260200033301

Page: 1 of 19

TEST REPORT

Application No.: SHCR2602000333MD
FCC ID: 2BVVE-IRDIANA
Applicant: Agile Robots SE
Address of Applicant: Plinganserstrasse 134, 81369 Muenchen, Germany
Manufacturer: Agile Robots SE
Address of Manufacturer: Plinganserstrasse 134, 81369 Muenchen, Germany
Equipment Under Test (EUT):
EUT Name: Industrial Robot
Model No.: Diana3, Diana7, Diana7 G2
Remark: Please refer to section 2 of this report which indicates which model was actually tested and which were electrically identical.
Standard(s) : 47 CFR Part 15, Subpart B
Date of Receipt: 2026-02-03
Date of Test: 2026-02-04 to 2026-03-03
Date of Issue: 2026-03-03

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.

Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Member of the SGS Group (SGS SA)



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR260200033301

Page: 2 of 19

Revision Record			
Version	Description	Date	Remark
00	Original	2026-03-03	/

Authorized for issue by:			
Tested By		Bill Wu	
		Bill Wu/Project Engineer	
Approved By		Parlam Zhan	
		Parlam Zhan / Reviewer	

2 Test Summary

Emission Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at Mains Terminals (150kHz-30MHz)	47 CFR Part 15, Subpart B	ANSI C63.4-2014	15.107(b);Class A	Pass
Radiated Emissions (30MHz-1GHz)		ANSI C63.4-2014	15.109(b);Class A	Pass
Radiated Emissions (Above 1GHz)		ANSI C63.4-2014	15.109(g);Class A	Pass

Note: There are series models mentioned in this report, and they are the similar in electrical and electronic characters. The difference was show as below, Consider the difference only the model Diana7 was tested.

Robot arm	Specification		
Model	Diana3	Diana7	Diana7 G2
Payload	3 kg	7kg	7kg
Maximum reach	772 mm	923 mm	923 mm
Weight	19 kg	28 kg	26 kg
Degrees of freedom	7	7	7
Repeatability*1	±0.05 mm	±0.05 mm	±0.05 mm
TCP maximum speed	2.3 m/s	2.4 m/s	2.4 m/s
Joint maximum speed	Joint 1: 175°/s Joint 2: 175°/s Joint 3: 175°/s Joint 4: 175°/s Joint 5: 305°/s Joint 6: 305°/s Joint 7: 305°/s	Joint 1: 180°/s Joint 2: 180°/s Joint 3: 210°/s Joint 4: 210°/s Joint 5: 270°/s Joint 6: 270°/s Joint 7: 270°/s	Joint 1: 180°/s Joint 2: 180°/s Joint 3: 210°/s Joint 4: 210°/s Joint 5: 240°/s Joint 6: 270°/s Joint 7: 270°/s
Joint range of motion	Joint 1: -179° ~ 179° Joint 2: -90° ~ 90° Joint 3: -179° ~ 179°	Joint 1: -179° ~ 179° Joint 2: -90° ~ 90° Joint 3: -179° ~ 179° Joint 4: 0° ~ 175°	Joint 1: -360° ~ 360° Joint 2: -90° ~ 90° Joint 3: -360° ~ 360° Joint 4: 0° ~ 175°

Robot arm	Specification		
	Joint 4: 0° ~ 175° Joint 5: -179° ~ 179° Joint 6: -100° ~ 100° Joint 7: -179° ~ 179°	Joint 5: -179° ~ 179° Joint 6: -179° ~ 179° Joint 7: -179° ~ 179°	Joint 5: -360° ~ 360° Joint 6: -360° ~ 360° Joint 7: -360° ~ 360°
IP rating	IP54	IP50	IP54

Note: The Diana3 robot is equipped with the controller model CB-FS-3.2T-0.3KW; the Diana7, and Diana7 G2 robots are equipped with the controller model CB-FS-3.2T-0.6KW.

3 Contents

	Page
1 COVER PAGE	1
2 Test Summary.....	3
3 Contents	5
4 General Information.....	6
4.1 Details of E.U.T.	6
4.2 Description of Support Units	6
4.3 Measurement Uncertainty & Decision Rule	6
4.4 Test Location	7
4.5 Test Facility.....	7
4.6 Deviation from Standards	7
4.7 Abnormalities from Standard Conditions	7
5 Equipment List	8
6 Emission Test Results	10
6.1 Conducted Emissions at Mains Terminals (150kHz-30MHz)	10
6.1.1 E.U.T. Operation	10
6.1.2 Test Mode Description	10
6.1.3 Test Setup Diagram	10
6.1.4 Measurement Procedure and Data	10
6.2 Radiated Emissions (30MHz-1GHz)	13
6.2.1 E.U.T. Operation	13
6.2.2 Test Mode Description	13
6.2.3 Test Setup Diagram	13
6.2.4 Measurement Procedure and Data	14
6.3 Radiated Emissions (Above 1GHz).....	16
6.3.1 E.U.T. Operation	16
6.3.2 Test Mode Description	16
6.3.3 Test Setup Diagram	16
6.3.4 Measurement Procedure and Data	16
7 Test Setup Photo	19
8 EUT Constructional Details (EUT Photos).....	19

4 General Information

4.1 Details of E.U.T.

Power supply:	AC 200-240V,60Hz
Test voltage:	AC 240V 60Hz
Max clock frequency:	2.2 GHz

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
--	--	--	--

The EUT has been tested as an independent unit.

4.3 Measurement Uncertainty & Decision Rule

Measurement Uncertainty:

No.	Item	Measurement Uncertainty (U_{Lab})	U_{CISPR}
1	Conducted Emission at mains port using AMN	3.4dB (9kHz to 150kHz)	3.8dB (9kHz to 150kHz)
		2.9dB (150kHz to 30MHz)	3.4dB (150kHz to 30MHz)
2	Conducted Emission at mains port using VP	2.2dB (9kHz to 30MHz)	2.9dB (9kHz to 30MHz)
3	Conducted Emission at telecommunication port using AAN	4.6dB (150kHz to 30MHz)	5.0dB (150kHz to 30MHz)
4	Radiated Power	3.4dB (30MHz to 300MHz)	4.5dB (30MHz to 300MHz)
5	Radiated emission	5.7dB (30MHz-1GHz)	6.3dB (30MHz-1GHz)
		4.8dB (1GHz-6GHz)	5.2dB (1GHz-6GHz)
		5.0dB (6GHz-18GHz)	5.5dB (6GHz-18GHz)
6	Radiated disturbance (disturbance current in a LLAS)	2.6dB (9kHz to 30MHz)	3.3dB (9kHz to 30MHz)

Note: The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Decision Rule:

• CISPR 16-4-2 for emission measurements is as below described.

Pass means the test result passed the test standard requirement, please find the detailed decision rule in the report relative section.

U_{LAB} less than U_{CISPR} , therefore:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. E&E Lab
588 West Jindu Road, Xinqiao, Songjiang, 201612 Shanghai, China
Tel: +86 21 6191 5666 Fax: +86 21 6191 5678

No tests were sub-contracted.

Note:

1. SGS is not responsible for wrong test results due to incorrect information (e.g., max. internal working frequency, antenna gain, cable loss, etc) is provided by the applicant. (If applicable).
2. SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (If applicable).
3. Sample source: sent by customer.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA (Certificate No. 6332.01)**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. is accredited by the American Association for Laboratory Accreditation(A2LA).

- **FCC (Designation Number: CN1301)**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been recognized as an accredited testing laboratory.

- **ISED (CAB Identifier: CN0020)**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. EMC Laboratory has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory.
Company Number: 8617A

- **VCCI (Member No.: 3061)**

The 3m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-13868, C-14336, T-12221, G-10830 respectively.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None

5 Equipment List

Conducted Emissions at Mains Terminals (150kHz-30MHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
EMI test receiver	Rohde & Schwarz	ESR7	SHEM162-1	2025/12/17	2026/12/16
Line impedance stabilization network	SCHWARZBECK	NSLK8127	SHEM061-1	2025/12/17	2026/12/16
Line impedance stabilization network	EMCO	3816_2	SHEM019-1	2025/12/17	2026/12/16
Pulse limiter	Rohde & Schwarz	ESH3-Z2	SHEM029-1	2025/12/17	2026/12/16
Shielding Room	ZHONGYU	8*4*3M	SHEM079-2	2023/12/19	2026/12/18
CE test Cable	/	9kHz-30MHz	SHEM172-2	2025/12/17	2026/12/16
Test Software	ESE	e3	Version: 6.191211	N/A	N/A

Radiated Emissions (30MHz-1GHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
EMI test receiver	Rohde & Schwarz	ESU40	SHEM051-1	2025/12/17	2026/12/16
EMI test receiver	Rohde & Schwarz	ESR7	SHEM201-1	2025/07/30	2026/07/29
CONTROLLER	INNCO	CO2000	SHEM047-1	N/A	N/A
ANTENNA MAST	INNCO	MA400-EP	SHEM047-2	N/A	N/A
TURN DEVICE	INNCO	DE 3600-RH	SHEM047-3	N/A	N/A
Broadband UHF-VHF ANTENNA	SCHWARZBECK	VULB9168	SHEM048-1	2025/08/31	2027/08/30
Broadband UHF-VHF ANTENNA	SCHWARZBECK	VULB9168	SHEM202-1	2025/04/12	2027/04/11
Semi/Fully Anechoic	ST	11*6*6M	SHEM078-2	2023/05/06	2026/05/05
Pre-amplifier	HP	8447D	SHEM236-1	2025/12/17	2026/12/16
Pre-amplifier	HP	8447D	SHEM143-1	2025/12/17	2026/12/16
RE test Cable	/	/	SHEM217-2	2025/07/30	2026/07/29
Test Software	ESE	e3	Version: 6.191211	N/A	N/A
Semi/Fully Anechoic	TIANDE	9*6*6M	SHEM198-1	2024/05/06	2027/05/05

Radiated Emissions (Above 1GHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
EMI test receiver	Rohde & Schwarz	ESU40	SHEM051-1	2025/12/17	2026/12/16
EMI test receiver	Rohde & Schwarz	ESR7	SHEM201-1	2025/07/30	2026/07/29
CONTROLLER	INNCO	CO2000	SHEM047-1	N/A	N/A
ANTENNA MAST	INNCO	MA400-EP	SHEM047-2	N/A	N/A
TURN DEVICE	INNCO	DE 3600-RH	SHEM047-3	N/A	N/A
Broadband UHF-VHF ANTENNA	SCHWARZBECK	VULB9168	SHEM048-1	2025/08/31	2027/08/30
Broadband UHF-VHF ANTENNA	SCHWARZBECK	VULB9168	SHEM202-1	2025/04/12	2027/04/11
Horn Antenna (1-18GHz)	Schwarzbeck	BBHA9120D	SHEM050-1	2025/08/31	2027/08/30
Pre-amplifier (1-18GHz)	Schwarzbeck	SCU-F0118-	SHEM050-2	2025/12/17	2026/12/16



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR260200033301

Page: 9 of 19

		G40-BZ4-CSS(F)			
Horn Antenna (1-18GHz)	Schwarzbeck	HF906	SHEM009-1	2024/08/05	2026/08/04
Semi/Fully Anechoic	ST	11*6*6M	SHEM078-2	2023/05/06	2026/05/05
RE test Cable	/	/	SHEM217-2	2025/07/30	2026/07/29
Test Software	ESE	e3	Version: 6.191211	N/A	N/A
Semi/Fully Anechoic	TIANDE	9*6*6M	SHEM198-1	2024/05/06	2027/05/05
RE test Cable	/	XH830A-N/J-N/J-8M	SHEM217-4	2025/12/17	2026/12/16

General used equipment

Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Atmospheric Pressure Meter	Nanjing XiangRuiDe	DYM3	SHEM082-2	2024/01/18	2027/01/17
Temperature&humidity recorder	ShangHai weather meter work	ZJ 1-2B	SHEM042-9~10	2025/12/18	2026/12/17
Temperature&humidity recorder	ShangHai weather meter work	ZJ 1-2B	SHEM042-5	2025/07/09	2026/07/08
Digital Temperature& humidity recorder	Jianda Renke	RS-WS-N01-6J	SHEM247-1~8	2025/12/29	2026/12/28
Digital Multimeter	FLUKE	17B+	SHEM271-7	2025/07/07	2026/07/06
AC Power Supply	APC	KDF-31020T-V0-F0-IO	SHEM216-1	2025/12/17	2026/12/16
DC Power Supply	HP	6010A	SHEM222-1	2025/12/17	2026/12/16
Multi-purpose tong tester	FLUKE	317	SHEM001-2	2025/10/23	2026/10/22

6 Emission Test Results

6.1 Conducted Emissions at Mains Terminals (150kHz-30MHz)

Test Requirement: 47 CFR Part 15, Subpart B

Test Method: ANSI C63.4-2014

Limit:

0.15MHz-0.5MHz: 79dB(μV) quasi-peak, 66dB(μV) average

0.5MHz-30MHz: 73dB(μV) quasi-peak, 60dB(μV) average

Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz

6.1.1 E.U.T. Operation

Operating Environment:

Temperature: 19.9 °C


Humidity: 43.4 % RH

Atmospheric Pressure: 1028 mbar

6.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	Working mode_Keep the EUT working continuously.

6.1.3 Test Setup Diagram

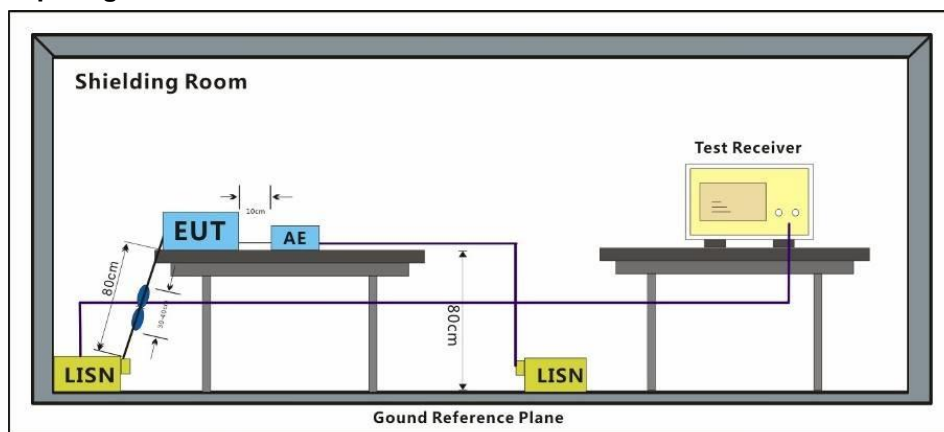


6.1.4 Measurement Procedure and Data

An initial pre-scan was performed with peak detector. Quasi-Peak or Average measurement were performed at the frequencies with maximized peak emission were detected.

Remark : Level= Read Level+ Cable Loss+ LISN Factor

Test Mode: 00; Line: Live line

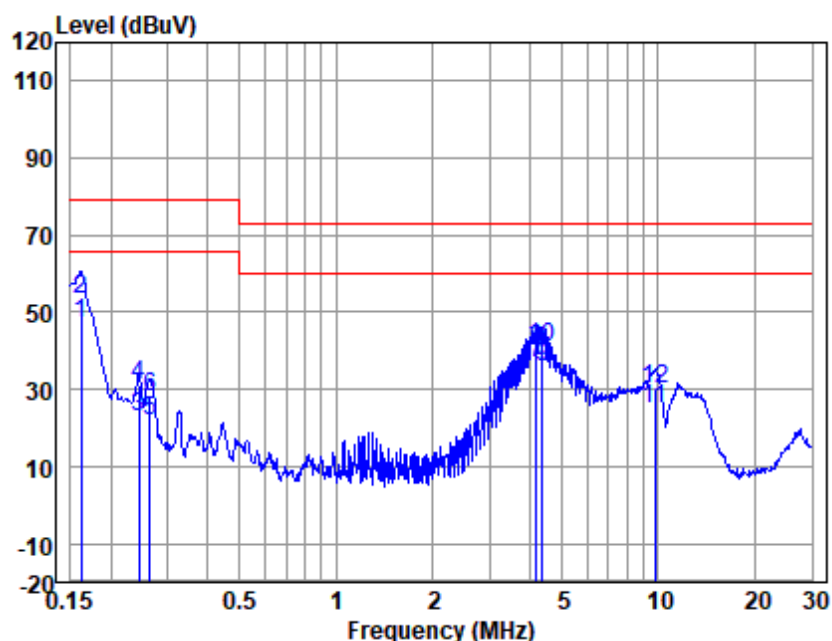


LISN : LINE
EUT/Project No : 0333MD
Test Mode : 00

	Freq (MHz)	Read level (dBuV)	LISN Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	0.16	37.10	0.10	9.90	47.10	66.00	-18.90	Average
2	0.16	43.15	0.10	9.90	53.15	79.00	-25.85	QP
3	0.24	13.13	0.10	9.90	23.13	66.00	-42.87	Average
4	0.24	21.36	0.10	9.90	31.36	79.00	-47.64	QP
5	0.26	11.67	0.10	9.90	21.67	66.00	-44.33	Average
6	0.26	18.00	0.10	9.90	28.00	79.00	-51.00	QP
7	4.18	26.89	0.18	9.98	37.05	60.00	-22.95	Average
8	4.18	30.28	0.18	9.98	40.44	73.00	-32.56	QP
9	4.38	25.62	0.19	9.99	35.80	60.00	-24.20	Average
10	4.38	30.87	0.19	9.99	41.05	73.00	-31.95	QP
11	9.76	14.44	0.29	10.00	24.73	60.00	-35.27	Average
12	9.76	19.87	0.29	10.00	30.16	73.00	-42.84	QP

Notes1: Emission Level = Read Level + LISN Factor + Cable loss

Notes2: Average in Remark means CISPR AV detector

Test Mode: 00; Line: Neutral Line

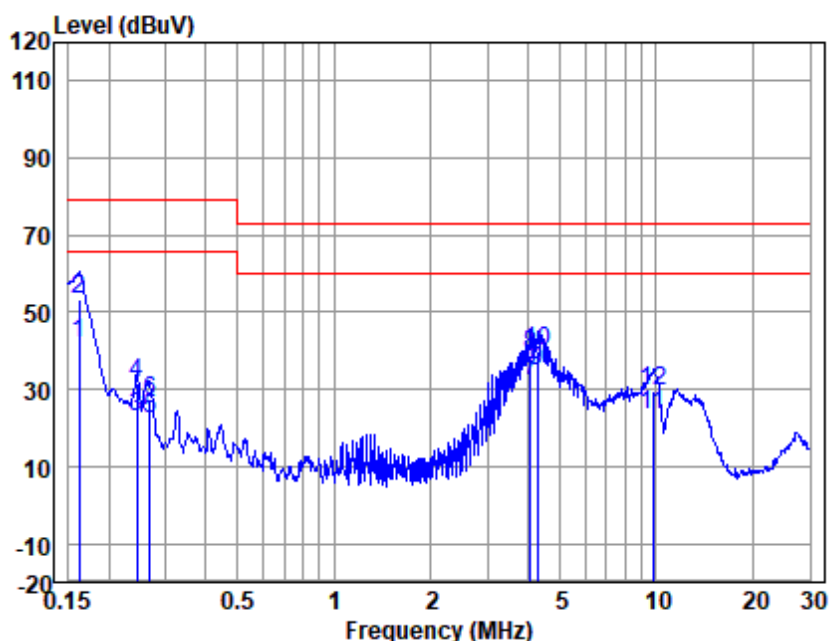

LISN : NEUTRAL
EUT/Project No : 0333MD
Test Mode : 00

	Freq (MHz)	Read level (dBuV)	LISN Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	0.16	31.75	0.10	9.90	41.75	66.00	-24.25	Average
2	0.16	43.35	0.10	9.90	53.35	79.00	-25.65	QP
3	0.24	13.07	0.10	9.90	23.07	66.00	-42.93	Average
4	0.24	21.45	0.10	9.90	31.45	79.00	-47.55	QP
5	0.27	12.57	0.10	9.90	22.57	66.00	-43.43	Average
6	0.27	16.96	0.10	9.90	26.96	79.00	-52.04	QP
7	4.07	22.19	0.18	9.98	32.35	60.00	-27.65	Average
8	4.07	28.95	0.18	9.98	39.11	73.00	-33.89	QP
9	4.27	24.37	0.18	9.98	34.53	60.00	-25.47	Average
10	4.27	29.97	0.18	9.98	40.13	73.00	-32.87	QP
11	9.76	13.27	0.29	10.00	23.56	60.00	-36.44	Average
12	9.76	19.40	0.29	10.00	29.69	73.00	-43.31	QP

Notes1: Emission Level = Read Level + LISN Factor + Cable loss

Notes2: Average in Remark means CISPR AV detector

6.2 Radiated Emissions (30MHz-1GHz)

Test Requirement: 47 CFR Part 15, Subpart B

Test Method: ANSI C63.4-2014

Limit:

Class A

Test Distance: 3m

30MHz -88MHz 49.5 (dB μ V/m) quasi-peak

88MHz-216MHz 54.0 (dB μ V/m) quasi-peak

216MHz-960MHz 56.9 (dB μ V/m) quasi-peak

960MHz-1000MHz 60.0 (dB μ V/m) quasi-peak

Detector: Peak for pre-scan (120kHz resolution bandwidth) 30MHz to1000MHz

Class A

Test Distance: 10m

30MHz -88MHz 39.08 (dB μ V/m) quasi-peak

88MHz-216MHz 43.52 (dB μ V/m) quasi-peak

216MHz-960MHz 46.44 (dB μ V/m) quasi-peak

960MHz-1000MHz 49.54 (dB μ V/m) quasi-peak

Detector: Peak for pre-scan (120kHz resolution bandwidth) 30MHz to1000MHz

6.2.1 E.U.T. Operation

Operating Environment:

Temperature: 22.4 °C


Humidity: 50.3 % RH

Atmospheric Pressure: 1020 mbar

6.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	Working mode_Keep the EUT working continuously.

6.2.3 Test Setup Diagram

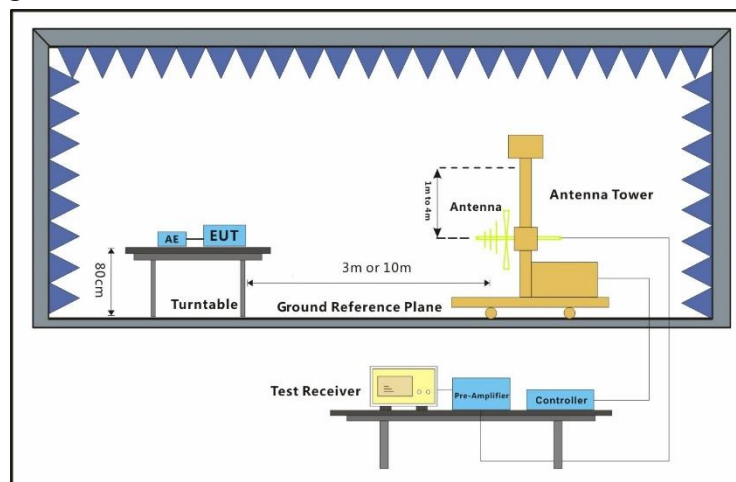


6.2.4 Measurement Procedure and Data

An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by BiConiLog antenna with 2 orthogonal polarities.

Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Test Mode: 00; Polarity: Horizontal

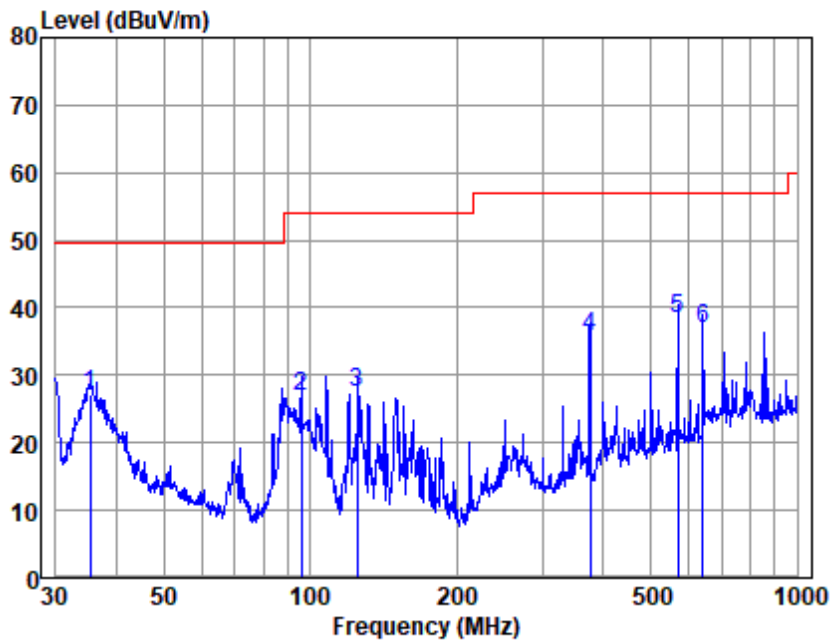


Antenna Polarity :HORIZONTAL
EUT/Project :0333MD
Test mode :00

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	35.251	41.00	12.80	0.63	27.20	27.23	49.50	-22.27	QP
2	95.762	44.18	8.90	0.89	27.10	26.87	54.00	-27.13	QP
3	125.007	42.00	11.50	1.04	27.05	27.49	54.00	-26.51	QP
4	375.939	46.77	14.22	1.72	27.06	35.65	56.90	-21.25	QP
5	568.613	46.01	18.28	2.05	28.00	38.34	56.90	-18.56	QP
6	640.611	42.72	20.10	2.18	28.08	36.92	56.90	-19.98	QP

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Vertical

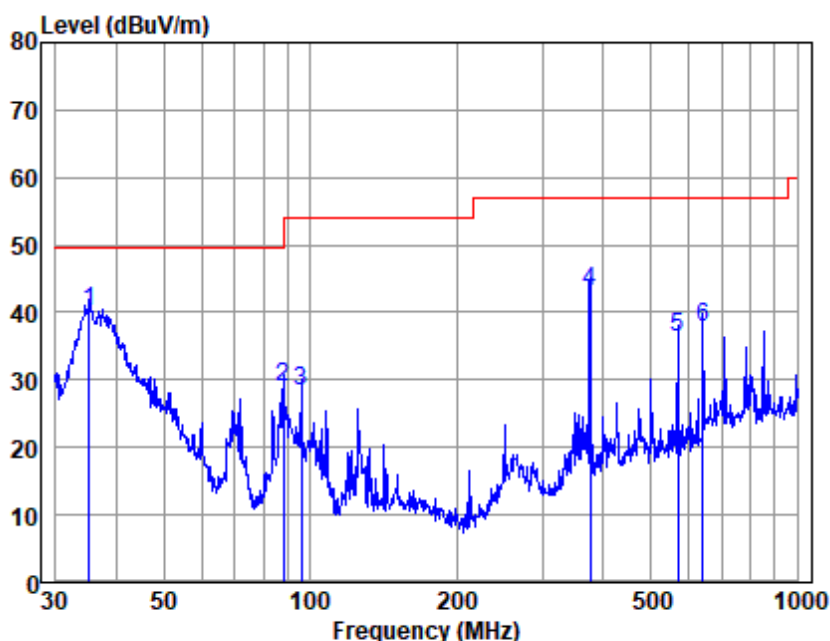

Antenna Polarity :VERTICAL

EUT/Project :0333MD

Test mode :00

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	35.128	53.80	12.80	0.63	27.20	40.03	49.50	-9.47	QP
2	88.033	46.43	8.60	0.87	27.10	28.80	54.00	-25.20	QP
3	95.762	45.52	8.90	0.89	27.10	28.21	54.00	-25.79	QP
4	375.939	54.29	14.22	1.72	27.06	43.17	56.90	-13.73	QP
5	568.613	43.90	18.28	2.05	28.00	36.23	56.90	-20.67	QP
6	640.611	43.71	20.10	2.18	28.08	37.91	56.90	-18.99	QP

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

6.3 Radiated Emissions (Above 1GHz)

Test Requirement: 47 CFR Part 15, Subpart B

Test Method: ANSI C63.4-2014

Limit:

Class A

Above 1GHz 80(dBμV/m) peak, 60(dBμV/m) average

Detector: Peak for pre-scan (1000kHz resolution bandwidth) 1000M to 18000MHz

6.3.1 E.U.T. Operation

Operating Environment:

Temperature: 22.5 °C


Humidity: 51.3 % RH

Atmospheric Pressure: 1020 mbar

6.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	Working mode_Keep the EUT working continuously.

6.3.3 Test Setup Diagram

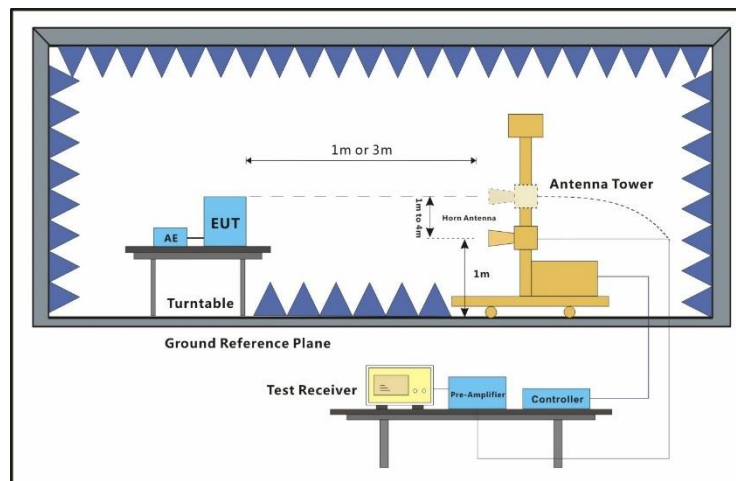


6.3.4 Measurement Procedure and Data

An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Average measurements were conducted based on the peak sweep graph. The EUT was measured by Horn antenna with 2 orthogonal polarities.

The red line show in graphic is the limit in standard used in this section.

Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Test Mode: 00; Polarity: Horizontal

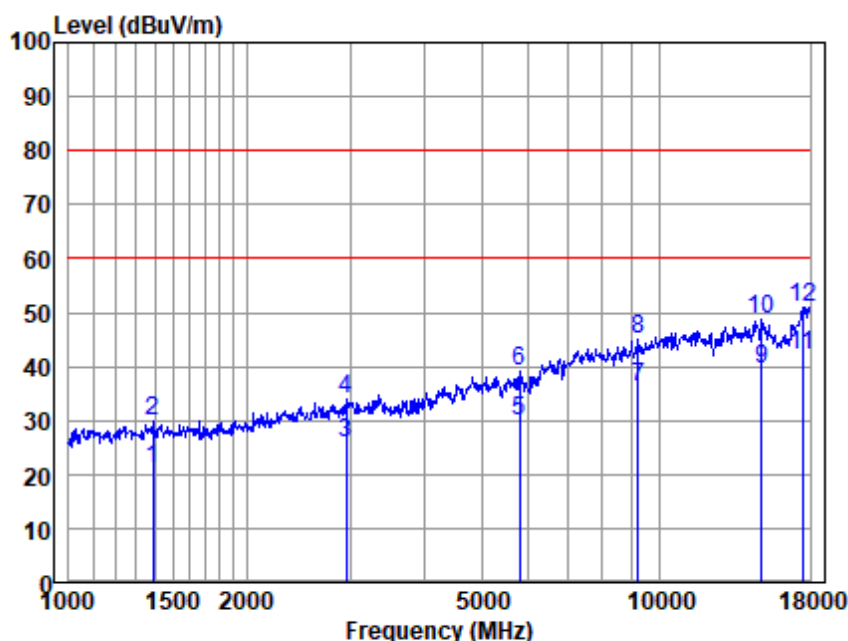

Antenna Polarity :HORIZONTAL


EUT/Project :0333MD

Test mode :00

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1390.276	35.04	23.44	3.25	40.86	20.87	60.00	-39.13	Average
2	1390.276	44.04	23.44	3.25	40.86	29.87	80.00	-50.13	Peak
3	2947.623	34.96	27.25	4.74	41.10	25.85	60.00	-34.15	Average
4	2947.623	42.96	27.25	4.74	41.10	33.85	80.00	-46.15	Peak
5	5797.032	32.69	32.12	6.70	41.58	29.93	60.00	-30.07	Average
6	5797.032	41.69	32.12	6.70	41.58	38.93	80.00	-41.07	Peak
7	9205.540	31.52	37.69	8.51	41.70	36.02	60.00	-23.98	Average
8	9205.540	40.52	37.69	8.51	41.70	45.02	80.00	-34.98	Peak
9	14916.940	29.00	41.04	10.90	41.37	39.57	60.00	-20.43	Average
10	14916.940	38.00	41.04	10.90	41.37	48.57	80.00	-31.43	Peak
11	17487.180	26.81	43.40	11.85	40.12	41.94	60.00	-18.06	Average
12	17487.180	35.81	43.40	11.85	40.12	50.94	80.00	-29.06	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Vertical

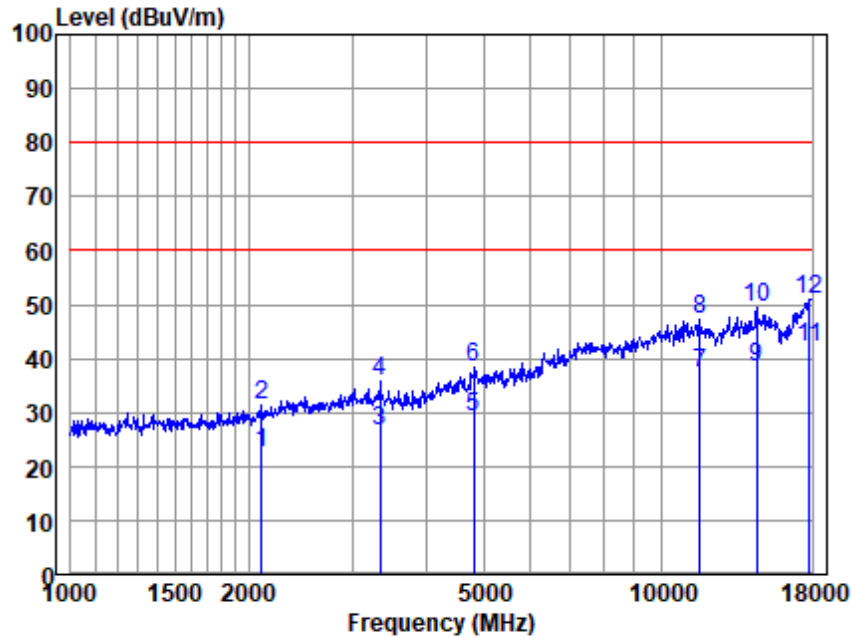

Antenna Polarity :VERTICAL
EUT/Project :0333MD
Test mode :00

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2107.950	34.15	25.17	4.00	40.93	22.39	60.00	-37.61	Average
2	2107.950	43.15	25.17	4.00	40.93	31.39	80.00	-48.61	Peak
3	3337.710	34.67	28.20	5.06	41.24	26.69	60.00	-33.31	Average
4	3337.710	43.67	28.20	5.06	41.24	35.69	80.00	-44.31	Peak
5	4818.016	33.60	31.03	6.07	41.50	29.20	60.00	-30.80	Average
6	4818.016	42.60	31.03	6.07	41.50	38.20	80.00	-41.80	Peak
7	11633.930	29.98	38.88	9.57	41.33	37.10	60.00	-22.90	Average
8	11633.930	39.98	38.88	9.57	41.33	47.10	80.00	-32.90	Peak
9	14491.960	27.90	41.36	10.75	41.70	38.31	60.00	-21.69	Average
10	14491.960	38.90	41.36	10.75	41.70	49.31	80.00	-30.69	Peak
11	17844.590	26.53	43.88	11.98	40.38	42.01	60.00	-17.99	Average
12	17844.590	35.53	43.88	11.98	40.38	51.01	80.00	-28.99	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR260200033301

Page: 19 of 19

7 Test Setup Photo

Refer to Appendix - Test Setup Photo for SHCR2602000333MD

8 EUT Constructional Details (EUT Photos)

Refer to Appendix_Photographs of EUT Constructional Details for SHCR2602000333MD

- End of the Report -