
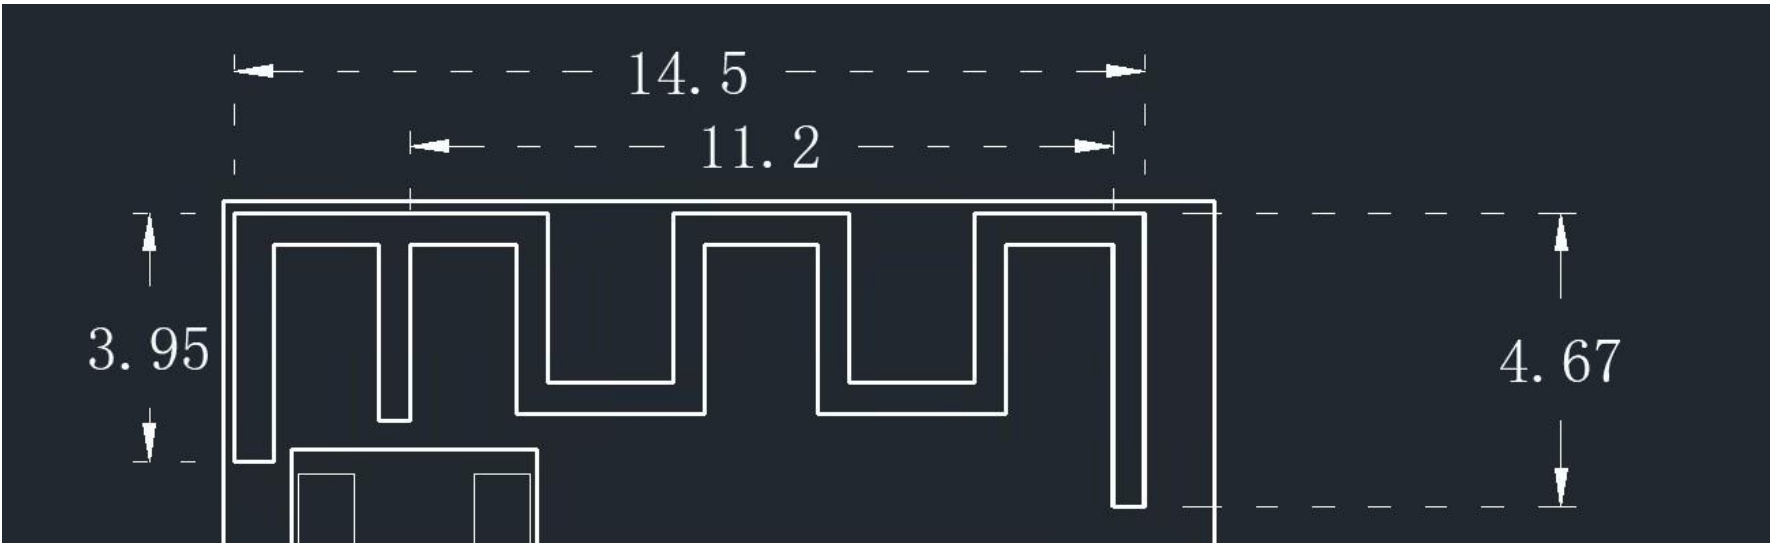


Antenna Test Report

Antenna	Internal Antenna
Location of measurement(company name)	Shenzhen Saifuli Electronic Technology Development Co., Ltd.
Manufacturer:	A1004, Jieshun Technology Center, No. 5 Guansheng 2nd Road, Luhuhu Community, Guanhu Street, Longhua District, Shenzhen, China
测试条件 Test Conditions	常温环境下温度：21℃， 湿度：50%RH Humidity：50%,Temperature：21℃,
测试设备 Test Equipment	SATIMO-OTA 实验室；CMW500；MT8000；E5071C 等 SATIMO-OTA Lab,
测试环境 Test Ambient	温度(Temperature):____25____℃ 湿度(Humidity):____40____RH
判定标准 Decision criteria	见下表 TRP/TIS 故障判定标准 Look at the table of TRP and TIS

1.External View Drawing:

Antenna Photo & Length (mm)

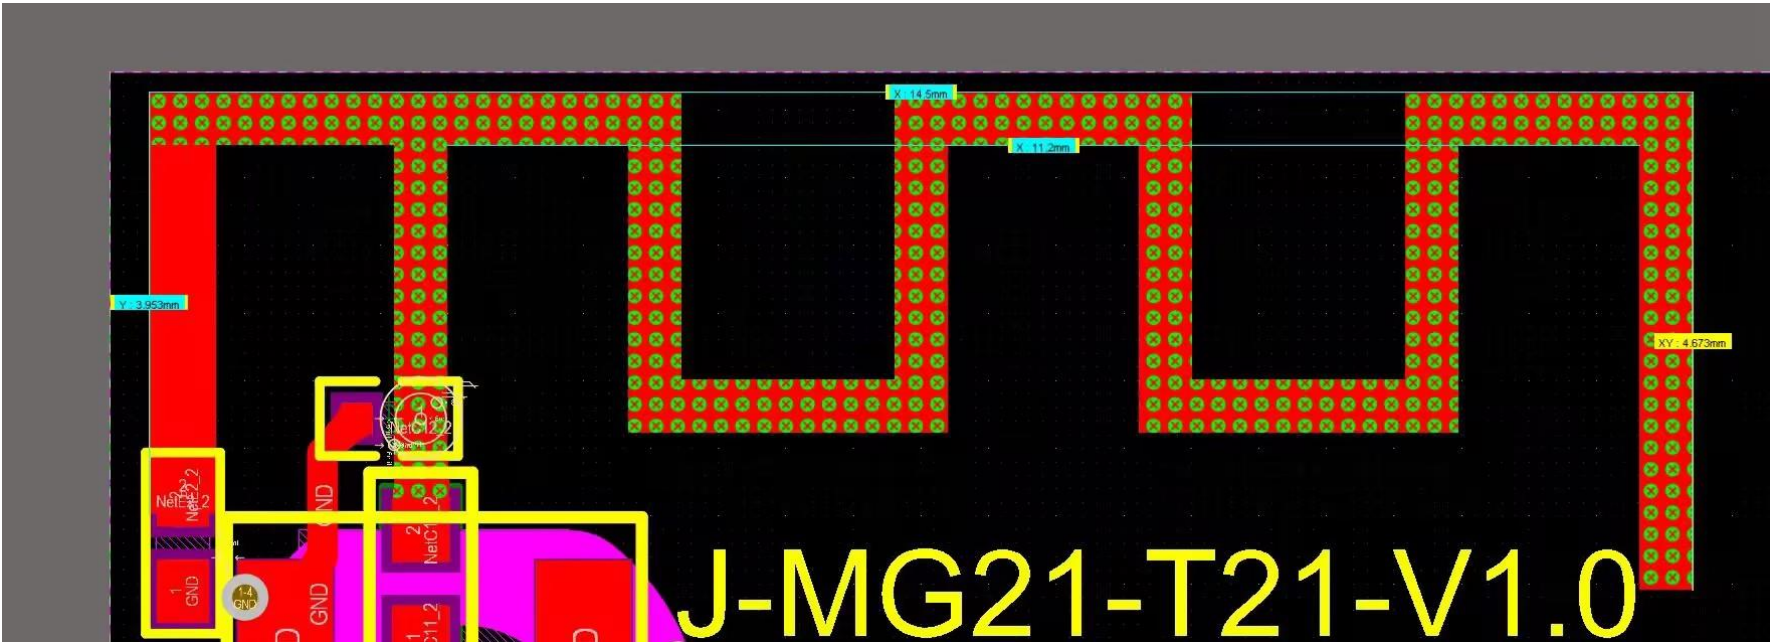

2. Antenna Test Data

Frequency/Mhz	MaxGain/dBi	Efficiency / %
2400	2.27	69.82
2405	2.12	67.45
2410	2.29	69.82
2415	2.2	69.82
2420	1.91	66.83
2425	1.76	66.83
2430	1.58	64.86
2435	1.58	64.57
2440	1.76	67.61
2445	1.78	66.68
2450	1.87	67.92
2455	2.13	70.31
2460	2.21	71.12
2465	2.41	73.62
2470	2.34	70.31
2475	2.09	65.92
2480	2.37	68.55
2485	2.38	68.71
2490	2.27	66.07
2495	2.37	66.99
2500	2.42	66.99

