

承 認 書

SPECIFICATION FOR APPROVAL

客 戶:
CUSTOMER:

客 戶 料 號:
CUST P/N:

淘 軟 料 號:
BESOFTP/N:

產 品 型 號:
DESC:

日 期:
DATE:

版 本:
Version:

Φ15x39-12Ts-0.08x24*2-50mm-CLB

2026/04/29

A.O


擬制 PREPARED BY	審核 CHECKED BY	批准 APPROVED BY	客戶承認 CUSTOMER APPROVE
Boqun Feng	Yanping Su	Limou Qian	

Company: Shenzhen Taoruan Electronics Co., Ltd
Factory Address: 605, No. 3, 4 Xinhe Avenue, Gonghe Community, Shajing Street, Bao'an District, Shenzhen
TEL: 138 2488 3512

Version Change History

[illegible]

SPECIFICATION

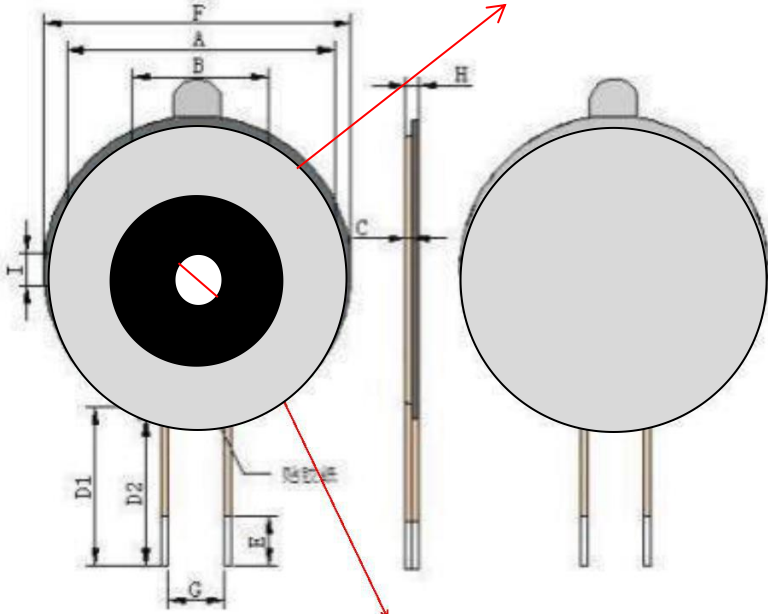
产 品 型 号: DESC		Φ 15 x39-12Ts-0.08x24*2-50mm-CLB		版本 Rev: A 0		客 户 CUST:																																												
						淘软料号 Fine P/N:																																												
						客 户 料 号 CUST P/N:																																												
一、尺寸 DIMENSION:(mm)  Coil surface sticker 43 * 19 with hand tear adhesive backing Middle magnet size 7.8 * 1.4 with markings 二、原理图 SCHEMATIC DIAGRAM:  三、绕线参数 Winding Specification: <table><tr><th>序号 NO</th><th colspan="2">端子 TERMINAL</th><th>线径 WIRE</th><th>圈数 Turns</th><th>绕线方向 Winding Direction</th></tr><tr><td>1</td><td>S</td><td>F</td><td>Hot air line 0.08*24*2P</td><td>12Ts</td><td>CCW</td></tr></table> 四、电气特性 ELECTRICAL CHARACTERISTICS: 温度 TEMPERATURE : 25 ± 10 ° C, 湿 度 RELATIVE HUMIDITY : 65 ± 20 % <table><tr><th>序号 NO</th><th>项目 ITEM</th><th>端子 TERMINAL</th><th>标准 SPECIFICATION</th><th>测试条件 TEST FREQUENCY</th><th>测试仪器 TEST EQUIPMENTS</th></tr><tr><td>1</td><td>IND.</td><td>S-F</td><td>4.8 uH ±20%Individual coil</td><td>100KHz/ 1.0V</td><td>LCZ METER 1062B</td></tr><tr><td>2</td><td>IND.</td><td>S-F</td><td>7.2 uH ± 5%Add magnetic plates</td><td>100KHz/ 1.0V</td><td>LCZ METER 1062B</td></tr><tr><td>3</td><td>Q 值</td><td>S-F</td><td>55.0(ref) ≤90m Ω</td><td>100KHz/ 1.0V</td><td>LCZ METER 1062B</td></tr><tr><td>4</td><td>DCR</td><td>S-F</td><td></td><td></td><td>LCZ METER 502 B</td></tr></table> 拟制/日期 PREPARED BY/DATE Boqun Feng 2026/04/29 审核/日期 CHECKED BY/DATE Yanping Su 2026/04/29							序号 NO	端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction	1	S	F	Hot air line 0.08*24*2P	12Ts	CCW	序号 NO	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS	1	IND.	S-F	4.8 uH ±20%Individual coil	100KHz/ 1.0V	LCZ METER 1062B	2	IND.	S-F	7.2 uH ± 5%Add magnetic plates	100KHz/ 1.0V	LCZ METER 1062B	3	Q 值	S-F	55.0(ref) ≤90m Ω	100KHz/ 1.0V	LCZ METER 1062B	4	DCR	S-F			LCZ METER 502 B	A	39.0±1
							序号 NO	端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction																																						
							1	S	F	Hot air line 0.08*24*2P	12Ts	CCW																																						
							序号 NO	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS																																						
							1	IND.	S-F	4.8 uH ±20%Individual coil	100KHz/ 1.0V	LCZ METER 1062B																																						
							2	IND.	S-F	7.2 uH ± 5%Add magnetic plates	100KHz/ 1.0V	LCZ METER 1062B																																						
							3	Q 值	S-F	55.0(ref) ≤90m Ω	100KHz/ 1.0V	LCZ METER 1062B																																						
							4	DCR	S-F			LCZ METER 502 B																																						
							B	15±0.5																																										
							C	0.8±0.05																																										
D1	52±2																																																	
D2	50±2																																																	
E	3-5mm																																																	
F	43±0.5																																																	
G	11 ref																																																	
H	1.6±0.2 Max																																																	
I	8 ref																																																	
Note:																																																		
1. Coil magnets, size of magnets 43 ± 0.5mm, inner hole 8.0mm, thickness 0.8 ± 0.1mm, with an L-shaped groove																																																		
2. Wrap the width of the coil outlet position 8mm ± 0.5 high-temperature adhesive paper.																																																		
3. Apply 43 * 19 adhesive tape on the front of the coil, with a hand torn circular diameter of 41.5mm (ref) on the back, and double-sided adhesive tape without holes																																																		
4. Attach 7.8-1.4 marked magnets in the middle of the magnetic sheet.																																																		

SPECIFICATION

產 品 型 號: DESC	Φ15 x39-12Ts-0.08x24*2-50mm-CLB	版本 Rev: A 0	客 戶 CUST:	
			淘软料号 Fine P/N:	
			客户料号 CUST P/N:	

五、包装 PACKONG:

5.1 包装图片Packing pictures:

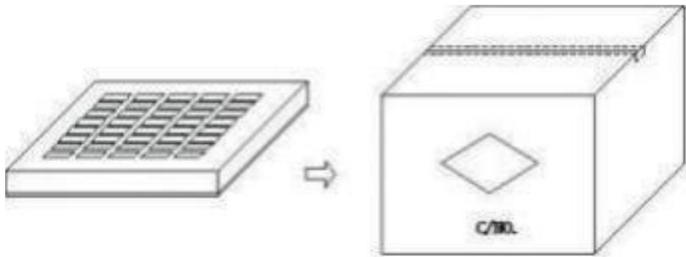

5.2 包装数量及规格Packing Quantity:

项目 Item	数量 Quantity	材料规格 Material	
盒 Box	350 Pcs	370*265*55mm	
箱 Big Carton	1400 Pcs	390*270*245mm	

5.3 包装以现有包装盘为参照标准，以实际出货包装为准,如有特新要求可以定制。

The packaging shall be based on the existing packing plate and the actual delivery package shall prevail. If

there is any requirement, we can customize it.

六、材料清单 Material list:

序号 number	材 料 名 称 Material name	品 名 描 述 Product Description	制 造 商 Manufacturer
1	Hot air line		
2	Solder Bar		
3	disk		
4	glue		
5	High-temperature adhesive tape		
6	Perforated double-sided tape		

擬制/日期 PREPARED BY/DATE	審核/日期 CHECKED BY/DATE
Boqun Feng 2026/04/29	Yanping Su 2026/04/29