

Prüfbericht-Nr.: <i>Test report no.:</i>	CN26HP4W 004	Auftrags-Nr.: <i>Order no.:</i>	27232965	Seite 1 von 10 Page 1 of 10
Kunden-Referenz-Nr.: <i>Client reference no.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	2026-05-06	
Auftraggeber: <i>Client:</i>	Bunker Supply Co., LLC 75 Aero Camino, STE 103, Goleta, CA 93117, USA			
Prüfgegenstand: <i>Test item:</i>	Scout Battery			
Bezeichnung / Typ-Nr.: <i>Identification / Type no.:</i>	PWR-MAK-A-BTL-G01-X ; PWR-MAK-A-BTL-G02-X ; PWR-MAK-A-BTL-G03-X			
Auftrags-Inhalt: <i>Order content:</i>	Test Report			
Prüfgrundlage: <i>Test specification:</i>	CFR Title 47 FCC Part 2.1093			
Wareneingangsdatum: <i>Date of sample receipt:</i>	2026-07-14	Please refer to Photo Document		
Prüfmuster-Nr.: <i>Test sample no:</i>	A004332920-001~002 A004341874-001~002			
Prüfzeitraum: <i>Testing period:</i>	2026-08-06 - 2026-09-19			
Ort der Prüfung: <i>Place of testing:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: <i>Test result*:</i>	Pass			
geprüft von: <i>tested by:</i>		genehmigt von: <i>authorized by:</i>	 Bell Hu	
Datum: <i>Date:</i>	2026-09-29	Ausstellungsdatum: <i>Issue date:</i>	2026-09-29	
Stellung / Position:	Sachverständige(r)/Expert	Stellung / Position:	Sachverständige(r)/Expert	
Sonstiges / <i>Other:</i>	FCC ID: 2BVXU-SCOUT1A			
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>	Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>			
* Legende:	P(ass) = entspricht o.g. Prüfgrundlage(n)	F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	N/A = nicht anwendbar	N/T = nicht getestet
* Legend:	P(ass) = passed a.m. test specification(s)	F(ail) = failed a.m. test specification(s)	N/A = not applicable	N/T = not tested
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

Prüfbericht-Nr.: CN26HP4W 004
Test report no.:

Seite 2 von 10
Page 2 of 10

Anmerkungen
Remarks

1	Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben. Detaillierte Informationen bezüglich Prüfbedingungen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden. <i>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</i>
2	Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. Informationen zur Verifizierung der Authentizität unserer Dokumente erhalten Sie auf folgender Webseite: go.tuv.com/digital-signature <i>As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged. For information on verifying the authenticity of our documents, please visit the following website: go.tuv.com/digital-signature</i>
3	Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben. Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt. <i>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report.</i> <i>Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</i>
4	Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2023, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019. <i>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2023, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</i>

CONTENTS

1.	TEST SITES.....	4
1.1	TEST FACILITIES.....	4
1.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS	4
1.3	TRACEABILITY	4
1.4	CALIBRATION	4
1.5	LOCATION OF ORIGINAL DATA	4
1.6	STATUS OF FACILITY USED FOR TESTING	4
2.	GENERAL PRODUCT INFORMATION.....	5
2.1	PRODUCT FUNCTION AND INTENDED USE	5
2.2	RATING AND SYSTEM DETAILS.....	5
2.3	INDEPENDENT OPERATION MODES.....	6
2.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS	6
2.5	SUBMITTED DOCUMENTS	6
2.6	TEST SETUP DIAGRAM	6
2.7	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	7
3.	SAFETY HUMAN EXPOSURE	8
3.1	RADIO FREQUENCY EXPOSURE COMPLIANCE FOR BLUETOOTH LOW ENERGY	8
3.1.1	<i>RF Exposure Compliance.....</i>	8
3.2	RADIO FREQUENCY EXPOSURE COMPLIANCE FOR WPT	9
3.2.1	<i>Test Procedures According to the Technical Standards</i>	9
3.2.2	<i>Limit of Maximum Permissible Exposure.....</i>	9
3.2.3	<i>Test Result.....</i>	10
4.	PHOTOGRAPHS OF THE TEST SET-UP	11
5.	LIST OF TABLES	11

1. Test Sites

1.1 Test Facilities

TÜV Rheinland (Shenzhen) Co., Ltd.

2-3F, 101 & 102, No.2, Nuclear Power Industrial Park, Fuming Community, Fucheng Street, Longhua District, Shenzhen 518000, People's Republic of China

FCC Registration No.: CN1260

1.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. until
Electric and Magnetic Field Analyzer	Narda	EHP200A	180ZX20517	2025-09-28	2027-09-26

1.3 Traceability

All measurement equipment calibrations are traceable to NIST or where calibration is performed outside the United States, to equivalent nationally recognized standards organizations.

1.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

1.5 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendixes of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) file for certification follow-up purposes.

1.6 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at 2-3F, 101 & 102, No.2, Nuclear Power Industrial Park, Fuming Community, Fucheng Street, Longhua District, Shenzhen 518000, People's Republic of China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

2. General Product Information

2.1 Product Function and Intended Use

The Scout Battery is a portable, rechargeable lithium-ion battery pack designed to charge and power consumer electronic devices. The product incorporates a three-cell lithium-ion battery (18650 format, configured in 3S1P), a multi-protocol USB Power Delivery (USB-PD) output port, a standard USB Type-C output port, a wireless charging output, and an integrated Bluetooth Low Energy (BLE) radio for smartphone-based user control and over-the-air (OTA) firmware updates.

The products have 3 models for marking. The only difference among the 3 models is the external enclosure color and the corresponding model number used to identify each color variant.

For details refer to the User Manual, Technical Description and Circuit Diagram.

2.2 Rating and System Details

Table 2: Technical Specification of EUT

General Information of EUT	Value
Kind of Equipment:	Scout Battery
Type Designation:	PWR-MAK-A-BTL-G01-X, PWR-MAK-A-BTL-G02-X, PWR-MAK-A-BTL-G03-X
FCC ID:	2BVXU-SCOUT1A
Operating Voltage:	Internal battery operated (10.8Vdc, 3000mAh) USB-C2 Input: 5Vdc, 3A / 9Vdc, 2.33A / 12dc, 1.75A / 15Vdc, 1.4A USB-C1 Output: 5Vdc, 3A USB-C2 Output: 5Vdc, 3A / 9Vdc, 2.33A
Testing Voltage:	Built-in battery
Technical Specification of Bluetooth LE	
Operating Frequency:	2402 MHz to 2480 MHz
Type of Modulation:	GFSK
Channel Number:	40 channels
Channel Separation:	2MHz
Data Rate:	1Mbps
Antenna Type:	Ceramic antenna
Antenna Gain:	2.0 dBi (Provided by the Client)
Technical Specification of WPT	
Frequency Range:	110.5 – 205 kHz & 360 kHz
Operating Frequency:	110.5 – 148.5 kHz & 360 kHz
Type of Modulation:	FSK, ASK
Antenna Type:	Induction coil
Wireless charging output power:	5W / 7.5W / 10W / 15W Max.

2.3 Independent Operation Modes

The basic operation modes are:

- A. On, Wireless Charging, BPP, 5W
- B. On, Wireless Charging, EPP, 7.5W / 10W
- C. On, Wireless Charging, MPP, 15W
- D. On, Standby mode

According to clause 2.1 & 2.2, all tests were performed on model PWR-MAK-A-BTL-G03-X in this report.

2.4 Noise Generating and Noise Suppressing Parts


Refer to Circuit Diagram for further details.

2.5 Submitted Documents

- Application Form
- User Manual
- Operation Description
- ID Label and Location Info

2.6 Test Setup Diagram

Diagram of Measurement Configuration (WPT)

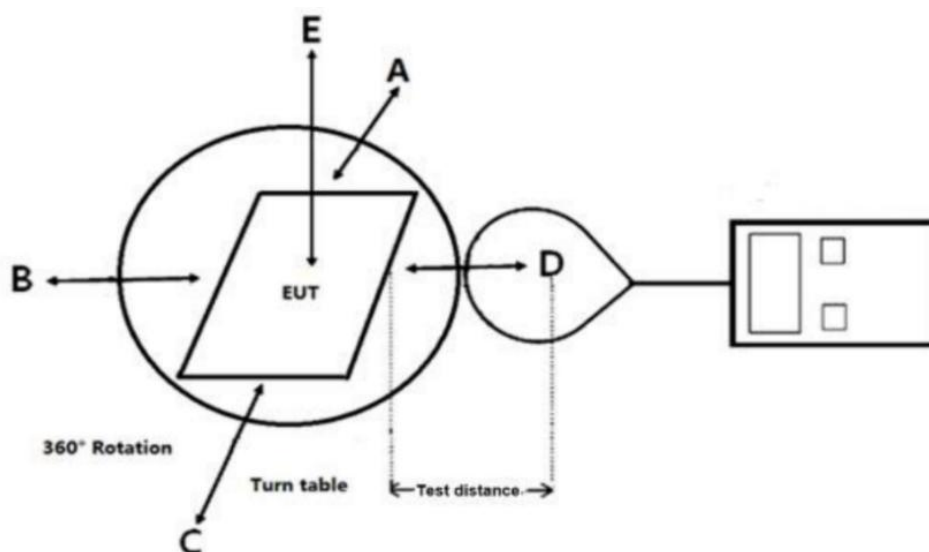

2.7 Special Accessories and Auxiliary Equipment

Table 3: List of Accessories and Auxiliary Equipment

Description	Manufacturer	Model	Remark
Smart Phone	samsung	Galaxy S20 5G	S/N: R3CN60275ST
Smart Phone	Apple	iPhone 16 plus	S/N: HFV2GPC4MG
Smart Phone	Apple	iPhone 8	S/N: C8PY4GXEJC6C

2.8 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table.

Table 4: Measurement Uncertainty

Parameter	Uncertainty (k=2)
Magnetic Field Emissions (A/m)	$\pm 1.2\mu\text{T}$
Electric Field Emissions (V/m)	$\pm 18\%$

3. Safety Human Exposure

3.1 Radio Frequency Exposure Compliance for Bluetooth Low Energy

3.1.1 RF Exposure Compliance

Test standard : FCC Part 2: Section 2.1093
FCC KDB 447498 D01 General RF Exposure Guidance v06

Measurement Record:

The minimum distance for the EUT is less than 5mm.

Since maximum peak output power of the Bluetooth is 1.69 dBm $\approx$ 1.48 mW $< \frac{3 \cdot d}{\sqrt{f}} = 9.52$ mW.

Note: The RF output power of Bluetooth refer to test report CN26HP4W 002.

Hence the EUT is excluded from SAR evaluation according to FCC KDB Publication 447498 D01 General RF Exposure Guidance v06.

3.2 Radio Frequency Exposure Compliance for WPT

3.2.1 Test Procedures According to the Technical Standards

Standards	Test Item	Judgment
FCC CFR 47 part1, 1.1310 KDB 680106 D01 Wireless Power Transfer v04	Electric Field Strength (E) (V/m)	PASS
	Magnetic Field Strength (H) (A/m)	PASS

3.2.2 Limit of Maximum Permissible Exposure

Limit of Maximum Permissible Exposure

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/f	*900/f ²	6
30-300	61.4	0.163	1.0	6
300-1,500			f/300	6
1,500-100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f ²	30
30-300	27.5	0.073	0.2	30
300-1,500			f/1500	30
1,500-100,000			1.0	30

f = frequency in MHz * = Plane-wave equivalent power density

Note 1: f = frequency in MHz ; *Plane-wave equivalent power density.

Note 2: For the applicable limit, see FCC 1.1310, 680106 D01 RF Exposure Wireless Charging Apps v03.

Note 3: Emissions between 100 kHz to 300 kHz should be assessed versus the limits at 300 kHz in Table 1 of Section 1.1310: 614 V/m and 1.63 A/m. A KDB inquiry is required to determine the applicable exposure limits below 100 kHz.

3.2.3 Test Result

RF Exposure Evaluation - Electric Field Emissions

Test Mode	Test Distance (cm)	Measure Value (V/m)						Limit (V/m)	Result
		Front	Rear	Left	Right	Top	Bottom		
Standby	0	Noise floor						614	PASS
Charging (5W)	0	2.115	4.235	1.675	1.249	0.678	1.337	614	PASS
Charging (10W)	0	1.912	1.553	1.315	1.447	1.876	3.446	614	PASS
Charging (15W)	0	2.388	3.927	1.295	1.255	1.589	0.896	614	PASS

RF Exposure Evaluation - Magnetic Field Emissions

Test Mode	Test Distance (cm)	Measure Value (A/m)						Limit (A/m)	Result
		Front	Rear	Left	Right	Top	Bottom		
Standby	0	Noise floor						1.63	PASS
Charging (5W)	0	0.051	0.432	0.117	0.338	0.157	0.085	1.63	PASS
Charging (10W)	0	0.046	0.401	0.123	0.456	0.043	0.367	1.63	PASS
Charging (15W)	0	0.048	0.095	0.146	0.161	0.141	0.097	1.63	PASS

Note 4: The curve-fitting techniques were used to extrapolate the E/H field values to 0mm distance value. These initial measurements are made at 7cm from the surface of the face (six faces are considered) with 1cm step to 20cm distance.

4. Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix A.

5. List of Tables

Table 1: List of Test and Measurement Equipment	4
Table 2: Technical Specification of EUT	5
Table 3: List of Accessories and Auxiliary Equipment	7
Table 4: Measurement Uncertainty	7

Appendix A: Photographs of the Test Set-Up

APPENDIX A: PHOTOGRAPHS OF THE TEST SET-UP	1
PHOTOGRAPH 1: SET-UP PHOTO FOR SAFETY HUMAN EXPOSURE	2

Photograph 1: Set-up photo for Safety Human Exposure

