

Prüfbericht-Nr.: <i>Test report no.:</i>	CN26HP4W 002	Auftrags-Nr.: <i>Order no.:</i>	27232965	Seite 1 von 22 Page 1 of 22
Kunden-Referenz-Nr.: <i>Client reference no.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	2026-05-06	
Auftraggeber: <i>Client:</i>	Bunker Supply Co., LLC 75 Aero Camino, STE 103, Goleta, CA 93117, USA			
Prüfgegenstand: <i>Test item:</i>	Scout Battery			
Bezeichnung / Typ-Nr.: <i>Identification / Type no.:</i>	PWR-MAK-A-BTL-G01-X ; PWR-MAK-A-BTL-G02-X ; PWR-MAK-A-BTL-G03-X			
Auftrags-Inhalt: <i>Order content:</i>	Test Report			
Prüfgrundlage: <i>Test specification:</i>	CFR Title 47 FCC Part 15: Subpart C Section 15.247 CFR Title 47 FCC Part 15: Subpart C Section 15.207 CFR Title 47 FCC Part 15: Subpart C Section 15.209			
Wareneingangsdatum: <i>Date of sample receipt:</i>	2026-07-14	Please refer to Photo Document		
Prüfmuster-Nr.: <i>Test sample no.:</i>	A004332920-001~002 A004341874-001~002			
Prüfzeitraum: <i>Testing period:</i>	2026-07-19 - 2026-09-15			
Ort der Prüfung: <i>Place of testing:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: <i>Test result*:</i>	Pass			
geprüft von: <i>tested by:</i>		genehmigt von: <i>authorized by:</i>	 Bell Hu	
Datum: <i>Date:</i>	2026-09-29	Ausstellungsdatum: <i>Issue date:</i>	2026-09-29	
Stellung / Position:	Sachverständige(r)/Expert	Stellung / Position:	Sachverständige(r)/Expert	
Sonstiges / <i>Other:</i>	FCC ID: 2BVXU-SCOUT1A This report is for Bluetooth Low Energy.			
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>	Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>			
* Legende:	P(ass) = entspricht o.g. Prüfgrundlage(n)	F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	N/A = nicht anwendbar	N/T = nicht getestet
* Legend:	P(ass) = passed a.m. test specification(s)	F(ail) = failed a.m. test specification(s)	N/A = not applicable	N/T = not tested
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

Prüfbericht-Nr.: CN26HP4W 002
Test report no.:

Seite 2 von 22
Page 2 of 22

Anmerkungen
Remarks

1	Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben. Detaillierte Informationen bezüglich Prüfbedingungen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden. <i>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</i>
2	Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. Informationen zur Verifizierung der Authentizität unserer Dokumente erhalten Sie auf folgender Webseite: go.tuv.com/digital-signature <i>As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged. For information on verifying the authenticity of our documents, please visit the following website: go.tuv.com/digital-signature</i>
3	Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben. Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt. <i>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report.</i> <i>Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</i>
4	Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2023, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019. <i>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2023, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</i>

Prüfbericht - Nr.: CN26HP4W 002
Test Report No.:

Seite 3 von 22
Page 3 of 22

Test Summary

5.1.1 ANTENNA REQUIREMENT

RESULT: Pass

5.1.2 MAXIMUM PEAK CONDUCTED OUTPUT POWER

RESULT: Pass

5.1.3 CONDUCTED POWER SPECTRAL DENSITY

RESULT: Pass

5.1.4 6dB BANDWIDTH

RESULT: Pass

5.1.5 99% BANDWIDTH

RESULT: Pass

5.1.6 CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 KHz BANDWIDTH

RESULT: Pass

5.1.7 RADIATED SPURIOUS EMISSION

RESULT: Pass

5.1.8 CONDUCTED EMISSION ON AC MAINS

RESULT: Pass

Contents

1	GENERAL REMARKS	5
1.1	COMPLEMENTARY MATERIALS	5
2	TEST SITES	6
2.1	TEST FACILITIES	6
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	6
2.3	TRACEABILITY	7
2.4	CALIBRATION	7
2.5	MEASUREMENT UNCERTAINTY.....	7
2.6	LOCATION OF ORIGINAL DATA.....	8
2.7	STATUS OF FACILITY USED FOR TESTING.....	8
3	GENERAL PRODUCT INFORMATION	9
3.1	PRODUCT FUNCTION AND INTENDED USE.....	9
3.2	RATINGS AND SYSTEM DETAILS	9
3.3	INDEPENDENT OPERATION MODES	10
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS.....	10
3.5	SUBMITTED DOCUMENTS.....	10
4	TEST SET-UP AND OPERATION MODES	11
4.1	PRINCIPLE OF CONFIGURATION SELECTION	11
4.2	TEST OPERATION AND TEST SOFTWARE.....	11
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	11
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	11
4.5	TEST SETUP DIAGRAM	12
5	TEST RESULTS	14
5.1	TRANSMITTER REQUIREMENT & TEST SUITES	14
5.1.1	<i>Antenna Requirement</i>	<i>14</i>
5.1.2	<i>Maximum Peak Conducted Output Power</i>	<i>15</i>
5.1.3	<i>Conducted Power Spectral Density</i>	<i>16</i>
5.1.4	<i>6dB Bandwidth</i>	<i>17</i>
5.1.5	<i>99% Bandwidth</i>	<i>18</i>
5.1.6	<i>Conducted Spurious Emissions Measured in 100 kHz Bandwidth</i>	<i>19</i>
5.1.7	<i>Radiated Spurious Emission</i>	<i>20</i>
5.1.8	<i>Conducted Emission on AC Mains.....</i>	<i>21</i>
6	PHOTOGRAPHS OF THE TEST SET-UP	22
7	LIST OF TABLES.....	22

Prüfbericht - Nr.: CN26HP4W 002
Test Report No.:

Seite 5 von 22
Page 5 of 22

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Test Results of Bluetooth Low Energy

Appendix B: Photographs of the Test Set-up

2 Test Sites

2.1 Test Facilities

TÜV Rheinland (Shenzhen) Co., Ltd.

2-3F, 101 & 102, No.2, Nuclear Power Industrial Park, Fuming Community, Fucheng Street, Longhua District, Shenzhen 518000, People's Republic of China

FCC Registration No.: CN1260

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Radio Spectrum Testing (SRD-Tonscend 1)					
Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. until
Wireless Connectivity Tester	R&S	CMW270	102505	2025-09-23	2026-09-22
EXA Signal Analyzer, Multi-touch	Keysight	N9010B	MY60241175	2025-09-23	2026-09-22
MXG X-Series RF Vector Signal Generator	Keysight	N5182B	MY61250137	2025-09-23	2026-09-22
EXG X-Series Microwave Analog Signal Generator	Keysight	N5173B	MY61250141	2025-09-23	2026-09-22
DC power supply	Keysight	E3642A	MY61276100	2025-09-23	2026-09-22
Power Control Unit	Tonscend	JS0806-4ADC	N/A	2025-09-23	2026-09-22
Automation Control Unit	Tonscend	JS0806-2	21C8060396	2025-09-23	2026-09-22
Test Software	Tonscend	JS1120-3	N/A	N/A	N/A
Control PC	Lenovo	TianYi510S-071MB	YLX23JMF	N/A	N/A
Shielding Room	Albatross	SR1	APC17151-SR1	2024-09-14	2027-09-13
Unwanted Emission Testing (TS9975)					
Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. until
EMI Test Receiver	R&S	ESR 7	102021	2025-09-22	2026-09-21
Signal Analyzer	R&S	FSV 40	101439	2025-09-22	2026-09-21
System Controller Interface	R&S	SCI-100	S10010038	N/A	N/A
Filterbank	R&S	Wlan	100759	2025-09-22	2026-09-21
OSP	R&S	OSP 120	102040	N/A	N/A
Pre-amplifier	R&S	SCU08F1	08320031	2025-09-22	2026-09-21
Amplifier	R&S	SCU-18F	180070	2025-09-22	2026-09-21
Amplifier	R&S	SCU40A	100475	2025-09-22	2026-09-21
Trilog Broadband Antenna (30 MHz - 7 GHz)	Schwarzbeck	VULB 9162	193	2024-09-28	2026-09-27
Double-Ridged Antenna (1-18 GHz)	ETS-LINDGREN	3117	00218717	2024-09-28	2026-09-27

Prüfbericht - Nr.: CN26HP4W 002
Test Report No.:

Seite 7 von 22
Page 7 of 22

Wideband Ridged Horn Antenna (18-40 GHz)	Steatite	QMS-00880	19067	2024-09-28	2026-09-27
Active Loop Antenna	Schwarzbeck	FMZB 1513	302	2024-09-28	2026-09-27
Test software	R&S	EMC32 (V10.60.10)	N/A	N/A	N/A
Control PC	Dell	OptiPlex 7050	36NV9P2	N/A	N/A
3m Semi-Anechoic Chamber	Albatross	SAC-3m	APC17151-SAC	2024-09-14	2027-09-13

Conducted Emission				
Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
EMI Test Receiver	R&S	ESR3	102680	2027-02-03
Artificial Mains Network	R&S	ENV216	102333	2027-07-20
Artificial Mains Network	R&S	ENV216	101445	2027-02-03
EMC32 Test Software	R&S	EMC32(Ver.10.60.20)	N/A	N/A

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table.

Table 2: Measurement Uncertainty

Parameter	Uncertainty (k=2)
RF output power, conducted	± 0.99 dB
Occupied Channel Bandwidth	± 2.08 %
RF power density, conducted	± 0.99 dB
Unwanted Emissions, conducted	± 0.89 dB
All emissions, radiated	± 4.17 dB
Conducted Emission, (9kHz to 150kHz)/(150kHz to 30MHz)	± 3.24 dB / ± 3.24 dB

Prüfbericht - Nr.: CN26HP4W 002
*Test Report No.:*Seite 8 von 22
Page 8 of 22

2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix A & B of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) Co., Ltd. file for certification follow-up purposes.

2.7 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at 2-3F, 101 & 102, No.2, Nuclear Power Industrial Park, Fuming Community, Fucheng Street, Longhua District, Shenzhen 518000, People's Republic of China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3 General Product Information

3.1 Product Function and Intended Use

The Scout Battery is a portable, rechargeable lithium-ion battery pack designed to charge and power consumer electronic devices. The product incorporates a three-cell lithium-ion battery (18650 format, configured in 3S1P), a multi-protocol USB Power Delivery (USB-PD) output port, a standard USB Type-C output port, a wireless charging output, and an integrated Bluetooth Low Energy (BLE) radio for smartphone-based user control and over-the-air (OTA) firmware updates.

The products have 3 models for marking. The only difference among the 3 models is the external enclosure color and the corresponding model number used to identify each color variant.

For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 Ratings and System Details

Table 3: Technical Specification of EUT

General Information of EUT	Value
Kind of Equipment:	Scout Battery
Type Designation:	PWR-MAK-A-BTL-G01-X, PWR-MAK-A-BTL-G02-X, PWR-MAK-A-BTL-G03-X
FCC ID:	2BVXU-SCOUT1A
Operating Voltage:	Internal battery operated (10.8Vdc, 3000mAh) USB-C2 Input: 5Vdc, 3A / 9Vdc, 2.33A / 12dc, 1.75A / 15Vdc, 1.4A USB-C1 Output: 5Vdc, 3A USB-C2 Output: 5Vdc, 3A / 9Vdc, 2.33A
Testing Voltage:	Built-in battery or AC 120V, 60Hz
Technical Specification of Bluetooth LE	
Operating Frequency:	2402 MHz to 2480 MHz
Type of Modulation:	GFSK
Channel Number:	40 channels
Channel Separation:	2MHz
Data Rate:	1Mbps
Antenna Type:	Ceramic antenna
Antenna Gain:	2.0 dBi (Provided by the Client)

Note: The correctness of all data provided by customer in the test report is ensured and responsible of the customer. Any misjudgment of the test results caused by the use of incorrect data provided by customer shall be borne by the customer.

Table 4: RF Channel and Frequency

RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

Test frequencies are lowest channel: 2402 MHz, middle channel: 2440 MHz and highest channel: 2480 MHz for Bluetooth LE

3.3 Independent Operation Modes

The basic operation modes are:

- A. On, Bluetooth transmitting mode (Low / Middle / High)
- B. On, Charging + Normal working

3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

3.5 Submitted Documents

- Application Form
- Operation Description
- Circuit Diagram
- User Manual
- ID Label and Location Info

4 Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Radio Spectrum: The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All tests were performed according to the procedures in ANSI C63.10:2020.

According to clause 3.1, all tests were performed on model *PWR-MAK-A-BTL-G03-X* in this report.

4.3 Special Accessories and Auxiliary Equipment

Table 5: List of Accessories and Auxiliary Equipment

Description	Manufacturer	Model	Remark
Laptop	Lenovo	T480	S/N:PF-16A6N8
Wireless charging load	YBZ	YBZ1.1	N/A
AC/DC Adapter	Apple	A2452	Input: 100-240VAC, 50-60Hz Output: 5.2VDC, 3.0A / 9.0VDC, 3.0A/ 15.0VDC, 5.0A/ 20.5VDC, 5.0A/ 28.0VDC, 5.0A

4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 1GHz)

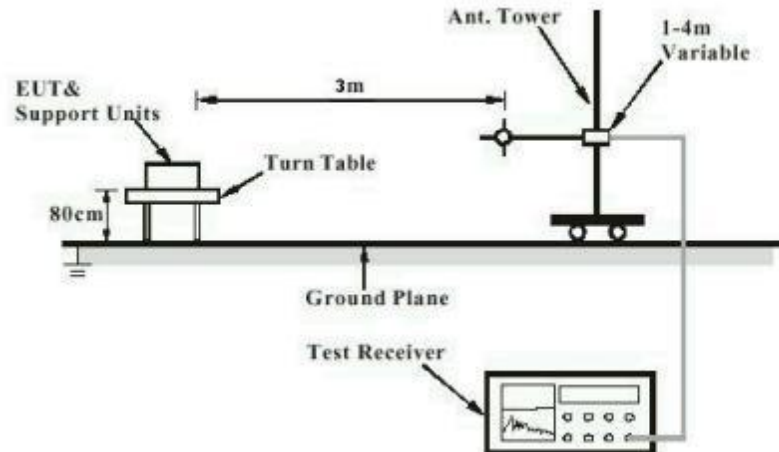


Diagram of Measurement Configuration for Radiation Test (Above 1GHz)

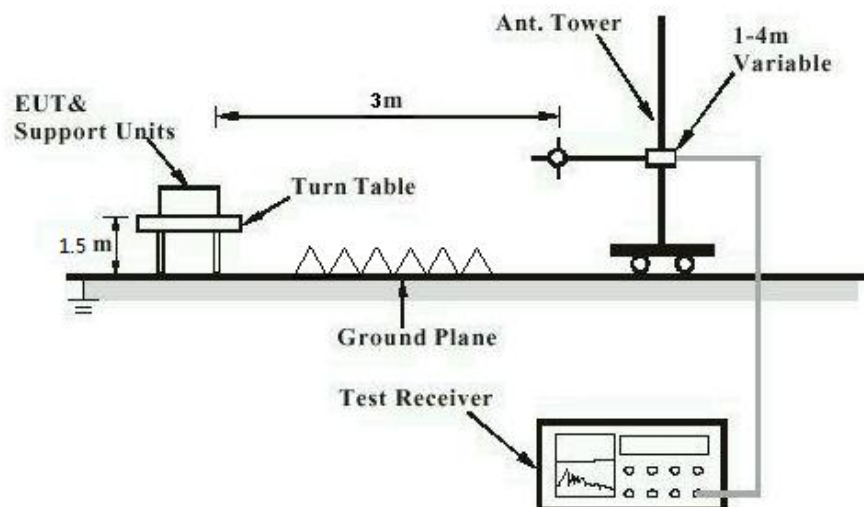


Diagram of Measurement Configuration for Mains Conduction Measurement


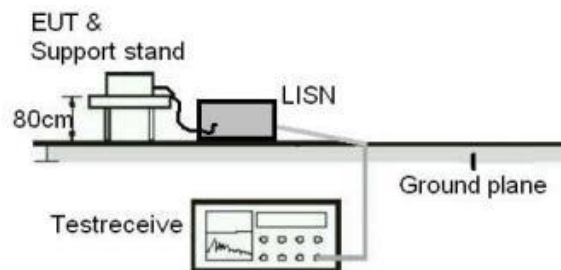


Diagram of Measurement Configuration for Conducted Transmitter Measurement

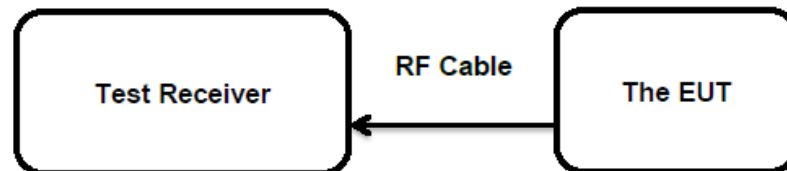

5 Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:

Pass

Test Specification

Test standard : FCC Part 15.247(b)(4) and Part 15.203

According to the manufacturer declared, the EUT has Ceramic antenna, permanent attachment and no consideration of replacement, refer to section 3.2 for details.

Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

Prüfbericht - Nr.: CN26HP4W 002
Test Report No.:

Seite 15 von 22
Page 15 of 22

5.1.2 Maximum Peak Conducted Output Power

RESULT:
Pass
Test Specification

Test standard : FCC Part 15.247(b)(3)
 Basic standard : ANSI C63.10:2020
 Limits : < 1.0 W
 Kind of test site : Shielded Room

Test Setup

Date of testing : 2026-08-06 to 2026-08-14
 Test voltage : Fully charged battery
 Operation mode : A
 Test channel : Low / Middle / High
 Ambient temperature : 24.8 °C
 Relative humidity : 54 %
 Atmospheric pressure : 101 kPa

For details refer to following test result.

Table 6: Test Result of Maximum Conducted Output Power, Bluetooth LE

Test Mode	Test Channel (MHz)	Measured Peak Power		Limit (W)
		(dBm)	(W)	
Bluetooth LE (1 Mbps)	2402	0.45	0.0011	< 1.0
	2440	1.16	0.0013	
	2480	1.69	0.0015	
Max. Measured Value		1.69	0.0015	

Note:

- 1) The cable loss is taken into account in results.
- 2) Antenna gain(G): 2.0dBi

Prüfbericht - Nr.: CN26HP4W 002
Test Report No.:

Seite 16 von 22
Page 16 of 22

5.1.3 Conducted Power Spectral Density

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.247(e)
Basic standard	: ANSI C63.10:2020
Limits	: < 8 dBm / 3kHz
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2026-08-06 to 2026-08-14
Test voltage	: Fully charged battery
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 24.8 °C
Relative humidity	: 54 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to appendix A.

Prüfbericht - Nr.: CN26HP4W 002
Test Report No.:

Seite 17 von 22
Page 17 of 22

5.1.4 6dB Bandwidth

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.247(a)(2)
Basic standard	: ANSI C63.10:2020
Limits	: > 500 kHz
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2026-08-06 to 2026-08-14
Test voltage	: Fully charged battery
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 24.8 °C
Relative humidity	: 54 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to appendix A.

Prüfbericht - Nr.: CN26HP4W 002
Test Report No.:

Seite 18 von 22
Page 18 of 22

5.1.5 99% Bandwidth

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.247(a)
Basic standard	: ANSI C63.10:2020
Limits	: Within assigned band 2400-2483.5MHz
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2026-08-06 to 2026-08-14
Test voltage	: Fully charged battery
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 24.8 °C
Relative humidity	: 54 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to appendix A.

Prüfbericht - Nr.: CN26HP4W 002
Test Report No.:Seite 19 von 22
Page 19 of 22

5.1.6 Conducted Spurious Emissions Measured in 100 kHz Bandwidth

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.247(d)
Basic standard	: ANSI C63.10:2020
Limits	: 20dB (below that in the 100kHz bandwidth within the band that contains the highest level of the desired power); In addition, radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits specified in 15.209(a)
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2026-08-06 to 2026-08-14
Test voltage	: Fully charged battery
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 24.8 °C
Relative humidity	: 54 %
Atmospheric pressure	: 101 kPa

Test results of 100kHz Bandwidth of Frequency Band Edge by Conducted method refer to test plots, and compliance is achieved as well.

For the measurement records, refer to appendix A.

Prüfbericht - Nr.: **CN26HP4W 002**
Test Report No.:Seite 20 von 22
Page 20 of 22

5.1.7 Radiated Spurious Emission

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.247(d) & FCC Part 15.205
Basic standard	: ANSI C63.10:2020
Limits	: Refer to 15.209(a) of FCC part 15.247(d)
Kind of test site	: 3m Semi-anechoic Chamber

Test Setup

Date of testing	: 2026-08-13 to 2026-08-14
Input voltage	: Fully charged battery
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: Refer to test results
Relative humidity	: Refer to test results
Atmospheric pressure	: 101 kPa

Remark:

Testing was carried out within frequency range 9kHz to the tenth harmonics. Only the worst case spurious emissions configuration of the each mode were reported.

For the measurement records, refer to appendix A.

Prüfbericht - Nr.: CN26HP4W 002
Test Report No.:Seite 21 von 22
Page 21 of 22

5.1.8 Conducted Emission on AC Mains

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.207(a)
Basic standard	: ANSI C63.10: 2020
Frequency range	: 0.15 – 30MHz
Limits	: FCC Part 15.207(a)
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2026-07-19 to 2026-09-15
Input voltage	: AC 120V, 60Hz
Operation mode	: B
Ambient temperature	: Refer to test result
Relative humidity	: Refer to test result
Atmospheric pressure	: 101 kPa

For the measurement records, refer to appendix A.

6 Photographs of the Test Set-Up

For photographs of the test set-up, refer to appendix B.

7 List of Tables

Table 1: List of Test and Measurement Equipment.....	6
Table 2: Measurement Uncertainty.....	7
Table 3: Technical Specification of EUT	9
Table 4: RF Channel and Frequency	10
Table 5: List of Accessories and Auxiliary Equipment.....	11
Table 6: Test Result of Maximum Conducted Output Power, Bluetooth LE	15

Appendix A: Test Results of Bluetooth Low Energy

APPENDIX A: TEST RESULTS OF BLUETOOTH LOW ENERGY	1
APPENDIX A.1: TEST RESULTS OF 6dB BANDWIDTH	2
<i>Test Result.....</i>	<i>2</i>
<i>Test Graphs.....</i>	<i>3</i>
APPENDIX A.2: TEST RESULTS OF 99% BANDWIDTH.....	5
<i>Test Result.....</i>	<i>5</i>
<i>Test Graphs.....</i>	<i>6</i>
APPENDIX A.3: TEST RESULTS OF CONDUCTED POWER SPECTRAL DENSITY	8
<i>Test Result.....</i>	<i>8</i>
<i>Test Graphs.....</i>	<i>9</i>
APPENDIX A.4: TEST RESULTS OF BAND EDGE MEASUREMENTS	11
<i>Test Result.....</i>	<i>11</i>
APPENDIX A.5: TEST RESULTS OF CONDUCTED SPURIOUS EMISSION.....	12
<i>Test Result.....</i>	<i>12</i>
<i>Test Graphs.....</i>	<i>13</i>
APPENDIX A.6: TEST RESULTS OF RADIATED SPURIOUS EMISSIONS	17
30MHz - 1GHz	17
1GHz - 18GHz	19
APPENDIX A.7: TEST RESULTS OF RADIATED EMISSIONS IN RESTRICTED BANDS.....	31
APPENDIX A.8: TEST RESULTS OF CONDUCTED EMISSION ON AC MAINS.....	35


Appendix A.1: Test Results of 6dB Bandwidth

Test Result


TestMode	Antenna	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.73	2401.64	2402.37	0.5	PASS
		2440	0.72	2439.64	2440.37	0.5	PASS
		2480	0.74	2479.64	2480.37	0.5	PASS

Test Graphs


BLE_1M_Ant1_2402

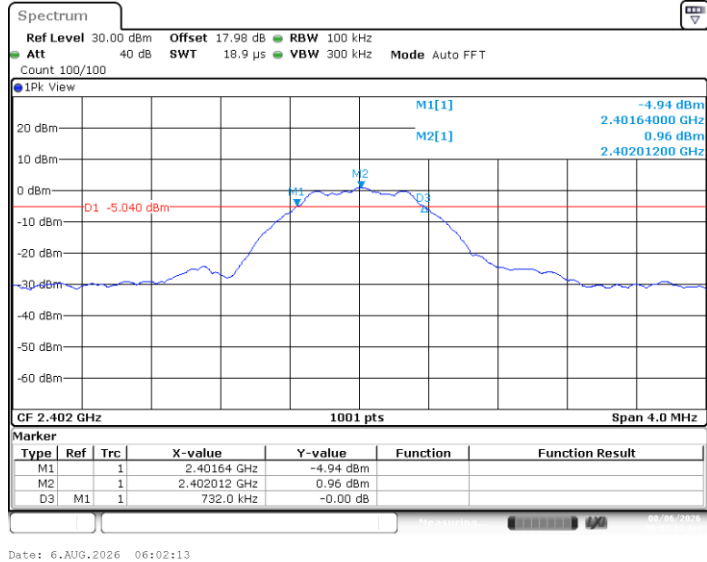

BLE_1M_Ant1_2440

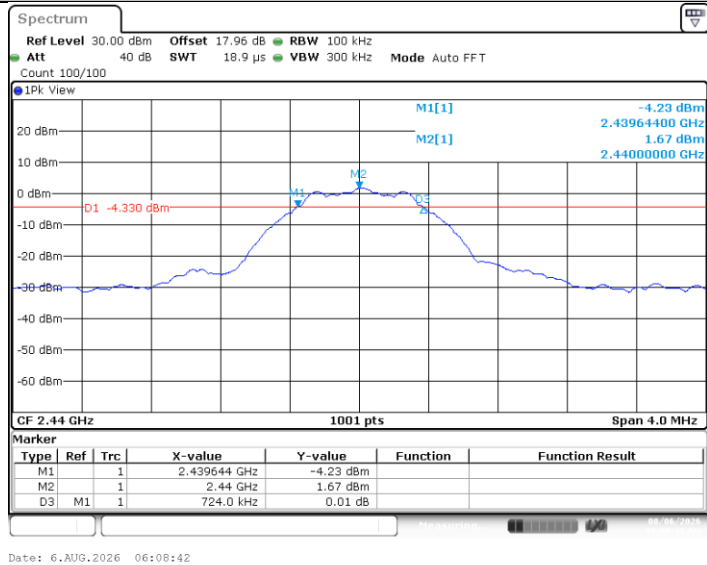

BLE_1M_Ant1_2480

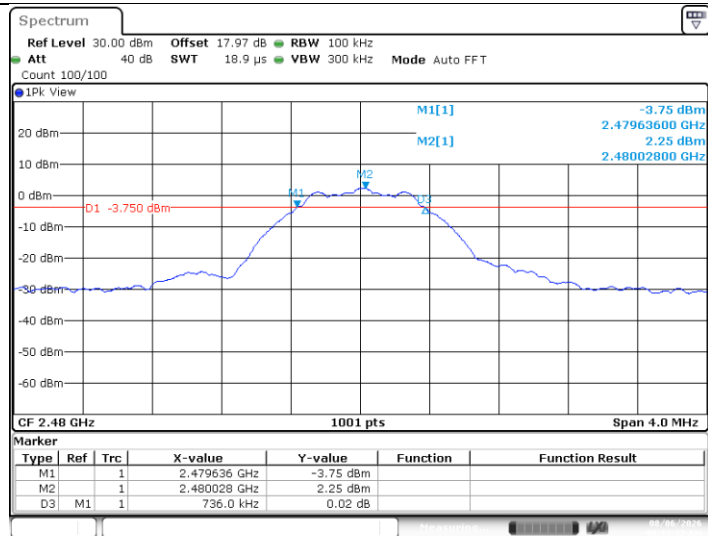

Date: 6.AUG.2026 06:12:32


Appendix A.2: Test Results of 99% Bandwidth

Test Result


TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	1.1389	2401.4366	2402.5754	---	PASS
		2440	1.1349	2439.4366	2440.5714	---	PASS
		2480	1.1349	2479.4406	2480.5754	---	PASS

Test Graphs


BLE_1M_Ant1_2402

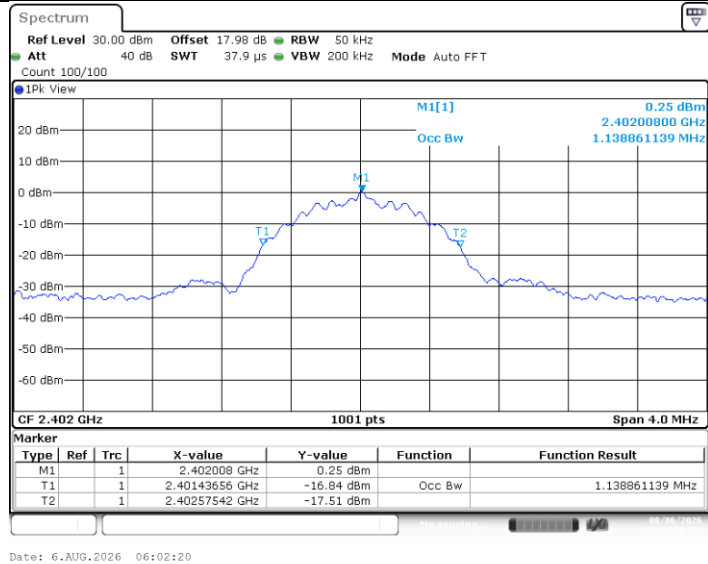

BLE_1M_Ant1_2440

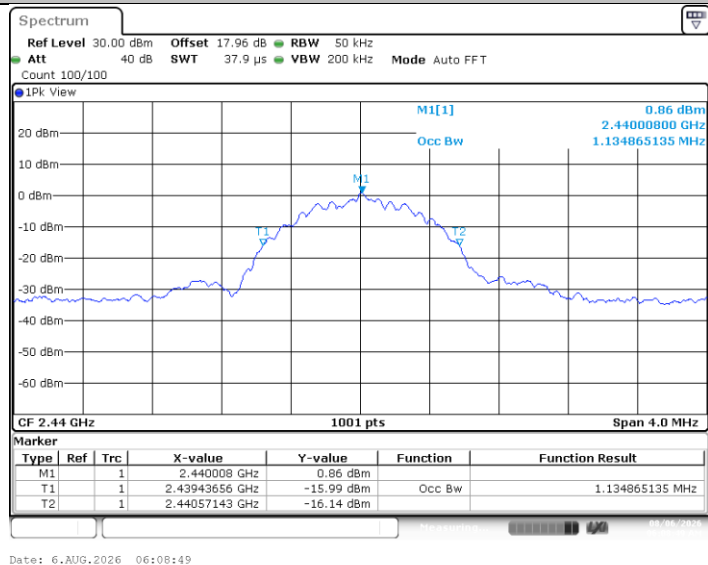

BLE_1M_Ant1_2480

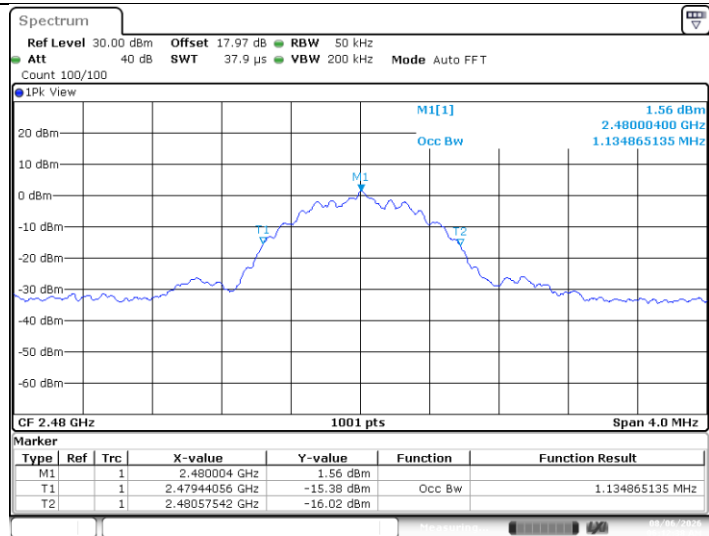

Date: 6.AUG.2026 06:12:38


Appendix A.3: Test Results of Conducted Power Spectral Density

Test Result


TestMode	Antenna	Channel	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-14.42	≤8.00	PASS
		2440	-14.74	≤8.00	PASS
		2480	-13.68	≤8.00	PASS

Test Graphs


BLE_1M_Ant1_2402

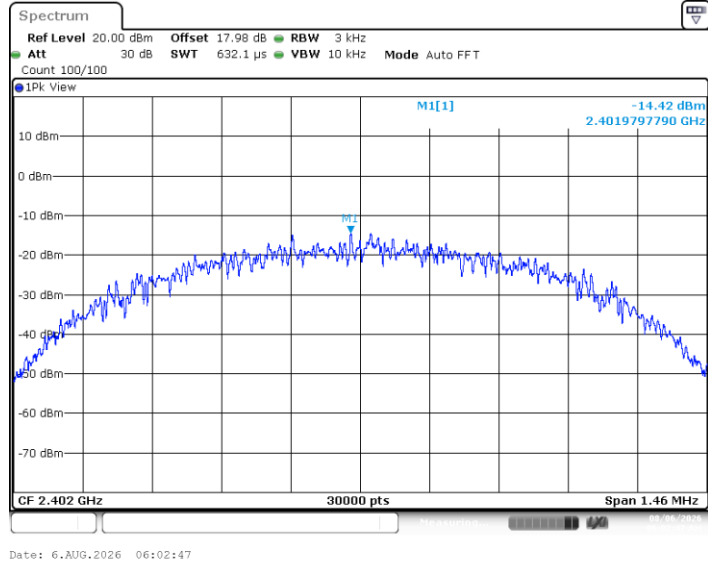

BLE_1M_Ant1_2440

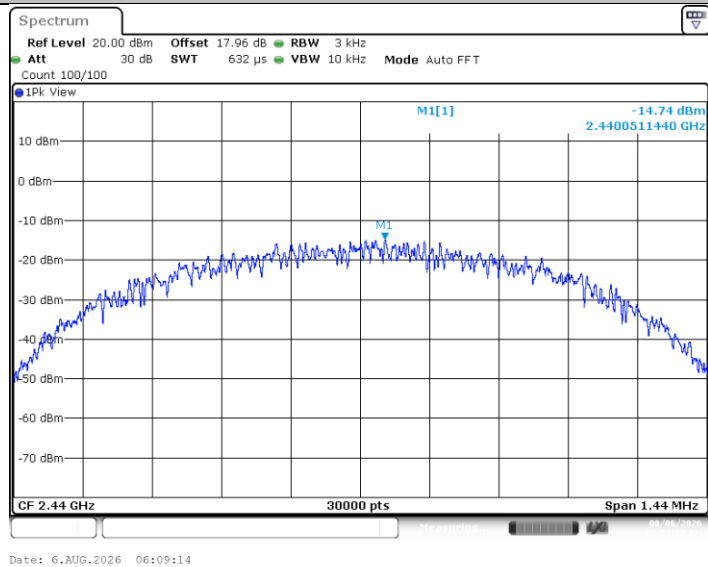


BLE_1M_Ant1_2480

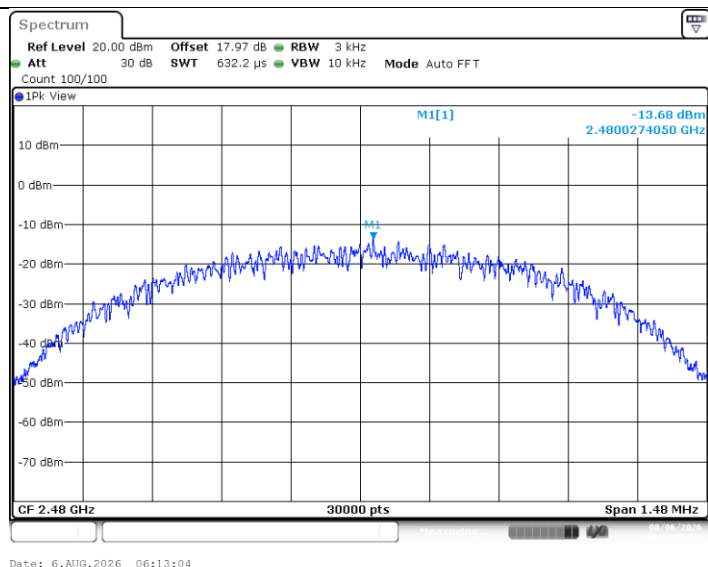


Appendix A.4: Test Results of Band Edge Measurements

Test Result

Low Channel

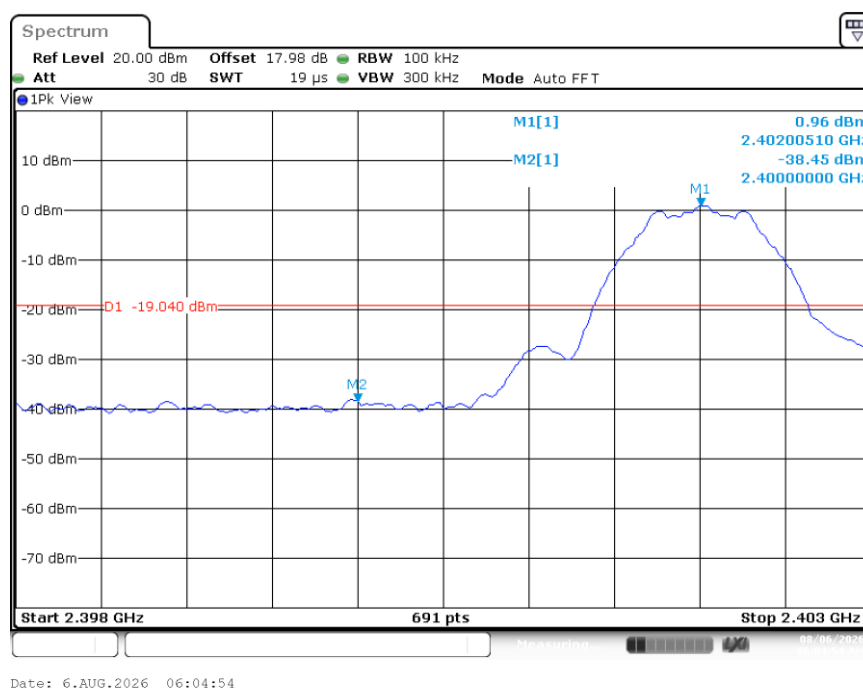

High Channel

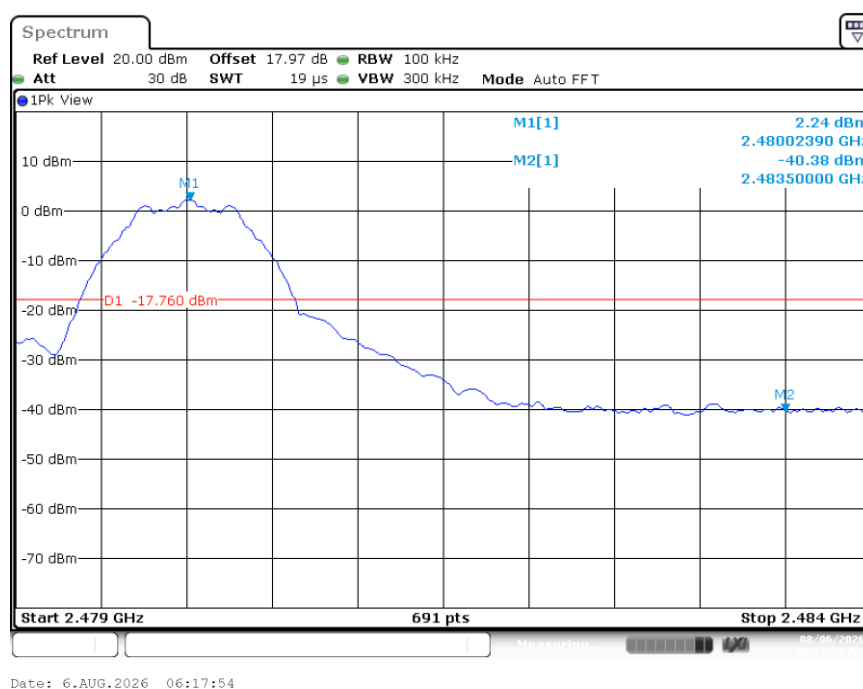


Appendix A.5: Test Results of Conducted Spurious Emission

Test Result


TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	Reference	1.00	1.00	---	PASS
			30~1000	1.00	-48.15	≤-19	PASS
			1000~26500	1.00	-36.32	≤-19	PASS
		2440	Reference	1.65	1.65	---	PASS
			30~1000	1.65	-48.33	≤-18.35	PASS
			1000~26500	1.65	-34.81	≤-18.35	PASS
		2480	Reference	2.23	2.23	---	PASS
			30~1000	2.23	-48.45	≤-17.77	PASS
			1000~26500	2.23	-37.75	≤-17.77	PASS

Test Graphs


BLE_1M_Ant1_2402_0~Reference

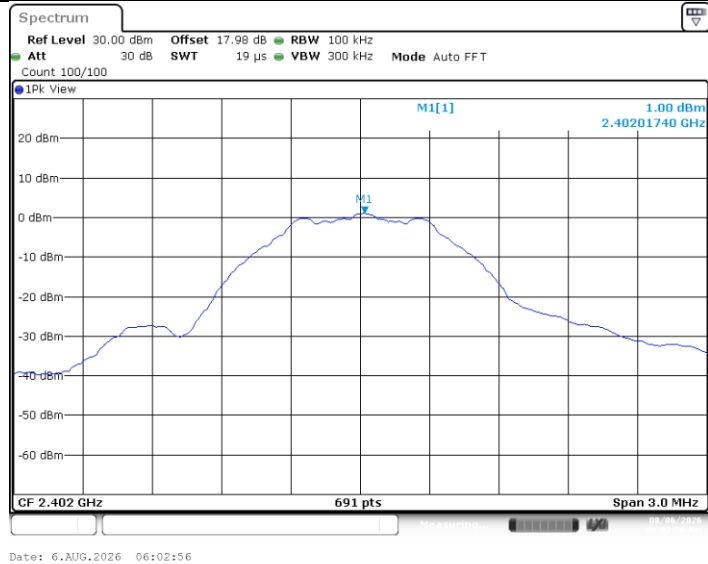


BLE_1M_Ant1_2402_30~1000

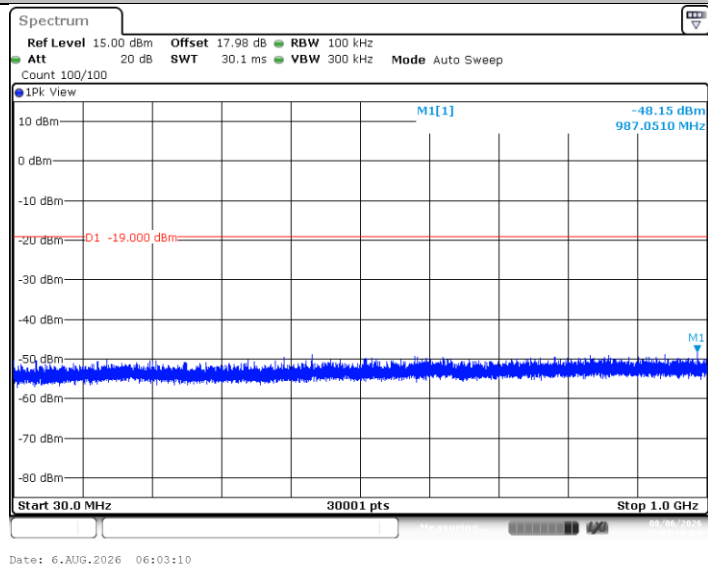


BLE_1M_Ant1_2402_1000~26500

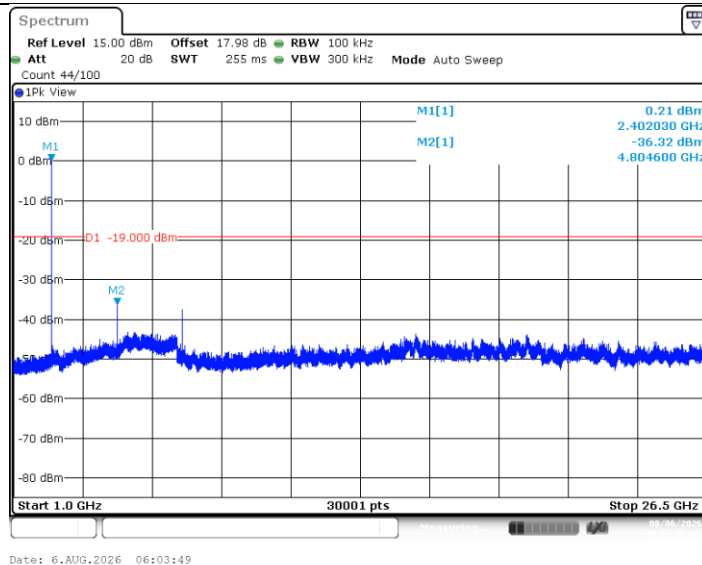


BLE_1M_Ant1_2440_0~Reference

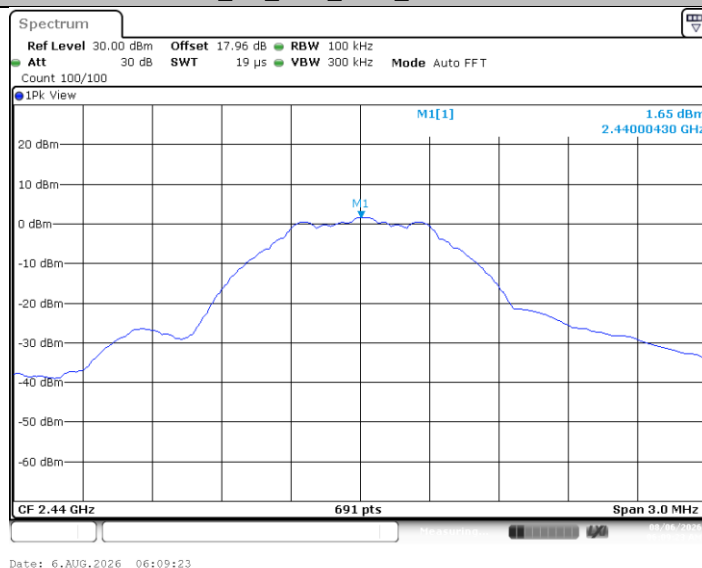

BLE_1M_Ant1_2440_30~1000

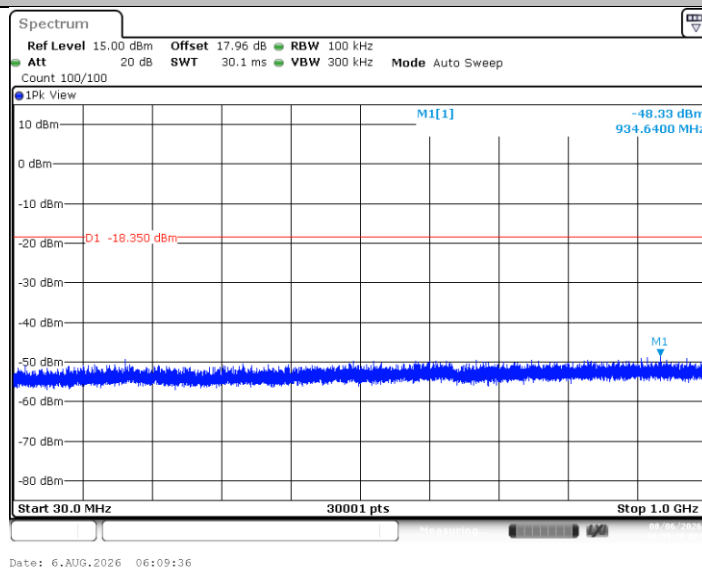


BLE_1M_Ant1_2440_1000~26500

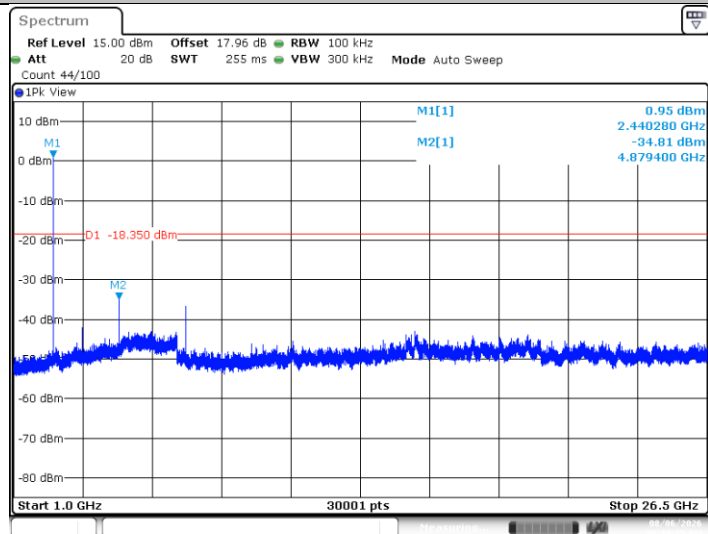


Date: 6.AUG.2026 06:10:15

BLE_1M_Ant1_2480_0~Reference

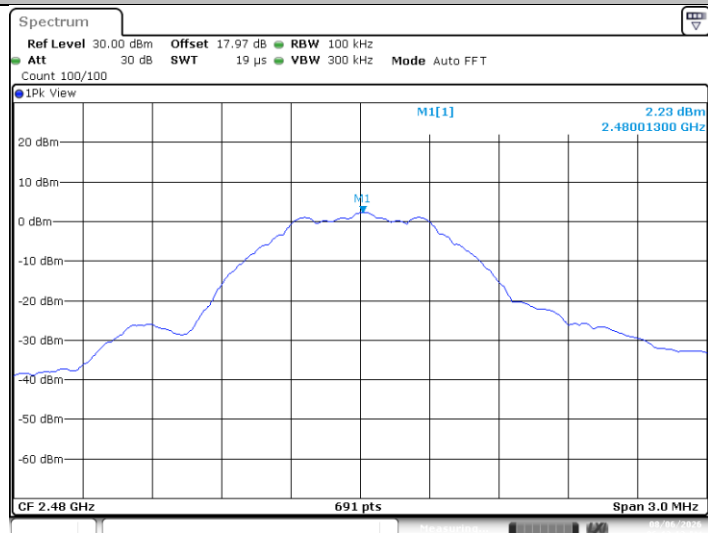


Date: 6.AUG.2026 06:13:12

BLE_1M_Ant1_2480_30~1000

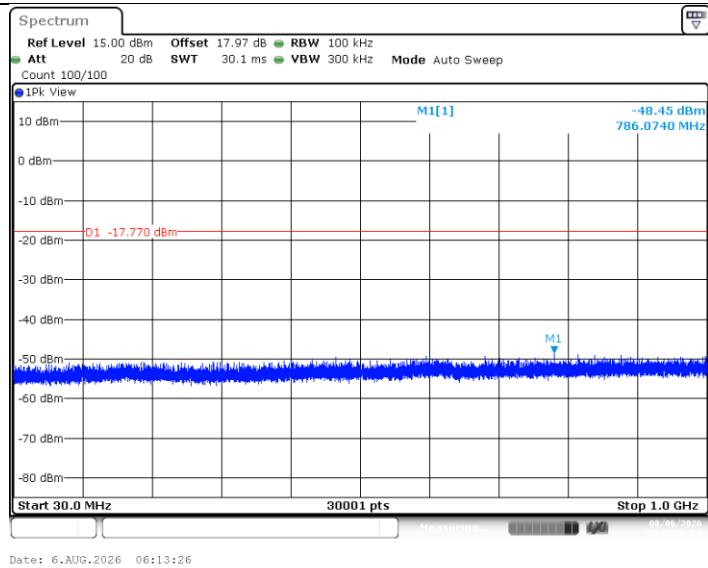

BLE_1M_Ant1_2480_1000~26500

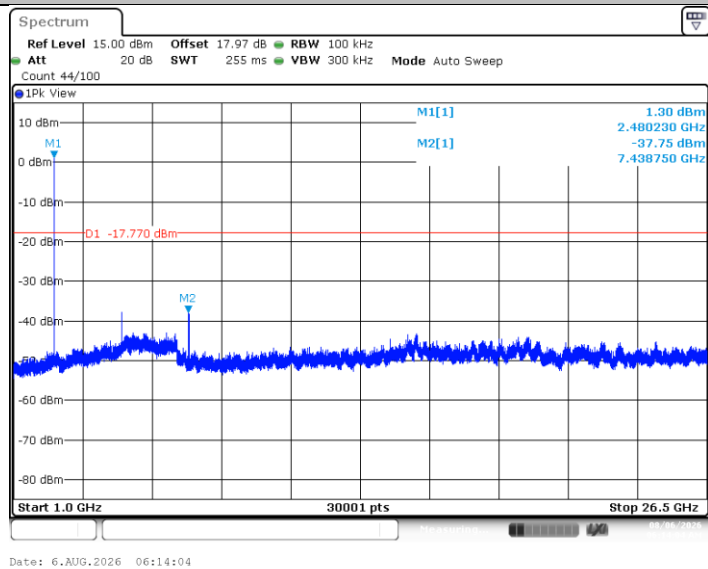

Appendix A.6: Test Results of Radiated Spurious Emissions


Note:

- 1) This testing was carried out on different modulations, but only the worst case was presented in this report.
- 2) Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.

30MHz - 1GHz

EUT Information

EUT Name:	Scout Battery
Model:	PWR-MAK-A-BTL-G03-X
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	27232965/A004341874-002
Test Voltage:	Battery
Remark:	Temp 21.8°C Humi:49%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

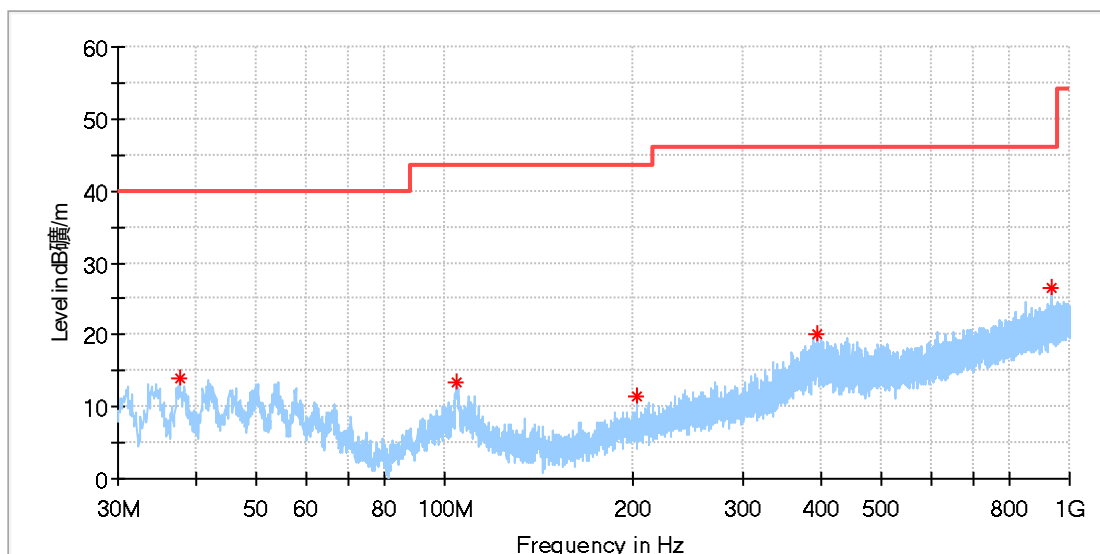

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
37.652222	13.92	40.00	26.08	100.0	H	74.0	-20.9
104.743889	13.48	43.50	30.02	100.0	H	233.0	-18.9
203.522222	11.51	43.50	31.99	100.0	H	130.0	-19.0
394.396667	20.01	46.00	25.99	100.0	H	154.0	-13.9
936.950000	26.40	46.00	19.60	100.0	H	74.0	-4.4

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: Scout Battery
Model: PWR-MAK-A-BTL-G03-X
Test Mode: BLE 1M_Mid channel
Order No/Sample No: 27232965/A004341874-002
Test Voltage: Battery
Remark: Temp 21.8°C Humi:49%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

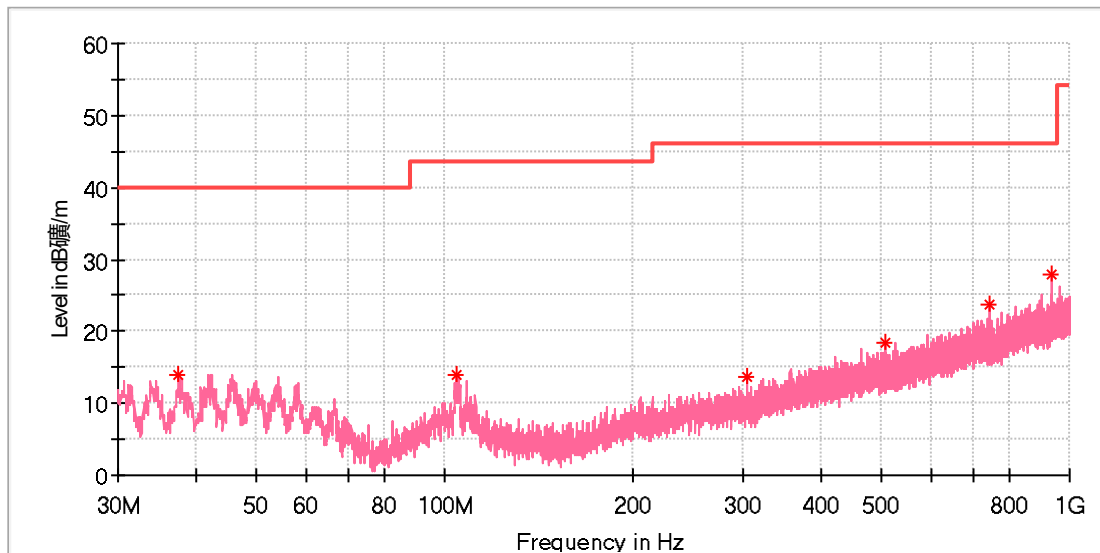

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
37.544444	13.83	40.00	26.17	100.0	V	199.0	-21.0
104.151111	13.93	43.50	29.57	100.0	V	128.0	-18.9
303.971111	13.80	46.00	32.20	100.0	V	6.0	-16.2
508.156111	18.50	46.00	27.50	100.0	V	0.0	-11.8
742.465000	23.83	46.00	22.17	100.0	V	184.0	-7.2
938.458889	27.82	46.00	18.18	100.0	V	350.0	-4.4

Final_Result


Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

1GHz - 18GHz

Note: The highest waveform in the figure is Bluetooth Fundamental.

EUT Information

EUT Name:	Scout Battery
Model:	PWR-MAK-A-BTL-G03-X
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	27232965/A004341874-002
Test Voltage:	Battery
Remark:	Temp 21.8°C Humi:49%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

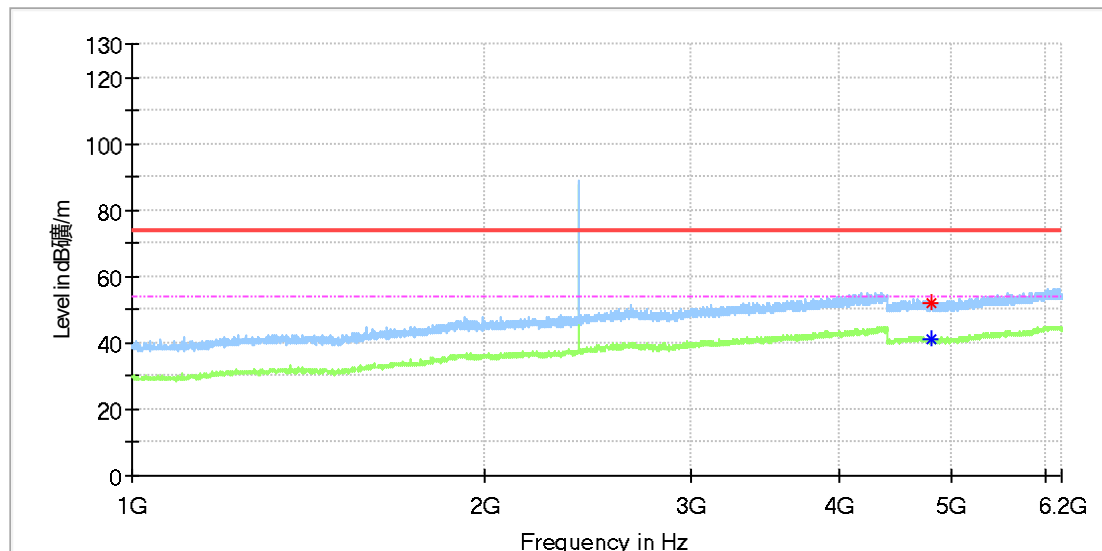

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	PoI	Azimuth (deg)	Corr. (dB/m)
4804.500000	52.17	---	74.00	21.83	150.0	H	295.0	13.3
4810.500000	---	41.40	54.00	12.60	150.0	H	6.0	13.3

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	Scout Battery
Model:	PWR-MAK-A-BTL-G03-X
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	27232965/A004341874-002
Test Voltage:	Battery
Remark:	Temp 21.8°C Humi:49%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

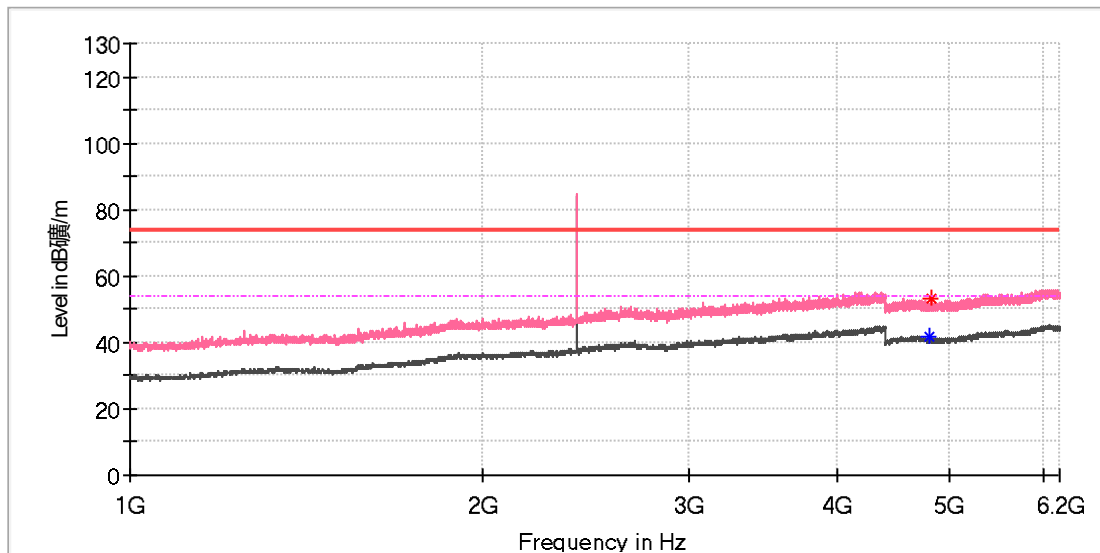

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4804.500000	---	41.68	54.00	12.32	150.0	V	2.0	13.3
4822.500000	52.95	---	74.00	21.05	150.0	V	145.0	13.3

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
-----	-----	-----	-----	-----	-----		-----	

EUT Information

EUT Name: Scout Battery
Model: PWR-MAK-A-BTL-G03-X
Test Mode: BLE 1M_Low channel
Order No/Sample No: 27232965/A004341874-002
Test Voltage: Battery
Remark: Temp 21.8°C Humi:49%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

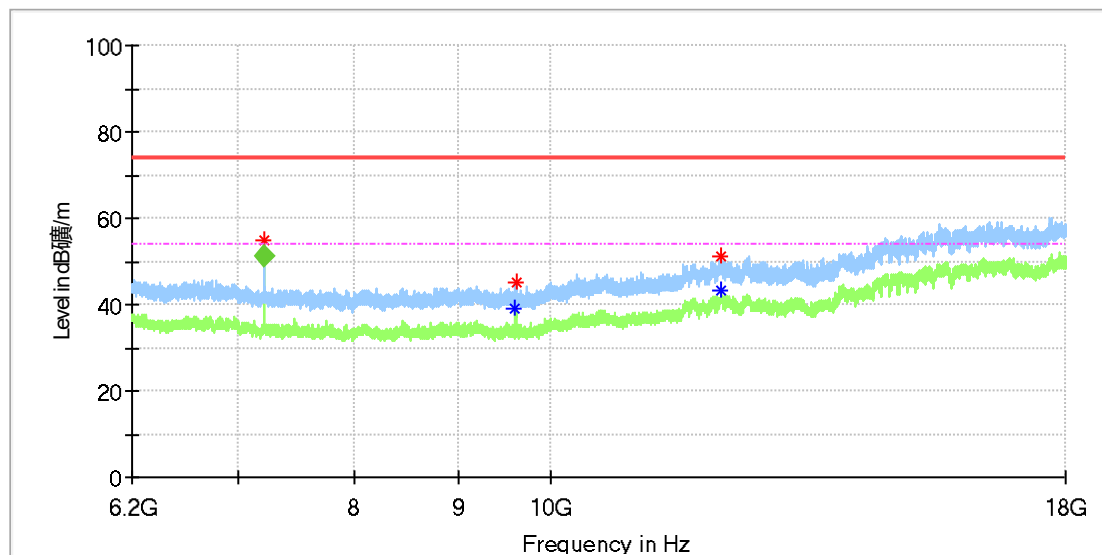

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7205.458333	55.11	---	74.00	18.89	150.0	H	295.0	8.8
9606.758333	---	39.08	54.00	14.92	150.0	H	6.0	10.4
9608.725000	45.28	---	74.00	28.72	150.0	H	0.0	10.4
12138.841667	---	43.21	54.00	10.79	150.0	H	306.0	16.4
12139.333333	51.21	---	74.00	22.79	150.0	H	220.0	16.5

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7206.075000	---	51.20	54.00	2.80	150.0	H	241.0	8.8

EUT Information

EUT Name:	Scout Battery
Model:	PWR-MAK-A-BTL-G03-X
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	27232965/A004341874-002
Test Voltage:	Battery
Remark:	Temp 21.8°C Humi:49%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

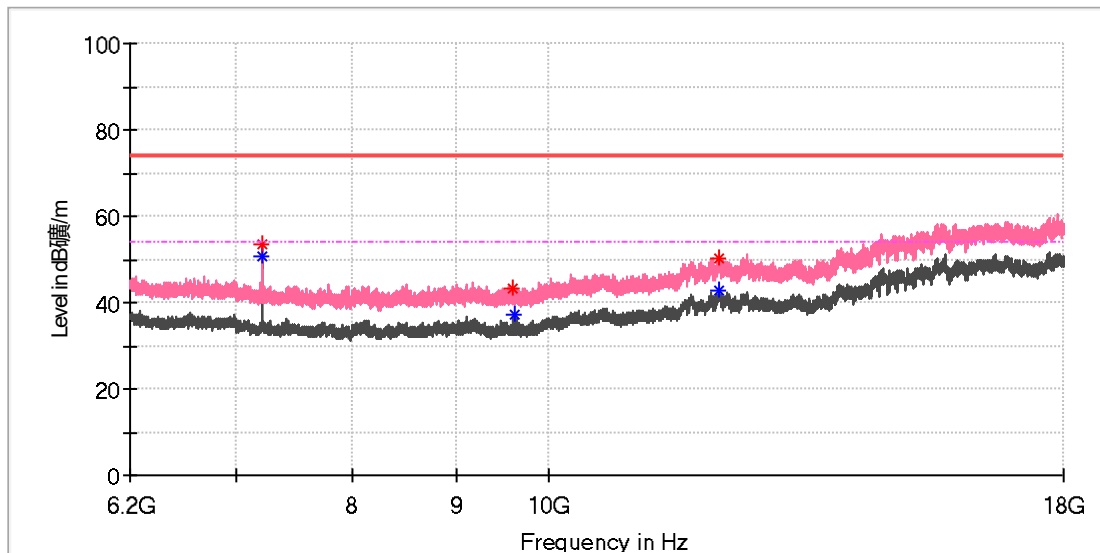

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	PoI	Azimuth (deg)	Corr. (dB/m)
7204.966667	53.49	---	74.00	20.51	150.0	V	270.0	8.8
7206.441667	---	50.54	54.00	3.46	150.0	V	294.0	8.8
9595.941667	43.45	---	74.00	30.55	150.0	V	82.0	10.3
9608.725000	---	37.25	54.00	16.75	150.0	V	225.0	10.4
12145.233333	50.38	---	74.00	23.62	150.0	V	16.0	16.6
12148.675000	---	42.61	54.00	11.39	150.0	V	225.0	16.7

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	Scout Battery
Model:	PWR-MAK-A-BTL-G03-X
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	27232965/A004341874-002
Test Voltage:	Battery
Remark:	Temp 21.8°C Humi:49%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

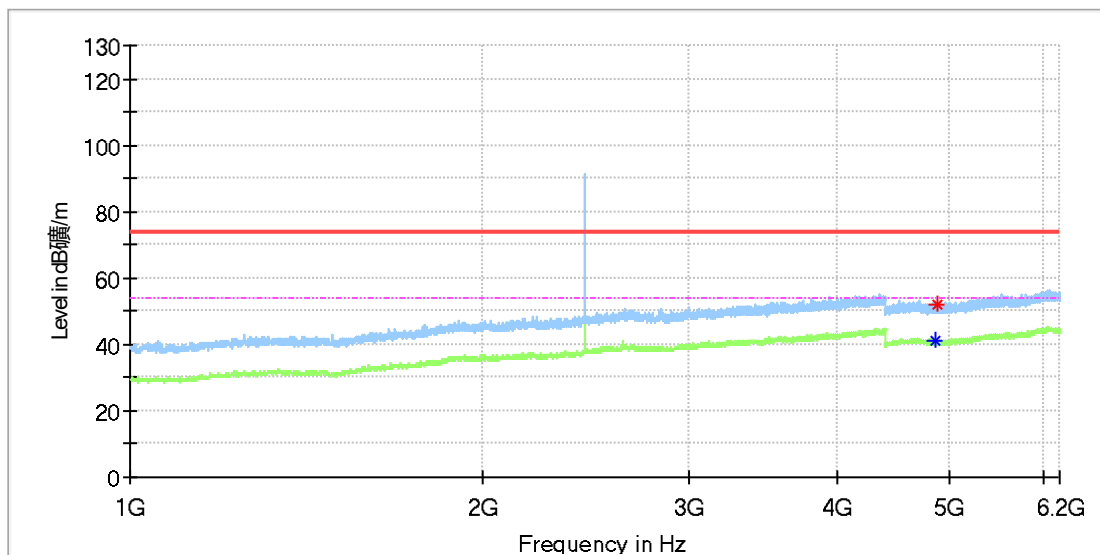

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4860.500000	---	41.39	54.00	12.61	150.0	H	116.0	13.3
4880.000000	52.29	---	74.00	21.71	150.0	H	180.0	13.3

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
-----	-----	-----	-----	-----	-----		-----	

EUT Information

EUT Name:	Scout Battery
Model:	PWR-MAK-A-BTL-G03-X
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	27232965/A004341874-002
Test Voltage:	Battery
Remark:	Temp 21.8°C Humi:49%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

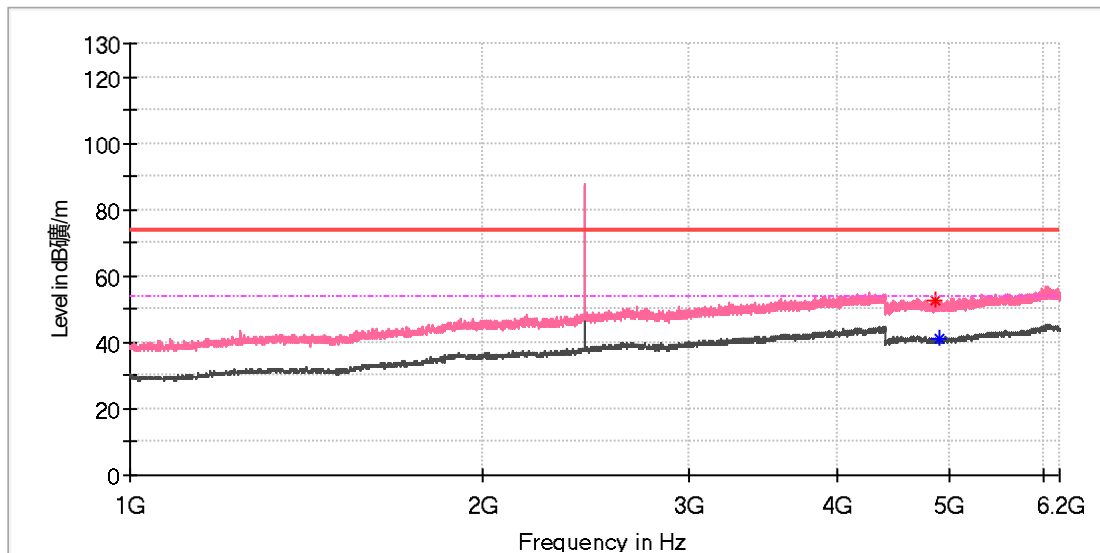

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4867.500000	52.51	---	74.00	21.49	150.0	V	355.0	13.3
4904.000000	---	41.10	54.00	12.90	150.0	V	105.0	13.3

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
----	----	----	----	----	----		----	----

EUT Information

EUT Name: Scout Battery
Model: PWR-MAK-A-BTL-G03-X
Test Mode: BLE 1M_Mid channel
Order No/Sample No: 27232965/A004341874-002
Test Voltage: Battery
Remark: Temp 21.8°C Humi:49%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

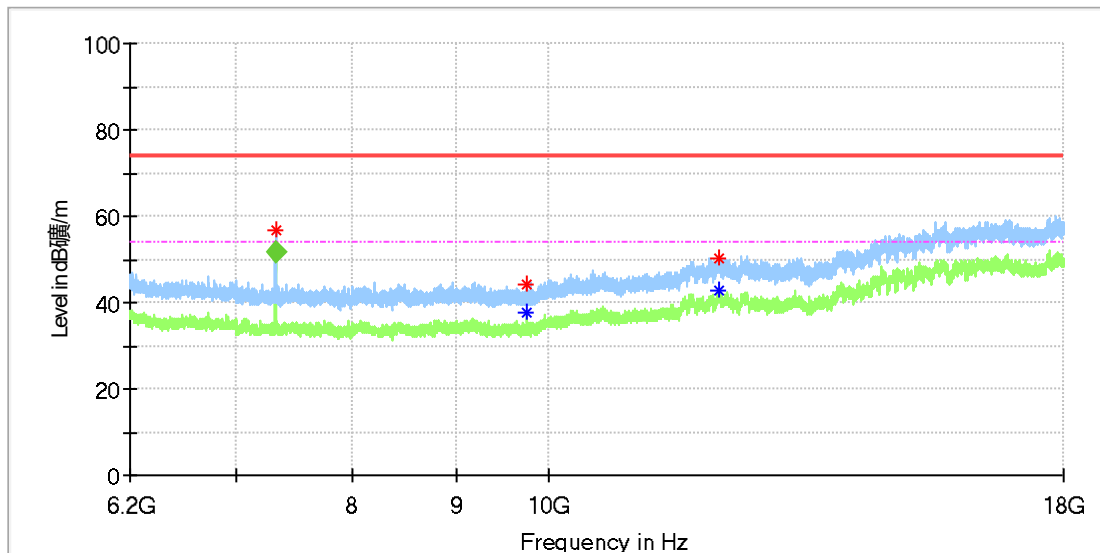

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7319.033333	56.93	---	74.00	17.07	150.0	H	117.0	8.2
9759.175000	44.09	---	74.00	29.91	150.0	H	159.0	10.4
9760.650000	---	37.53	54.00	16.47	150.0	H	106.0	10.4
12139.333333	---	42.89	54.00	11.11	150.0	H	75.0	16.5
12153.591667	50.26	---	74.00	23.74	150.0	H	216.0	16.5

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7320.879584	---	51.84	54.00	2.16	150.0	H	194.0	8.2

EUT Information

EUT Name: Scout Battery
Model: PWR-MAK-A-BTL-G03-X
Test Mode: BLE 1M_Mid channel
Order No/Sample No: 27232965/A004341874-002
Test Voltage: Battery
Remark: Temp 21.8°C Humi:49%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

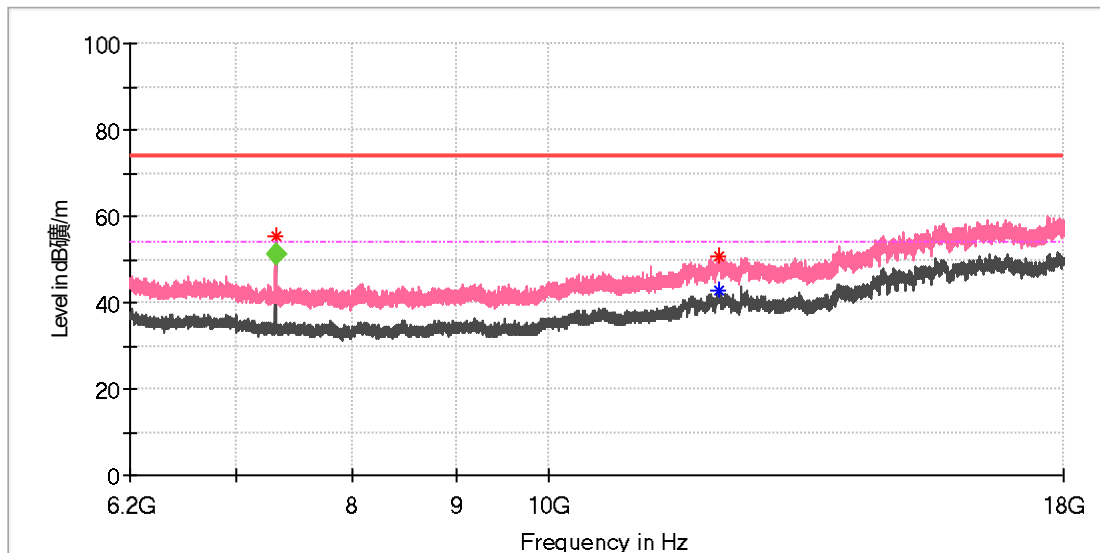

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7319.525000	55.24	---	74.00	18.76	150.0	V	91.0	8.2
12136.383333	---	42.87	54.00	11.13	150.0	V	102.0	16.4
12145.725000	50.84	---	74.00	23.16	150.0	V	355.0	16.6

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7320.245000	---	51.24	54.00	2.76	150.0	V	102.0	8.2

EUT Information

EUT Name:	Scout Battery
Model:	PWR-MAK-A-BTL-G03-X
Test Mode:	BLE 1M_High channel
Order No/Sample No:	27232965/A004341874-002
Test Voltage:	Battery
Remark:	Temp 21.8°C Humi:49%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

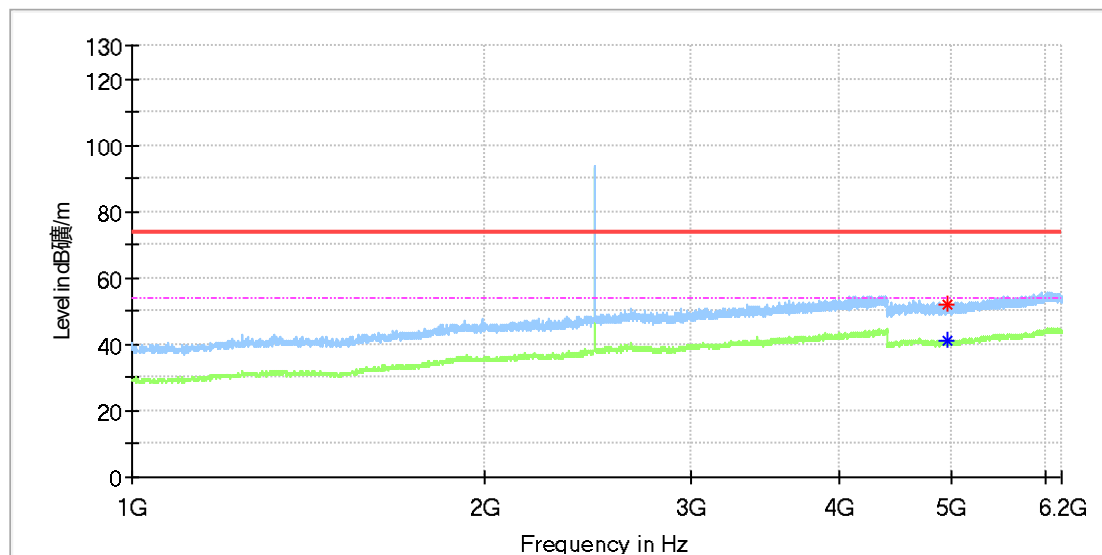

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4949.500000	51.79	---	74.00	22.21	150.0	H	210.0	13.3
4956.500000	---	41.00	54.00	13.00	150.0	H	356.0	13.3

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
----	----	----	----	----	----		----	----

EUT Information

EUT Name:	Scout Battery
Model:	PWR-MAK-A-BTL-G03-X
Test Mode:	BLE 1M_High channel
Order No/Sample No:	27232965/A004341874-002
Test Voltage:	Battery
Remark:	Temp 21.8°C Humi:49%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

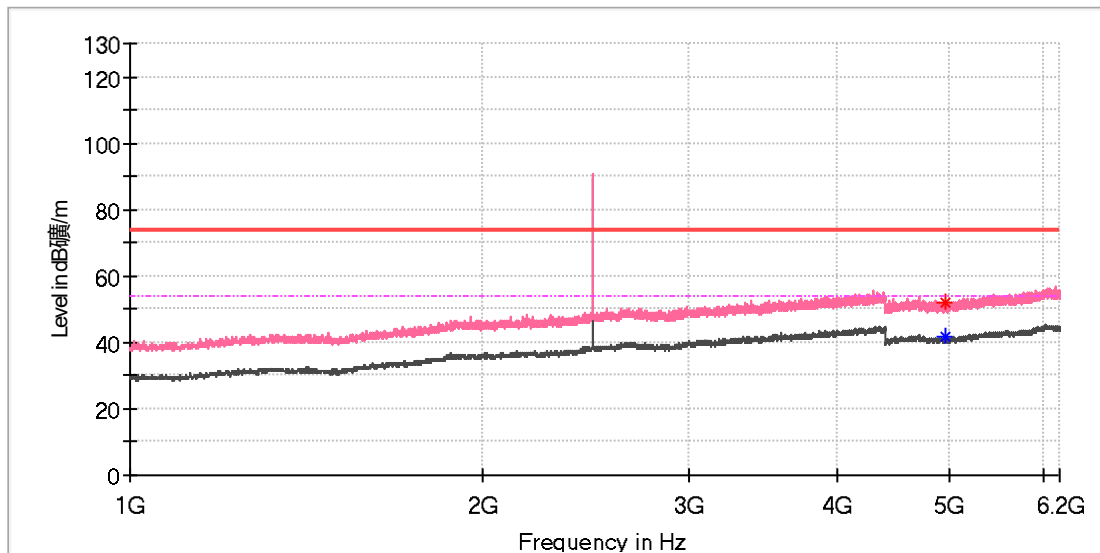

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4949.000000	51.82	---	74.00	22.18	150.0	V	301.0	13.3
4950.000000	---	41.56	54.00	12.44	150.0	V	180.0	13.3

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
----	----	----	----	----	----		----	----

EUT Information

EUT Name: Scout Battery
Model: PWR-MAK-A-BTL-G03-X
Test Mode: BLE 1M_High channel
Order No/Sample No: 27232965/A004341874-002
Test Voltage: Battery
Remark: Temp 21.8°C Humi:49%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

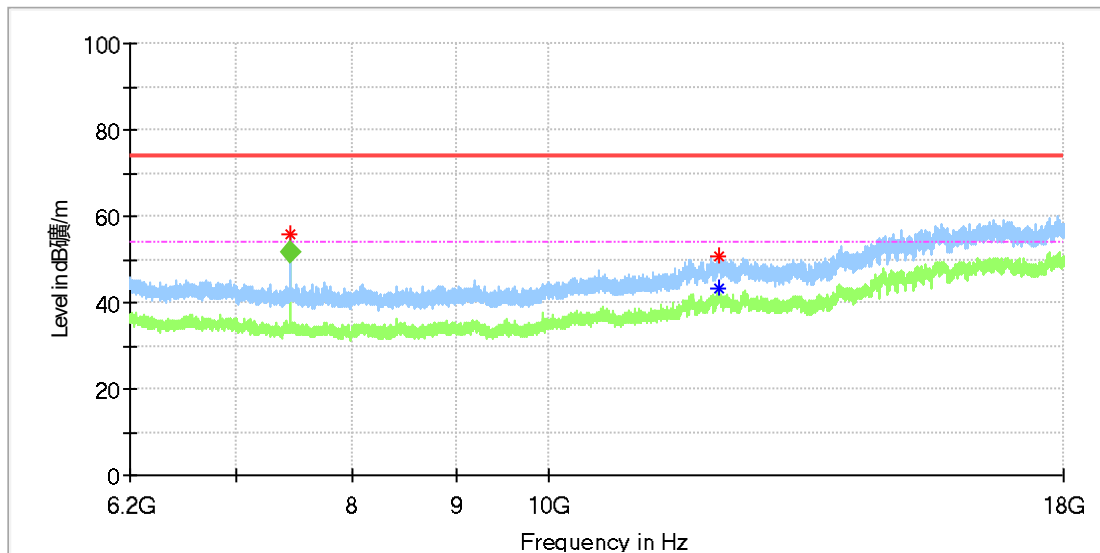

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7440.966667	55.84	---	74.00	18.16	150.0	H	206.0	8.4
12139.333333	---	43.03	54.00	10.97	150.0	H	324.0	16.5
12141.300000	50.92	---	74.00	23.08	150.0	H	0.0	16.5

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7439.965833	---	51.45	54.00	2.55	150.0	H	228.0	8.4

EUT Information

EUT Name: Scout Battery
Model: PWR-MAK-A-BTL-G03-X
Test Mode: BLE 1M_High channel
Order No/Sample No: 27232965/A004341874-002
Test Voltage: Battery
Remark: Temp 21.8°C Humi:49%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

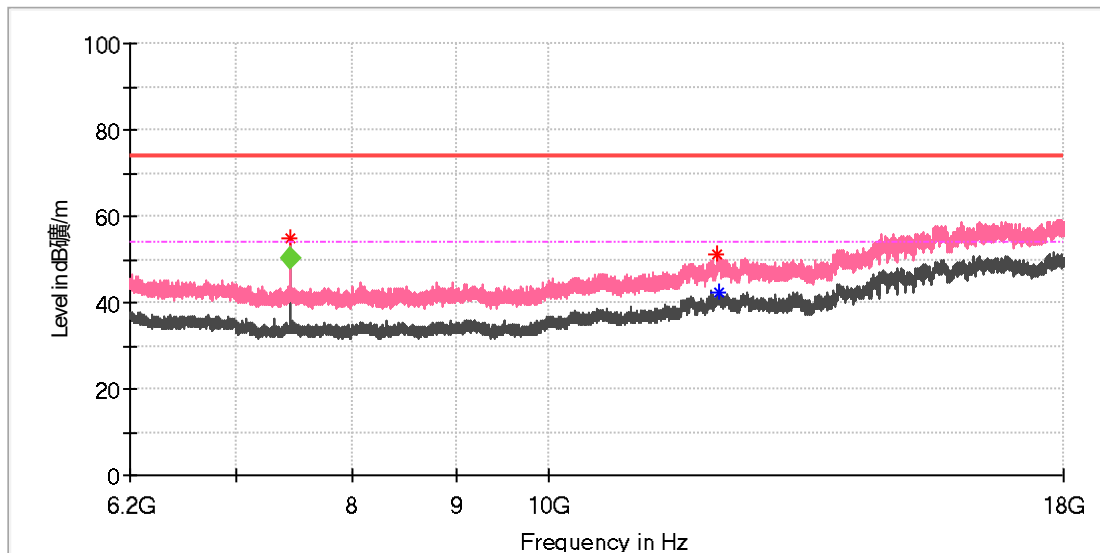

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7439.983333	54.71	---	74.00	19.29	150.0	V	88.0	8.4
12125.075000	51.35	---	74.00	22.65	150.0	V	100.0	16.1
12140.316667	---	42.50	54.00	11.50	150.0	V	270.0	16.5


Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7440.150000	---	50.44	54.00	3.56	150.0	V	88.0	8.4

Appendix A.7: Test Results of Radiated Emissions in Restricted Bands

EUT Information

EUT Name:	Scout Battery
Model:	PWR-MAK-A-BTL-G03-X
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	27232965/A004341874-002
Test Voltage:	Battery
Remark:	Temp 21.8°C Humi:49%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

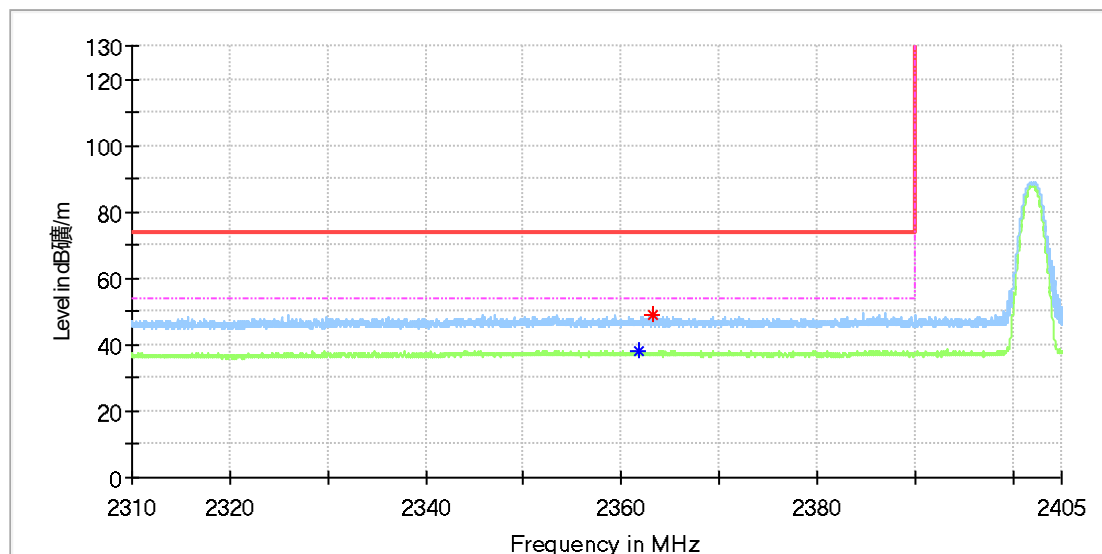

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2361.839118	---	38.12	54.00	15.88	150.0	H	258.0	8.5
2363.265882	49.15	---	74.00	24.85	150.0	H	21.0	8.5

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
90.00	-78.60	-78.60	-78.60	21.40	1.00	V	0.00	0.00

EUT Information

EUT Name:	Scout Battery
Model:	PWR-MAK-A-BTL-G03-X
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	27232965/A004341874-002
Test Voltage:	Battery
Remark:	Temp 21.8°C Humi:49%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

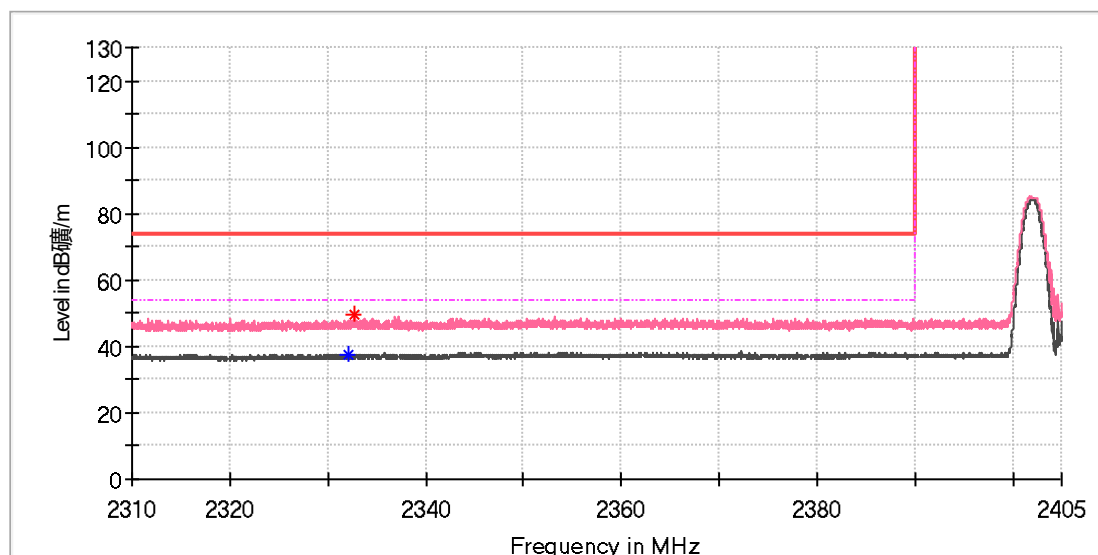

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2332.122059	---	37.66	54.00	16.34	150.0	V	289.0	8.3
2332.741765	49.67	---	74.00	24.33	150.0	V	137.0	8.3

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	Scout Battery
Model:	PWR-MAK-A-BTL-G03-X
Test Mode:	BLE 1M_High channel
Order No/Sample No:	27232965/A004341874-002
Test Voltage:	Battery
Remark:	Temp 21.8°C Humi:49%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

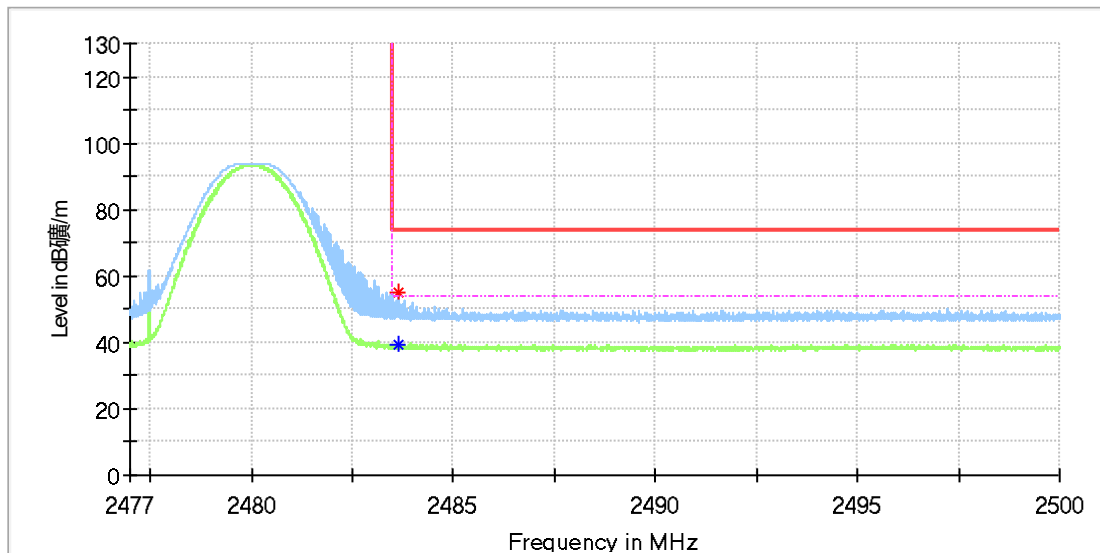

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.636471	---	39.52	54.00	14.48	150.0	H	211.0	9.0
2483.636471	54.81	---	74.00	19.19	150.0	H	211.0	9.0

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
-----	-----	-----	-----	-----	-----		-----	

EUT Information

EUT Name:	Scout Battery
Model:	PWR-MAK-A-BTL-G03-X
Test Mode:	BLE 1M_High channel
Order No/Sample No:	27232965/A004341874-002
Test Voltage:	Battery
Remark:	Temp 21.8°C Humi:49%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

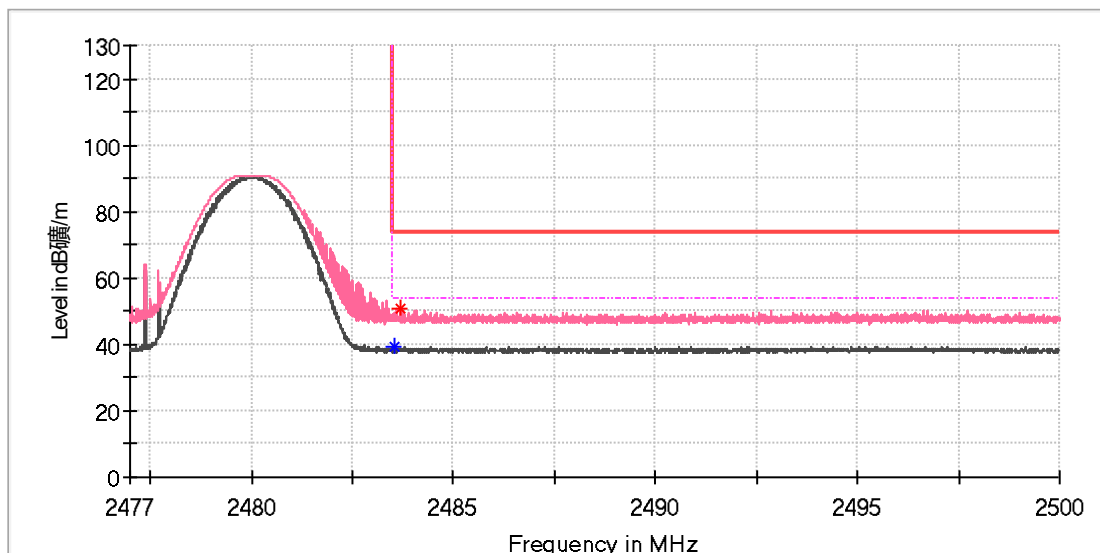

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.566177	---	39.03	54.00	14.97	150.0	V	0.0	9.0
2483.676471	50.56	---	74.00	23.44	150.0	V	197.0	9.0


Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
----	----	----	----	----	----		----	----

Appendix A.8: Test Results of Conducted Emission on AC Mains

EUT Information

EUT Name: Scout Battery
Model: PWR-MAK-A-BTL-G03-X
Sample: A004332920-001 & 002
Test Mode: Charging + Normal working
Test Voltage: AC 120V, 50Hz
Remark: Temp:24.3°C; Humi:51.1%
Test standard: FCC Part 15B
Tested By: Andrew Xiao
Reviewed by: Charlie Zha

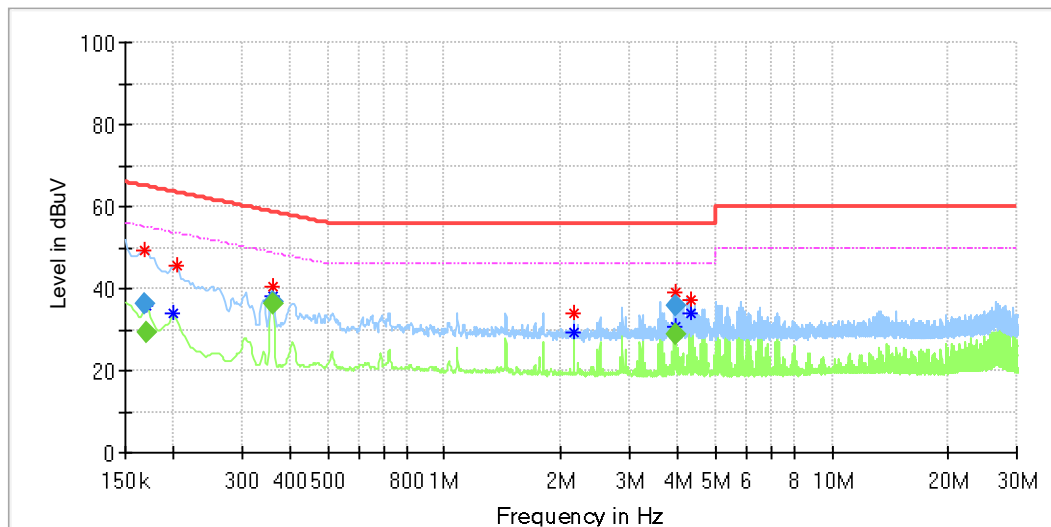

Critical Freqs


Frequency (MHz)	MaxPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.17	49.33	---	65.09	15.76	L1	9.61
0.17	---	35.85	54.97	19.12	L1	9.62
0.20	---	33.77	53.62	19.85	L1	9.74
0.20	45.38	---	63.42	18.03	L1	9.73
0.36	---	38.12	48.75	10.64	L1	9.55
0.36	40.40	---	58.75	18.36	L1	9.55
2.16	33.95	---	56.00	22.05	L1	9.58
2.16	---	29.45	46.00	16.55	L1	9.58
3.96	---	30.89	46.00	15.11	L1	9.67
3.96	39.07	---	56.00	16.93	L1	9.67
4.32	---	34.14	46.00	11.86	L1	9.70
4.32	37.44	---	56.00	18.56	L1	9.70

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.17	36.05	---	65.09	29.04	1000.00	9.00	L1	9.61
0.17	---	29.28	54.97	25.68	1000.00	9.00	L1	9.62
0.36	36.78	---	58.75	21.97	1000.00	9.00	L1	9.55
0.36	---	36.46	48.75	12.30	1000.00	9.00	L1	9.55
3.96	---	28.91	46.00	17.09	1000.00	9.00	L1	9.67
3.96	35.82	---	56.00	20.18	1000.00	9.00	L1	9.67

EUT Information

EUT Name: Scout Battery
Model: PWR-MAK-A-BTL-G03-X
Sample: A004332920-001 & 002
Test Mode: Charging + Normal working
Test Voltage: AC 120V, 60Hz
Remark: Temp:24.3°C; Humi:51.1%
Test standard: FCC Part 15B
Tested By: Andrew Xiao
Reviewed by: Charlie Zha

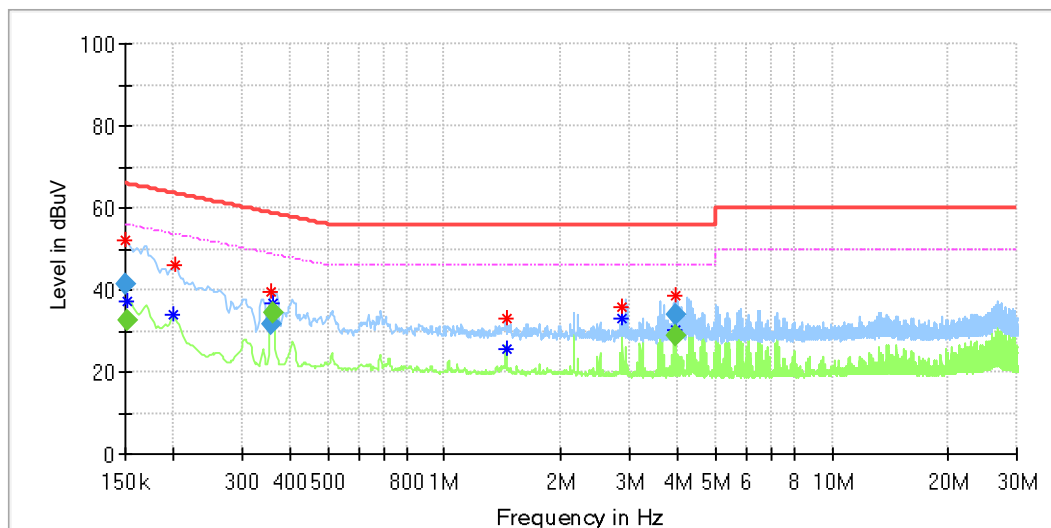

Critical Freqs

Frequency (MHz)	MaxPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.15	51.90	---	66.00	14.10	N	9.73
0.15	---	37.24	55.86	18.62	N	9.75
0.20	---	33.85	53.62	19.78	N	9.94
0.20	45.88	---	63.52	17.64	N	9.94
0.36	39.55	---	58.81	19.26	N	9.95
0.36	---	36.95	48.75	11.80	N	9.95
1.44	---	25.57	46.00	20.43	N	9.87
1.44	33.22	---	56.00	22.78	N	9.87
2.88	---	32.81	46.00	13.19	N	9.81
2.88	35.92	---	56.00	20.08	N	9.81
3.96	38.51	---	56.00	17.49	N	9.68
3.96	---	30.05	46.00	15.95	N	9.68


Final Result

Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.15	41.41	---	66.00	24.59	1000.00	9.00	N	9.73
0.15	---	32.49	55.86	23.37	1000.00	9.00	N	9.75
0.36	31.46	---	58.81	27.35	1000.00	9.00	N	9.95
0.36	---	34.52	48.75	14.23	1000.00	9.00	N	9.95
3.96	---	28.78	46.00	17.22	1000.00	9.00	N	9.68
3.96	34.16	---	56.00	21.84	1000.00	9.00	N	9.68


Appendix B: Photographs of the Test Set-Up

APPENDIX B: PHOTOGRAPHS OF THE TEST SET-UP	1
PHOTOGRAPH 1: SET-UP PHOTO FOR CONDUCTED EMISSION ON AC MAINS.....	2
PHOTOGRAPH 2: SET-UP PHOTO FOR RADIATED SPURIOUS EMISSION, BELOW 1GHz	2
PHOTOGRAPH 3: SET-UP PHOTO FOR RADIATED SPURIOUS EMISSION, ABOVE 1GHz	3

Photograph 1: Set-up photo for Conducted Emission on AC Mains

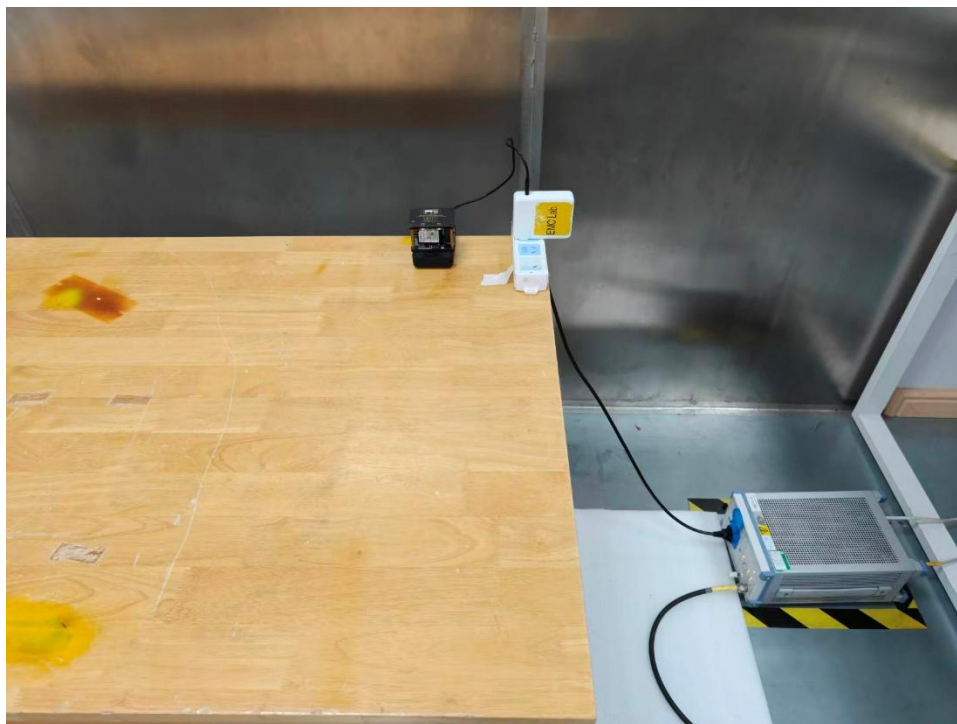

Photograph 2: Set-up photo for Radiated Spurious Emission, Below 1GHz

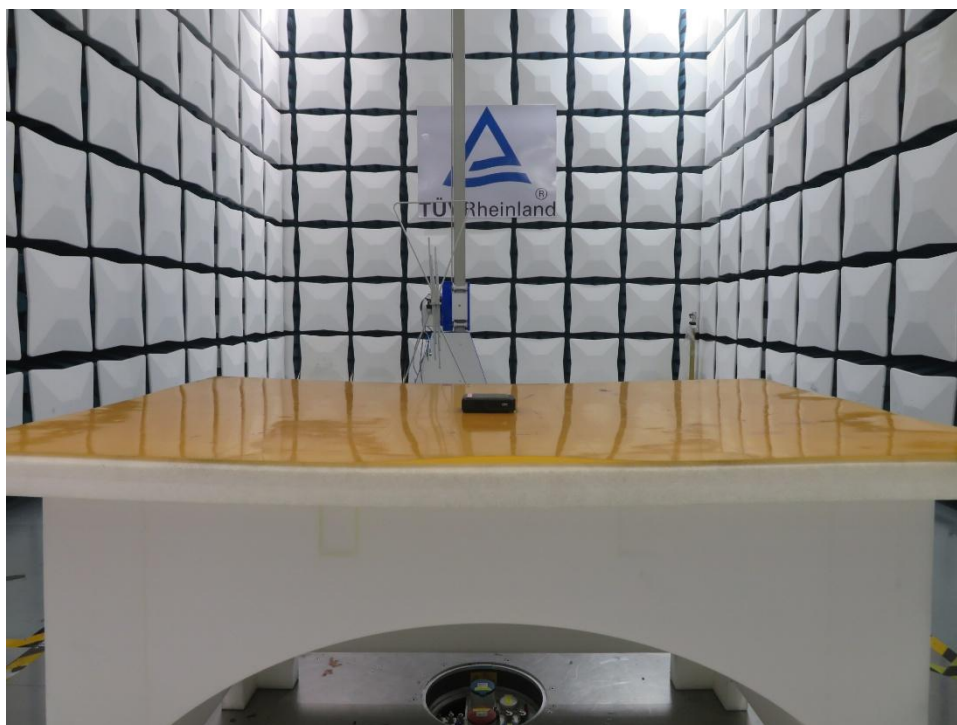

Photograph 3: Set-up photo for Radiated Spurious Emission, Above 1GHz

