





Appendix E. Test Result of Antenna Port Conducted Emission

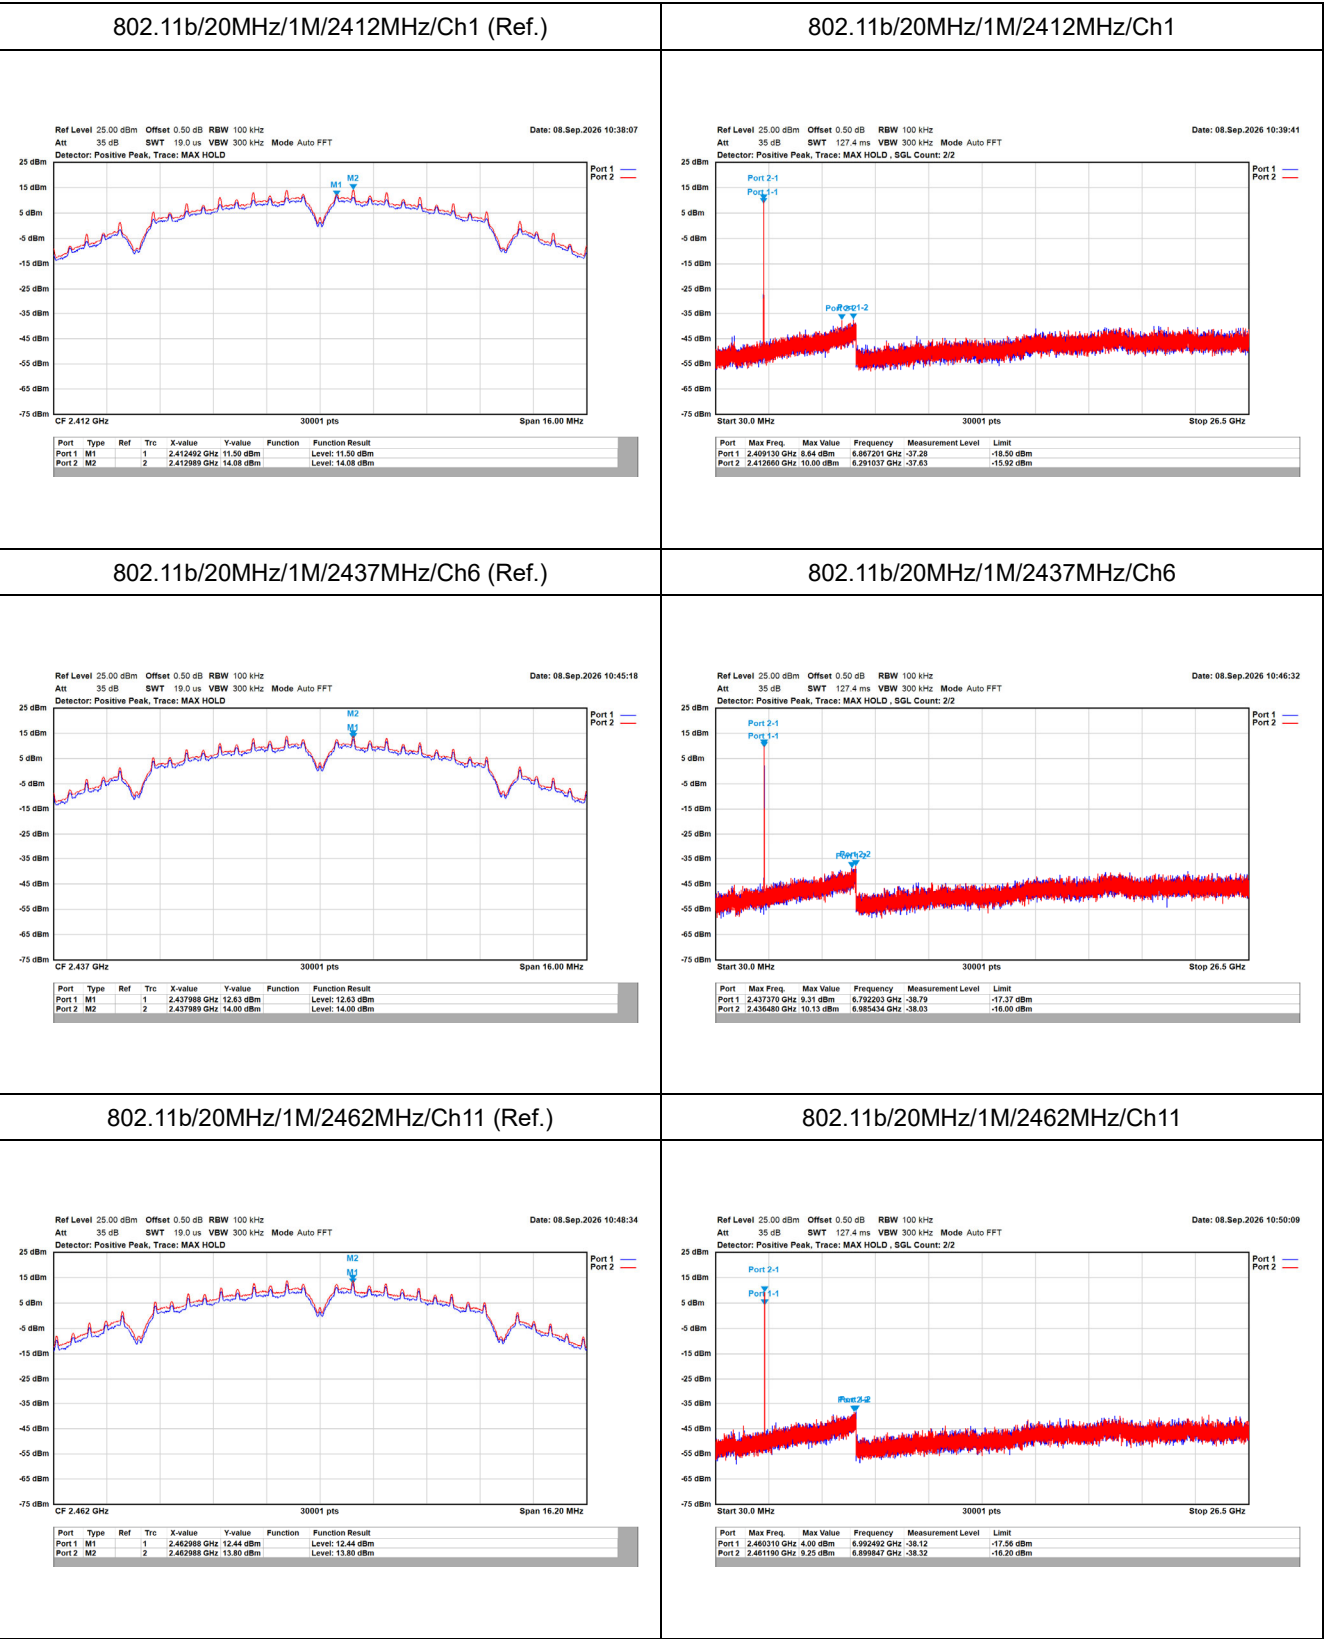

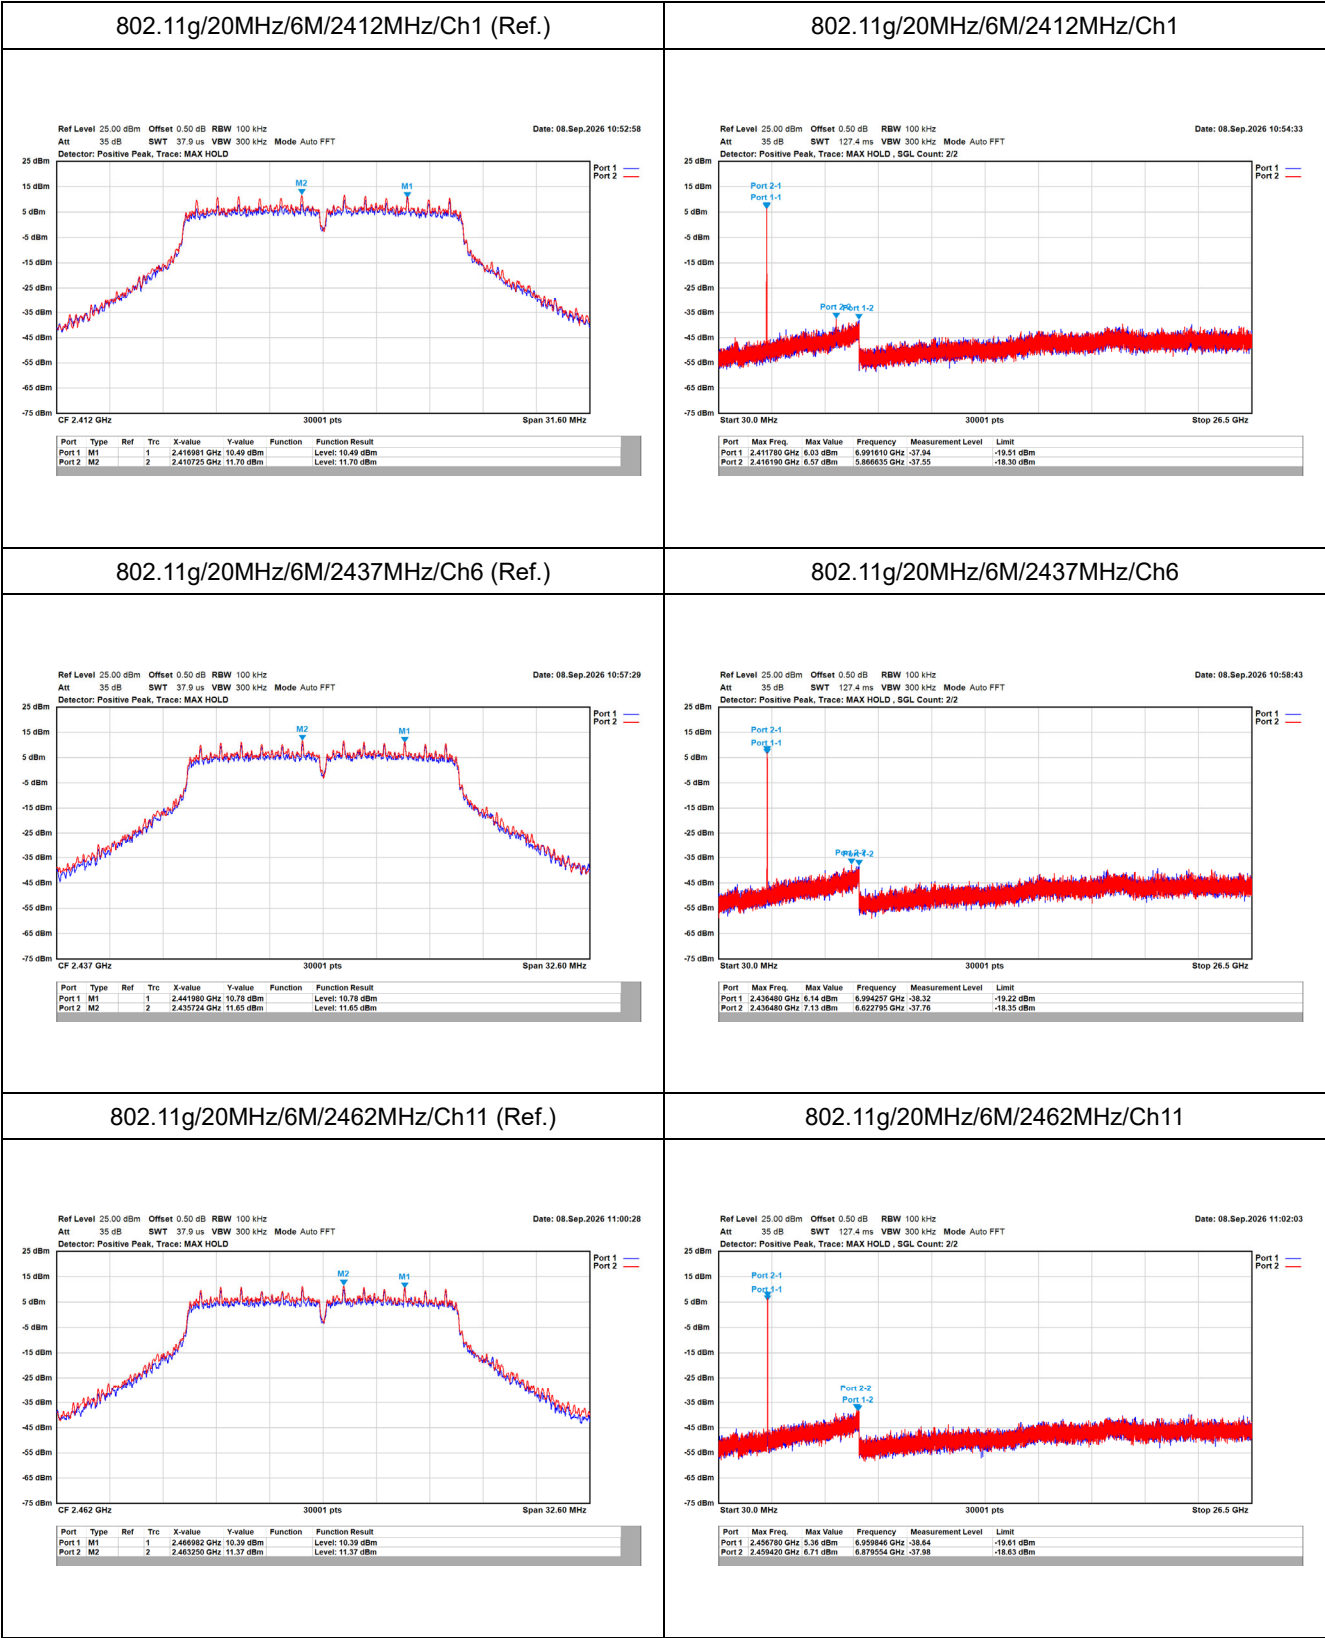


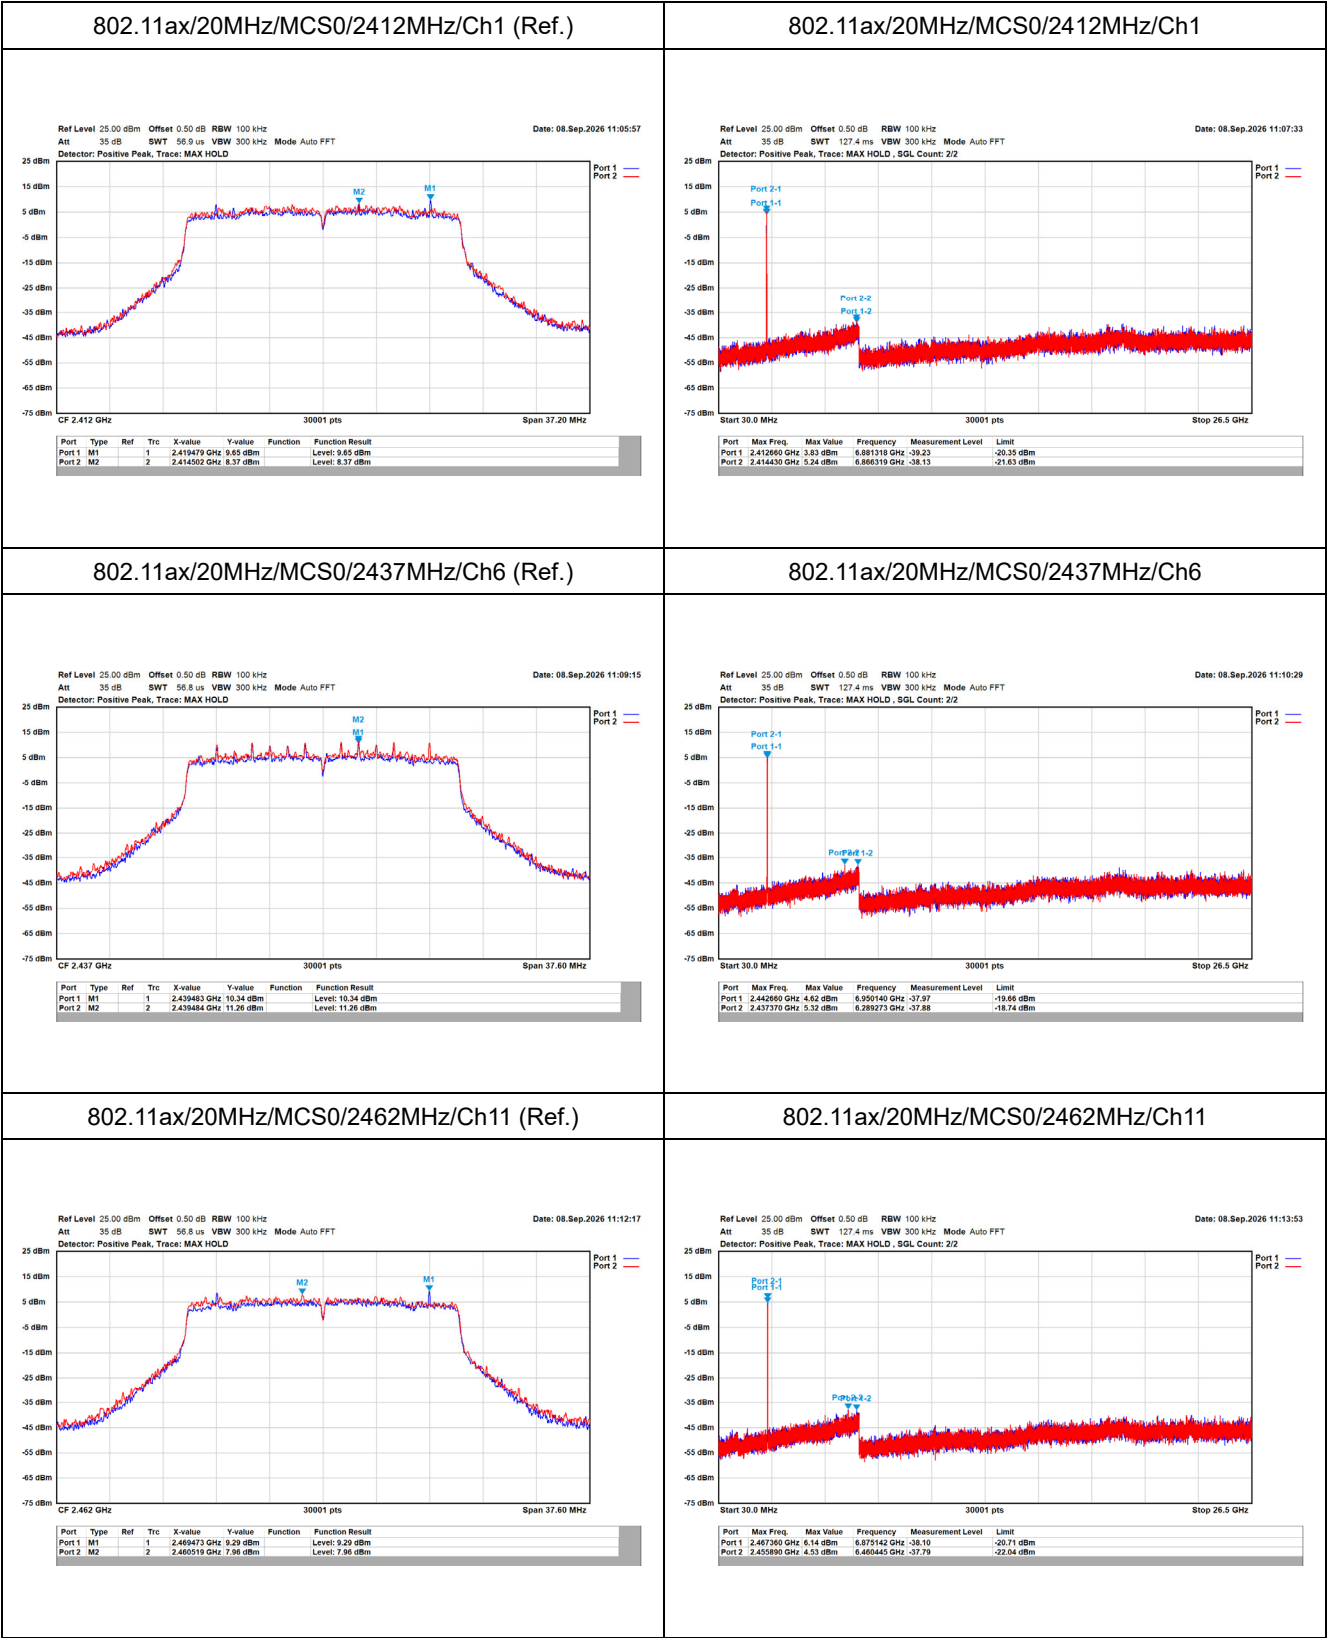


802.11ax/40MHz/MCS0/2422MHz/Ch3 (Ref.)

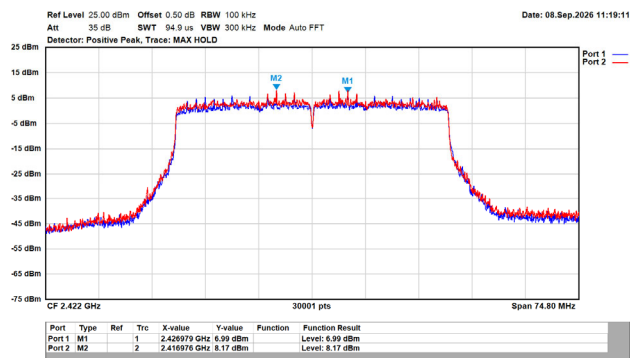


802.11ax/40MHz/MCS0/2422MHz/Ch3

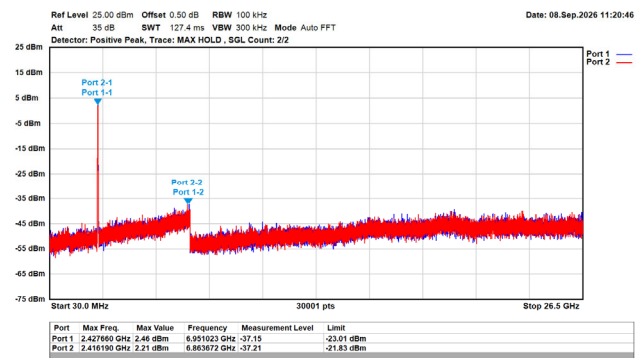


802.11ax/40MHz/MCS0/2437MHz/Ch6 (Ref.)

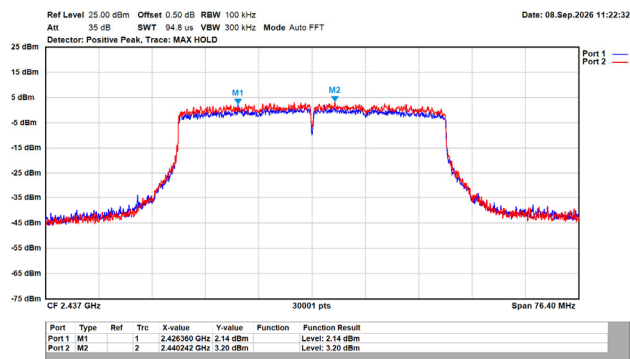


802.11ax/40MHz/MCS0/2437MHz/Ch6

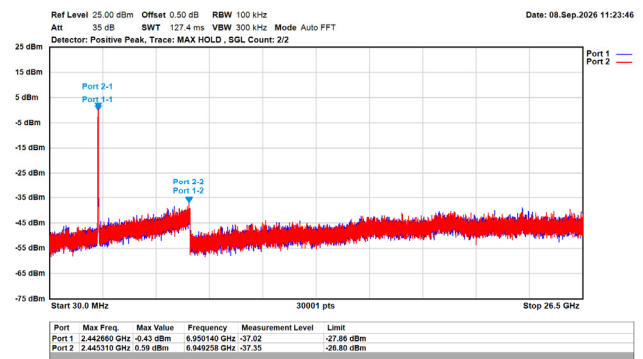


802.11ax/40MHz/MCS0/2452MHz/Ch9 (Ref.)

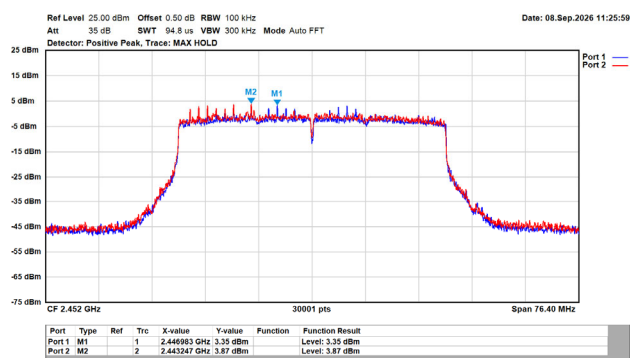


802.11ax/40MHz/MCS0/2452MHz/Ch9

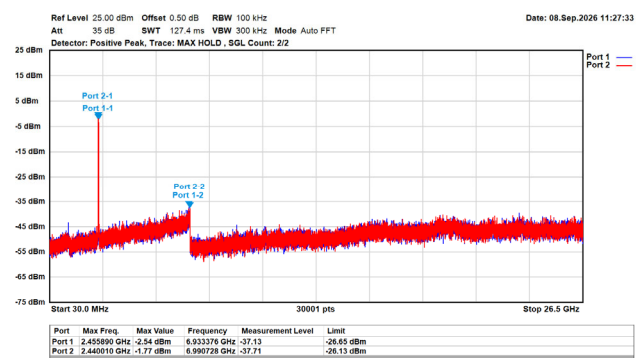


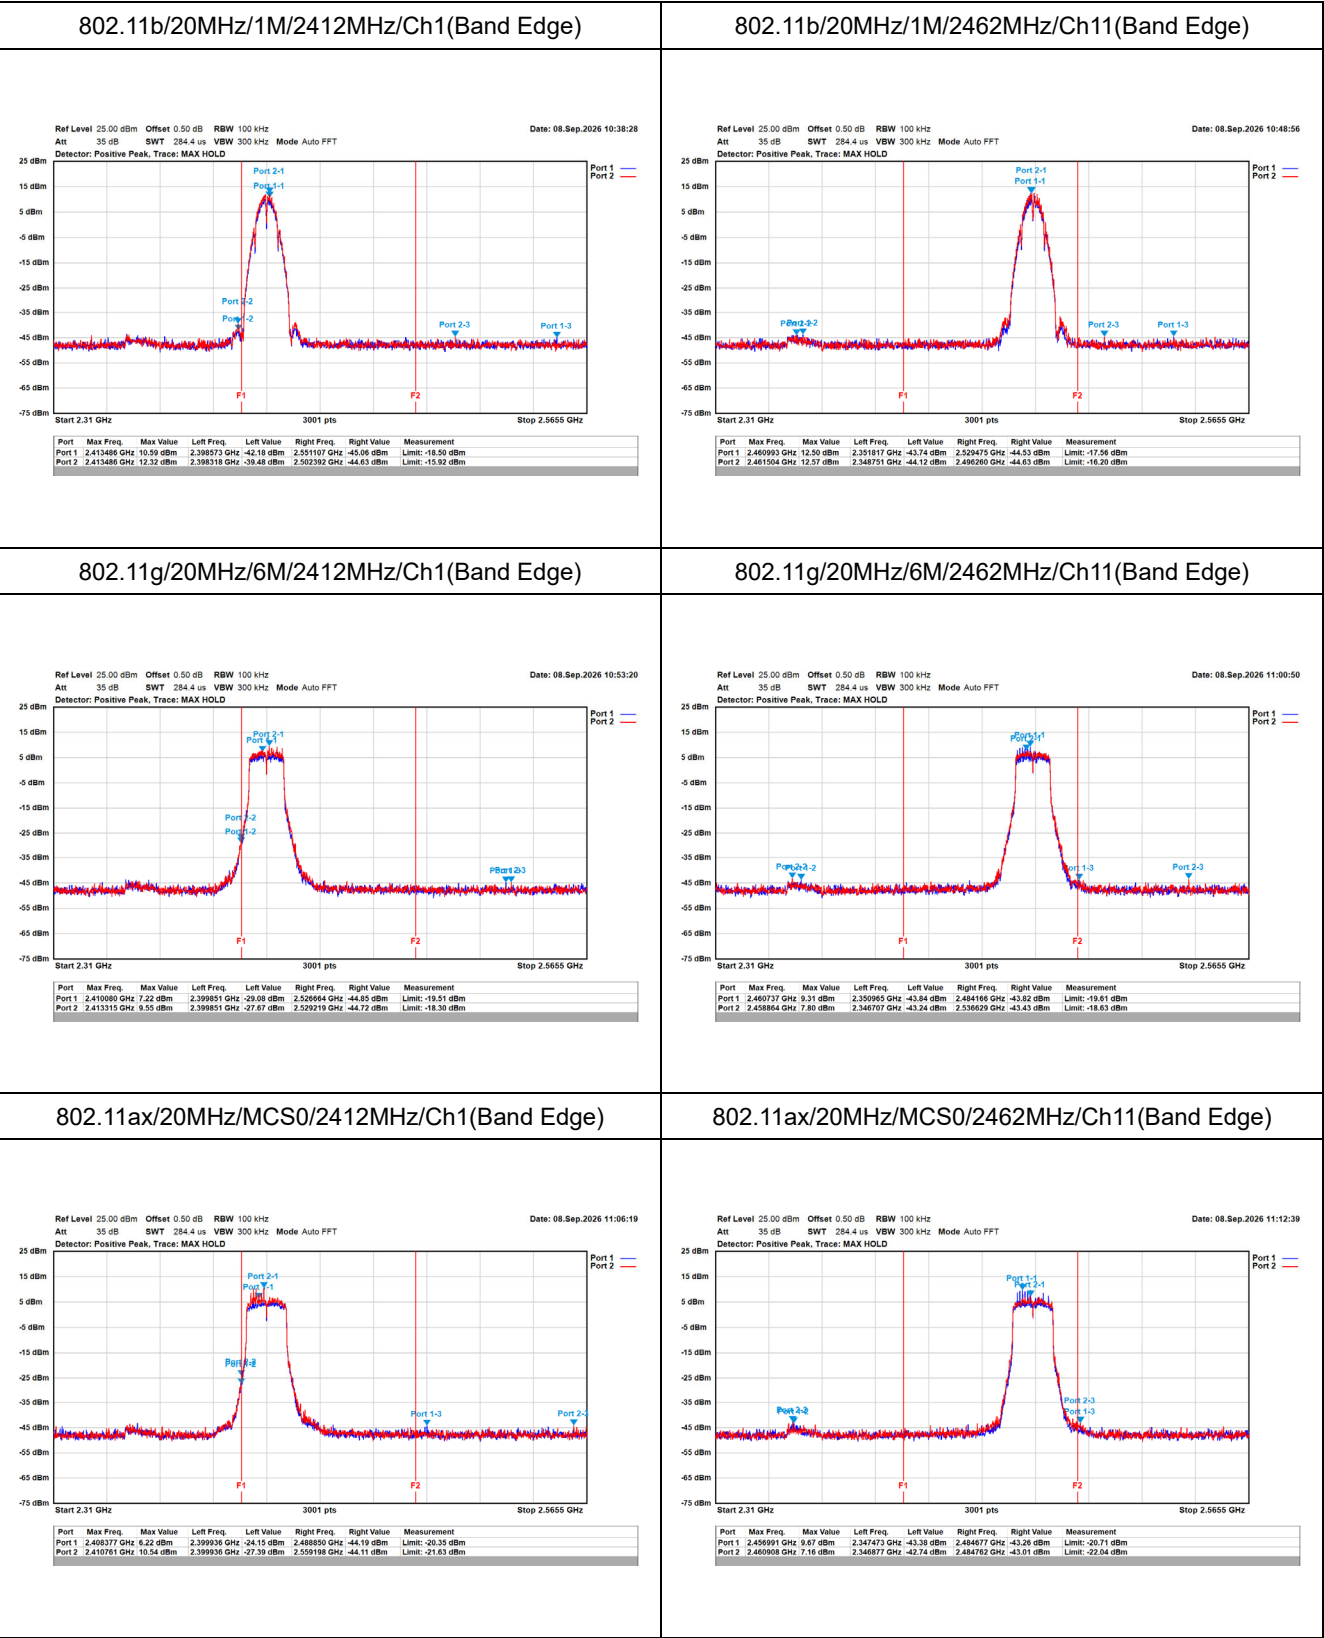

802.11ax/40MHz/MCS0/2422MHz/Ch3(Band Edge)

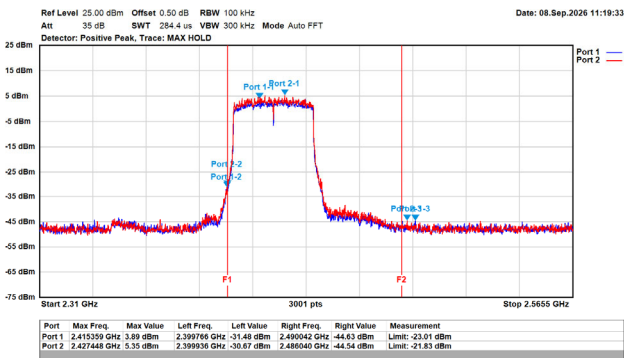

802.11ax/40MHz/MCS0/2452MHz/Ch9(Band Edge)

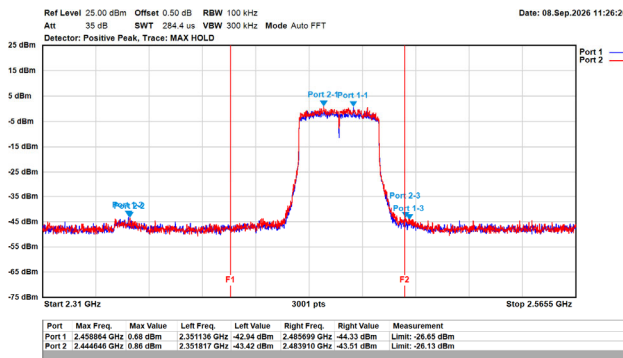


Appendix F. Test Result of Radiated Emission

MAX BR2 Pro DX

DC Power supply


TX_b_2412MHz_H

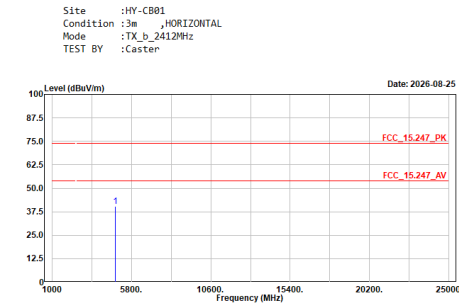

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4824.000	40.21	74.00	-33.79	55.05	-14.84	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_b_2412MHz_V

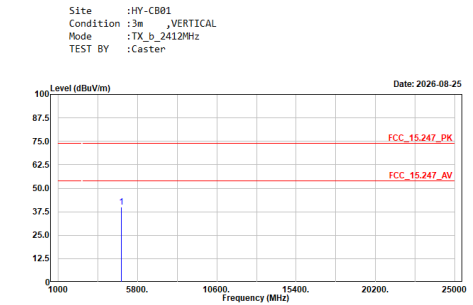

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4824.000	39.95	74.00	-34.05	54.79	-14.84	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_b_2437MHz_H

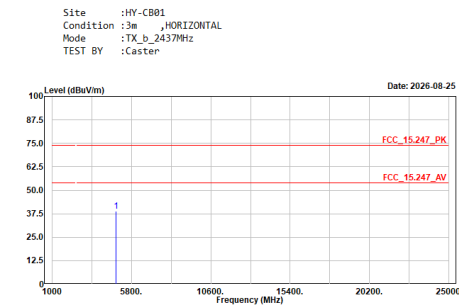

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4874.000	39.05	74.00	-34.95	53.86	-14.81	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_b_2437MHz_V

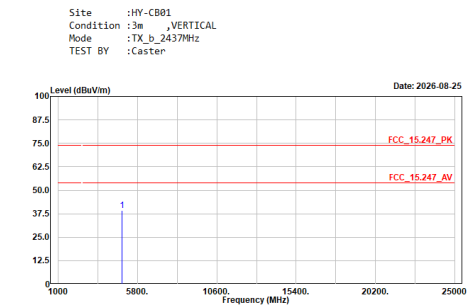

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4874.000	39.31	74.00	-34.69	54.12	-14.81	Peak


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2462MHz_H

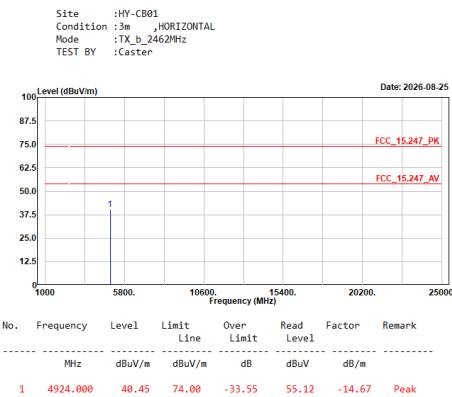


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2462MHz_V

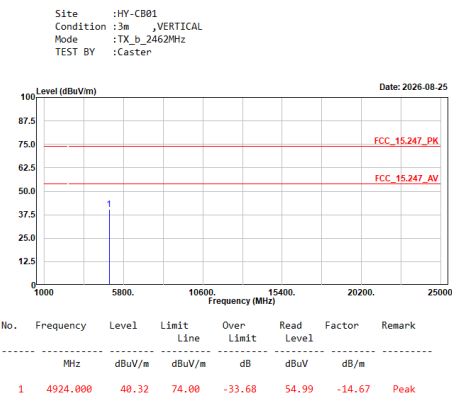


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2412MHz_H

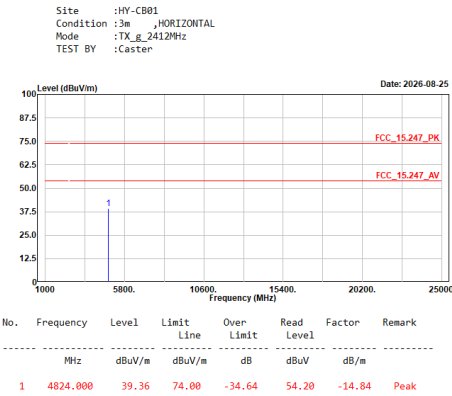

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_g_2412MHz_V

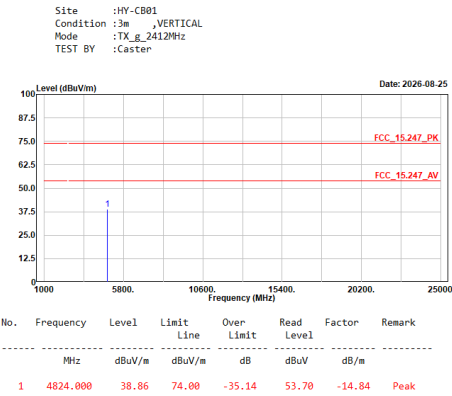

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_g_2437MHz_H Site :HY-CB01 Condition :3m ,HORIZONTAL Mode :TX_g_2437MHz TEST BY :Caster Level (dBuV/m) Date: 2026-08-25 <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>Limit</th><th>Level</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>4874.000</td><td>39.40</td><td>74.00</td><td>-34.60</td><td>54.21</td><td>-14.81</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	Limit	Level	dB/m		1	4874.000	39.40	74.00	-34.60	54.21	-14.81	Peak	TX_g_2437MHz_V Site :HY-CB01 Condition :3m ,VERTICAL Mode :TX_g_2437MHz TEST BY :Caster Level (dBuV/m) Date: 2026-08-25 <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>Limit</th><th>Level</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>4874.000</td><td>38.66</td><td>74.00</td><td>-35.34</td><td>53.47</td><td>-14.81</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	Limit	Level	dB/m		1	4874.000	38.66	74.00	-35.34	53.47	-14.81	Peak
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m																																											
1	4874.000	39.40	74.00	-34.60	54.21	-14.81	Peak																																										
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m																																											
1	4874.000	38.66	74.00	-35.34	53.47	-14.81	Peak																																										
TX_g_2462MHz_H Site :HY-CB01 Condition :3m ,HORIZONTAL Mode :TX_g_2462MHz TEST BY :Caster Level (dBuV/m) Date: 2026-08-25 <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>Limit</th><th>Level</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>4924.000</td><td>39.49</td><td>74.00</td><td>-34.51</td><td>54.16</td><td>-14.67</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	Limit	Level	dB/m		1	4924.000	39.49	74.00	-34.51	54.16	-14.67	Peak	TX_g_2462MHz_V Site :HY-CB01 Condition :3m ,VERTICAL Mode :TX_g_2462MHz TEST BY :Caster Level (dBuV/m) Date: 2026-08-25 <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>Limit</th><th>Level</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>4924.000</td><td>38.37</td><td>74.00</td><td>-35.63</td><td>53.04</td><td>-14.67</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	Limit	Level	dB/m		1	4924.000	38.37	74.00	-35.63	53.04	-14.67	Peak
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m																																											
1	4924.000	39.49	74.00	-34.51	54.16	-14.67	Peak																																										
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m																																											
1	4924.000	38.37	74.00	-35.63	53.04	-14.67	Peak																																										

TX_ax20_2412MHz_H

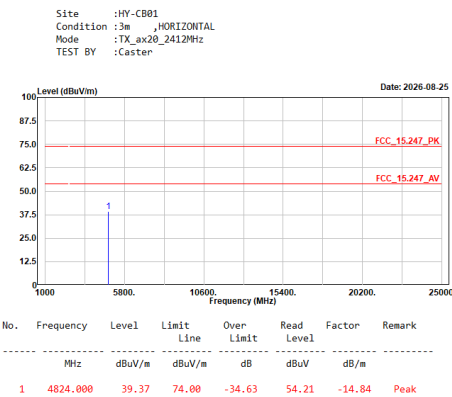


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2412MHz_V

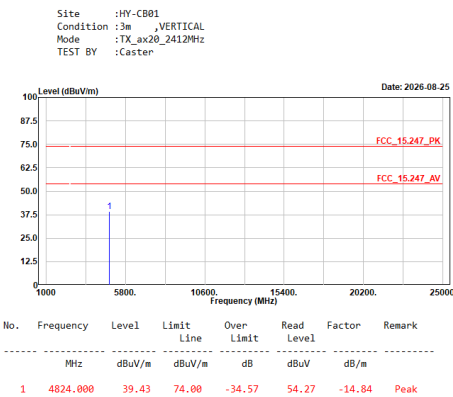


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2437MHz_H

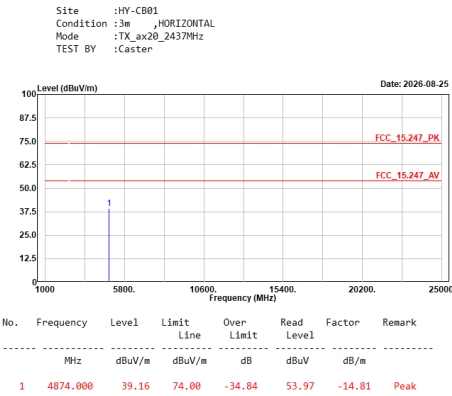

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_ax20_2437MHz_V

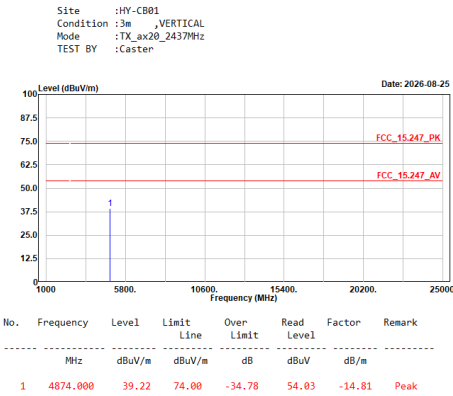

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2462MHz_H

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax20_2462MHz
TEST BY :Caster




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4924.000	38.75	74.00	-35.25	53.42	-14.67	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2462MHz_V

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax20_2462MHz
TEST BY :Caster




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4924.000	39.25	74.00	-34.75	53.92	-14.67	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2422MHz_H

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax40_2422MHz
TEST BY :Caster

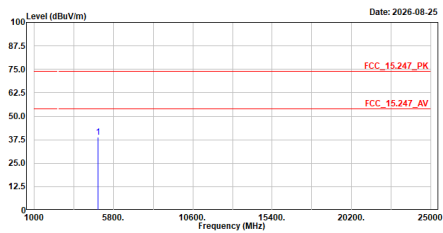


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4844.000	39.04	74.00	-34.96	53.93	-14.89	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2422MHz_V

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax40_2422MHz
TEST BY :Caster




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4844.000	37.74	74.00	-36.26	52.63	-14.89	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2437MHz_H

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax40_2437MHz
TEST BY :Caster




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4874.000	37.97	74.00	-36.03	52.78	-14.81	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2437MHz_V

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax40_2437MHz
TEST BY :Caster

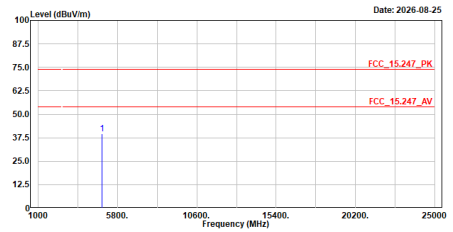


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4874.000	39.45	74.00	-34.55	54.26	-14.81	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2452MHz_H

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax40_2452MHz
TEST BY :Caster

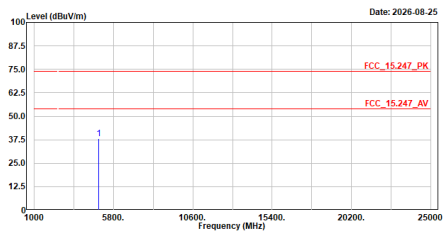


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4904.000	37.99	74.00	-36.01	52.71	-14.72	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2452MHz_V

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax40_2452MHz
TEST BY :Caster

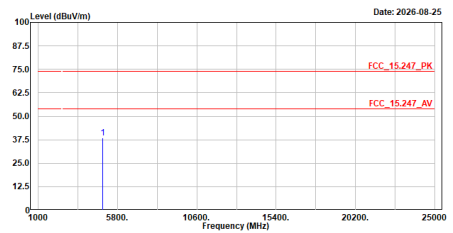


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4904.000	38.43	74.00	-35.57	53.15	-14.72	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2437MHz_H

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax40_2437MHz
TEST BY :Caster

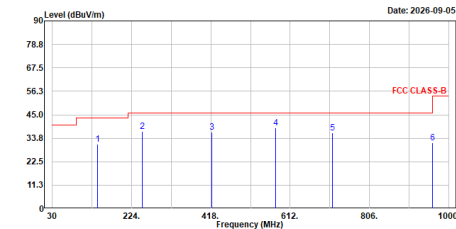


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	140.356	30.78	43.50	-12.72	55.25	-24.47	QP
2	250.011	37.00	46.00	-8.92	62.06	-24.98	QP
3	420.070	36.57	46.00	-9.43	56.87	-20.30	QP
4	576.028	38.78	46.00	-7.22	55.33	-16.55	QP
5	714.935	36.47	46.00	-9.53	50.51	-14.04	QP
6	960.048	31.56	54.00	-22.44	42.47	-10.91	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_ax40_2437MHz_V

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax40_2437MHz
TEST BY :Caster

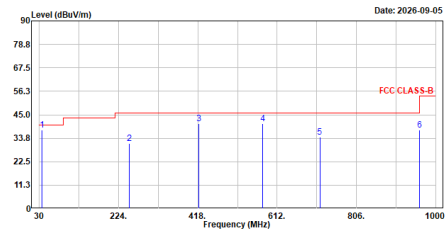


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	36.400	37.82	48.00	-2.18	62.55	-24.73	QP
2	250.011	31.13	46.00	-14.87	56.11	-24.98	QP
3	420.020	40.77	46.00	-5.23	61.07	-20.30	QP
4	576.028	40.61	46.00	-5.39	57.16	-16.55	QP
5	716.435	34.27	46.00	-11.73	48.28	-14.01	QP
6	959.998	37.58	46.00	-8.42	48.49	-10.91	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_b_2412MHz_H_Average

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_b_2412MHz
TEST BY :Caster

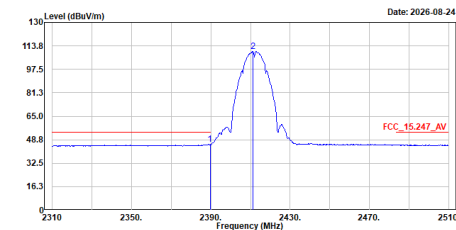


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2389.600	45.60	54.00	-8.40	15.61	29.99	Average
2	2411.200	110.08	-----	-----	80.16	29.92	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2412MHz_H_Peak

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_b_2412MHz
TEST BY :Caster

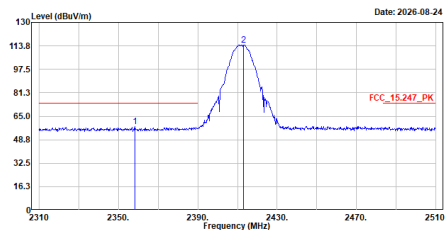


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2358.200	57.73	74.00	-16.27	27.84	29.89	Peak
2	2413.200	114.44	-----	-----	84.50	29.94	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2412MHz_V_Average

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_b_2412MHz
TEST BY :Caster

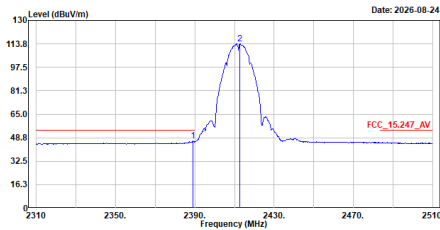


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2389.200	46.39	54.00	-7.61	16.40	29.99	Average
2	2412.800	114.01	-----	-----	84.07	29.94	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2412MHz_V_Peak

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_b_2412MHz
TEST BY :Caster




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2330.000	58.09	74.00	-15.91	28.23	29.86	Peak
2	2413.200	118.23	-----	-----	88.29	29.94	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2437MHz_H_Average

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_b_2437MHz
TEST BY :Caster

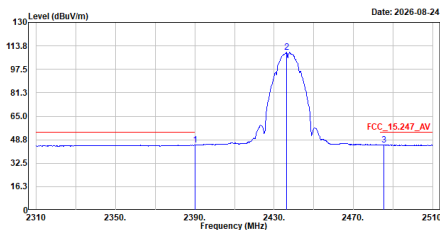


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2390.000	45.11	54.00	-8.89	15.12	29.99	Average
2	2436.200	109.34	-----	-----	79.41	29.93	Average
3	2485.200	45.25	54.00	-8.75	15.35	29.90	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2437MHz_H_Peak

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_b_2437MHz
TEST BY :Caster




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2333.400	57.68	74.00	-16.32	27.79	29.89	Peak
2	2435.800	113.57	-----	-----	83.64	29.93	Peak
3	2485.000	58.16	74.00	-15.84	28.26	29.90	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2437MHz_V_Average

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_b_2437MHz
TEST BY :Caster

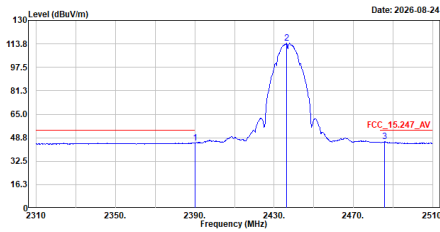


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2390.000	45.23	54.00	-8.77	15.24	29.99	Average
2	2436.200	114.34	-----	-----	84.41	29.93	Average
3	2485.800	45.94	54.00	-8.06	16.05	29.89	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2437MHz_V_Peak

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_b_2437MHz
TEST BY :Caster

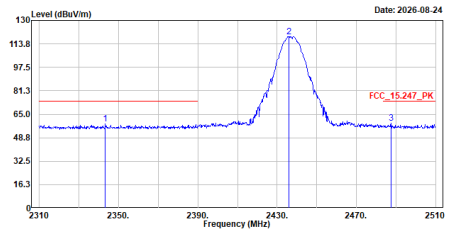


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2343.400	58.29	74.00	-15.71	28.33	29.96	Peak
2	2435.800	118.81	-----	-----	88.88	29.93	Peak
3	2487.400	58.68	74.00	-15.32	28.80	29.88	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2462MHz_H_Average

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_b_2462MHz
TEST BY :Caster

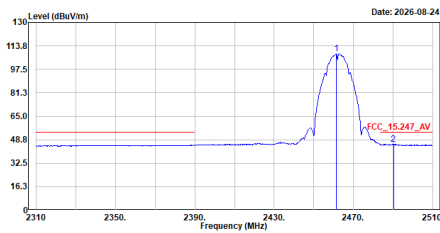


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2461.400	108.28	-----	-----	78.43	29.85	Average
2	2490.200	45.58	54.00	-8.42	15.72	29.86	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2462MHz_H_Peak

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_b_2462MHz
TEST BY :Caster

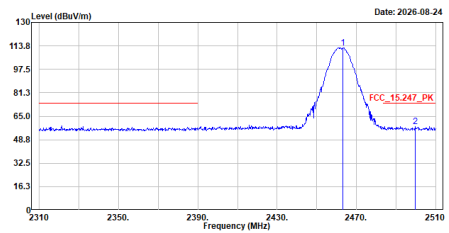


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2463.200	112.58	-----	-----	82.73	29.85	Peak
2	2499.600	58.08	74.00	-15.92	28.22	29.86	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2462MHz_V_Average

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_b_2462MHz
TEST BY :Caster

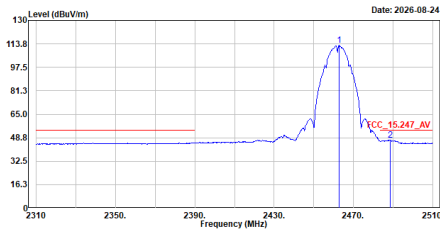


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2462.800	112.65	-----	-----	82.80	29.85	Average
2	2488.600	47.11	54.00	-6.89	17.24	29.87	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2462MHz_V_Peak

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_b_2462MHz
TEST BY :Caster

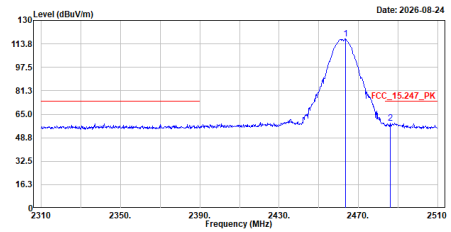


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2463.400	117.03	-----	-----	87.18	29.85	Peak
2	2486.200	58.98	74.00	-15.02	29.09	29.89	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2412MHz_H_Average

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_g_2412MHz
TEST BY :Caster

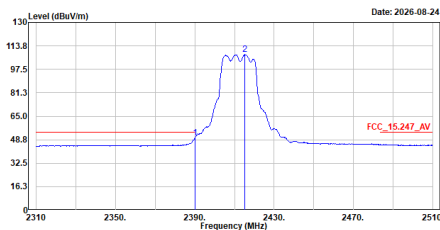


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2390.000	50.01	54.00	-3.99	20.02	29.99	Average
2	2415.200	107.72	-----	-----	77.75	29.97	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2412MHz_H_Peak

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_g_2412MHz
TEST BY :Caster

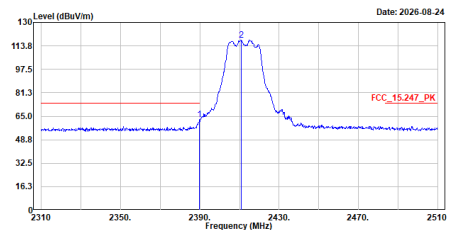


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2389.800	62.69	74.00	-11.31	32.70	29.99	Peak
2	2411.000	117.71	-----	-----	87.79	29.92	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2412MHz_V_Average

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_g_2412MHz
TEST BY :Caster

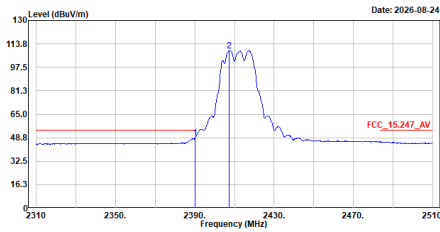


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2390.000	48.42	54.00	-5.58	18.43	29.99	Average
2	2407.400	109.14	-----	-----	79.20	29.94	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2412MHz_V_Peak

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_g_2412MHz
TEST BY :Caster

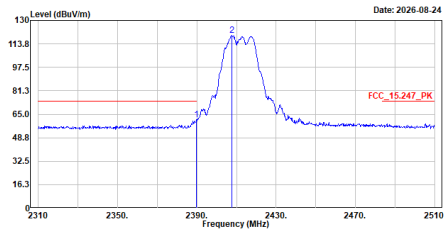


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2389.800	61.27	74.00	-12.73	31.28	29.99	Peak
2	2407.800	119.77	-----	-----	89.84	29.93	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2437MHz_H_Average

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_g_2437MHz
TEST BY :Caster

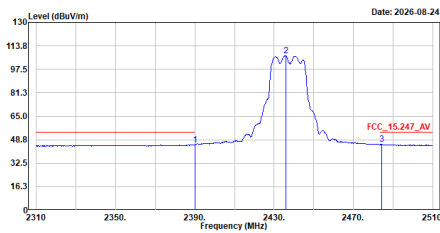


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2390.000	45.36	54.00	-8.64	15.37	29.99	Average
2	2435.000	106.88	-----	-----	76.95	29.93	Average
3	2484.400	45.58	54.00	-8.42	15.67	29.91	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2437MHz_H_Peak

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_g_2437MHz
TEST BY :Caster

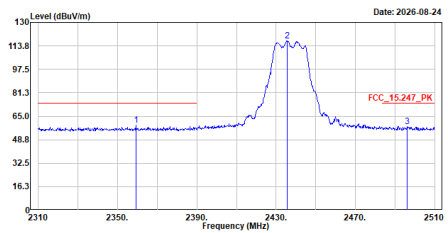


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2359.200	58.66	74.00	-15.34	28.78	29.88	Peak
2	2435.600	117.39	-----	-----	87.46	29.93	Peak
3	2496.200	58.06	74.00	-15.94	28.20	29.86	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2437MHz_V_Average

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_g_2437MHz
TEST BY :Caster

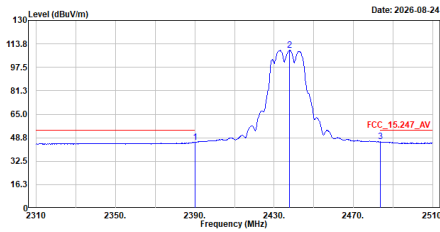


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2390.000	45.60	54.00	-8.40	15.61	29.99	Average
2	2437.000	109.29	-----	-----	79.36	29.93	Average
3	2483.600	46.00	54.00	-8.00	16.09	29.91	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2437MHz_V_Peak

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_g_2437MHz
TEST BY :Caster

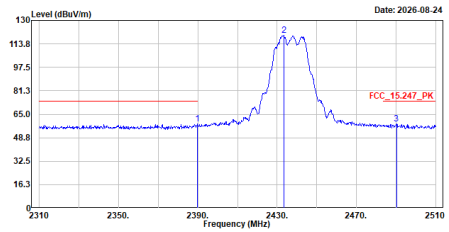


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2389.800	58.18	74.00	-15.82	28.19	29.99	Peak
2	2433.600	119.60	-----	-----	89.67	29.93	Peak
3	2490.200	58.32	74.00	-15.68	28.46	29.86	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2462MHz_H_Average

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_g_2462MHz
TEST BY :Caster

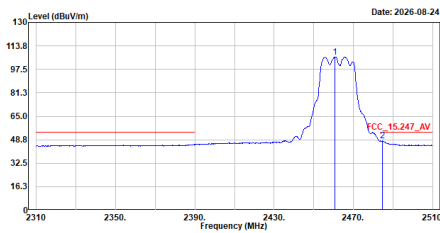


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2460.800	106.14	-----	-----	76.29	29.85	Average
2	2484.600	47.93	54.00	-6.07	18.03	29.90	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2462MHz_H_Peak

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_g_2462MHz
TEST BY :Caster

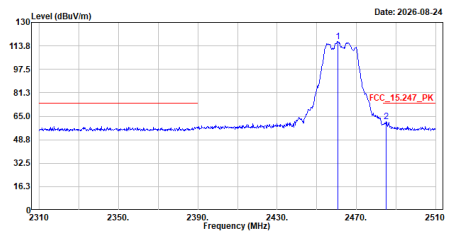


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2460.600	116.82	-----	-----	86.97	29.85	Peak
2	2485.000	61.43	74.00	-12.57	31.53	29.90	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2462MHz_V_Average

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_g_2462MHz
TEST BY :Caster

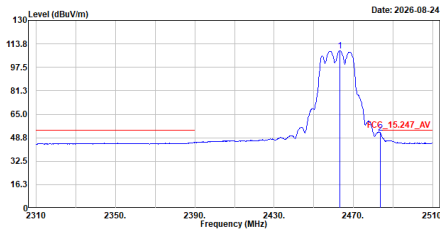


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2462.000	109.07	-----	-----	79.22	29.85	Average
2	2483.600	52.06	54.00	-1.94	22.15	29.91	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2462MHz_V_Peak

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_g_2462MHz
TEST BY :Caster




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2462.000	119.14	-----	-----	89.29	29.85	Peak
2	2484.000	64.97	74.00	-9.03	35.06	29.91	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2412MHz_H_Average

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ax20_2412MHz
TEST BY :Caster

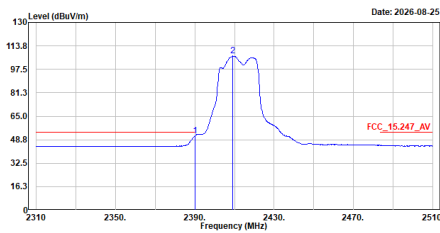


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2390.000	51.66	54.00	-2.34	21.67	29.99	Average
2	2409.000	106.73	-----	-----	76.81	29.92	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2412MHz_H_Peak

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ax20_2412MHz
TEST BY :Caster

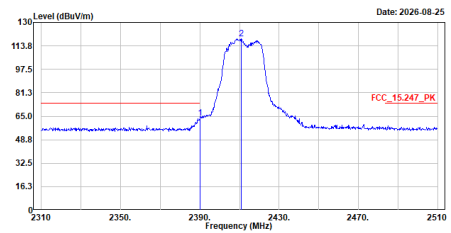


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2390.000	63.81	74.00	-10.19	33.82	29.99	Peak
2	2411.000	118.67	-----	-----	88.75	29.92	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2412MHz_V_Average

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ax20_2412MHz
TEST BY :Caster

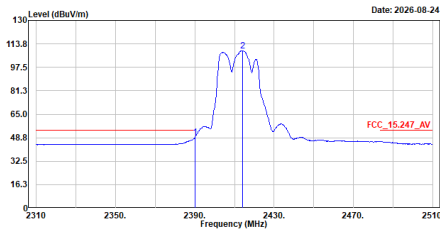


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2390.000	49.03	54.00	-4.97	19.04	29.99	Average
2	2414.200	109.05	-----	-----	79.10	29.95	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2412MHz_V_Peak

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ax20_2412MHz
TEST BY :Caster

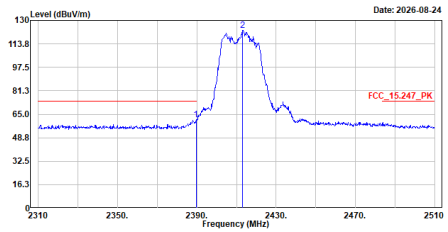


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2389.600	61.55	74.00	-12.45	31.56	29.99	Peak
2	2413.200	123.09	-----	-----	93.15	29.94	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2437MHz_H_Average

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ax20_2437MHz
TEST BY :Caster

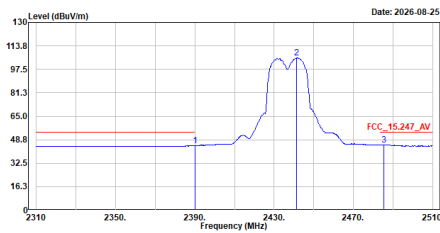


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2390.000	44.76	54.00	-9.24	14.77	29.99	Average
2	2441.200	105.38	-----	-----	75.45	29.93	Average
3	2485.400	45.30	54.00	-8.70	15.40	29.90	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2437MHz_H_Peak

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ax20_2437MHz
TEST BY :Caster

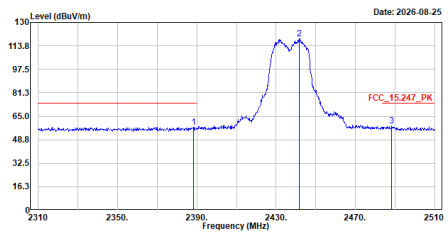


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2388.200	57.45	74.00	-16.55	27.46	29.99	Peak
2	2441.800	118.73	-----	-----	88.81	29.92	Peak
3	2488.400	58.24	74.00	-15.76	28.36	29.88	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2437MHz_V_Average

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax20_2437MHz
TEST BY :Caster

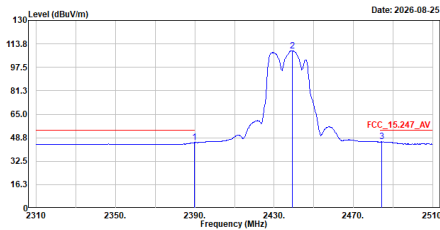


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2389.800	45.39	54.00	-8.61	15.40	29.99	Average
2	2439.200	109.12	-----	79.18	29.94	29.94	Average
3	2484.200	45.91	54.00	-8.09	16.00	29.91	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2437MHz_V_Peak

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax20_2437MHz
TEST BY :Caster

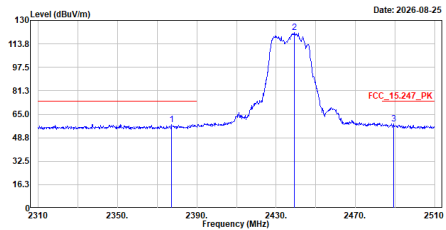


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2377.400	57.92	74.00	-16.08	27.97	29.95	Peak
2	2439.200	121.84	-----	91.90	29.94	29.94	Peak
3	2489.200	58.48	74.00	-15.52	28.61	29.87	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2462MHz_H_Average

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax20_2462MHz
TEST BY :Caster

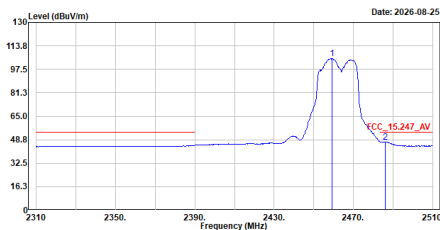


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2459.400	104.90	-----	75.05	29.85	29.85	Average
2	2486.000	47.31	54.00	-6.69	17.42	29.89	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2462MHz_H_Peak

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax20_2462MHz
TEST BY :Caster

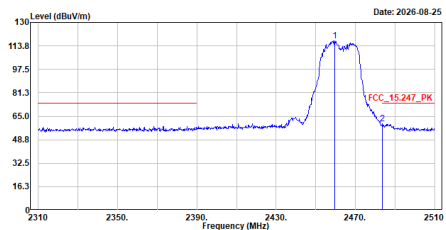


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2459.600	117.45	-----	87.60	29.85	29.85	Peak
2	2483.600	59.66	74.00	-14.34	29.75	29.91	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2462MHz_V_Average

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax20_2462MHz
TEST BY :Caster

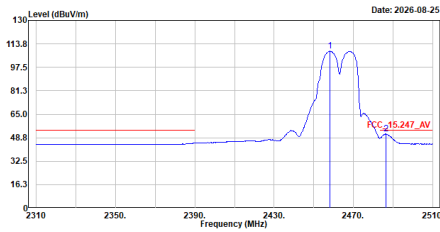


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2458.200	108.69	-----	-----	78.85	29.84	Average
2	2486.400	51.38	54.00	-2.62	21.49	29.89	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2462MHz_V_Peak

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax20_2462MHz
TEST BY :Caster

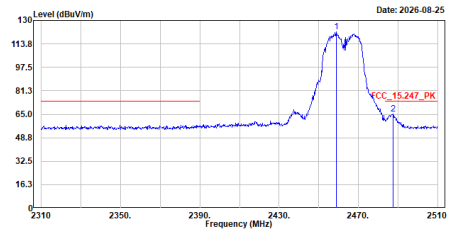


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2459.000	122.04	-----	-----	92.20	29.84	Peak
2	2487.400	65.01	74.00	-8.99	35.13	29.88	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2422MHz_H_Average

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax40_2422MHz
TEST BY :Caster

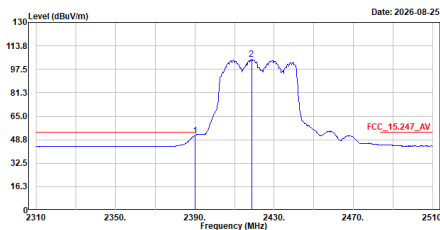


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2390.000	51.65	54.00	-2.35	21.66	29.99	Average
2	2418.600	104.26	-----	-----	74.25	30.01	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2422MHz_H_Peak

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax40_2422MHz
TEST BY :Caster

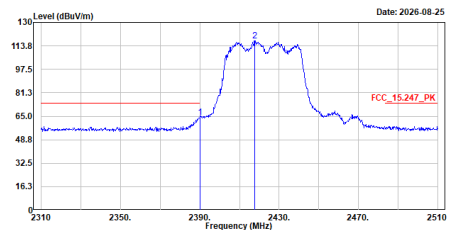


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2390.000	64.42	74.00	-9.58	34.43	29.99	Peak
2	2417.600	117.15	-----	-----	87.15	30.00	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2422MHz_V_Average

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax40_2422MHz
TEST BY :Caster

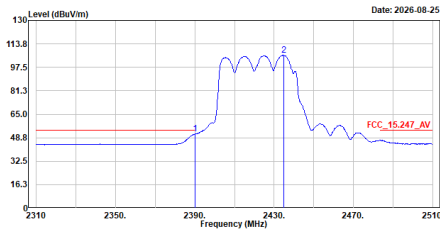


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	2390.000	51.28	54.00	-2.72	21.29	29.99	Average
2	2434.800	105.85	-----	-----	75.92	29.93	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2422MHz_V_Peak

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax40_2422MHz
TEST BY :Caster

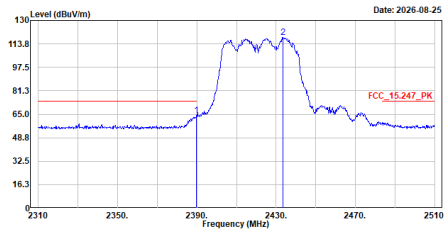


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	2389.800	64.02	74.00	-9.98	34.03	29.99	Peak
2	2433.400	118.43	-----	-----	88.50	29.93	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2437MHz_H_Average

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax40_2437MHz
TEST BY :Caster

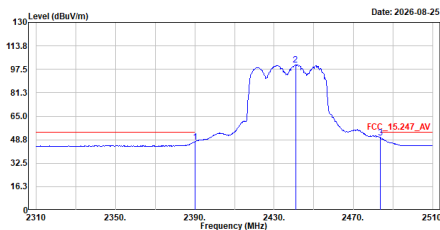


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	2390.000	47.25	54.00	-6.75	17.26	29.99	Average
2	2440.800	100.70	-----	-----	70.77	29.93	Average
3	2483.600	50.21	54.00	-3.79	20.30	29.91	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2437MHz_H_Peak

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax40_2437MHz
TEST BY :Caster

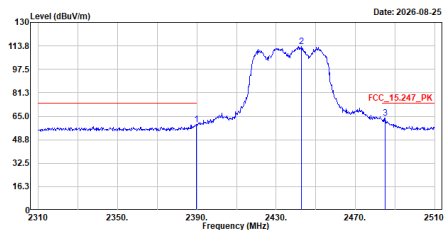


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	2389.800	59.30	74.00	-14.70	29.31	29.99	Peak
2	2442.800	113.31	-----	-----	83.40	29.91	Peak
3	2485.000	63.80	74.00	-10.20	33.90	29.90	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2437MHz_V_Average

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax40_2437MHz
TEST BY :Caster

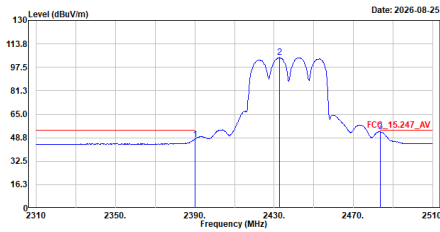


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2390.000	47.82	54.00	-6.18	17.83	29.99	Average
2	2432.800	104.28	-----	-----	74.35	29.93	Average
3	2483.600	52.74	54.00	-1.26	22.83	29.91	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2437MHz_V_Peak

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax40_2437MHz
TEST BY :Caster

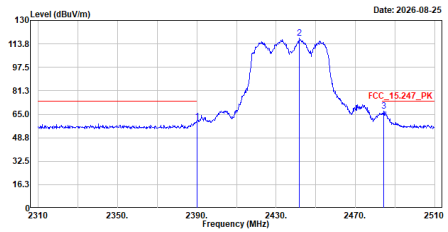


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2390.000	60.05	74.00	-13.95	30.06	29.99	Peak
2	2441.600	117.64	-----	-----	87.72	29.92	Peak
3	2484.400	67.22	74.00	-6.78	37.31	29.91	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2452MHz_H_Average

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ax40_2452MHz
TEST BY :Caster

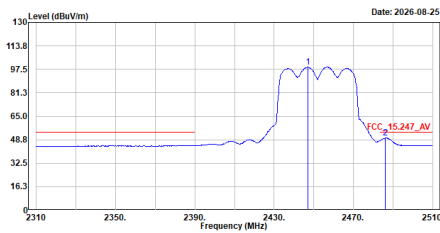


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2447.200	99.06	-----	-----	69.19	29.87	Average
2	2486.200	50.05	54.00	-3.95	20.16	29.89	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2452MHz_H_Peak

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ax40_2452MHz
TEST BY :Caster

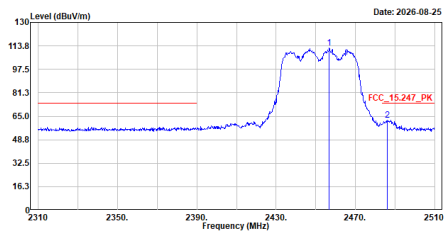


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2456.800	112.25	-----	-----	82.41	29.84	Peak
2	2486.200	62.21	74.00	-11.79	32.32	29.89	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2452MHz_V_Average

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax40_2452MHz
TEST BY :Caster

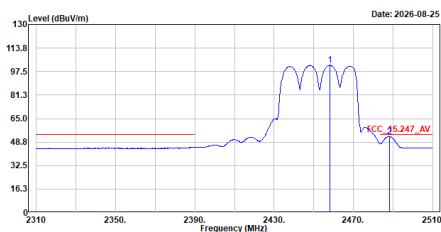


No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2458.200	101.87	-----		72.83	29.84	Average
2	2488.400	52.66	54.00	-1.34	22.78	29.88	Average

Note:

1. $\text{Level} = \text{Read Level} + \text{Factor}$
2. $\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Preamp Factor}$
3. $\text{Over Limit} = \text{Level} - \text{Limit Line}$
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2452MHz_V_Peak

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax40_2452MHz
TEST BY :Caster

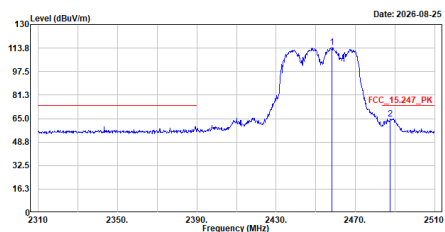

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2458.200	114.52	-----		84.68	29.84	Peak
2	2487.600	64.71	74.00	-9.29	34.83	29.88	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

MAX Orbit 4
Adapter

TX_ax40_2437MHz_H

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax40_2437MHz
TEST BY :Caster

Level (dBuV/m)

90
78.8
67.5
56.3
45.0
33.8
22.5
11.3
0

30224.4186128061000

Frequency (MHz)

Date: 2026-09-07

FCC CLASS-B

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	140.106	29.06	43.50	-14.44	53.12	-24.06	QP
2	214.410	24.55	43.50	-18.95	51.30	-26.75	QP
3	384.018	26.03	46.00	-19.97	46.99	-20.96	QP
4	572.178	23.43	46.00	-22.57	40.11	-16.68	QP
5	730.086	24.89	46.00	-21.11	38.53	-13.64	QP
6	945.447	27.66	46.00	-18.34	38.79	-11.13	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_ax40_2437MHz_V

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax40_2437MHz
TEST BY :Caster

Level (dBuV/m)

90
78.8
67.5
56.3
45.0
33.8
22.5
11.3
0

30224.4186128061000

Frequency (MHz)

Date: 2026-09-07

FCC CLASS-B

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	33.400	32.43	40.00	-7.57	57.47	-25.04	QP
2	138.906	27.37	43.50	-16.13	51.90	-24.53	QP
3	383.968	21.36	46.00	-24.64	42.32	-20.96	QP
4	576.028	25.06	46.00	-20.94	41.61	-16.55	QP
5	768.038	26.98	46.00	-19.02	40.13	-13.15	QP
6	959.998	30.19	46.00	-15.81	41.10	-10.91	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Co-location

TX_b_2412MHz+TX_ax80_5775MHz+5GNR_n77_100M_1R B0_CH650000_H	TX_b_2412MHz+TX_ax80_5775MHz+5GNR_n77_100M_1R B0_CH650000_V
Site :HY-CB01 Condition :3m ,HORIZONTAL Mode :TX_b_2412MHz+TX_ax80_5775MHz+5GNR_n77_100M_1RB0_CH650000 TEST BY :Caster Level (dBuV/m) <	

TX_b_2412MHz+TX_ax80_5775MHz+WCDMA_B5_CH4182

_H




Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2412MHz+TX_ax80_5775MHz+WCDMA_B5_CH4182


_V



Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

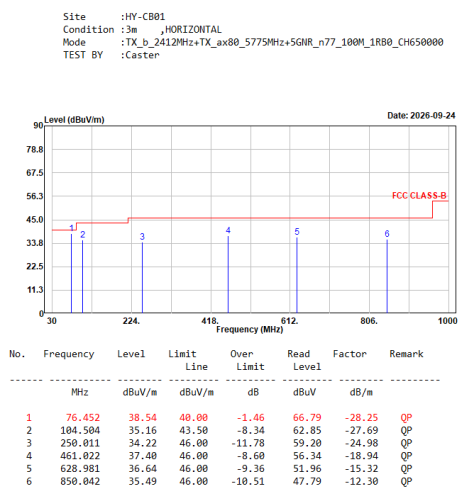TX_b_2412MHz+TX_ax80_5775MHz+5G NR_n77_100M_1R
B0_CH650000_H

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

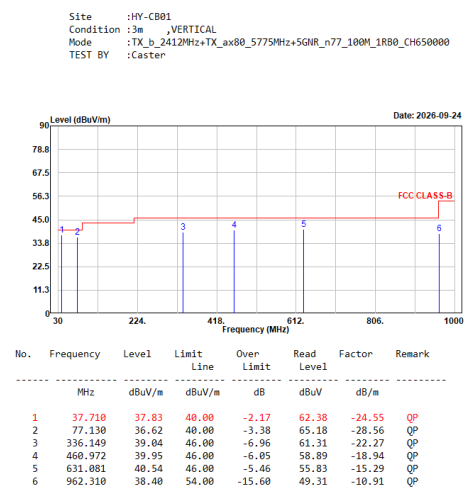TX_b_2412MHz+TX_ax80_5775MHz+5G NR_n77_100M_1R
B0_CH650000_V

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_b_2412MHz+TX_ax80_5775MHz+LTE_B41_20M_1RB0 40620_H	TX_b_2412MHz+TX_ax80_5775MHz+LTE_B41_20M_1RB0 40620_V																																																																																																																																
Site :HY-CB01 Condition :3m ,HORIZONTAL Mode :TX_b_2412MHz+TX_ax80_5775MHz+LTE_B41_20M_1RB0_40620 TEST BY :Caster Level (dBuV/m) 90 78.8 67.5 56.3 45.0 33.8 22.5 11.3 0 302244186128061000 Frequency (MHz) FCC CLASS-B 1/23456 <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>70.530</td><td>38.47</td><td>48.00</td><td>-1.53</td><td>67.31</td><td>-28.84</td><td>QP</td></tr><tr><td>2</td><td>102.404</td><td>38.52</td><td>43.50</td><td>-4.98</td><td>66.79</td><td>-28.27</td><td>QP</td></tr><tr><td>3</td><td>420.070</td><td>35.58</td><td>46.00</td><td>-10.42</td><td>55.88</td><td>-20.30</td><td>QP</td></tr><tr><td>4</td><td>504.074</td><td>35.77</td><td>46.00</td><td>-10.23</td><td>54.05</td><td>-18.28</td><td>QP</td></tr><tr><td>5</td><td>627.081</td><td>35.36</td><td>46.00</td><td>-10.64</td><td>50.72</td><td>-15.36</td><td>QP</td></tr><tr><td>6</td><td>959.998</td><td>30.72</td><td>46.00</td><td>-15.28</td><td>41.63</td><td>-10.91</td><td>QP</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission under 30MHz was not included since the emission levels are very low against the limit.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	70.530	38.47	48.00	-1.53	67.31	-28.84	QP	2	102.404	38.52	43.50	-4.98	66.79	-28.27	QP	3	420.070	35.58	46.00	-10.42	55.88	-20.30	QP	4	504.074	35.77	46.00	-10.23	54.05	-18.28	QP	5	627.081	35.36	46.00	-10.64	50.72	-15.36	QP	6	959.998	30.72	46.00	-15.28	41.63	-10.91	QP	Site :HY-CB01 Condition :3m ,VERTICAL Mode :TX_b_2412MHz+TX_ax80_5775MHz+LTE_B41_20M_1RB0_40620 TEST BY :Caster Level (dBuV/m) 90 78.8 67.5 56.3 45.0 33.8 22.5 11.3 0 302244186128061000 Frequency (MHz) FCC CLASS-B 123456 <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>52.251</td><td>38.08</td><td>48.00</td><td>-1.92</td><td>61.88</td><td>-23.80</td><td>QP</td></tr><tr><td>2</td><td>252.011</td><td>31.82</td><td>46.00</td><td>-14.18</td><td>56.79</td><td>-24.97</td><td>QP</td></tr><tr><td>3</td><td>420.330</td><td>40.77</td><td>46.00</td><td>-5.23</td><td>61.07</td><td>-20.30</td><td>QP</td></tr><tr><td>4</td><td>576.030</td><td>40.90</td><td>46.00</td><td>-5.10</td><td>57.45</td><td>-16.55</td><td>QP</td></tr><tr><td>5</td><td>630.082</td><td>40.04</td><td>46.00</td><td>-5.96</td><td>55.36</td><td>-15.32</td><td>QP</td></tr><tr><td>6</td><td>950.047</td><td>38.04</td><td>46.00</td><td>-7.96</td><td>49.07</td><td>-11.03</td><td>QP</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission under 30MHz was not included since the emission levels are very low against the limit.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	52.251	38.08	48.00	-1.92	61.88	-23.80	QP	2	252.011	31.82	46.00	-14.18	56.79	-24.97	QP	3	420.330	40.77	46.00	-5.23	61.07	-20.30	QP	4	576.030	40.90	46.00	-5.10	57.45	-16.55	QP	5	630.082	40.04	46.00	-5.96	55.36	-15.32	QP	6	950.047	38.04	46.00	-7.96	49.07	-11.03	QP
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																											
1	70.530	38.47	48.00	-1.53	67.31	-28.84	QP																																																																																																																										
2	102.404	38.52	43.50	-4.98	66.79	-28.27	QP																																																																																																																										
3	420.070	35.58	46.00	-10.42	55.88	-20.30	QP																																																																																																																										
4	504.074	35.77	46.00	-10.23	54.05	-18.28	QP																																																																																																																										
5	627.081	35.36	46.00	-10.64	50.72	-15.36	QP																																																																																																																										
6	959.998	30.72	46.00	-15.28	41.63	-10.91	QP																																																																																																																										
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																											
1	52.251	38.08	48.00	-1.92	61.88	-23.80	QP																																																																																																																										
2	252.011	31.82	46.00	-14.18	56.79	-24.97	QP																																																																																																																										
3	420.330	40.77	46.00	-5.23	61.07	-20.30	QP																																																																																																																										
4	576.030	40.90	46.00	-5.10	57.45	-16.55	QP																																																																																																																										
5	630.082	40.04	46.00	-5.96	55.36	-15.32	QP																																																																																																																										
6	950.047	38.04	46.00	-7.96	49.07	-11.03	QP																																																																																																																										
TX_b_2412MHz+TX_ax80_5775MHz+WCDMA_B5_CH4182 H	TX_b_2412MHz+TX_ax80_5775MHz+WCDMA_B5_CH4182 V																																																																																																																																
Site :HY-CB01 Condition :3m ,HORIZONTAL Mode :TX_b_2412MHz+TX_ax80_5775MHz+WCDMA_B5_CH4182 TEST BY :Caster Level (dBuV/m) 90 78.8 67.5 56.3 45.0 33.8 22.5 11.3 0 302244186128061000 Frequency (MHz) FCC CLASS-B 123456 <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>51.860</td><td>37.51</td><td>48.00</td><td>-2.49</td><td>61.32</td><td>-23.81</td><td>QP</td></tr><tr><td>2</td><td>250.130</td><td>38.35</td><td>46.00</td><td>-7.65</td><td>63.33</td><td>-24.98</td><td>QP</td></tr><tr><td>3</td><td>336.030</td><td>37.65</td><td>46.00</td><td>-8.35</td><td>59.92</td><td>-22.27</td><td>QP</td></tr><tr><td>4</td><td>420.020</td><td>36.29</td><td>46.00</td><td>-9.71</td><td>56.59</td><td>-20.30</td><td>QP</td></tr><tr><td>5</td><td>576.040</td><td>39.93</td><td>46.00</td><td>-6.07</td><td>56.48</td><td>-16.55</td><td>QP</td></tr><tr><td>6</td><td>716.030</td><td>36.42</td><td>46.00</td><td>-9.58</td><td>50.46</td><td>-14.04</td><td>QP</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission under 30MHz was not included since the emission levels are very low against the limit.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	51.860	37.51	48.00	-2.49	61.32	-23.81	QP	2	250.130	38.35	46.00	-7.65	63.33	-24.98	QP	3	336.030	37.65	46.00	-8.35	59.92	-22.27	QP	4	420.020	36.29	46.00	-9.71	56.59	-20.30	QP	5	576.040	39.93	46.00	-6.07	56.48	-16.55	QP	6	716.030	36.42	46.00	-9.58	50.46	-14.04	QP	Site :HY-CB01 Condition :3m ,VERTICAL Mode :TX_b_2412MHz+TX_ax80_5775MHz+WCDMA_B5_CH4182 TEST BY :Caster Level (dBuV/m) 90 78.8 67.5 56.3 45.0 33.8 22.5 11.3 0 302244186128061000 Frequency (MHz) FCC CLASS-B 123456 <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>51.250</td><td>38.18</td><td>48.00</td><td>-1.82</td><td>61.93</td><td>-23.75</td><td>QP</td></tr><tr><td>2</td><td>139.456</td><td>27.69</td><td>43.50</td><td>-15.81</td><td>52.21</td><td>-24.52</td><td>QP</td></tr><tr><td>3</td><td>336.066</td><td>33.66</td><td>46.00</td><td>-12.34</td><td>55.93</td><td>-22.27</td><td>QP</td></tr><tr><td>4</td><td>504.074</td><td>36.44</td><td>46.00</td><td>-9.56</td><td>54.72</td><td>-18.28</td><td>QP</td></tr><tr><td>5</td><td>627.231</td><td>39.14</td><td>46.00</td><td>-6.86</td><td>54.50</td><td>-15.36</td><td>QP</td></tr><tr><td>6</td><td>950.047</td><td>37.41</td><td>46.00</td><td>-8.59</td><td>48.44</td><td>-11.03</td><td>QP</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission under 30MHz was not included since the emission levels are very low against the limit.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	51.250	38.18	48.00	-1.82	61.93	-23.75	QP	2	139.456	27.69	43.50	-15.81	52.21	-24.52	QP	3	336.066	33.66	46.00	-12.34	55.93	-22.27	QP	4	504.074	36.44	46.00	-9.56	54.72	-18.28	QP	5	627.231	39.14	46.00	-6.86	54.50	-15.36	QP	6	950.047	37.41	46.00	-8.59	48.44	-11.03	QP
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																											
1	51.860	37.51	48.00	-2.49	61.32	-23.81	QP																																																																																																																										
2	250.130	38.35	46.00	-7.65	63.33	-24.98	QP																																																																																																																										
3	336.030	37.65	46.00	-8.35	59.92	-22.27	QP																																																																																																																										
4	420.020	36.29	46.00	-9.71	56.59	-20.30	QP																																																																																																																										
5	576.040	39.93	46.00	-6.07	56.48	-16.55	QP																																																																																																																										
6	716.030	36.42	46.00	-9.58	50.46	-14.04	QP																																																																																																																										
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																											
1	51.250	38.18	48.00	-1.82	61.93	-23.75	QP																																																																																																																										
2	139.456	27.69	43.50	-15.81	52.21	-24.52	QP																																																																																																																										
3	336.066	33.66	46.00	-12.34	55.93	-22.27	QP																																																																																																																										
4	504.074	36.44	46.00	-9.56	54.72	-18.28	QP																																																																																																																										
5	627.231	39.14	46.00	-6.86	54.50	-15.36	QP																																																																																																																										
6	950.047	37.41	46.00	-8.59	48.44	-11.03	QP																																																																																																																										