


TX_ax40_5230MHz_Band2_V_Average

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax40_5230MHz_Band2
TEST BY :Caster

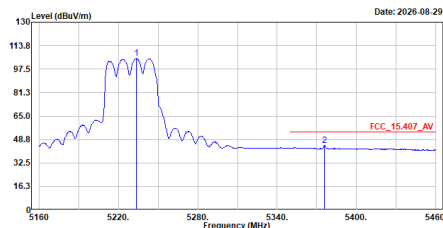


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5233.500	104.78	-----	-----	90.91	13.87	Average
2	5376.000	44.76	54.00	-9.24	30.89	13.87	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_5230MHz_Band2_V_Peak

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax40_5230MHz_Band2
TEST BY :Caster

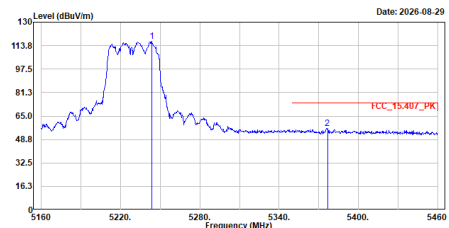


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5243.700	116.51	-----	-----	102.63	13.88	Peak
2	5376.600	56.47	74.00	-17.53	42.60	13.87	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_5755MHz_H_Peak

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax40_5755MHz
TEST BY :Caster

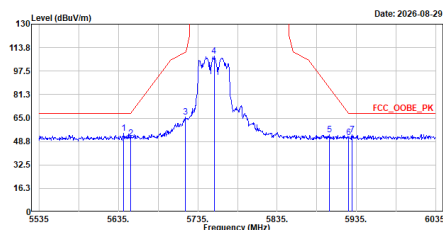


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5641.500	54.40	68.22	-13.82	39.25	15.15	Peak
2	5650.000	51.02	68.23	-17.21	35.82	15.20	Peak
3	5719.500	65.67	110.66	-44.99	50.67	15.60	Peak
4	5755.500	108.05	-----	-----	92.41	15.64	Peak
5	5900.500	53.63	86.34	-32.71	37.93	15.70	Peak
6	5925.000	51.70	68.23	-16.53	36.00	15.70	Peak
7	5929.500	53.40	68.22	-14.82	37.69	15.71	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_5755MHz_V_Peak

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax40_5755MHz
TEST BY :Caster

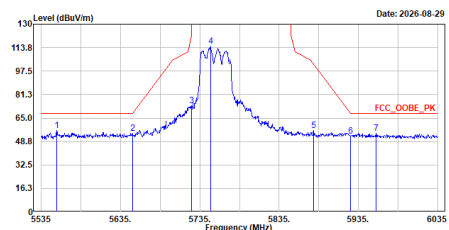


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5554.500	56.22	68.22	-12.00	41.68	14.54	Peak
2	5650.000	54.23	68.23	-14.00	39.03	15.20	Peak
3	5724.500	73.35	121.06	-47.71	57.75	15.60	Peak
4	5748.500	114.93	-----	-----	99.29	15.64	Peak
5	5878.500	56.25	102.61	-46.36	40.57	15.68	Peak
6	5925.000	52.41	68.23	-15.82	36.71	15.70	Peak
7	5957.500	54.28	68.22	-13.94	38.49	15.79	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_5795MHz_H_Peak

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax40_5795MHz
TEST BY :Caster

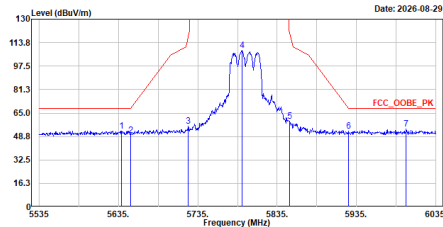


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5639.000	52.72	68.22	-15.50	37.58	15.14	Peak
2	5650.000	49.64	68.23	-18.59	34.44	15.20	Peak
3	5725.000	55.88	117.64	-61.76	40.28	15.60	Peak
4	5790.500	108.62	-----	-----	93.00	15.62	Peak
5	5850.500	59.55	121.06	-61.51	43.87	15.68	Peak
6	5925.000	52.31	68.23	-15.92	36.61	15.70	Peak
7	5998.000	54.04	68.22	-14.18	38.11	15.93	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_5795MHz_V_Peak

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax40_5795MHz
TEST BY :Caster

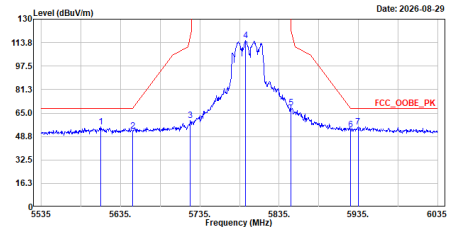


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5610.000	55.32	68.22	-12.90	40.38	14.94	Peak
2	5650.000	52.48	68.23	-15.75	37.28	15.20	Peak
3	5725.000	59.76	117.64	-57.88	44.16	15.60	Peak
4	5792.500	115.40	-----	-----	99.79	15.61	Peak
5	5850.000	68.57	122.20	-53.63	52.89	15.68	Peak
6	5925.000	53.42	68.23	-14.81	37.72	15.70	Peak
7	5934.500	55.65	68.22	-12.57	39.93	15.72	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax80_5210MHz_H_Average

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax80_5210MHz
TEST BY :Caster

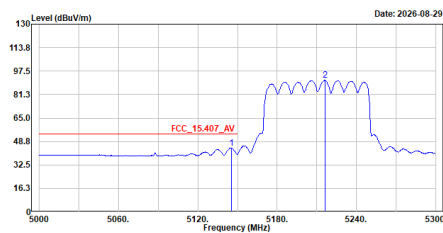


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5145.200	44.17	54.00	-9.83	30.26	13.91	Average
2	5216.300	91.03	-----	-----	77.19	13.84	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax80_5210MHz_H_Peak

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax80_5210MHz
TEST BY :Caster

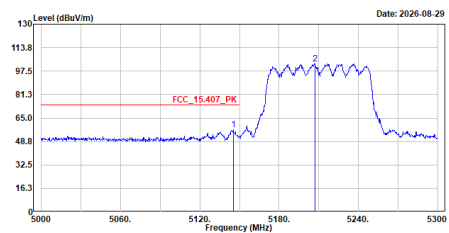


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5145.200	56.82	74.00	-17.18	42.91	13.91	Peak
2	5207.000	102.52	-----	-----	88.70	13.82	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax80_5210MHz_V_Average

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax80_5210MHz
TEST BY :Caster

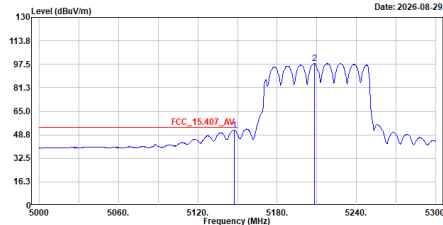


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5147.600	52.02	54.00	-1.98	38.10	13.92	Average
2	5208.200	98.09			84.27	13.82	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax80_5210MHz_V_Peak

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax80_5210MHz
TEST BY :Caster

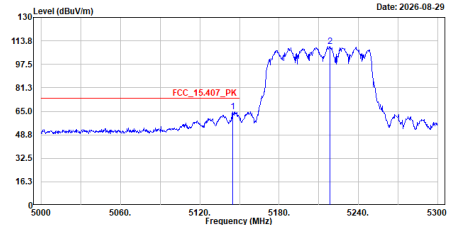


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5144.900	64.72	74.00	-9.28	50.81	13.91	Peak
2	5218.400	109.83			95.99	13.84	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax80_5775MHz_H_Peak

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax80_5775MHz
TEST BY :Caster

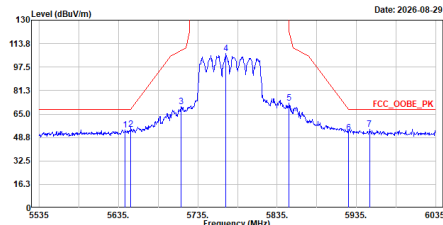


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5643.500	53.97	68.22	-14.25	38.81	15.16	Peak
2	5650.000	54.58	68.23	-13.65	39.38	15.20	Peak
3	5714.000	70.07	109.12	-39.05	54.49	15.58	Peak
4	5770.500	107.14			91.50	15.64	Peak
5	5850.000	72.49	122.20	-49.71	56.81	15.68	Peak
6	5925.000	51.83	68.23	-16.40	36.13	15.70	Peak
7	5951.500	54.50	68.22	-13.72	38.72	15.78	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax80_5775MHz_V_Peak

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax80_5775MHz
TEST BY :Caster

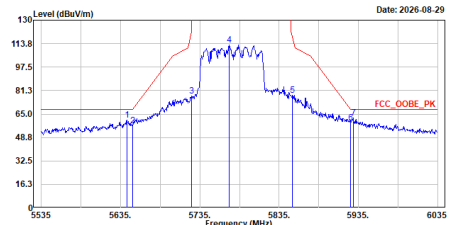

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5643.000	61.04	68.22	-7.18	45.88	15.16	Peak
2	5650.000	57.10	68.23	-11.13	41.90	15.20	Peak
3	5725.000	77.52	122.20	-44.68	61.92	15.60	Peak
4	5772.000	112.87			97.24	15.63	Peak
5	5852.000	78.15	117.64	-39.49	62.47	15.68	Peak
6	5925.000	58.65	68.23	-9.58	42.95	15.70	Peak
7	5928.500	62.40	68.22	-5.82	46.69	15.71	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

PoE



MAX Orbit 4
Adapter

</


Co-location

TX_b_2412MHz+TX_ax80_5775MHz+5GNR_n77_100M_1R B0_CH650000_H Site :HY-CB01 Condition :3m ,HORIZONTAL Mode :TX_b_2412MHz+TX_ax80_5775MHz+5GNR_n77_100M_1RB0_CH650000 TEST BY :Caster Level (dBuV/m) Date: 2026-09-24 </
--

TX_b_2412MHz+TX_ax80_5775MHz+WCDMA_B5_CH4182

H

Site :HY-CB01
 Condition :3m ,HORIZONTAL
 Mode :TX_b_2412MHz+TX_ax80_5775MHz+WCDMA_B5_CH4182
 TEST BY :Caster

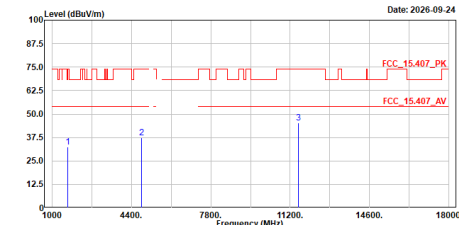


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	1673.000	32.51	74.00	-41.49	56.64	-24.13	Peak
2	4824.000	37.41	74.00	-36.59	52.25	-14.84	Peak
3	11550.000	45.26	74.00	-28.74	54.53	-9.27	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2412MHz+TX_ax80_5775MHz+WCDMA_B5_CH4182

V

Site :HY-CB01
 Condition :3m ,VERTICAL
 Mode :TX_b_2412MHz+TX_ax80_5775MHz+WCDMA_B5_CH4182
 TEST BY :Caster

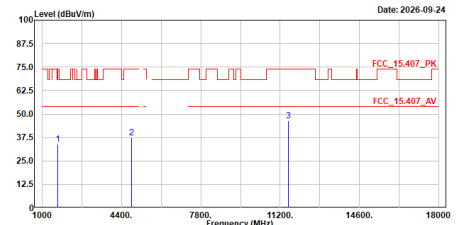


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	1673.000	33.95	74.00	-40.05	58.08	-24.13	Peak
2	4824.000	37.34	74.00	-36.66	52.18	-14.84	Peak
3	11550.000	46.45	74.00	-27.55	55.72	-9.27	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2412MHz+TX_ax80_5775MHz+5G NR_n77_100M_1R
B0_CH650000_H

Site :HY-CB01
 Condition :3m ,HORIZONTAL
 Mode :TX_b_2412MHz+TX_ax80_5775MHz+5G NR_n77_100M_1R0_CH650000
 TEST BY :Caster

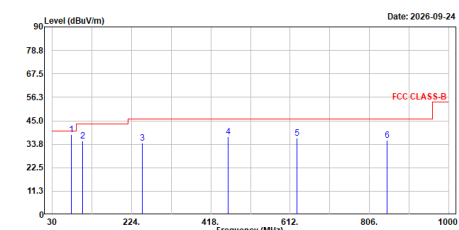


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	76.452	38.54	48.00	-1.46	66.79	-28.25	QP
2	104.504	35.16	43.50	-8.34	62.85	-27.69	QP
3	250.011	34.22	46.00	-11.78	59.20	-24.98	QP
4	461.022	37.40	46.00	-8.60	56.34	-18.94	QP
5	628.981	36.64	46.00	-9.36	51.96	-15.32	QP
6	850.042	35.49	46.00	-10.51	47.79	-12.30	QP

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission under 30MHz was not included since the emission levels are very low against the limit.





TX_b_2412MHz+TX_ax80_5775MHz+5G NR_n77_100M_1R
B0_CH650000_V

Site :HY-CB01
 Condition :3m ,VERTICAL
 Mode :TX_b_2412MHz+TX_ax80_5775MHz+5G NR_n77_100M_1R0_CH650000
 TEST BY :Caster

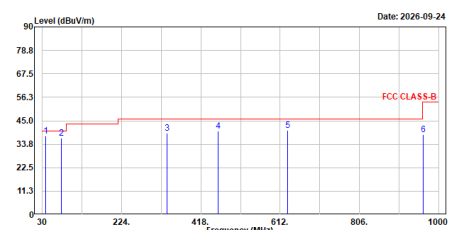

No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	37.710	37.83	48.00	-2.17	62.38	-24.55	QP
2	77.110	36.62	48.00	-3.38	65.18	-28.56	QP
3	336.149	39.04	46.00	-6.96	61.31	-22.27	QP
4	460.972	39.95	46.00	-6.05	58.89	-18.94	QP
5	631.081	40.54	46.00	-5.46	55.83	-15.29	QP
6	962.310	38.40	54.00	-15.60	49.31	-10.91	QP

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission under 30MHz was not included since the emission levels are very low against the limit.

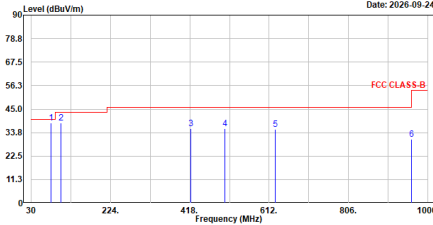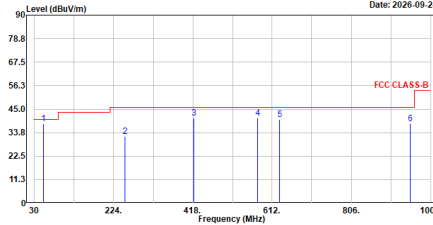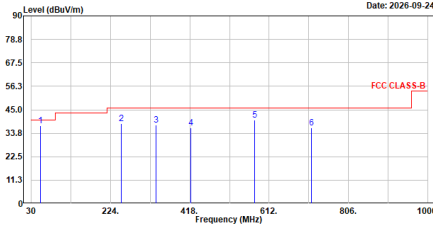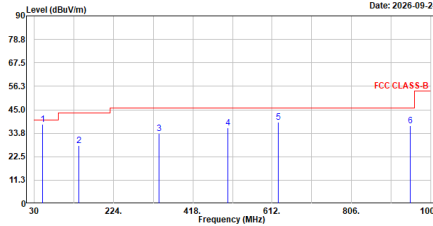TX_b_2412MHz+TX_ax80_5775MHz+LTE_B41_20M_1RB0 40620_H	TX_b_2412MHz+TX_ax80_5775MHz+LTE_B41_20M_1RB0 40620_V																																																																																																																																
Site :HY-CB01 Condition :3m ,HORIZONTAL Mode :TX_b_2412MHz+TX_ax80_5775MHz+LTE_B41_20M_1RB0_40620 TEST BY :Caster Level (dBuV/m) Date: 2026-09-24  <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>70.530</td><td>38.47</td><td>48.00</td><td>-1.53</td><td>67.31</td><td>-28.84</td><td>QP</td></tr><tr><td>2</td><td>102.404</td><td>38.52</td><td>43.50</td><td>-4.98</td><td>66.79</td><td>-28.27</td><td>QP</td></tr><tr><td>3</td><td>420.070</td><td>35.58</td><td>46.00</td><td>-10.42</td><td>55.88</td><td>-20.30</td><td>QP</td></tr><tr><td>4</td><td>504.074</td><td>35.77</td><td>46.00</td><td>-10.23</td><td>54.05</td><td>-18.28</td><td>QP</td></tr><tr><td>5</td><td>627.081</td><td>35.36</td><td>46.00</td><td>-10.64</td><td>50.72</td><td>-15.36</td><td>QP</td></tr><tr><td>6</td><td>959.998</td><td>30.72</td><td>46.00</td><td>-15.28</td><td>41.63</td><td>-10.91</td><td>QP</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission under 30MHz was not included since the emission levels are very low against the limit.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	70.530	38.47	48.00	-1.53	67.31	-28.84	QP	2	102.404	38.52	43.50	-4.98	66.79	-28.27	QP	3	420.070	35.58	46.00	-10.42	55.88	-20.30	QP	4	504.074	35.77	46.00	-10.23	54.05	-18.28	QP	5	627.081	35.36	46.00	-10.64	50.72	-15.36	QP	6	959.998	30.72	46.00	-15.28	41.63	-10.91	QP	Site :HY-CB01 Condition :3m ,VERTICAL Mode :TX_b_2412MHz+TX_ax80_5775MHz+LTE_B41_20M_1RB0_40620 TEST BY :Caster Level (dBuV/m) Date: 2026-09-24  <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>52.251</td><td>38.08</td><td>48.00</td><td>-1.92</td><td>61.88</td><td>-23.80</td><td>QP</td></tr><tr><td>2</td><td>252.011</td><td>31.82</td><td>46.00</td><td>-14.18</td><td>56.79</td><td>-24.97</td><td>QP</td></tr><tr><td>3</td><td>420.330</td><td>40.77</td><td>46.00</td><td>-5.23</td><td>61.07</td><td>-20.30</td><td>QP</td></tr><tr><td>4</td><td>576.030</td><td>40.90</td><td>46.00</td><td>-5.10</td><td>57.45</td><td>-16.55</td><td>QP</td></tr><tr><td>5</td><td>630.082</td><td>40.04</td><td>46.00</td><td>-5.96</td><td>55.36</td><td>-15.32</td><td>QP</td></tr><tr><td>6</td><td>950.047</td><td>38.04</td><td>46.00</td><td>-7.96</td><td>49.07</td><td>-11.03</td><td>QP</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission under 30MHz was not included since the emission levels are very low against the limit.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	52.251	38.08	48.00	-1.92	61.88	-23.80	QP	2	252.011	31.82	46.00	-14.18	56.79	-24.97	QP	3	420.330	40.77	46.00	-5.23	61.07	-20.30	QP	4	576.030	40.90	46.00	-5.10	57.45	-16.55	QP	5	630.082	40.04	46.00	-5.96	55.36	-15.32	QP	6	950.047	38.04	46.00	-7.96	49.07	-11.03	QP
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																											
1	70.530	38.47	48.00	-1.53	67.31	-28.84	QP																																																																																																																										
2	102.404	38.52	43.50	-4.98	66.79	-28.27	QP																																																																																																																										
3	420.070	35.58	46.00	-10.42	55.88	-20.30	QP																																																																																																																										
4	504.074	35.77	46.00	-10.23	54.05	-18.28	QP																																																																																																																										
5	627.081	35.36	46.00	-10.64	50.72	-15.36	QP																																																																																																																										
6	959.998	30.72	46.00	-15.28	41.63	-10.91	QP																																																																																																																										
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																											
1	52.251	38.08	48.00	-1.92	61.88	-23.80	QP																																																																																																																										
2	252.011	31.82	46.00	-14.18	56.79	-24.97	QP																																																																																																																										
3	420.330	40.77	46.00	-5.23	61.07	-20.30	QP																																																																																																																										
4	576.030	40.90	46.00	-5.10	57.45	-16.55	QP																																																																																																																										
5	630.082	40.04	46.00	-5.96	55.36	-15.32	QP																																																																																																																										
6	950.047	38.04	46.00	-7.96	49.07	-11.03	QP																																																																																																																										
TX_b_2412MHz+TX_ax80_5775MHz+WCDMA_B5_CH4182 H	TX_b_2412MHz+TX_ax80_5775MHz+WCDMA_B5_CH4182 V																																																																																																																																
Site :HY-CB01 Condition :3m ,HORIZONTAL Mode :TX_b_2412MHz+TX_ax80_5775MHz+WCDMA_B5_CH4182 TEST BY :Caster Level (dBuV/m) Date: 2026-09-24  <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>51.860</td><td>37.51</td><td>48.00</td><td>-2.49</td><td>61.32</td><td>-23.81</td><td>QP</td></tr><tr><td>2</td><td>250.130</td><td>38.35</td><td>46.00</td><td>-7.65</td><td>63.33</td><td>-24.98</td><td>QP</td></tr><tr><td>3</td><td>336.030</td><td>37.65</td><td>46.00</td><td>-8.35</td><td>59.92</td><td>-22.27</td><td>QP</td></tr><tr><td>4</td><td>420.020</td><td>36.29</td><td>46.00</td><td>-9.71</td><td>56.59</td><td>-20.30</td><td>QP</td></tr><tr><td>5</td><td>576.040</td><td>39.93</td><td>46.00</td><td>-6.07</td><td>56.48</td><td>-16.55</td><td>QP</td></tr><tr><td>6</td><td>716.030</td><td>36.42</td><td>46.00</td><td>-9.58</td><td>50.46</td><td>-14.04</td><td>QP</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission under 30MHz was not included since the emission levels are very low against the limit.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	51.860	37.51	48.00	-2.49	61.32	-23.81	QP	2	250.130	38.35	46.00	-7.65	63.33	-24.98	QP	3	336.030	37.65	46.00	-8.35	59.92	-22.27	QP	4	420.020	36.29	46.00	-9.71	56.59	-20.30	QP	5	576.040	39.93	46.00	-6.07	56.48	-16.55	QP	6	716.030	36.42	46.00	-9.58	50.46	-14.04	QP	Site :HY-CB01 Condition :3m ,VERTICAL Mode :TX_b_2412MHz+TX_ax80_5775MHz+WCDMA_B5_CH4182 TEST BY :Caster Level (dBuV/m) Date: 2026-09-24  <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>51.250</td><td>38.18</td><td>48.00</td><td>-1.82</td><td>61.93</td><td>-23.75</td><td>QP</td></tr><tr><td>2</td><td>139.456</td><td>27.69</td><td>43.50</td><td>-15.81</td><td>52.21</td><td>-24.52</td><td>QP</td></tr><tr><td>3</td><td>336.066</td><td>33.66</td><td>46.00</td><td>-12.34</td><td>55.93</td><td>-22.27</td><td>QP</td></tr><tr><td>4</td><td>504.074</td><td>36.44</td><td>46.00</td><td>-9.56</td><td>54.72</td><td>-18.28</td><td>QP</td></tr><tr><td>5</td><td>627.231</td><td>39.14</td><td>46.00</td><td>-6.86</td><td>54.50</td><td>-15.36</td><td>QP</td></tr><tr><td>6</td><td>950.047</td><td>37.41</td><td>46.00</td><td>-8.59</td><td>48.44</td><td>-11.03</td><td>QP</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission under 30MHz was not included since the emission levels are very low against the limit.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	51.250	38.18	48.00	-1.82	61.93	-23.75	QP	2	139.456	27.69	43.50	-15.81	52.21	-24.52	QP	3	336.066	33.66	46.00	-12.34	55.93	-22.27	QP	4	504.074	36.44	46.00	-9.56	54.72	-18.28	QP	5	627.231	39.14	46.00	-6.86	54.50	-15.36	QP	6	950.047	37.41	46.00	-8.59	48.44	-11.03	QP
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																											
1	51.860	37.51	48.00	-2.49	61.32	-23.81	QP																																																																																																																										
2	250.130	38.35	46.00	-7.65	63.33	-24.98	QP																																																																																																																										
3	336.030	37.65	46.00	-8.35	59.92	-22.27	QP																																																																																																																										
4	420.020	36.29	46.00	-9.71	56.59	-20.30	QP																																																																																																																										
5	576.040	39.93	46.00	-6.07	56.48	-16.55	QP																																																																																																																										
6	716.030	36.42	46.00	-9.58	50.46	-14.04	QP																																																																																																																										
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																											
1	51.250	38.18	48.00	-1.82	61.93	-23.75	QP																																																																																																																										
2	139.456	27.69	43.50	-15.81	52.21	-24.52	QP																																																																																																																										
3	336.066	33.66	46.00	-12.34	55.93	-22.27	QP																																																																																																																										
4	504.074	36.44	46.00	-9.56	54.72	-18.28	QP																																																																																																																										
5	627.231	39.14	46.00	-6.86	54.50	-15.36	QP																																																																																																																										
6	950.047	37.41	46.00	-8.59	48.44	-11.03	QP																																																																																																																										