





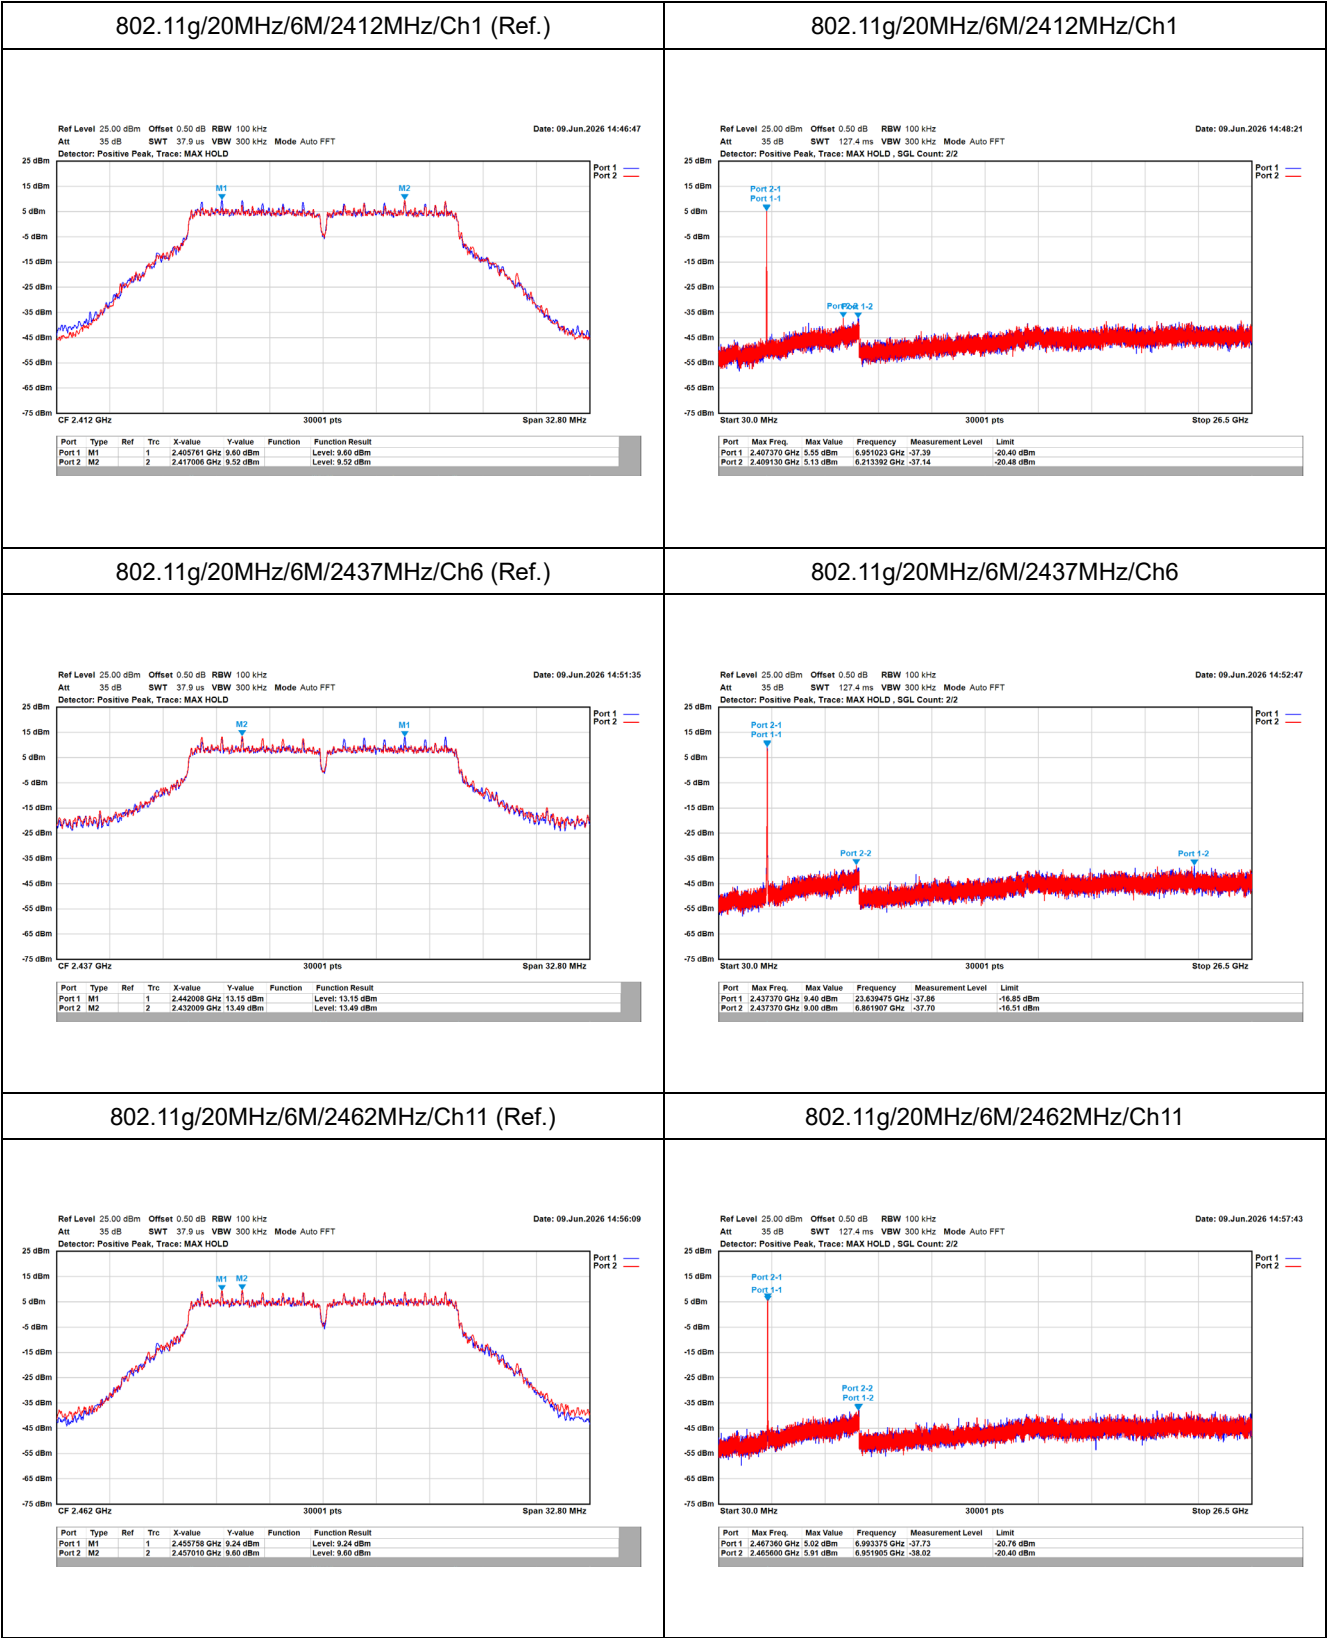


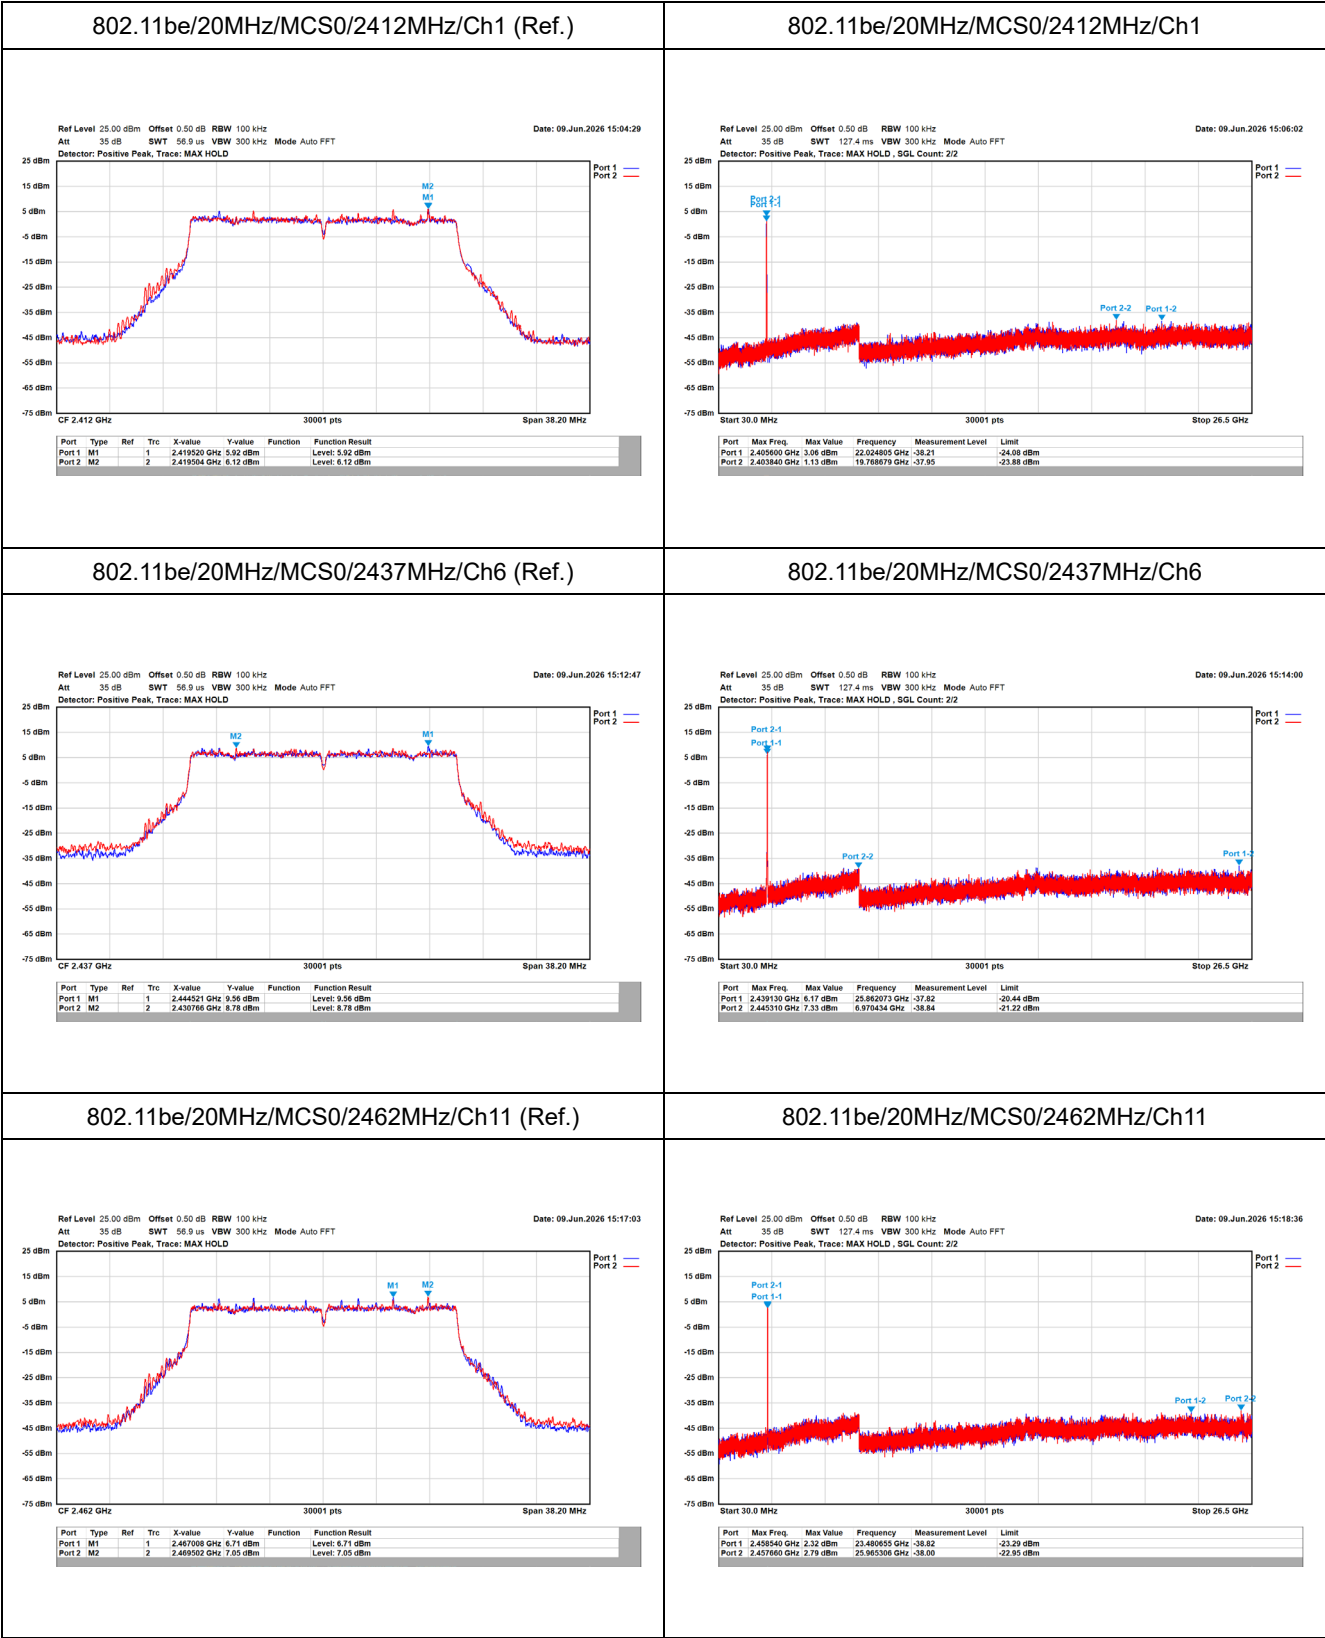

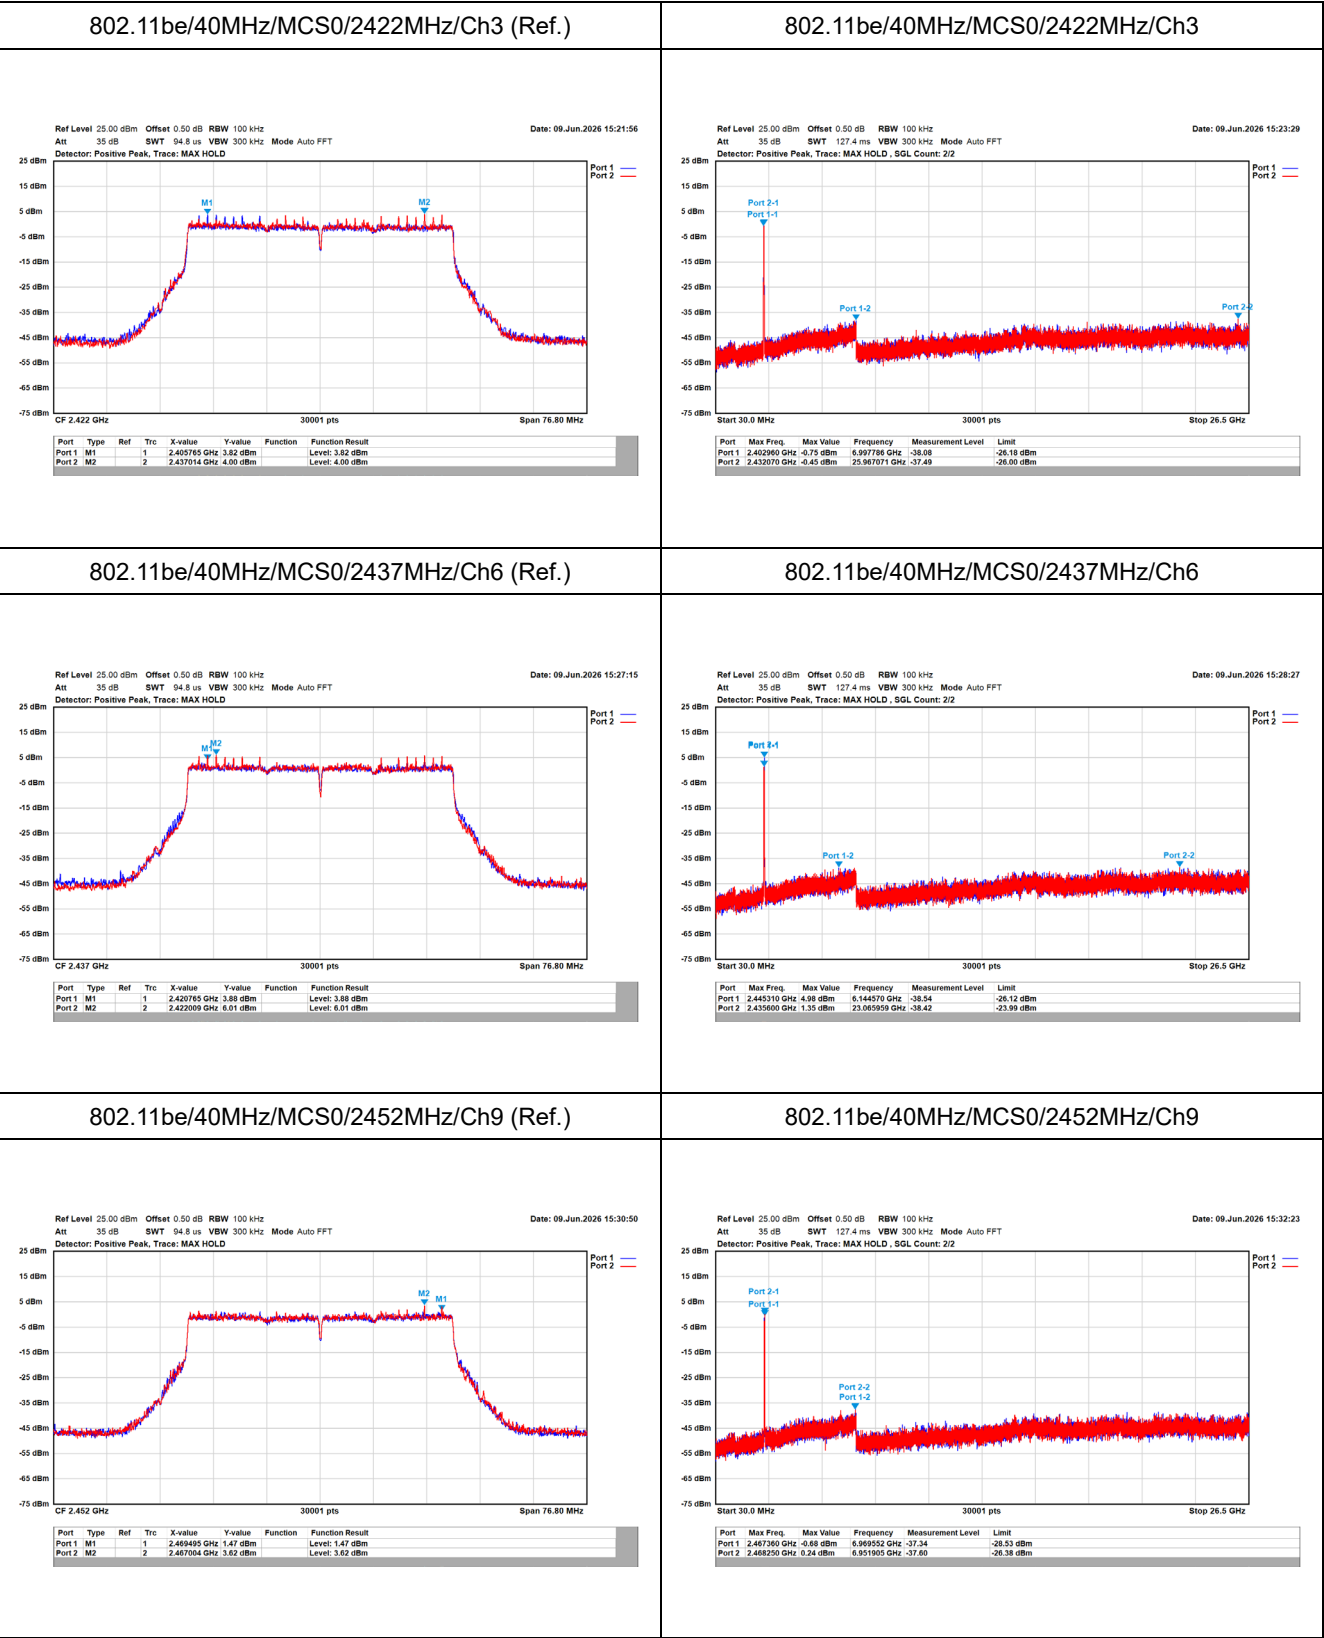


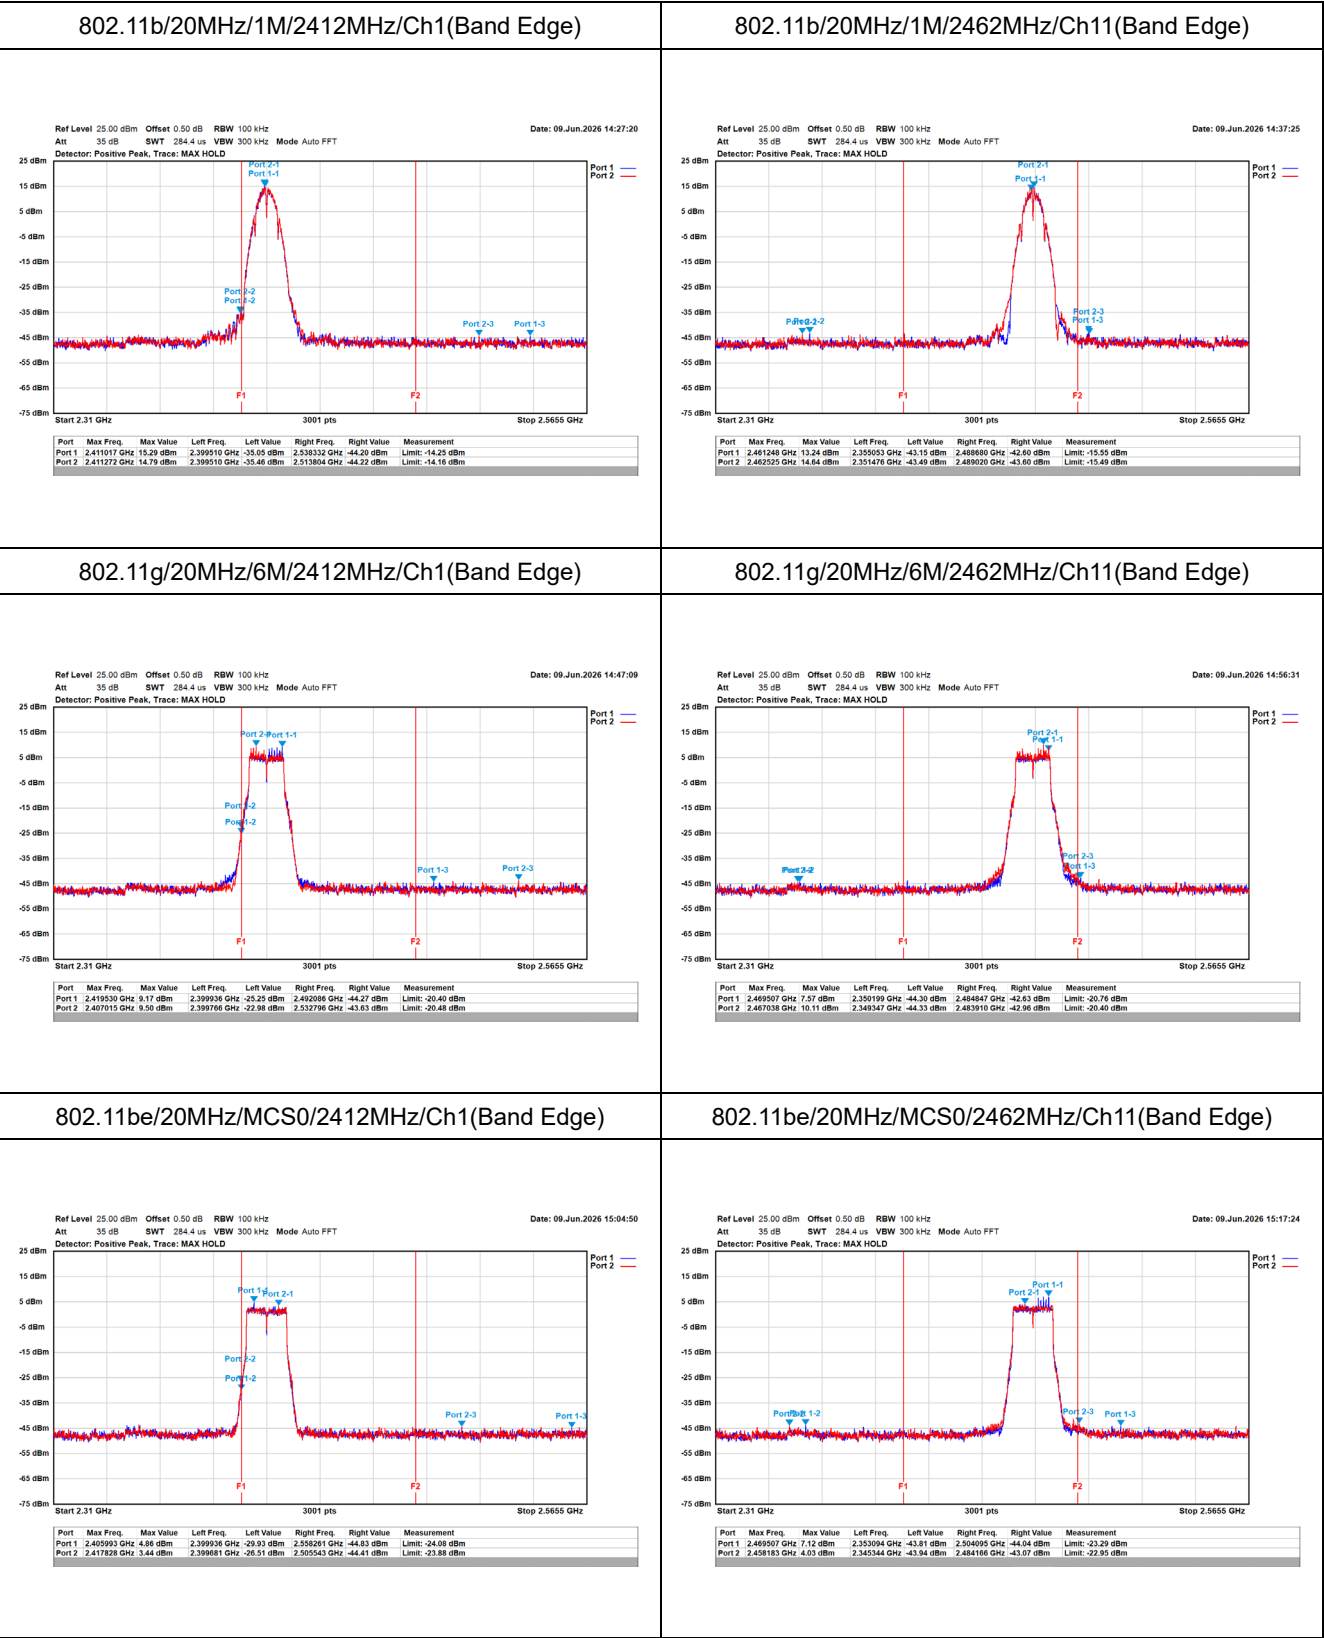

802.11be/40MHz/MCS0/2422MHz/Ch3(Band Edge)

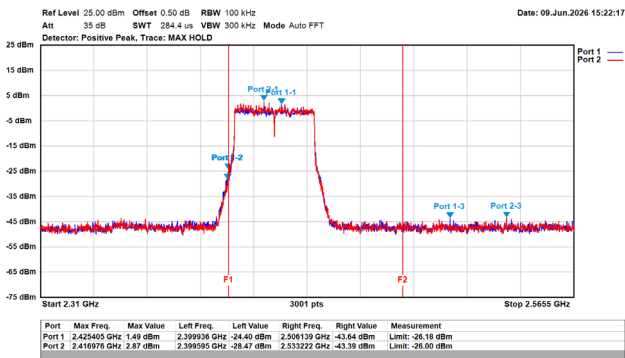


802.11be/40MHz/MCS0/2452MHz/Ch9(Band Edge)

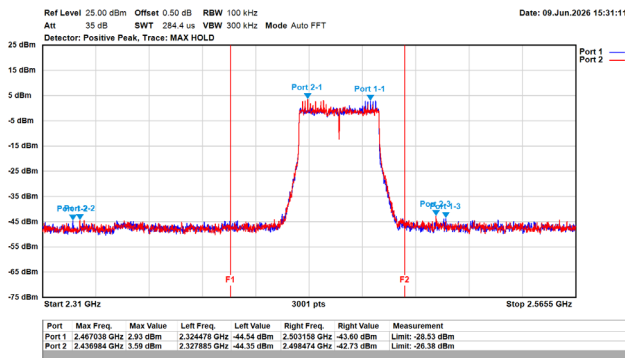

Appendix F. Test Result of Radiated Emission

Balance 310 5G


TX_b_2412MHz_H

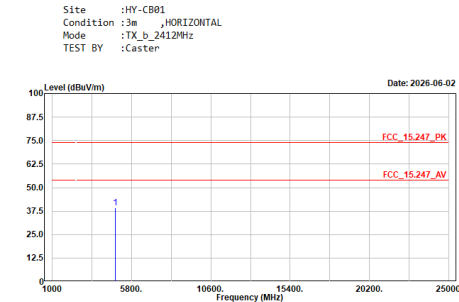

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	4824.000	39.10	74.00	-34.90	53.94	-14.84	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_b_2412MHz_V

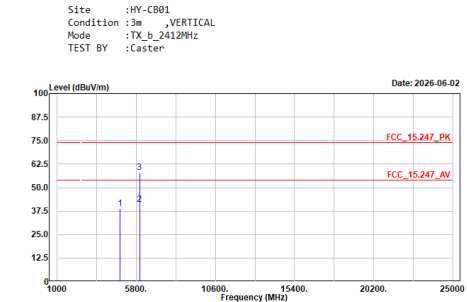

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	4824.000	38.76	74.00	-35.24	53.60	-14.84	Peak
2	5998.850	41.28	54.00	-12.72	55.42	-14.14	Average
3	5998.850	58.05	74.00	-15.95	72.19	-14.14	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_b_2437MHz_H

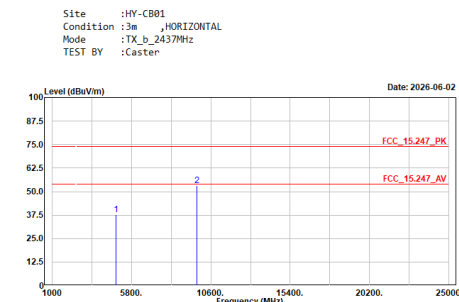

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	4874.000	37.69	74.00	-36.31	52.50	-14.81	Peak
2	9748.200	53.20	74.00	-20.80	64.53	-11.33	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2437MHz_V

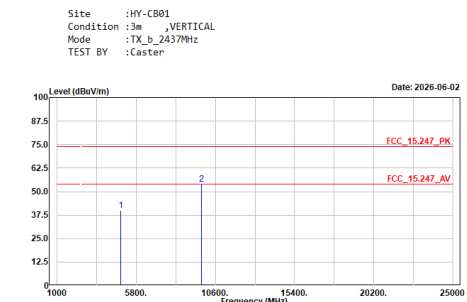


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	4874.000	48.14	74.00	-33.86	54.95	-14.81	Peak
2	9748.200	53.78	74.00	-20.22	65.11	-11.33	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_b_2462MHz_H Site :HY-CB01 Condition :3m ,HORIZONTAL Mode :TX_b_2462MHz TEST BY :Caster Level (dBuV/m) 100 87.5 75.0 62.5 50.0 37.5 25.0 12.5 0 Frequency (MHz) 1000580010600154002020025000 Date: 2026-06-02 FCC_15.247_PK FCC_15.247_AV <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>Limit</th><th>Level</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>4924.000</td><td>39.58</td><td>74.00</td><td>-34.42</td><td>54.25</td><td>-14.67</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	Limit	Level	dB/m		1	4924.000	39.58	74.00	-34.42	54.25	-14.67	Peak	TX_b_2462MHz_V Site :HY-CB01 Condition :3m ,VERTICAL Mode :TX_b_2462MHz TEST BY :Caster Level (dBuV/m) 100 87.5 75.0 62.5 50.0 37.5 25.0 12.5 0 Frequency (MHz) 1000580010600154002020025000 Date: 2026-06-02 FCC_15.247_PK FCC_15.247_AV <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>Limit</th><th>Level</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>4924.000</td><td>38.64</td><td>74.00</td><td>-35.36</td><td>53.31</td><td>-14.67</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	Limit	Level	dB/m		1	4924.000	38.64	74.00	-35.36	53.31	-14.67	Peak
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m																																											
1	4924.000	39.58	74.00	-34.42	54.25	-14.67	Peak																																										
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m																																											
1	4924.000	38.64	74.00	-35.36	53.31	-14.67	Peak																																										
TX_g_2412MHz_H Site :HY-CB01 Condition :3m ,HORIZONTAL Mode :TX_g_2412MHz TEST BY :Caster Level (dBuV/m) 100 87.5 75.0 62.5 50.0 37.5 25.0 12.5 0 Frequency (MHz) 1000580010600154002020025000 Date: 2026-06-02 FCC_15.247_PK FCC_15.247_AV <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>Limit</th><th>Level</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>4824.000</td><td>37.89</td><td>74.00</td><td>-36.11</td><td>52.73</td><td>-14.84</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	Limit	Level	dB/m		1	4824.000	37.89	74.00	-36.11	52.73	-14.84	Peak	TX_g_2412MHz_V Site :HY-CB01 Condition :3m ,VERTICAL Mode :TX_g_2412MHz TEST BY :Caster Level (dBuV/m) 100 87.5 75.0 62.5 50.0 37.5 25.0 12.5 0 Frequency (MHz) 1000580010600154002020025000 Date: 2026-06-02 FCC_15.247_PK FCC_15.247_AV <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>Limit</th><th>Level</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>4824.000</td><td>37.68</td><td>74.00</td><td>-36.32</td><td>52.52</td><td>-14.84</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	Limit	Level	dB/m		1	4824.000	37.68	74.00	-36.32	52.52	-14.84	Peak
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m																																											
1	4824.000	37.89	74.00	-36.11	52.73	-14.84	Peak																																										
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m																																											
1	4824.000	37.68	74.00	-36.32	52.52	-14.84	Peak																																										

TX_g_2437MHz_H

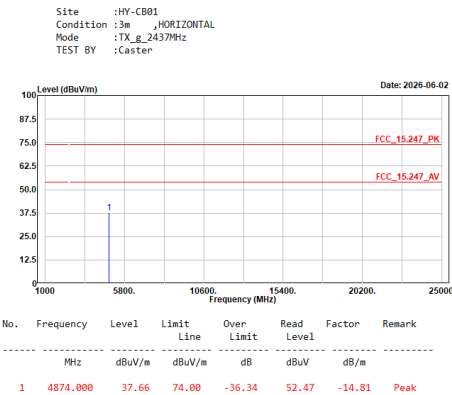


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2437MHz_V

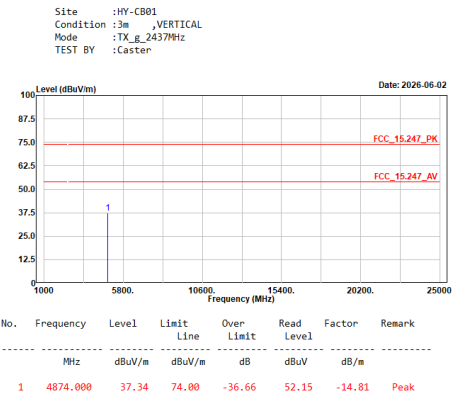


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2462MHz_H

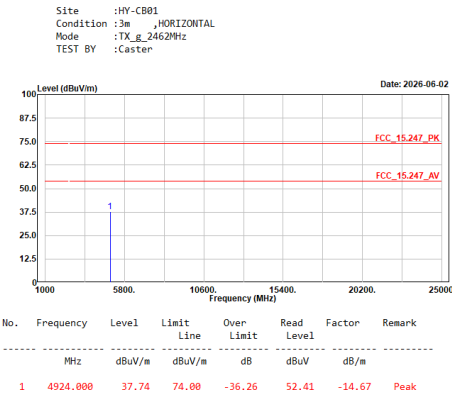


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2462MHz_V

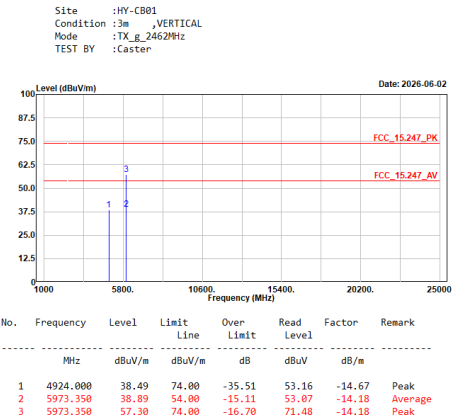


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_2412MHz_H

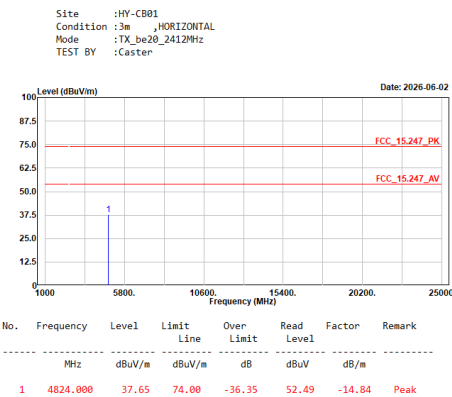


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_2412MHz_V

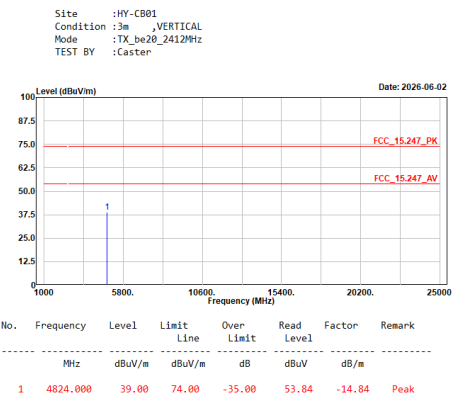


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_2437MHz_H

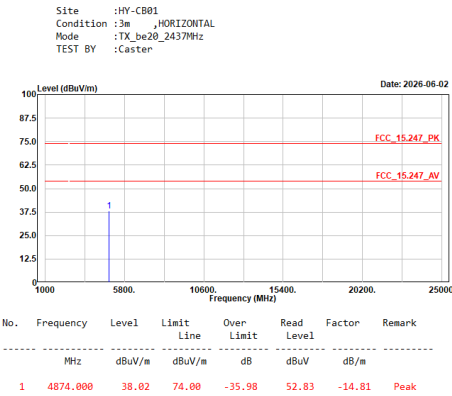


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_2437MHz_V

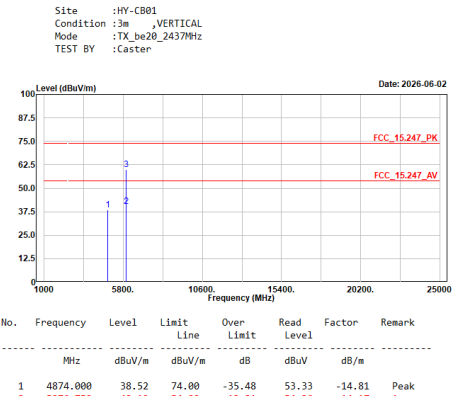


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_2462MHz_H

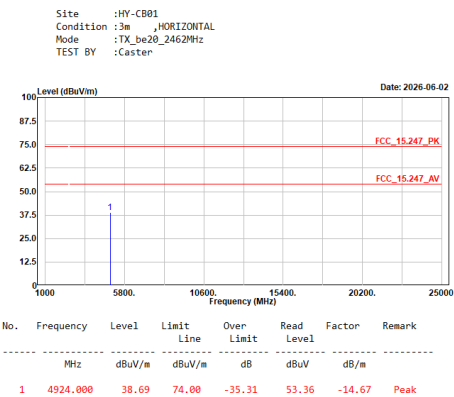


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_2462MHz_V

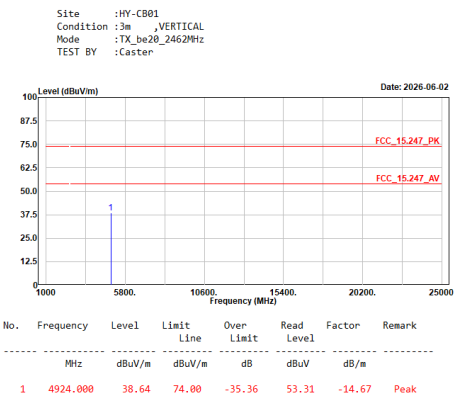


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_2422MHz_H

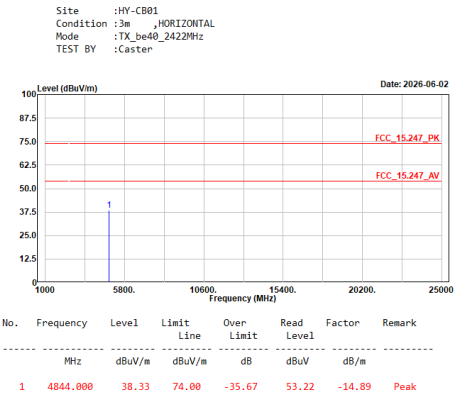


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_2422MHz_V

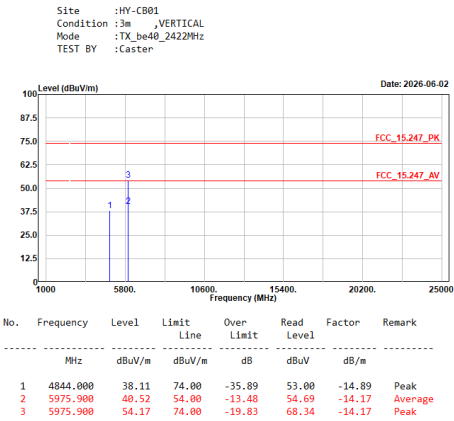


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_2437MHz_H

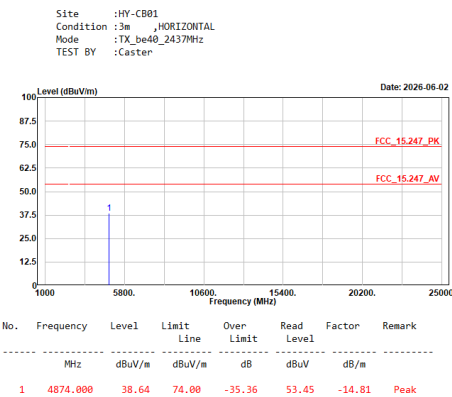


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_2437MHz_V

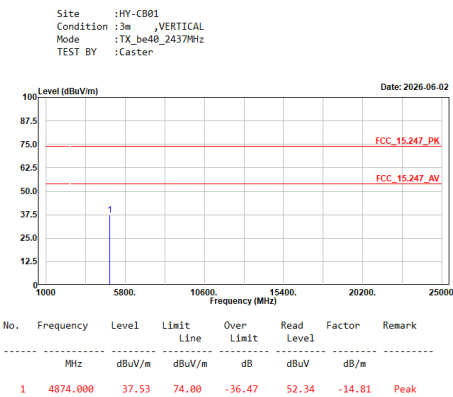


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_2452MHz_H

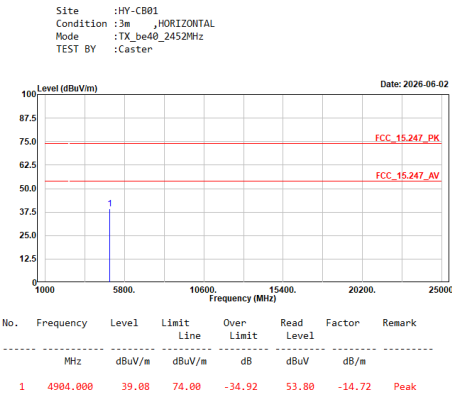

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_be40_2452MHz_V

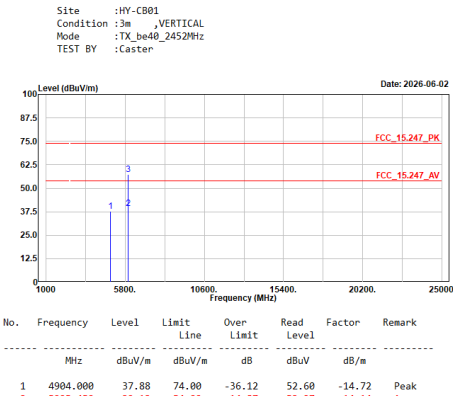

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_2437MHz_H

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_be40_2437MHz
TEST BY :Caster

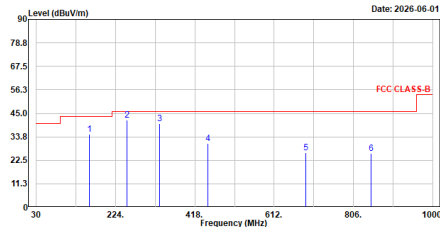


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	160.107	35.03	43.50	-8.47	59.06	-24.03	QP
2	252.362	41.80	46.00	-4.20	66.77	-24.97	QP
3	332.066	40.23	46.00	-5.77	62.52	-22.29	QP
4	450.322	30.68	46.00	-15.32	49.87	-19.19	QP
5	689.784	26.08	46.00	-19.92	40.56	-14.48	QP
6	849.242	25.93	46.00	-20.07	38.25	-12.32	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_be40_2437MHz_V

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_be40_2437MHz
TEST BY :Caster

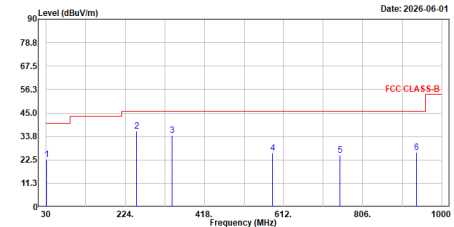


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	30.800	22.82	40.00	-17.18	47.96	-25.14	QP
2	251.311	36.28	46.00	-9.72	61.26	-24.98	QP
3	339.616	34.23	46.00	-11.77	56.49	-22.26	QP
4	584.629	25.71	46.00	-20.29	42.06	-16.35	QP
5	751.137	24.80	46.00	-21.20	38.09	-13.29	QP
6	937.297	26.22	46.00	-19.78	37.46	-11.24	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_b_2412MHz_H_Average

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_b_2412MHz
TEST BY :Caster

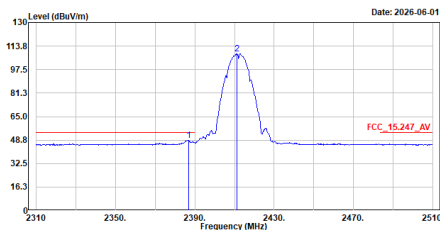


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2387.000	48.66	54.00	-5.34	18.67	29.99	Average
2	2411.200	108.59	-----	-----	78.67	29.92	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2412MHz_H_Peak

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_b_2412MHz
TEST BY :Caster

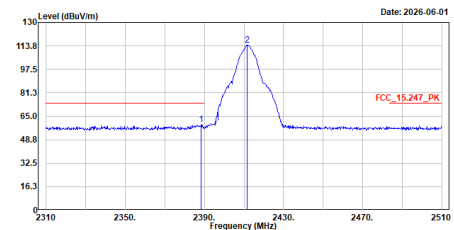


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2388.400	59.47	74.00	-14.53	29.48	29.99	Peak
2	2411.600	114.16	-----	-----	84.23	29.93	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2412MHz_V_Average

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_b_2412MHz
TEST BY :Caster

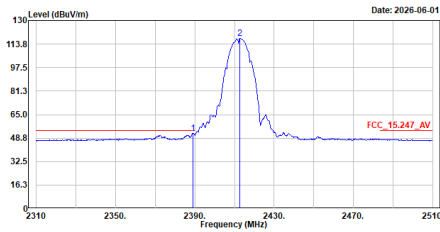


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2389.200	52.22	54.00	-1.78	22.23	29.99	Average
2	2412.000	117.90	-----	-----	87.96	29.94	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2412MHz_V_Peak

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_b_2412MHz
TEST BY :Caster

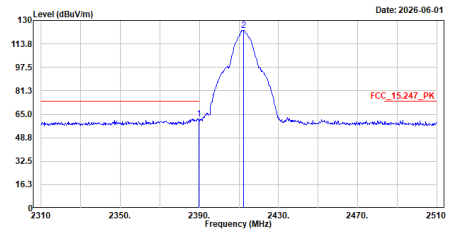


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2389.800	61.73	74.00	-12.27	31.74	29.99	Peak
2	2412.400	123.15	-----	-----	93.22	29.93	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2437MHz_H_Average

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_b_2437MHz
TEST BY :Caster

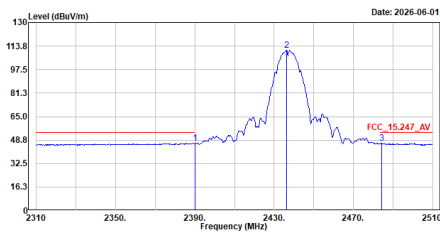


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2390.000	46.52	54.00	-7.48	16.53	29.99	Average
2	2436.200	110.92	-----	-----	80.99	29.93	Average
3	2484.400	46.56	54.00	-7.44	16.65	29.91	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2437MHz_H_Peak

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_b_2437MHz
TEST BY :Caster

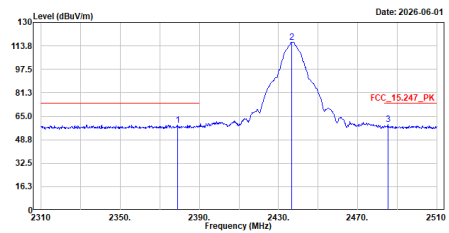


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2379.200	58.84	74.00	-15.16	28.86	29.98	Peak
2	2436.600	116.50	-----	-----	86.57	29.93	Peak
3	2485.200	59.52	74.00	-14.48	29.62	29.90	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2437MHz_V_Average

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_b_2437MHz
TEST BY :Caster

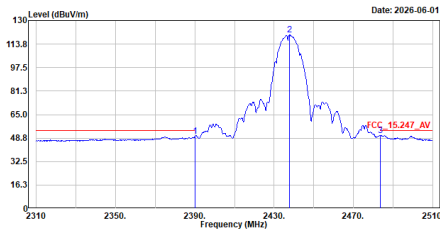


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2390.000	50.07	54.00	-3.93	20.08	29.99	Average
2	2437.000	120.17	-----	-----	90.24	29.93	Average
3	2483.600	58.61	54.00	-3.39	20.70	29.91	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2437MHz_V_Peak

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_b_2437MHz
TEST BY :Caster

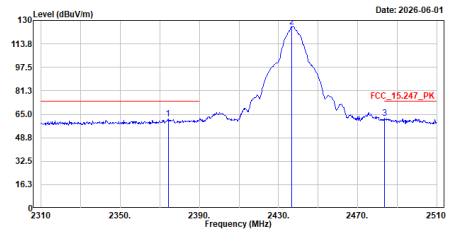


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2374.200	61.79	74.00	-12.21	31.87	29.92	Peak
2	2436.800	125.71	-----	-----	95.78	29.93	Peak
3	2483.600	62.43	74.00	-11.57	32.52	29.91	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2462MHz_H_Average

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_b_2462MHz
TEST BY :Caster

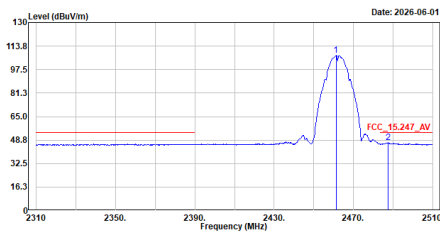


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2461.200	107.40	-----	-----	77.55	29.85	Average
2	2487.400	47.02	54.00	-6.98	17.14	29.88	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2462MHz_H_Peak

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_b_2462MHz
TEST BY :Caster

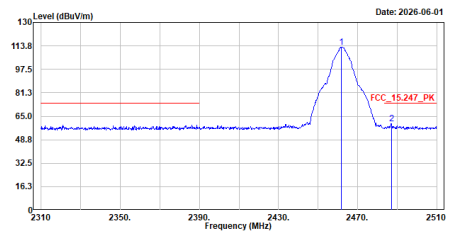


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2461.600	112.92	-----	-----	83.07	29.85	Peak
2	2487.000	59.74	74.00	-14.26	29.86	29.88	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2462MHz_V_Average

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_b_2462MHz
TEST BY :Caster

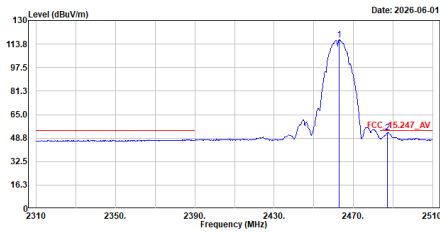


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2462.000	116.67	-----	-----	86.82	29.85	Average
2	2487.200	52.66	54.00	-1.34	22.78	29.88	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2462MHz_V_Peak

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_b_2462MHz
TEST BY :Caster

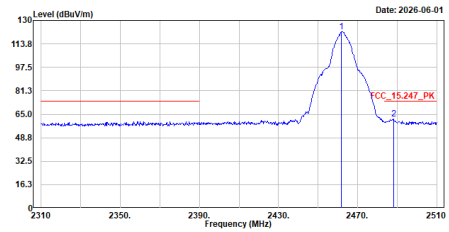


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2461.800	122.04	-----	-----	92.19	29.85	Peak
2	2488.200	61.96	74.00	-12.04	32.08	29.88	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2412MHz_H_Average

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_g_2412MHz
TEST BY :Caster

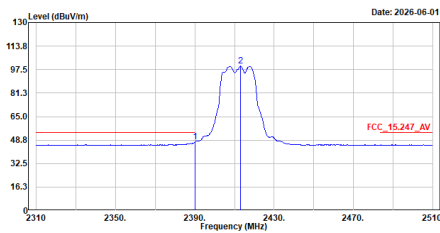


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2390.000	47.50	54.00	-6.50	17.51	29.99	Average
2	2413.000	99.86	-----	-----	69.92	29.94	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2412MHz_H_Peak

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_g_2412MHz
TEST BY :Caster

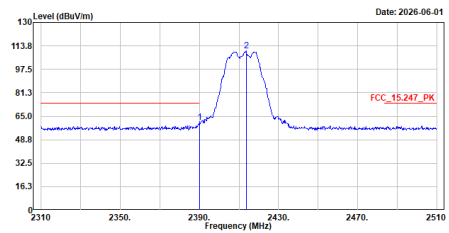


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2390.000	60.83	74.00	-13.17	30.84	29.99	Peak
2	2413.600	110.21	-----	-----	80.26	29.95	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2412MHz_V_Average

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_g_2412MHz
TEST BY :Caster

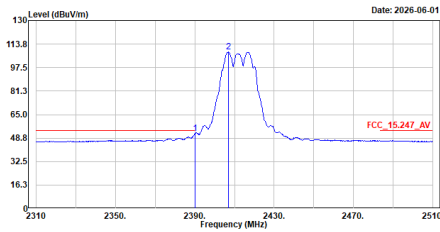


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2390.000	51.82	54.00	-2.18	21.83	29.99	Average
2	2406.800	108.21	-----	-----	78.27	29.94	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2412MHz_V_Peak

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_g_2412MHz
TEST BY :Caster

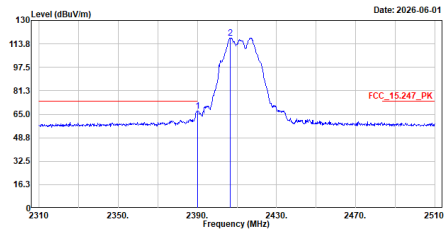


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2390.000	67.37	74.00	-6.63	37.38	29.99	Peak
2	2406.600	117.83	-----	-----	87.89	29.94	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2437MHz_H_Average

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_g_2437MHz
TEST BY :Caster

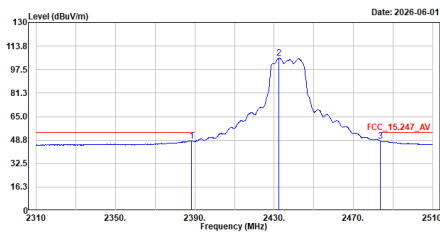


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2388.200	48.31	54.00	-5.69	18.32	29.99	Average
2	2432.400	105.49	-----	-----	75.56	29.93	Average
3	2483.600	48.22	54.00	-5.78	18.31	29.91	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2437MHz_H_Peak

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_g_2437MHz
TEST BY :Caster

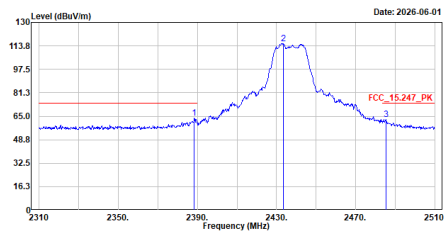


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2388.400	63.74	74.00	-10.26	33.75	29.99	Peak
2	2433.600	115.48	-----	-----	85.55	29.93	Peak
3	2485.400	62.76	74.00	-11.24	32.86	29.90	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2437MHz_V_Average

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_g_2437MHz
TEST BY :Caster

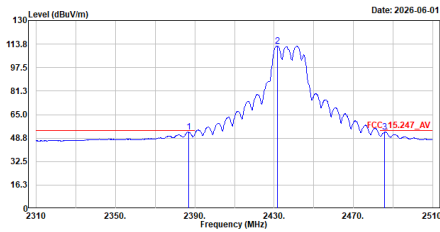


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2386.800	52.82	54.00	-1.18	22.83	29.99	Average
2	2431.800	112.57	-----	-----	82.64	29.93	Average
3	2485.600	52.98	54.00	-1.02	23.09	29.89	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2437MHz_V_Peak

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_g_2437MHz
TEST BY :Caster

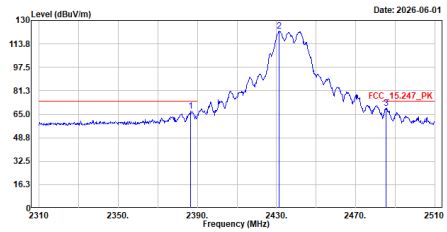


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2386.600	67.24	74.00	-6.76	37.25	29.99	Peak
2	2431.400	122.50	-----	-----	92.57	29.93	Peak
3	2485.400	69.24	74.00	-4.76	39.34	29.90	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2462MHz_H_Average

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_g_2462MHz
TEST BY :Caster

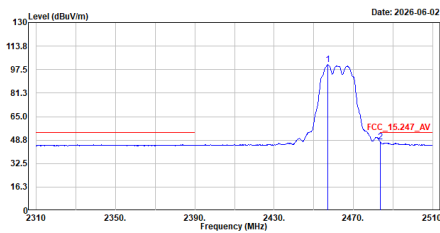


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2457.000	100.84	-----	-----	71.00	29.84	Average
2	2483.600	47.44	54.00	-6.56	17.53	29.91	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2462MHz_H_Peak

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_g_2462MHz
TEST BY :Caster

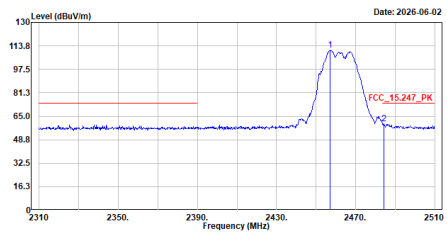


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2457.200	110.96	-----	-----	81.12	29.84	Peak
2	2484.200	59.98	74.00	-14.02	30.07	29.91	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2462MHz_V_Average

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_g_2462MHz
TEST BY :Caster

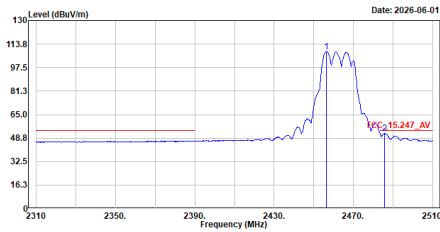


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2456.400	108.60	-----	-----	78.76	29.84	Average
2	2485.800	51.95	54.00	-2.05	22.06	29.89	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2462MHz_V_Peak

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_g_2462MHz
TEST BY :Caster

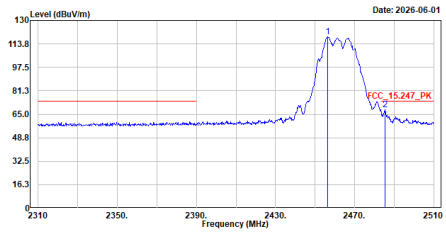


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2456.400	118.48	-----	-----	88.64	29.84	Peak
2	2485.400	67.99	74.00	-6.01	38.09	29.90	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_2412MHz_H_Average

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_be20_2412MHz
TEST BY :Caster

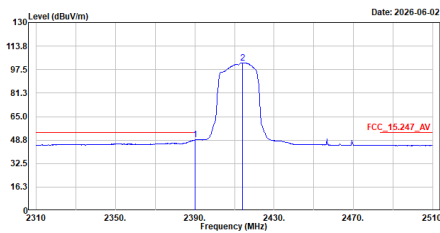


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2390.000	48.82	54.00	-5.18	18.83	29.99	Average
2	2414.000	102.28	-----	-----	72.33	29.95	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_2412MHz_H_Peak

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_be20_2412MHz
TEST BY :Caster

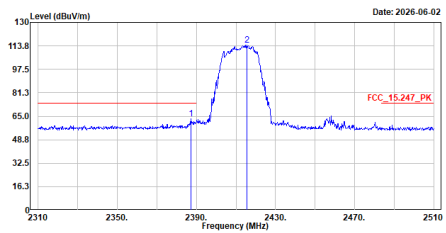


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2387.400	63.20	74.00	-10.80	33.21	29.99	Peak
2	2415.400	114.32	-----	-----	84.35	29.97	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_2412MHz_V_Average

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_be20_2412MHz
TEST BY :Caster

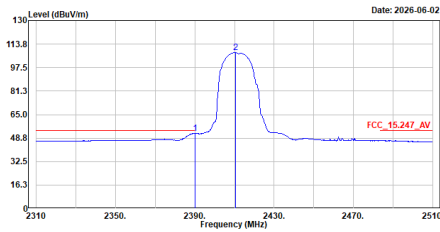


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2390.000	51.87	54.00	-2.13	21.88	29.99	Average
2	2410.600	107.99	-----	-----	78.07	29.92	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_2412MHz_V_Peak

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_be20_2412MHz
TEST BY :Caster

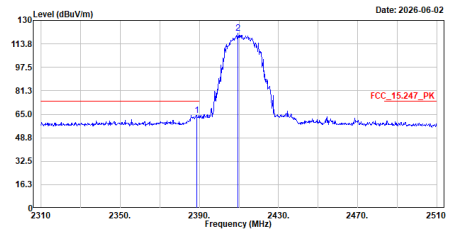


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2388.600	64.39	74.00	-9.61	34.40	29.99	Peak
2	2409.600	120.96	-----	-----	91.05	29.91	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_2437MHz_H_Average

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_be20_2437MHz
TEST BY :Caster

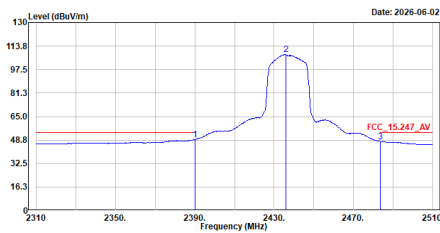


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2390.000	49.01	54.00	-4.99	19.02	29.99	Average
2	2435.000	107.87	-----	-----	77.94	29.93	Average
3	2483.600	47.79	54.00	-6.21	17.88	29.91	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_2437MHz_H_Peak

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_be20_2437MHz
TEST BY :Caster

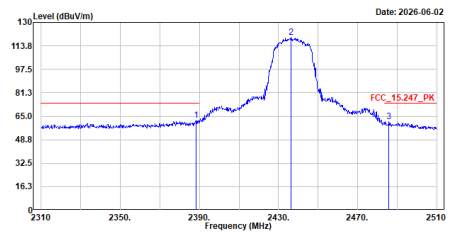


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2388.200	62.17	74.00	-11.83	32.18	29.99	Peak
2	2436.400	119.59	-----	-----	89.66	29.93	Peak
3	2485.800	61.39	74.00	-12.61	31.50	29.89	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_2437MHz_V_Average

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_be20_2437MHz
TEST BY :Caster

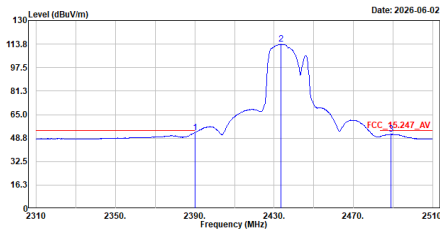


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2390.000	52.52	54.00	-1.48	22.53	29.99	Average
2	2433.600	113.68	-----	-----	83.75	29.93	Average
3	2489.000	51.36	54.00	-2.64	21.49	29.87	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_2437MHz_V_Peak

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_be20_2437MHz
TEST BY :Caster

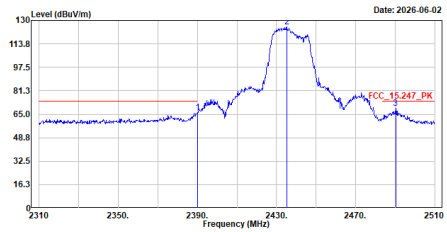


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2390.000	66.01	74.00	-7.99	36.02	29.99	Peak
2	2435.200	125.56	-----	-----	95.63	29.93	Peak
3	2490.200	68.97	74.00	-5.03	39.11	29.86	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_2462MHz_H_Average

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_be20_2462MHz
TEST BY :Caster

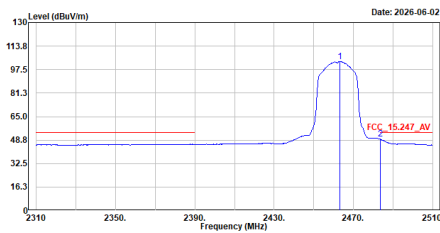


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2463.200	103.01	-----	-----	73.16	29.85	Average
2	2483.600	49.43	54.00	-4.57	19.52	29.91	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_2462MHz_H_Peak

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_be20_2462MHz
TEST BY :Caster

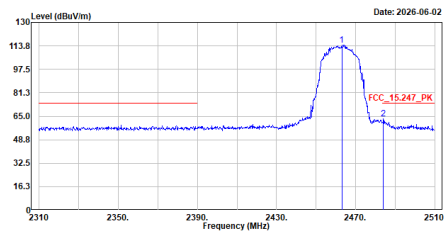


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2463.000	114.20	-----	-----	84.35	29.85	Peak
2	2484.000	63.52	74.00	-10.48	33.61	29.91	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_2462MHz_V_Average

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_be20_2462MHz
TEST BY :Caster

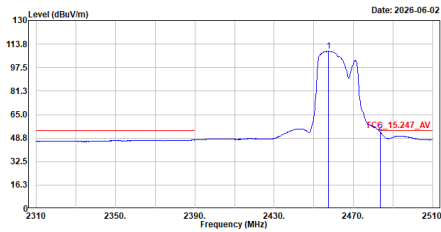


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2457.400	108.72	-----	-----	78.88	29.84	Average
2	2483.600	52.73	54.00	-1.27	22.82	29.91	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_2462MHz_V_Peak

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_be20_2462MHz
TEST BY :Caster

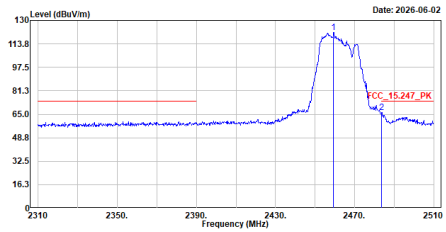


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2459.400	121.70	-----	-----	91.85	29.85	Peak
2	2483.600	66.15	74.00	-7.85	36.24	29.91	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_2422MHz_H_Average

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_be40_2422MHz
TEST BY :Caster

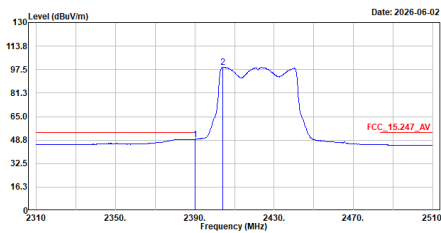


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2390.000	49.26	54.00	-4.74	19.27	29.99	Average
2	2404.000	99.06	-----	-----	69.09	29.97	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_2422MHz_H_Peak

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_be40_2422MHz
TEST BY :Caster

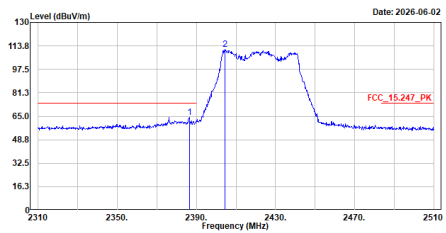


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2386.400	64.15	74.00	-9.85	34.16	29.99	Peak
2	2404.600	111.40	-----	-----	81.44	29.96	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_2422MHz_V_Average

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_be40_2422MHz
TEST BY :Caster

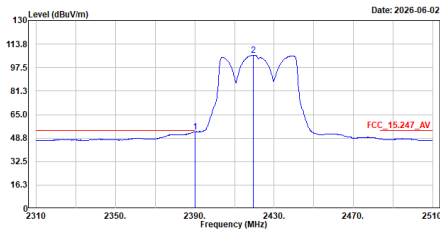


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2390.000	52.88	54.00	-1.12	22.89	29.99	Average
2	2419.400	106.16	-----	-----	76.15	30.01	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_2422MHz_V_Peak

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_be40_2422MHz
TEST BY :Caster

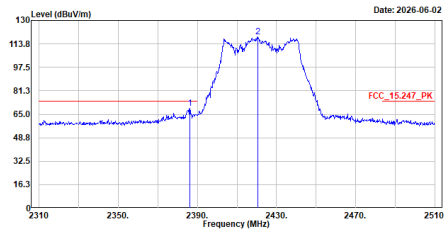


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2386.200	68.97	74.00	-5.03	38.98	29.99	Peak
2	2420.400	118.62	-----	-----	88.60	30.02	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_2437MHz_H_Average

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_be40_2437MHz
TEST BY :Caster

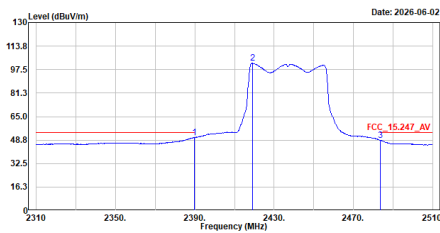


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2389.800	50.65	54.00	-3.35	20.66	29.99	Average
2	2419.000	101.88	-----	-----	71.87	30.01	Average
3	2483.600	48.68	54.00	-5.32	18.77	29.91	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_2437MHz_H_Peak

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_be40_2437MHz
TEST BY :Caster

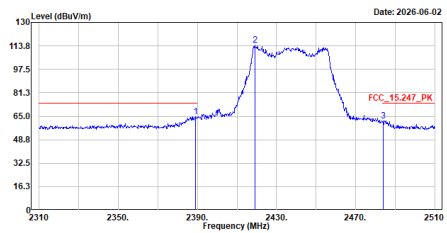


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2389.800	64.56	74.00	-9.44	34.57	29.99	Peak
2	2419.000	114.31	-----	-----	84.30	30.01	Peak
3	2484.000	61.91	74.00	-12.09	32.80	29.91	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_2437MHz_V_Average

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_be40_2437MHz
TEST BY :Caster

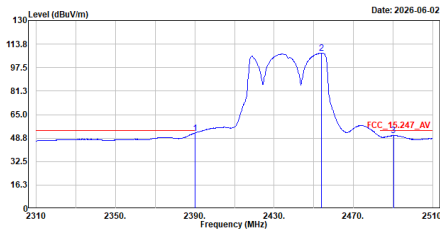


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2390.000	52.17	54.00	-1.83	22.18	29.99	Average
2	2453.000	107.53	-----	-----	77.69	29.84	Average
3	2490.200	58.72	54.00	-3.28	20.86	29.86	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_2437MHz_V_Peak

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_be40_2437MHz
TEST BY :Caster

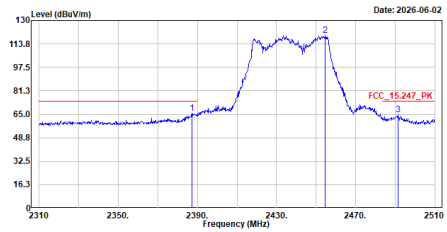


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2387.200	65.63	74.00	-8.37	35.64	29.99	Peak
2	2454.600	119.68	-----	-----	89.84	29.84	Peak
3	2491.400	64.58	74.00	-9.42	34.72	29.86	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_2452MHz_H_Average

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_be40_2452MHz
TEST BY :Caster

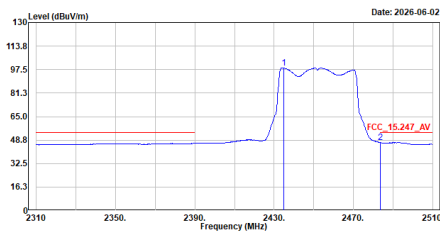


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2434.800	98.74	-----	-----	68.81	29.93	Average
2	2483.600	47.02	54.00	-6.98	17.11	29.91	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_2452MHz_H_Peak

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_be40_2452MHz
TEST BY :Caster

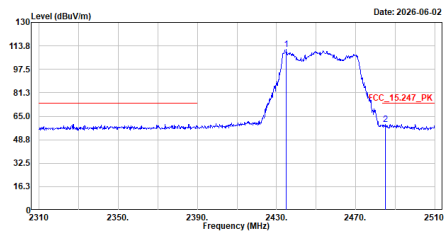


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2435.000	111.46	-----	-----	81.53	29.93	Peak
2	2485.000	59.49	74.00	-14.51	29.59	29.90	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_2452MHz_V_Average

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_be40_2452MHz
TEST BY :Caster

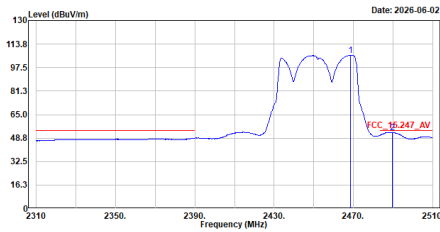


No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2468.400	105.94	-----		76.09	29.85	Average
2	2489.800	52.71	54.00	-1.29	22.85	29.86	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_2452MHz_V_Peak

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_be40_2452MHz
TEST BY :Caster

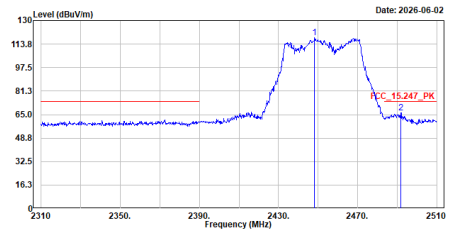

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2448.200	118.06	-----	-----	88.20	29.86	Peak
2	2491.800	66.44	74.00	-7.56	36.58	29.86	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

MAX Orbit 8




Co-location

Balance 310 5G

TX_b_2437MHz+TX_a_5745MHz+5GNR_n77_100M_1RB0_CH650000_H

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_b_2437MHz+TX_a_5745MHz+5GNR_n77_100M_1RB0_CH650000
TEST BY :Caster

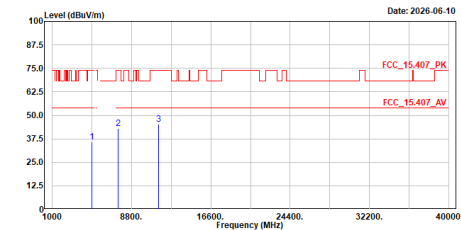


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4874.000	35.73	74.00	-38.27	50.54	-14.81	Peak
2	7500.000	43.00	74.00	-31.00	54.55	-11.55	Peak
3	11490.000	45.15	74.00	-28.85	54.50	-9.35	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2437MHz+TX_a_5745MHz+5GNR_n77_100M_1RB0_CH650000_V

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_b_2437MHz+TX_a_5745MHz+5GNR_n77_100M_1RB0_CH650000
TEST BY :Caster

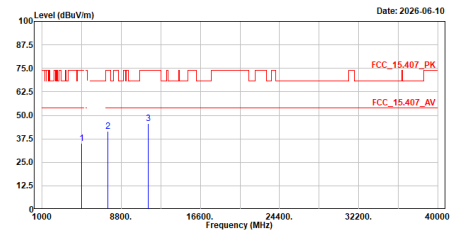


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4874.000	35.12	74.00	-38.88	49.93	-14.81	Peak
2	7500.000	41.52	74.00	-32.48	53.07	-11.55	Peak
3	11490.000	45.75	74.00	-28.25	55.10	-9.35	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2437MHz+TX_a_5745MHz+LTE_B41_20M_1RB0_40620_H

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_b_2437MHz+TX_a_5745MHz+LTE_B41_20M_1RB0_40620
TEST BY :Caster

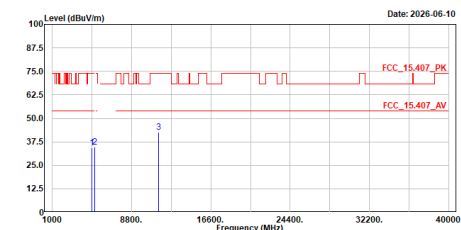


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4874.000	34.47	74.00	-39.53	49.28	-14.81	Peak
2	5186.000	34.80	74.00	-39.20	49.52	-14.72	Peak
3	11490.000	42.77	74.00	-31.23	52.12	-9.35	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2437MHz+TX_a_5745MHz+LTE_B41_20M_1RB0_40620_V

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_b_2437MHz+TX_a_5745MHz+LTE_B41_20M_1RB0_40620
TEST BY :Caster

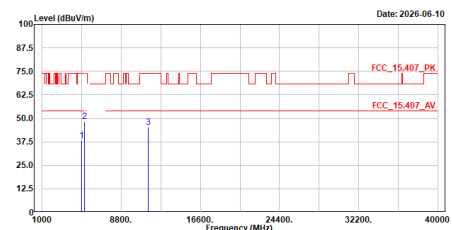

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4874.000	38.30	74.00	-35.70	53.11	-14.81	Peak
2	5186.000	48.30	74.00	-25.70	62.87	-14.57	Peak
3	11490.000	45.35	74.00	-28.65	54.70	-9.35	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2437MHz+TX_a_5745MHz+WCDMA_B5_CH4182_H Site :HY-CB01 Condition :3m ,HORIZONTAL Mode :TX_b_2437MHz+TX_a_5745MHz+WCDMA_B5_CH4182 TEST BY :Caster Level (dBuV/m)
--

TX_b_2437MHz+TX_a_5745MHz+LTE_B41_20M_1RB0_40 620_H	TX_b_2437MHz+TX_a_5745MHz+LTE_B41_20M_1RB0_40 620_V																																																																																																																																
Site :HY-CB01 Condition :3m ,HORIZONTAL Mode :TX_b_2437MHz+TX_a_5745MHz+LTE_B41_20M_1RB0_40620 TEST BY :Caster Level (dBuV/m) Date: 2026-06-11 <table><thead><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr></thead><tbody><tr><td>1</td><td>36.900</td><td>36.18</td><td>40.00</td><td>-3.82</td><td>60.86</td><td>-24.68</td><td>QP</td></tr><tr><td>2</td><td>125.005</td><td>39.48</td><td>43.50</td><td>-4.02</td><td>65.56</td><td>-26.08</td><td>QP</td></tr><tr><td>3</td><td>250.311</td><td>44.62</td><td>46.00</td><td>-1.38</td><td>69.60</td><td>-24.98</td><td>QP</td></tr><tr><td>4</td><td>415.470</td><td>40.15</td><td>46.00</td><td>-5.85</td><td>60.55</td><td>-20.40</td><td>QP</td></tr><tr><td>5</td><td>639.381</td><td>25.65</td><td>46.00</td><td>-20.35</td><td>40.90</td><td>-15.25</td><td>QP</td></tr><tr><td>6</td><td>972.049</td><td>27.89</td><td>54.00</td><td>-26.11</td><td>36.71</td><td>-10.82</td><td>QP</td></tr></tbody></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission under 30MHz was not included since the emission levels are very low against the limit.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	36.900	36.18	40.00	-3.82	60.86	-24.68	QP	2	125.005	39.48	43.50	-4.02	65.56	-26.08	QP	3	250.311	44.62	46.00	-1.38	69.60	-24.98	QP	4	415.470	40.15	46.00	-5.85	60.55	-20.40	QP	5	639.381	25.65	46.00	-20.35	40.90	-15.25	QP	6	972.049	27.89	54.00	-26.11	36.71	-10.82	QP	Site :HY-CB01 Condition :3m ,VERTICAL Mode :TX_b_2437MHz+TX_a_5745MHz+LTE_B41_20M_1RB0_40620 TEST BY :Caster Level (dBuV/m) Date: 2026-06-11 <table><thead><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr></thead><tbody><tr><td>1</td><td>31.850</td><td>38.03</td><td>40.00</td><td>-1.97</td><td>63.53</td><td>-25.50</td><td>QP</td></tr><tr><td>2</td><td>140.456</td><td>32.73</td><td>43.50</td><td>-10.77</td><td>57.19</td><td>-24.46</td><td>QP</td></tr><tr><td>3</td><td>252.662</td><td>38.82</td><td>46.00</td><td>-7.18</td><td>63.79</td><td>-24.97</td><td>QP</td></tr><tr><td>4</td><td>407.470</td><td>38.61</td><td>46.00</td><td>-7.39</td><td>59.14</td><td>-20.53</td><td>QP</td></tr><tr><td>5</td><td>632.081</td><td>25.72</td><td>46.00</td><td>-20.28</td><td>41.00</td><td>-15.28</td><td>QP</td></tr><tr><td>6</td><td>957.698</td><td>28.10</td><td>46.00</td><td>-17.90</td><td>39.02</td><td>-10.92</td><td>QP</td></tr></tbody></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission under 30MHz was not included since the emission levels are very low against the limit.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	31.850	38.03	40.00	-1.97	63.53	-25.50	QP	2	140.456	32.73	43.50	-10.77	57.19	-24.46	QP	3	252.662	38.82	46.00	-7.18	63.79	-24.97	QP	4	407.470	38.61	46.00	-7.39	59.14	-20.53	QP	5	632.081	25.72	46.00	-20.28	41.00	-15.28	QP	6	957.698	28.10	46.00	-17.90	39.02	-10.92	QP
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																											
1	36.900	36.18	40.00	-3.82	60.86	-24.68	QP																																																																																																																										
2	125.005	39.48	43.50	-4.02	65.56	-26.08	QP																																																																																																																										
3	250.311	44.62	46.00	-1.38	69.60	-24.98	QP																																																																																																																										
4	415.470	40.15	46.00	-5.85	60.55	-20.40	QP																																																																																																																										
5	639.381	25.65	46.00	-20.35	40.90	-15.25	QP																																																																																																																										
6	972.049	27.89	54.00	-26.11	36.71	-10.82	QP																																																																																																																										
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																											
1	31.850	38.03	40.00	-1.97	63.53	-25.50	QP																																																																																																																										
2	140.456	32.73	43.50	-10.77	57.19	-24.46	QP																																																																																																																										
3	252.662	38.82	46.00	-7.18	63.79	-24.97	QP																																																																																																																										
4	407.470	38.61	46.00	-7.39	59.14	-20.53	QP																																																																																																																										
5	632.081	25.72	46.00	-20.28	41.00	-15.28	QP																																																																																																																										
6	957.698	28.10	46.00	-17.90	39.02	-10.92	QP																																																																																																																										
TX_b_2437MHz+TX_a_5745MHz+WCDMA_B5_CH4182_H	TX_b_2437MHz+TX_a_5745MHz+WCDMA_B5_CH4182_V																																																																																																																																
Site :HY-CB01 Condition :3m ,HORIZONTAL Mode :TX_b_2437MHz+TX_a_5745MHz+WCDMA_B5_CH4182 TEST BY :Caster Level (dBuV/m) Date: 2026-06-11 <table><thead><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr></thead><tbody><tr><td>1</td><td>37.250</td><td>35.18</td><td>40.00</td><td>-4.82</td><td>59.80</td><td>-24.62</td><td>QP</td></tr><tr><td>2</td><td>259.162</td><td>44.16</td><td>46.00</td><td>-1.84</td><td>68.96</td><td>-24.80</td><td>QP</td></tr><tr><td>3</td><td>419.070</td><td>40.42</td><td>46.00</td><td>-5.58</td><td>60.74</td><td>-20.32</td><td>QP</td></tr><tr><td>4</td><td>547.877</td><td>26.40</td><td>46.00</td><td>-19.60</td><td>43.84</td><td>-17.44</td><td>QP</td></tr><tr><td>5</td><td>743.337</td><td>26.00</td><td>46.00</td><td>-20.00</td><td>39.36</td><td>-13.36</td><td>QP</td></tr><tr><td>6</td><td>977.049</td><td>27.33</td><td>54.00</td><td>-26.67</td><td>38.15</td><td>-10.82</td><td>QP</td></tr></tbody></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission under 30MHz was not included since the emission levels are very low against the limit.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	37.250	35.18	40.00	-4.82	59.80	-24.62	QP	2	259.162	44.16	46.00	-1.84	68.96	-24.80	QP	3	419.070	40.42	46.00	-5.58	60.74	-20.32	QP	4	547.877	26.40	46.00	-19.60	43.84	-17.44	QP	5	743.337	26.00	46.00	-20.00	39.36	-13.36	QP	6	977.049	27.33	54.00	-26.67	38.15	-10.82	QP	Site :HY-CB01 Condition :3m ,VERTICAL Mode :TX_b_2437MHz+TX_a_5745MHz+WCDMA_B5_CH4182 TEST BY :Caster Level (dBuV/m) Date: 2026-06-11 <table><thead><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr></thead><tbody><tr><td>1</td><td>31.100</td><td>38.77</td><td>40.00</td><td>-1.23</td><td>63.96</td><td>-25.19</td><td>QP</td></tr><tr><td>2</td><td>125.005</td><td>36.93</td><td>43.50</td><td>-6.57</td><td>63.01</td><td>-26.08</td><td>QP</td></tr><tr><td>3</td><td>250.761</td><td>38.67</td><td>46.00</td><td>-7.33</td><td>63.65</td><td>-24.98</td><td>QP</td></tr><tr><td>4</td><td>431.421</td><td>38.36</td><td>46.00</td><td>-7.64</td><td>58.17</td><td>-19.81</td><td>QP</td></tr><tr><td>5</td><td>648.382</td><td>25.07</td><td>46.00</td><td>-20.93</td><td>40.19</td><td>-15.12</td><td>QP</td></tr><tr><td>6</td><td>958.298</td><td>28.44</td><td>46.00</td><td>-17.56</td><td>39.36</td><td>-10.92</td><td>QP</td></tr></tbody></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission under 30MHz was not included since the emission levels are very low against the limit.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	31.100	38.77	40.00	-1.23	63.96	-25.19	QP	2	125.005	36.93	43.50	-6.57	63.01	-26.08	QP	3	250.761	38.67	46.00	-7.33	63.65	-24.98	QP	4	431.421	38.36	46.00	-7.64	58.17	-19.81	QP	5	648.382	25.07	46.00	-20.93	40.19	-15.12	QP	6	958.298	28.44	46.00	-17.56	39.36	-10.92	QP
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																											
1	37.250	35.18	40.00	-4.82	59.80	-24.62	QP																																																																																																																										
2	259.162	44.16	46.00	-1.84	68.96	-24.80	QP																																																																																																																										
3	419.070	40.42	46.00	-5.58	60.74	-20.32	QP																																																																																																																										
4	547.877	26.40	46.00	-19.60	43.84	-17.44	QP																																																																																																																										
5	743.337	26.00	46.00	-20.00	39.36	-13.36	QP																																																																																																																										
6	977.049	27.33	54.00	-26.67	38.15	-10.82	QP																																																																																																																										
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																											
1	31.100	38.77	40.00	-1.23	63.96	-25.19	QP																																																																																																																										
2	125.005	36.93	43.50	-6.57	63.01	-26.08	QP																																																																																																																										
3	250.761	38.67	46.00	-7.33	63.65	-24.98	QP																																																																																																																										
4	431.421	38.36	46.00	-7.64	58.17	-19.81	QP																																																																																																																										
5	648.382	25.07	46.00	-20.93	40.19	-15.12	QP																																																																																																																										
6	958.298	28.44	46.00	-17.56	39.36	-10.92	QP																																																																																																																										