


TX_be20_5745MHz_H_Peak

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_be20_5745MHz
TEST BY :Caster

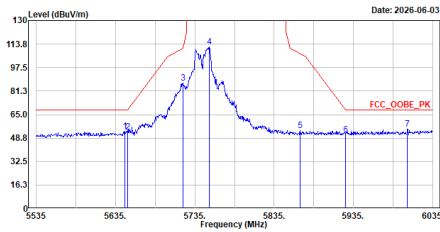


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5646.500	53.38	68.22	-14.84	38.20	15.18	Peak
2	5650.000	52.84	68.23	-15.39	37.64	15.20	Peak
3	5720.000	86.77	118.80	-24.03	71.17	15.60	Peak
4	5753.500	111.66	-----	-----	96.01	15.65	Peak
5	5867.500	54.18	107.30	-53.12	38.50	15.68	Peak
6	5925.000	51.08	68.23	-17.15	35.38	15.70	Peak
7	6003.000	54.99	68.22	-13.23	39.04	15.95	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_5745MHz_V_Peak

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_be20_5745MHz
TEST BY :Caster

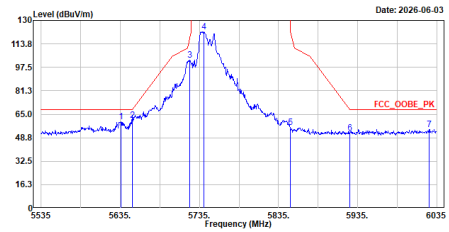


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5636.000	59.85	68.22	-8.37	44.75	15.10	Peak
2	5650.000	60.76	68.23	-7.47	45.56	15.20	Peak
3	5723.000	102.66	117.64	-14.98	87.86	15.00	Peak
4	5740.500	122.31	-----	-----	106.68	15.63	Peak
5	5850.000	55.98	122.20	-66.22	40.30	15.68	Peak
6	5925.000	51.80	68.23	-16.43	36.10	15.70	Peak
7	6025.500	54.45	68.22	-13.77	38.36	16.09	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_5785MHz_H_Peak

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_be20_5785MHz
TEST BY :Caster

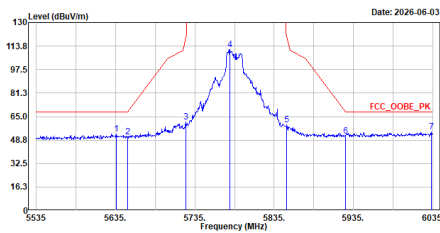


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5636.000	53.00	68.22	-15.22	37.90	15.10	Peak
2	5650.000	51.11	68.23	-17.12	35.91	15.20	Peak
3	5723.000	61.47	118.78	-57.31	45.87	15.60	Peak
4	5770.500	111.33	-----	-----	95.71	15.62	Peak
5	5851.000	59.48	119.92	-60.44	43.80	15.68	Peak
6	5925.000	51.69	68.23	-16.54	35.99	15.70	Peak
7	6033.000	54.55	68.22	-13.67	38.40	16.15	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_5785MHz_V_Peak

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_be20_5785MHz
TEST BY :Caster

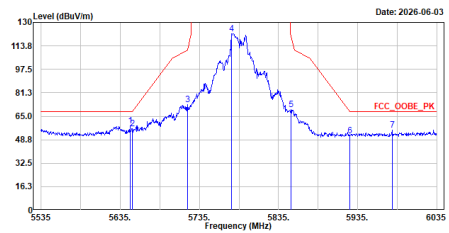


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5647.500	58.38	68.22	-9.84	43.19	15.19	Peak
2	5650.000	56.40	68.23	-11.83	41.20	15.20	Peak
3	5720.000	73.24	118.80	-37.56	57.64	15.60	Peak
4	5776.000	122.22	-----	-----	106.59	15.63	Peak
5	5850.500	69.53	121.06	-51.53	53.85	15.68	Peak
6	5925.000	51.67	68.23	-16.56	35.97	15.70	Peak
7	5978.500	55.36	68.22	-12.86	39.49	15.87	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_5825MHz_H_Peak

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_be20_5825MHz
TEST BY :Caster

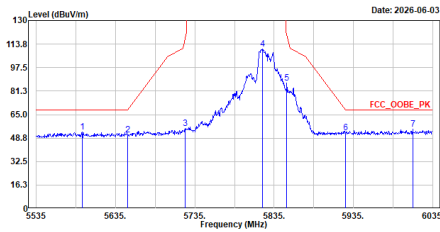


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5593.000	52.77	68.22	-15.45	37.95	14.82	Peak
2	5650.000	50.87	68.23	-17.36	35.67	15.20	Peak
3	5722.500	55.43	116.50	-61.07	39.82	15.61	Peak
4	5820.000	110.42	-----	-----	94.78	15.64	Peak
5	5851.000	86.78	119.92	-33.14	71.10	15.68	Peak
6	5925.000	52.48	68.23	-15.75	36.78	15.70	Peak
7	6010.000	54.77	68.22	-13.45	38.76	16.01	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_5825MHz_V_Peak

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_be20_5825MHz
TEST BY :Caster

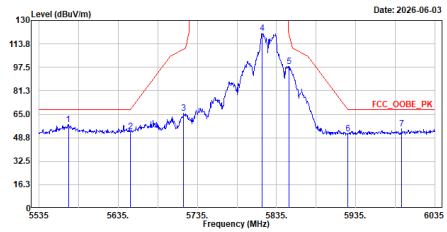


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5572.000	57.89	68.22	-10.33	43.24	14.65	Peak
2	5650.000	52.89	68.23	-15.34	37.69	15.20	Peak
3	5717.500	65.57	110.10	-44.53	49.99	15.58	Peak
4	5816.500	121.00	-----	-----	105.37	15.63	Peak
5	5851.000	98.09	119.92	-21.83	82.41	15.68	Peak
6	5925.000	51.62	68.23	-16.61	35.92	15.70	Peak
7	5993.500	55.03	68.22	-13.19	39.12	15.91	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_5190MHz_H_Average

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_be40_5190MHz
TEST BY :Caster

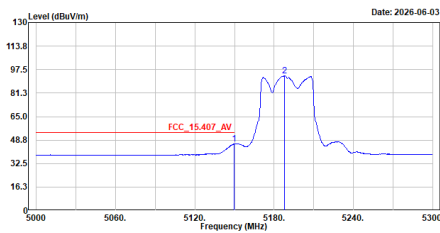


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5149.700	46.07	54.00	-7.93	32.14	13.93	Average
2	5188.100	93.10	-----	-----	79.25	13.85	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_5190MHz_V_Peak

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_be40_5190MHz
TEST BY :Caster

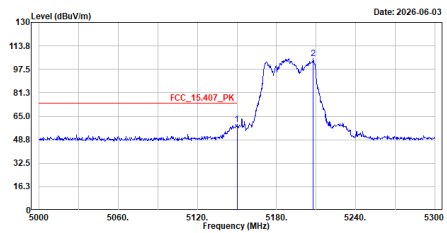


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5150.000	59.38	74.00	-14.62	45.45	13.93	Peak
2	5207.900	104.79	-----	-----	90.97	13.82	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_5190MHz_V_Average

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_be40_5190MHz
TEST BY :Caster

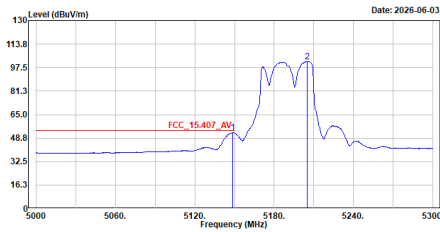


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5148.500	52.68	54.00	-1.32	38.76	13.92	Average
2	5204.900	101.64	-----	-----	87.82	13.82	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_5190MHz_V_Peak

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_be40_5190MHz
TEST BY :Caster

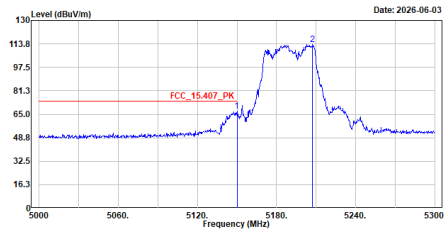


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5150.000	67.32	74.00	-6.68	53.39	13.93	Peak
2	5207.300	113.49	-----	-----	99.67	13.82	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_5230MHz_Band1_H_Average

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_be40_5230MHz_Band1
TEST BY :Caster

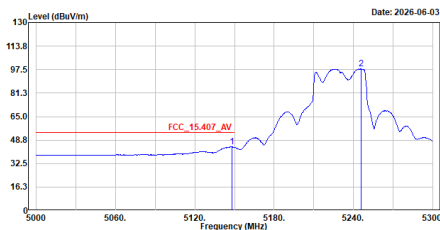


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5147.900	44.09	54.00	-9.91	30.17	13.92	Average
2	5245.700	97.90	-----	-----	84.01	13.89	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_5230MHz_Band1_H_Peak

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_be40_5230MHz_Band1
TEST BY :Caster

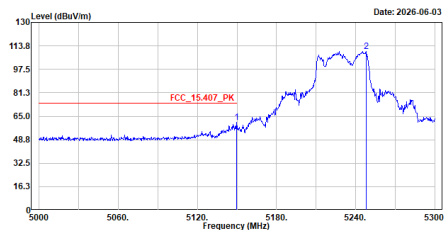


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5149.700	60.90	74.00	-13.10	46.97	13.93	Peak
2	5247.800	109.94	-----	-----	96.05	13.89	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_5230MHz_Band1_V_Average

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_be40_5230MHz_Band1
TEST BY :Caster

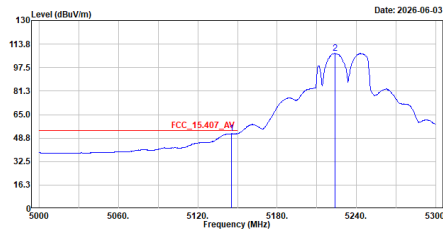


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5145.200	51.78	54.00	-2.22	37.87	13.91	Average
2	5223.800	107.30	-----	-----	93.45	13.85	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_5230MHz_Band1_V_Peak

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_be40_5230MHz_Band1
TEST BY :Caster

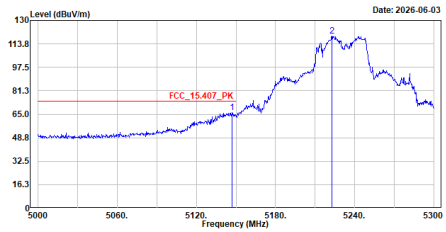


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5147.000	66.19	74.00	-7.81	52.27	13.92	Peak
2	5222.600	119.23	-----	-----	105.38	13.85	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_5230MHz_Band2_H_Average

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_be40_5230MHz_Band2
TEST BY :Caster

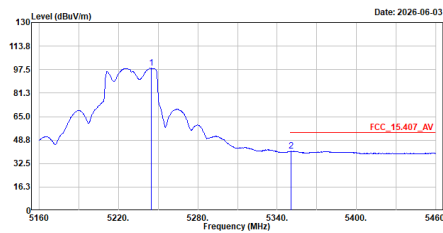


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5244.900	98.45	-----	-----	84.56	13.89	Average
2	5350.500	40.98	54.00	-13.02	27.10	13.88	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_5230MHz_Band2_H_Peak

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_be40_5230MHz_Band2
TEST BY :Caster

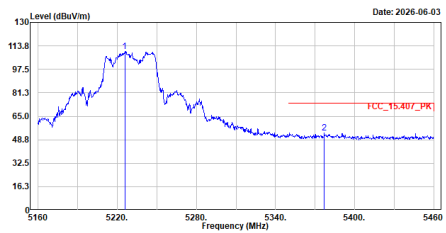


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5225.700	110.05	-----	-----	96.20	13.85	Peak
2	5376.900	53.50	74.00	-20.50	39.63	13.87	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_5230MHz_Band2_V_Average

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_be40_5230MHz_Band2
TEST BY :Caster

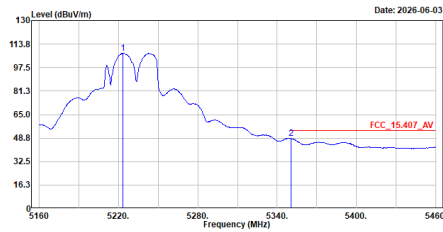


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5223.300	107.28	-----	-----	93.43	13.85	Average
2	5350.500	48.42	54.00	-5.58	34.54	13.88	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_5230MHz_Band2_V_Peak

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_be40_5230MHz_Band2
TEST BY :Caster

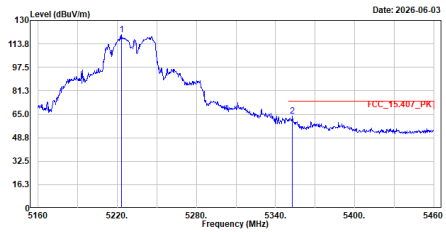


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5223.300	120.16	-----	-----	106.31	13.85	Peak
2	5352.900	63.75	74.00	-10.25	49.87	13.88	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_5755MHz_H_Peak

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_be40_5755MHz
TEST BY :Caster

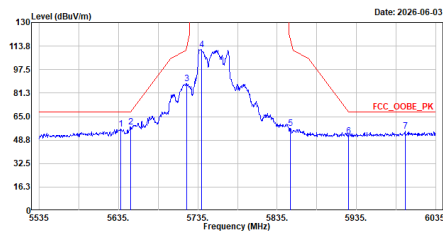


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5637.500	56.42	68.22	-11.80	41.29	15.13	Peak
2	5650.000	57.77	68.23	-10.46	42.57	15.20	Peak
3	5721.000	87.81	113.08	-25.27	72.21	15.60	Peak
4	5739.500	111.56	-----	-----	95.93	15.63	Peak
5	5851.500	57.06	118.78	-61.72	41.38	15.68	Peak
6	5925.000	51.56	68.23	-16.67	35.86	15.70	Peak
7	5996.500	54.98	68.22	-13.24	39.06	15.92	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_5755MHz_V_Peak

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_be40_5755MHz
TEST BY :Caster

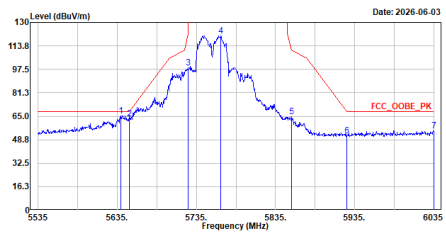


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5640.000	65.46	68.22	-2.76	50.32	15.14	Peak
2	5650.000	63.37	68.23	-4.86	48.17	15.20	Peak
3	5725.000	98.41	122.20	-23.79	82.81	15.60	Peak
4	5766.000	120.78	-----	-----	105.15	15.63	Peak
5	5855.000	64.69	110.80	-46.11	49.01	15.68	Peak
6	5925.000	51.42	68.23	-16.81	35.72	15.70	Peak
7	6035.000	55.07	68.22	-13.15	38.91	16.16	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_5795MHz_H_Peak

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_be40_5795MHz
TEST BY :Caster

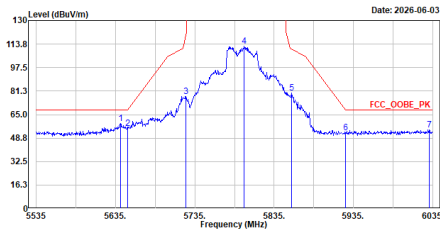


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5641.000	58.77	68.22	-9.45	43.63	15.14	Peak
2	5650.000	55.36	68.23	-12.87	40.16	15.20	Peak
3	5725.500	77.47	118.78	-41.31	61.87	15.60	Peak
4	5797.500	112.18	-----	-----	96.57	15.61	Peak
5	5857.000	80.12	110.24	-30.12	64.44	15.68	Peak
6	5925.000	52.69	68.23	-15.54	36.99	15.70	Peak
7	6031.000	54.58	68.22	-13.64	38.45	16.13	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_5795MHz_V_Peak

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_be40_5795MHz
TEST BY :Caster

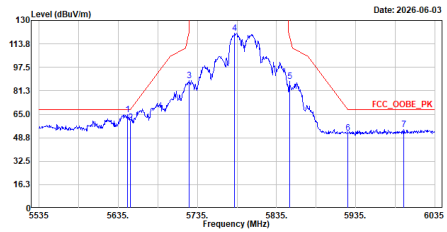


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5646.500	64.88	68.22	-3.34	49.70	15.18	Peak
2	5650.000	59.40	68.23	-8.83	44.20	15.20	Peak
3	5724.500	88.40	121.06	-32.66	72.80	15.60	Peak
4	5782.000	121.30	-----	-----	105.68	15.62	Peak
5	5851.500	87.94	118.78	-30.84	72.26	15.68	Peak
6	5925.000	52.08	68.23	-16.15	36.38	15.70	Peak
7	5996.000	54.64	68.22	-13.58	38.72	15.92	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be80_5210MHz_H_Average

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_be80_5210MHz
TEST BY :Caster

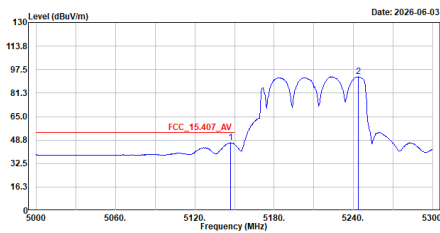


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5147.300	47.01	54.00	-6.99	33.09	13.92	Average
2	5243.600	92.54	-----	-----	78.66	13.88	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be80_5210MHz_H_Peak

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_be80_5210MHz
TEST BY :Caster

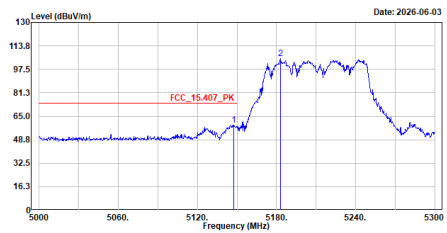


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5147.600	59.07	74.00	-14.93	45.15	13.92	Peak
2	5183.000	105.13	-----	-----	91.28	13.85	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be80_5210MHz_V_Average

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_be80_5210MHz
TEST BY :Caster

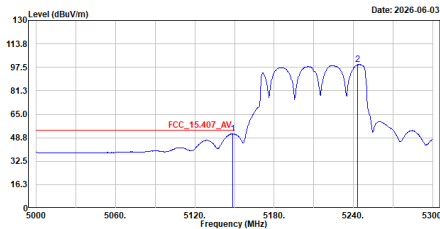


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
				dB	dBuV	dB/m	
1	5148.500	51.67	54.00	-2.33	37.75	13.92	Average
2	5243.300	99.40	-----	-----	85.52	13.88	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be80_5210MHz_V_Peak

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_be80_5210MHz
TEST BY :Caster

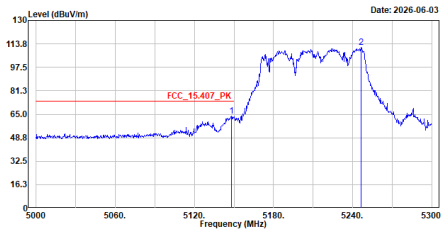


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
				dB	dBuV	dB/m	
1	5147.900	63.58	74.00	-10.42	49.66	13.92	Peak
2	5246.600	111.35	-----	-----	97.46	13.89	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be80_5775MHz_H_Peak

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_be80_5775MHz
TEST BY :Caster

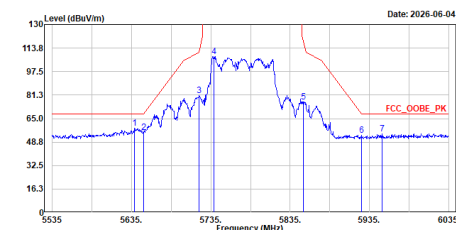


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
				dB	dBuV	dB/m	
1	5639.000	58.14	68.22	-10.08	43.00	15.14	Peak
2	5650.000	55.20	68.23	-13.03	40.00	15.20	Peak
3	5720.500	80.72	111.94	-31.22	65.12	15.60	Peak
4	5738.500	108.00	-----	-----	92.37	15.63	Peak
5	5851.500	76.42	118.78	-42.36	60.74	15.68	Peak
6	5925.000	53.56	68.23	-14.67	37.86	15.70	Peak
7	5951.000	54.57	68.22	-13.65	38.80	15.77	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be80_5775MHz_V_Peak

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_be80_5775MHz
TEST BY :Caster

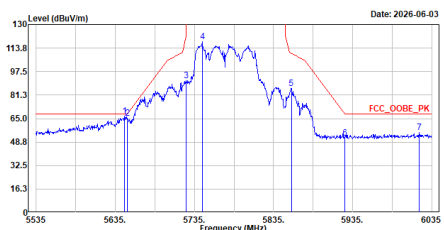

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
				dB	dBuV	dB/m	
1	5646.500	66.53	68.22	-1.69	51.35	15.18	Peak
2	5650.000	65.31	68.23	-2.92	50.11	15.20	Peak
3	5724.500	91.01	121.06	-30.05	75.41	15.60	Peak
4	5745.000	118.12	-----	-----	102.49	15.63	Peak
5	5857.500	85.83	110.10	-24.27	70.15	15.68	Peak
6	5925.000	51.51	68.23	-16.72	35.81	15.70	Peak
7	6019.000	55.21	68.22	-13.01	39.14	16.07	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

MAX Orbit 8

TX_be80_5775MHz_H

Site :HY-CB01

Condition :3m ,HORIZONTAL

Mode :TX_be80_5775MHz

TEST BY :Caster

Level (dBuV/m)

78.8

67.5

56.3

45.0

33.8

22.5

11.3

0

30

224

418

612

806

1000

Frequency (MHz)

Date: 2026-06-04

FCC CLASS-B

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	135.605	36.25	43.50	-7.25	61.14	-24.89	QP
2	153.106	36.54	43.50	-6.96	60.58	-24.04	QP
3	315.665	39.62	46.00	-6.38	62.45	-22.83	QP
4	432.571	40.97	46.00	-5.03	60.73	-19.76	QP
5	507.325	30.35	46.00	-15.65	48.53	-18.18	QP
6	792.089	26.62	46.00	-19.38	39.49	-12.87	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_be80_5775MHz_V

Site :HY-CB01

Condition :3m ,VERTICAL

Mode :TX_be80_5775MHz

TEST BY :Caster

Level (dBuV/m)

78.8

67.5

56.3

45.0

33.8

22.5

11.3

0

30

224

418

612

806

1000

Frequency (MHz)

Date: 2026-06-04

FCC CLASS-B

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	128.105	30.58	43.50	-12.92	56.41	-25.83	QP
2	232.060	32.36	46.00	-13.64	58.27	-25.91	QP
3	264.512	36.95	46.00	-9.05	61.53	-24.58	QP
4	355.917	39.38	46.00	-6.62	61.58	-22.20	QP
5	609.680	27.29	46.00	-18.71	43.07	-15.78	QP
6	855.643	27.74	46.00	-18.26	40.02	-12.28	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Co-location

TX_b_2437MHz+TX_a_5745MHz+5GNR_n77_100M_1RB0_CH650000_H Site :HY-CB01 Condition :3m ,HORIZONTAL Mode :TX_b_2437MHz+TX_a_5745MHz+5GNR_n77_100M_1RB0_CH650000 TEST BY :Caster Level (dBuV/m)
--

TX_b_2437MHz+TX_a_5745MHz+WCDMA_B5_CH4182_H Site :HY-CB01 Condition :3m ,HORIZONTAL Mode :TX_b_2437MHz+TX_a_5745MHz+WCDMA_B5_CH4182 TEST BY :Caster Level (dBuV/m) Date: 2026-06-10 <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>1673.000</td><td>29.93</td><td>74.00</td><td>-44.07</td><td>54.06</td><td>-24.13</td><td>Peak</td></tr><tr><td>2</td><td>4874.000</td><td>37.36</td><td>74.00</td><td>-36.64</td><td>52.17</td><td>-14.81</td><td>Peak</td></tr><tr><td>3</td><td>11490.000</td><td>44.56</td><td>74.00</td><td>-29.44</td><td>53.91</td><td>-9.35</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	1673.000	29.93	74.00	-44.07	54.06	-24.13	Peak	2	4874.000	37.36	74.00	-36.64	52.17	-14.81	Peak	3	11490.000	44.56	74.00	-29.44	53.91	-9.35	Peak	TX_b_2437MHz+TX_a_5745MHz+WCDMA_B5_CH4182_V Site :HY-CB01 Condition :3m ,VERTICAL Mode :TX_b_2437MHz+TX_a_5745MHz+WCDMA_B5_CH4182 TEST BY :Caster Level (dBuV/m) Date: 2026-06-10 <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>1673.000</td><td>31.41</td><td>74.00</td><td>-42.59</td><td>55.54</td><td>-24.13</td><td>Peak</td></tr><tr><td>2</td><td>4874.000</td><td>37.92</td><td>74.00</td><td>-36.08</td><td>52.73</td><td>-14.81</td><td>Peak</td></tr><tr><td>3</td><td>11490.000</td><td>43.75</td><td>74.00</td><td>-30.25</td><td>53.10</td><td>-9.35</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	1673.000	31.41	74.00	-42.59	55.54	-24.13	Peak	2	4874.000	37.92	74.00	-36.08	52.73	-14.81	Peak	3	11490.000	43.75	74.00	-30.25	53.10	-9.35	Peak																																																
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																											
1	1673.000	29.93	74.00	-44.07	54.06	-24.13	Peak																																																																																																																										
2	4874.000	37.36	74.00	-36.64	52.17	-14.81	Peak																																																																																																																										
3	11490.000	44.56	74.00	-29.44	53.91	-9.35	Peak																																																																																																																										
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																											
1	1673.000	31.41	74.00	-42.59	55.54	-24.13	Peak																																																																																																																										
2	4874.000	37.92	74.00	-36.08	52.73	-14.81	Peak																																																																																																																										
3	11490.000	43.75	74.00	-30.25	53.10	-9.35	Peak																																																																																																																										
TX_b_2437MHz+TX_a_5745MHz+5GNR_n77_100M_1RB0_CH650000_H Site :HY-CB01 Condition :3m ,HORIZONTAL Mode :TX_b_2437MHz+TX_a_5745MHz+5GNR_n77_100M_1RB0_CH650000 TEST BY :Caster Level (dBuV/m) Date: 2026-06-11 <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>37.800</td><td>35.66</td><td>40.00</td><td>-4.34</td><td>60.18</td><td>-24.52</td><td>QP</td></tr><tr><td>2</td><td>256.762</td><td>42.77</td><td>46.00</td><td>-3.23</td><td>67.67</td><td>-24.90</td><td>QP</td></tr><tr><td>3</td><td>415.720</td><td>40.57</td><td>46.00</td><td>-5.43</td><td>60.96</td><td>-20.39</td><td>QP</td></tr><tr><td>4</td><td>639.781</td><td>25.79</td><td>46.00</td><td>-20.21</td><td>41.04</td><td>-15.25</td><td>QP</td></tr><tr><td>5</td><td>790.089</td><td>25.64</td><td>46.00</td><td>-20.36</td><td>38.61</td><td>-12.97</td><td>QP</td></tr><tr><td>6</td><td>965.448</td><td>27.73</td><td>54.00</td><td>-26.27</td><td>38.64</td><td>-10.91</td><td>QP</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission under 30MHz was not included since the emission levels are very low against the limit.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	37.800	35.66	40.00	-4.34	60.18	-24.52	QP	2	256.762	42.77	46.00	-3.23	67.67	-24.90	QP	3	415.720	40.57	46.00	-5.43	60.96	-20.39	QP	4	639.781	25.79	46.00	-20.21	41.04	-15.25	QP	5	790.089	25.64	46.00	-20.36	38.61	-12.97	QP	6	965.448	27.73	54.00	-26.27	38.64	-10.91	QP	TX_b_2437MHz+TX_a_5745MHz+5GNR_n77_100M_1RB0_CH650000_V Site :HY-CB01 Condition :3m ,VERTICAL Mode :TX_b_2437MHz+TX_a_5745MHz+5GNR_n77_100M_1RB0_CH650000 TEST BY :Caster Level (dBuV/m) Date: 2026-06-11 <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>37.850</td><td>38.07</td><td>40.00</td><td>-1.93</td><td>62.58</td><td>-24.51</td><td>QP</td></tr><tr><td>2</td><td>246.461</td><td>39.25</td><td>46.00</td><td>-6.75</td><td>64.33</td><td>-25.08</td><td>QP</td></tr><tr><td>3</td><td>420.270</td><td>39.61</td><td>46.00</td><td>-6.39</td><td>59.90</td><td>-20.29</td><td>QP</td></tr><tr><td>4</td><td>601.630</td><td>25.12</td><td>46.00</td><td>-20.88</td><td>41.01</td><td>-15.89</td><td>QP</td></tr><tr><td>5</td><td>804.740</td><td>25.92</td><td>46.00</td><td>-20.08</td><td>38.62</td><td>-12.70</td><td>QP</td></tr><tr><td>6</td><td>981.099</td><td>28.75</td><td>54.00</td><td>-25.25</td><td>39.55</td><td>-10.80</td><td>QP</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission under 30MHz was not included since the emission levels are very low against the limit.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	37.850	38.07	40.00	-1.93	62.58	-24.51	QP	2	246.461	39.25	46.00	-6.75	64.33	-25.08	QP	3	420.270	39.61	46.00	-6.39	59.90	-20.29	QP	4	601.630	25.12	46.00	-20.88	41.01	-15.89	QP	5	804.740	25.92	46.00	-20.08	38.62	-12.70	QP	6	981.099	28.75	54.00	-25.25	39.55	-10.80	QP
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																											
1	37.800	35.66	40.00	-4.34	60.18	-24.52	QP																																																																																																																										
2	256.762	42.77	46.00	-3.23	67.67	-24.90	QP																																																																																																																										
3	415.720	40.57	46.00	-5.43	60.96	-20.39	QP																																																																																																																										
4	639.781	25.79	46.00	-20.21	41.04	-15.25	QP																																																																																																																										
5	790.089	25.64	46.00	-20.36	38.61	-12.97	QP																																																																																																																										
6	965.448	27.73	54.00	-26.27	38.64	-10.91	QP																																																																																																																										
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																											
1	37.850	38.07	40.00	-1.93	62.58	-24.51	QP																																																																																																																										
2	246.461	39.25	46.00	-6.75	64.33	-25.08	QP																																																																																																																										
3	420.270	39.61	46.00	-6.39	59.90	-20.29	QP																																																																																																																										
4	601.630	25.12	46.00	-20.88	41.01	-15.89	QP																																																																																																																										
5	804.740	25.92	46.00	-20.08	38.62	-12.70	QP																																																																																																																										
6	981.099	28.75	54.00	-25.25	39.55	-10.80	QP																																																																																																																										

TX_b_2437MHz+TX_a_5745MHz+LTE_B41_20M_1RB0_40	TX_b_2437MHz+TX_a_5745MHz+LTE_B41_20M_1RB0_40																																																																																																																																	
620_H	620_V																																																																																																																																	
Site :HY-CB01 Condition :3m ,HORIZONTAL Mode :TX_b_2437MHz+TX_a_5745MHz+LTE_B41_20M_1RB0_40620 TEST BY :Caster Level (dBuV/m) Date: 2026-06-11 <table><thead><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr></thead><tbody><tr><td>1</td><td>36.900</td><td>36.18</td><td>40.00</td><td>-3.82</td><td>60.86</td><td>-24.68</td><td>QP</td></tr><tr><td>2</td><td>125.005</td><td>39.48</td><td>43.50</td><td>-4.02</td><td>65.56</td><td>-26.08</td><td>QP</td></tr><tr><td>3</td><td>250.311</td><td>44.62</td><td>46.00</td><td>-1.38</td><td>69.60</td><td>-24.98</td><td>QP</td></tr><tr><td>4</td><td>415.470</td><td>40.15</td><td>46.00</td><td>-5.85</td><td>60.55</td><td>-20.40</td><td>QP</td></tr><tr><td>5</td><td>639.381</td><td>25.65</td><td>46.00</td><td>-20.35</td><td>40.90</td><td>-15.25</td><td>QP</td></tr><tr><td>6</td><td>972.049</td><td>27.89</td><td>54.00</td><td>-26.11</td><td>36.71</td><td>-10.82</td><td>QP</td></tr></tbody></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission under 30MHz was not included since the emission levels are very low against the limit.		No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	36.900	36.18	40.00	-3.82	60.86	-24.68	QP	2	125.005	39.48	43.50	-4.02	65.56	-26.08	QP	3	250.311	44.62	46.00	-1.38	69.60	-24.98	QP	4	415.470	40.15	46.00	-5.85	60.55	-20.40	QP	5	639.381	25.65	46.00	-20.35	40.90	-15.25	QP	6	972.049	27.89	54.00	-26.11	36.71	-10.82	QP	Site :HY-CB01 Condition :3m ,VERTICAL Mode :TX_b_2437MHz+TX_a_5745MHz+LTE_B41_20M_1RB0_40620 TEST BY :Caster Level (dBuV/m) Date: 2026-06-11 <table><thead><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr></thead><tbody><tr><td>1</td><td>31.850</td><td>38.03</td><td>40.00</td><td>-1.97</td><td>63.53</td><td>-25.50</td><td>QP</td></tr><tr><td>2</td><td>140.456</td><td>32.73</td><td>43.50</td><td>-10.77</td><td>57.19</td><td>-24.46</td><td>QP</td></tr><tr><td>3</td><td>252.662</td><td>38.82</td><td>46.00</td><td>-7.18</td><td>63.79</td><td>-24.97</td><td>QP</td></tr><tr><td>4</td><td>407.470</td><td>38.61</td><td>46.00</td><td>-7.39</td><td>59.14</td><td>-20.53</td><td>QP</td></tr><tr><td>5</td><td>632.081</td><td>25.72</td><td>46.00</td><td>-20.28</td><td>41.00</td><td>-15.28</td><td>QP</td></tr><tr><td>6</td><td>957.698</td><td>28.10</td><td>46.00</td><td>-17.90</td><td>39.02</td><td>-10.92</td><td>QP</td></tr></tbody></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission under 30MHz was not included since the emission levels are very low against the limit.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	31.850	38.03	40.00	-1.97	63.53	-25.50	QP	2	140.456	32.73	43.50	-10.77	57.19	-24.46	QP	3	252.662	38.82	46.00	-7.18	63.79	-24.97	QP	4	407.470	38.61	46.00	-7.39	59.14	-20.53	QP	5	632.081	25.72	46.00	-20.28	41.00	-15.28	QP	6	957.698	28.10	46.00	-17.90	39.02	-10.92	QP
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																												
1	36.900	36.18	40.00	-3.82	60.86	-24.68	QP																																																																																																																											
2	125.005	39.48	43.50	-4.02	65.56	-26.08	QP																																																																																																																											
3	250.311	44.62	46.00	-1.38	69.60	-24.98	QP																																																																																																																											
4	415.470	40.15	46.00	-5.85	60.55	-20.40	QP																																																																																																																											
5	639.381	25.65	46.00	-20.35	40.90	-15.25	QP																																																																																																																											
6	972.049	27.89	54.00	-26.11	36.71	-10.82	QP																																																																																																																											
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																												
1	31.850	38.03	40.00	-1.97	63.53	-25.50	QP																																																																																																																											
2	140.456	32.73	43.50	-10.77	57.19	-24.46	QP																																																																																																																											
3	252.662	38.82	46.00	-7.18	63.79	-24.97	QP																																																																																																																											
4	407.470	38.61	46.00	-7.39	59.14	-20.53	QP																																																																																																																											
5	632.081	25.72	46.00	-20.28	41.00	-15.28	QP																																																																																																																											
6	957.698	28.10	46.00	-17.90	39.02	-10.92	QP																																																																																																																											
TX_b_2437MHz+TX_a_5745MHz+WCDMA_B5_CH4182_H	TX_b_2437MHz+TX_a_5745MHz+WCDMA_B5_CH4182_V																																																																																																																																	
Site :HY-CB01 Condition :3m ,HORIZONTAL Mode :TX_b_2437MHz+TX_a_5745MHz+WCDMA_B5_CH4182 TEST BY :Caster Level (dBuV/m) Date: 2026-06-11 <table><thead><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr></thead><tbody><tr><td>1</td><td>37.250</td><td>35.18</td><td>40.00</td><td>-4.82</td><td>59.00</td><td>-24.62</td><td>QP</td></tr><tr><td>2</td><td>259.162</td><td>44.16</td><td>46.00</td><td>-1.84</td><td>68.96</td><td>-24.80</td><td>QP</td></tr><tr><td>3</td><td>419.070</td><td>40.42</td><td>46.00</td><td>-5.58</td><td>60.74</td><td>-20.32</td><td>QP</td></tr><tr><td>4</td><td>547.877</td><td>26.40</td><td>46.00</td><td>-19.60</td><td>43.84</td><td>-17.44</td><td>QP</td></tr><tr><td>5</td><td>743.337</td><td>26.00</td><td>46.00</td><td>-20.00</td><td>39.36</td><td>-13.36</td><td>QP</td></tr><tr><td>6</td><td>977.049</td><td>27.33</td><td>54.00</td><td>-26.67</td><td>38.15</td><td>-10.82</td><td>QP</td></tr></tbody></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission under 30MHz was not included since the emission levels are very low against the limit.		No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	37.250	35.18	40.00	-4.82	59.00	-24.62	QP	2	259.162	44.16	46.00	-1.84	68.96	-24.80	QP	3	419.070	40.42	46.00	-5.58	60.74	-20.32	QP	4	547.877	26.40	46.00	-19.60	43.84	-17.44	QP	5	743.337	26.00	46.00	-20.00	39.36	-13.36	QP	6	977.049	27.33	54.00	-26.67	38.15	-10.82	QP	Site :HY-CB01 Condition :3m ,VERTICAL Mode :TX_b_2437MHz+TX_a_5745MHz+WCDMA_B5_CH4182 TEST BY :Caster Level (dBuV/m) Date: 2026-06-11 <table><thead><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr></thead><tbody><tr><td>1</td><td>31.100</td><td>38.77</td><td>40.00</td><td>-1.23</td><td>63.96</td><td>-25.19</td><td>QP</td></tr><tr><td>2</td><td>125.005</td><td>36.93</td><td>43.50</td><td>-6.57</td><td>63.01</td><td>-26.08</td><td>QP</td></tr><tr><td>3</td><td>250.761</td><td>38.67</td><td>46.00</td><td>-7.33</td><td>63.65</td><td>-24.98</td><td>QP</td></tr><tr><td>4</td><td>431.421</td><td>38.36</td><td>46.00</td><td>-7.64</td><td>58.17</td><td>-19.81</td><td>QP</td></tr><tr><td>5</td><td>648.382</td><td>25.07</td><td>46.00</td><td>-20.93</td><td>40.19</td><td>-15.12</td><td>QP</td></tr><tr><td>6</td><td>958.298</td><td>28.44</td><td>46.00</td><td>-17.56</td><td>39.36</td><td>-10.92</td><td>QP</td></tr></tbody></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission under 30MHz was not included since the emission levels are very low against the limit.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	31.100	38.77	40.00	-1.23	63.96	-25.19	QP	2	125.005	36.93	43.50	-6.57	63.01	-26.08	QP	3	250.761	38.67	46.00	-7.33	63.65	-24.98	QP	4	431.421	38.36	46.00	-7.64	58.17	-19.81	QP	5	648.382	25.07	46.00	-20.93	40.19	-15.12	QP	6	958.298	28.44	46.00	-17.56	39.36	-10.92	QP
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																												
1	37.250	35.18	40.00	-4.82	59.00	-24.62	QP																																																																																																																											
2	259.162	44.16	46.00	-1.84	68.96	-24.80	QP																																																																																																																											
3	419.070	40.42	46.00	-5.58	60.74	-20.32	QP																																																																																																																											
4	547.877	26.40	46.00	-19.60	43.84	-17.44	QP																																																																																																																											
5	743.337	26.00	46.00	-20.00	39.36	-13.36	QP																																																																																																																											
6	977.049	27.33	54.00	-26.67	38.15	-10.82	QP																																																																																																																											
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																												
1	31.100	38.77	40.00	-1.23	63.96	-25.19	QP																																																																																																																											
2	125.005	36.93	43.50	-6.57	63.01	-26.08	QP																																																																																																																											
3	250.761	38.67	46.00	-7.33	63.65	-24.98	QP																																																																																																																											
4	431.421	38.36	46.00	-7.64	58.17	-19.81	QP																																																																																																																											
5	648.382	25.07	46.00	-20.93	40.19	-15.12	QP																																																																																																																											
6	958.298	28.44	46.00	-17.56	39.36	-10.92	QP																																																																																																																											