




TX_g_2437MHz_H

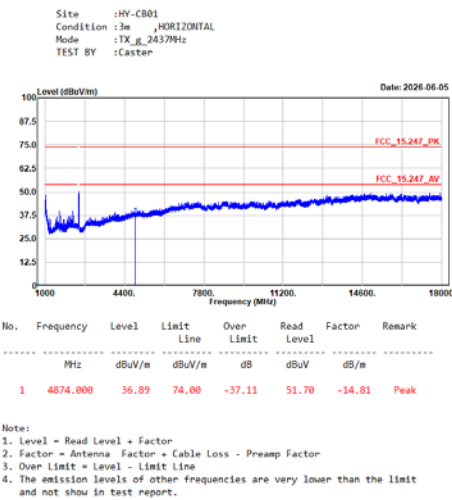


TX_g_2437MHz_V

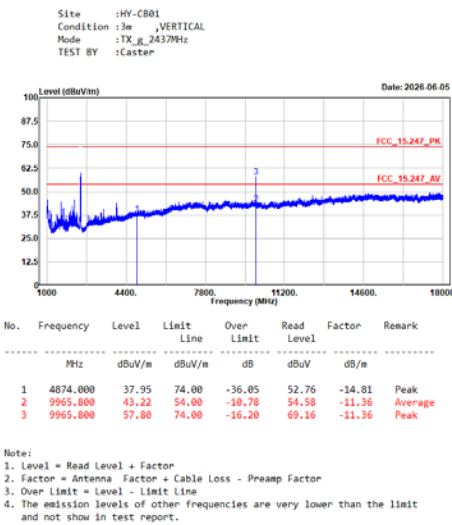


TX_g_2462MHz_H

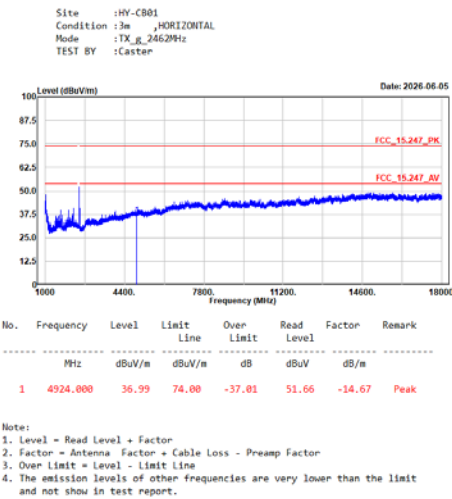


TX_g_2462MHz_V

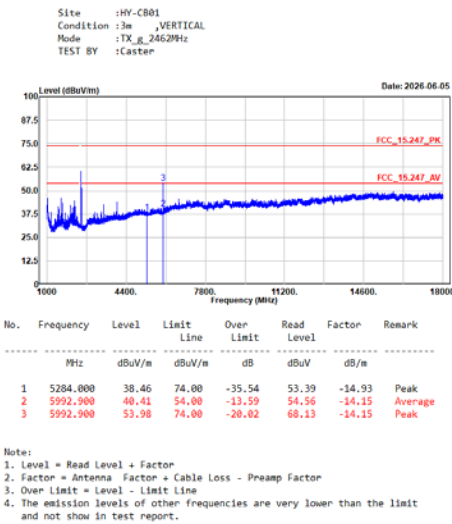


TX_ac20_2412MHz_H

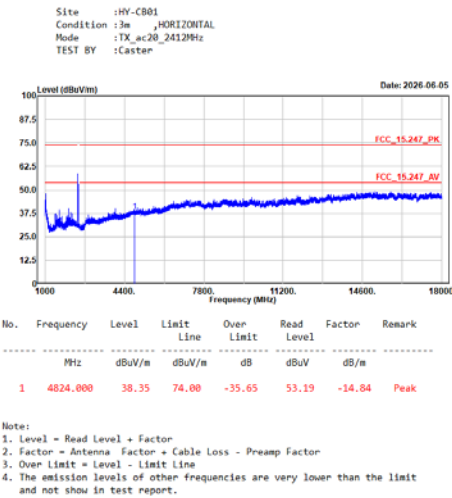


TX_ac20_2412MHz_V

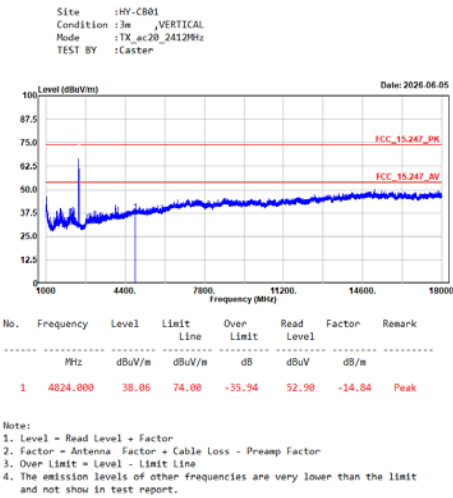

TX_ac20_2437MHz_H

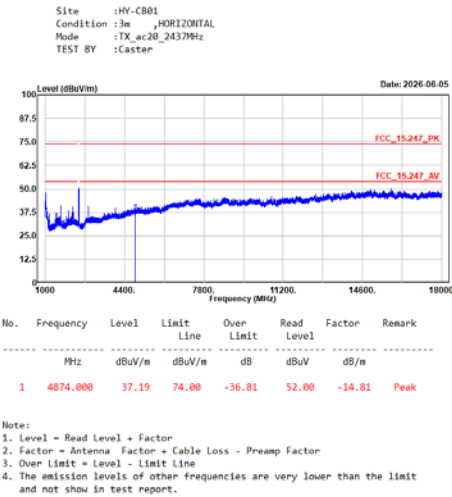


TX_ac20_2437MHz_V

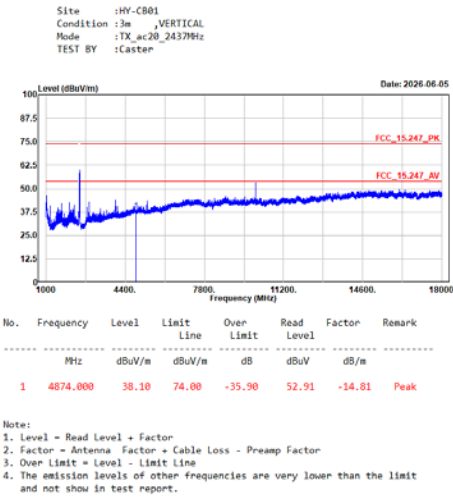

TX_ac20_2462MHz_H

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac20_2462MHz
TEST BY :Caster

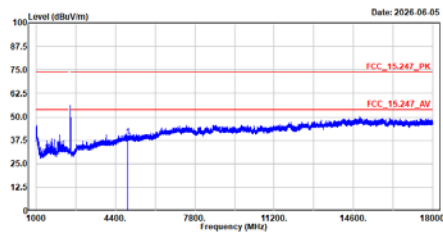


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4924.000	39.43	74.00	-34.57	54.10	-14.67	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_2462MHz_V

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac20_2462MHz
TEST BY :Caster

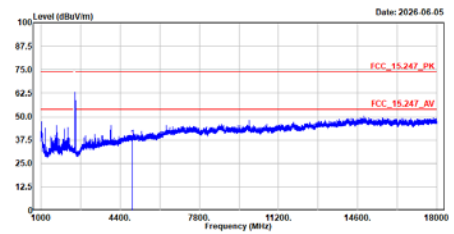


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4924.000	38.43	74.00	-35.57	53.10	-14.67	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_2422MHz_H

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac40_2422MHz
TEST BY :Caster

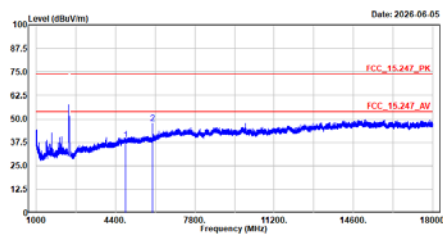


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4844.000	39.01	74.00	-34.99	53.90	-14.89	Peak
2	5979.300	47.67	74.00	-26.33	61.84	-14.17	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_2422MHz_V

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac40_2422MHz
TEST BY :Caster

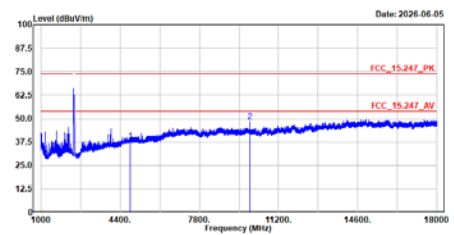


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4844.000	38.28	74.00	-35.72	53.17	-14.89	Peak
2	9978.550	48.16	74.00	-25.84	59.47	-11.31	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_2437MHz_H

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac40_2437MHz
TEST BY :Caster

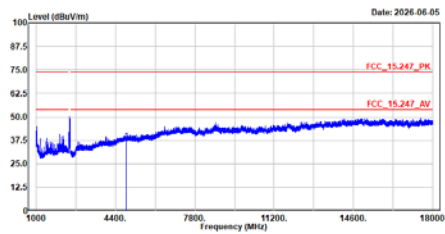


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	4874.000	37.12	74.00	-36.88	51.93	-14.81	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_2437MHz_V

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac40_2437MHz
TEST BY :Caster

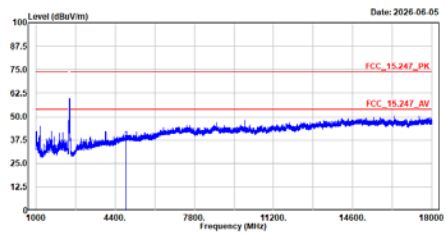


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	4874.000	37.64	74.00	-36.36	52.45	-14.81	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_2452MHz_H

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac40_2452MHz
TEST BY :Caster

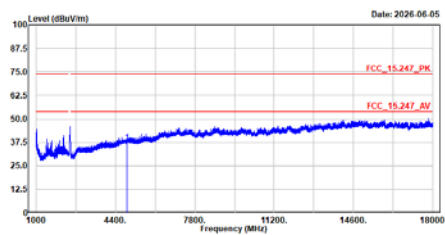


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	4904.000	37.53	74.00	-36.47	52.25	-14.72	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_2452MHz_V

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac40_2452MHz
TEST BY :Caster

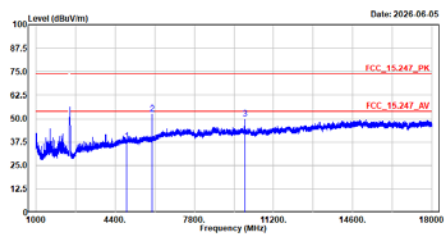


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	4904.000	38.15	74.00	-35.85	52.87	-14.72	Peak
2	5973.350	52.62	74.00	-21.38	66.80	-14.18	Peak
3	9971.750	49.74	74.00	-24.26	61.08	-11.34	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_2412MHz_H

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_be20_2412MHz
TEST BY :Caster

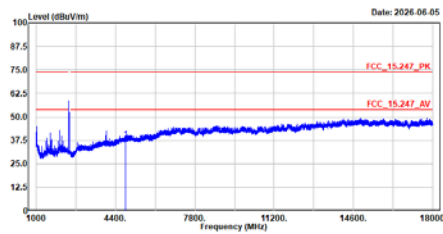


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4824.000	38.25	74.00	-35.75	53.09	-14.84	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_2412MHz_V

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_be20_2412MHz
TEST BY :Caster

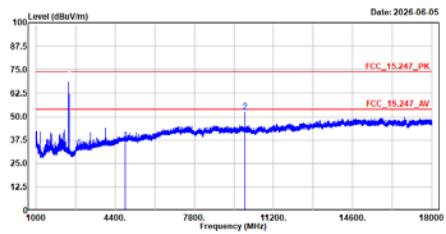


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4824.000	37.25	74.00	-36.75	52.09	-14.84	Peak
2	9967.500	52.52	74.00	-21.48	63.88	-11.36	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_2437MHz_H

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_be20_2437MHz
TEST BY :Caster

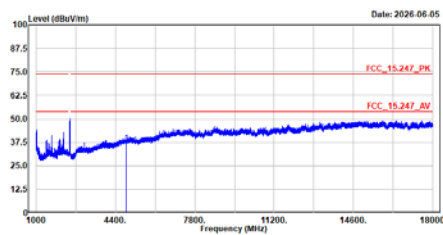


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4874.000	36.85	74.00	-37.15	51.66	-14.81	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_2437MHz_V

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_be20_2437MHz
TEST BY :Caster

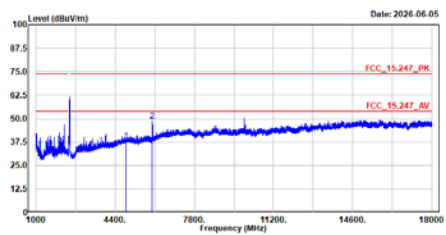


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4874.000	38.07	74.00	-35.93	52.88	-14.81	Peak
2	5990.350	48.74	74.00	-25.26	62.89	-14.15	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_2462MHz_H

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_be20_2462MHz
TEST BY :Caster

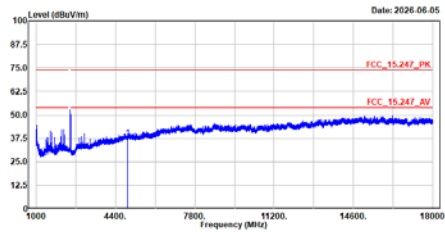


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4924.000	37.86	74.00	-36.14	52.53	-14.67	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_2462MHz_V

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_be20_2462MHz
TEST BY :Caster

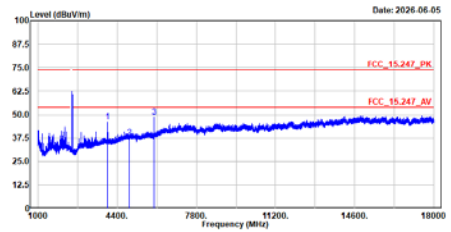


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	3982.650	46.14	74.00	-27.86	63.16	-17.02	Peak
2	4924.000	37.68	74.00	-36.32	52.35	-14.67	Peak
3	5998.350	48.51	74.00	-25.49	62.66	-14.15	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_2422MHz_H

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_be40_2422MHz
TEST BY :Caster

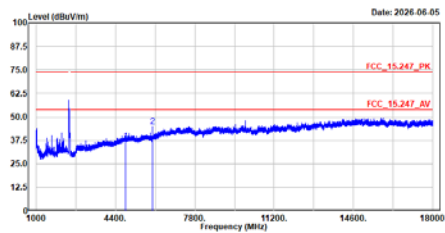


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4844.000	36.99	74.00	-37.01	51.88	-14.89	Peak
2	5975.050	44.90	74.00	-29.10	59.07	-14.17	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_2422MHz_V


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_be40_2422MHz
TEST BY :Caster

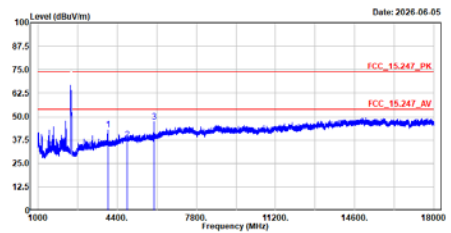


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	3999.650	43.13	74.00	-30.87	60.15	-17.02	Peak
2	4844.000	37.78	74.00	-36.22	52.67	-14.89	Peak
3	5975.050	47.28	74.00	-26.72	61.45	-14.17	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_be40_2437MHz_H

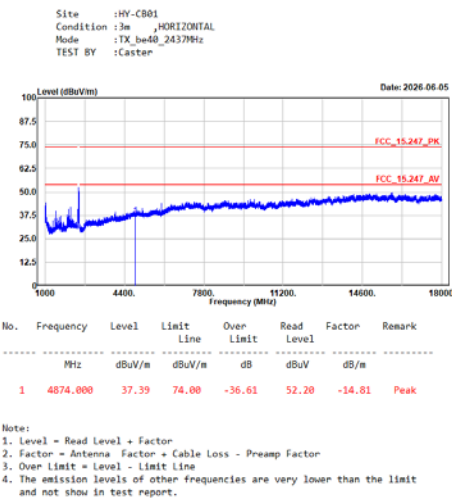


TX_be40_2437MHz_V

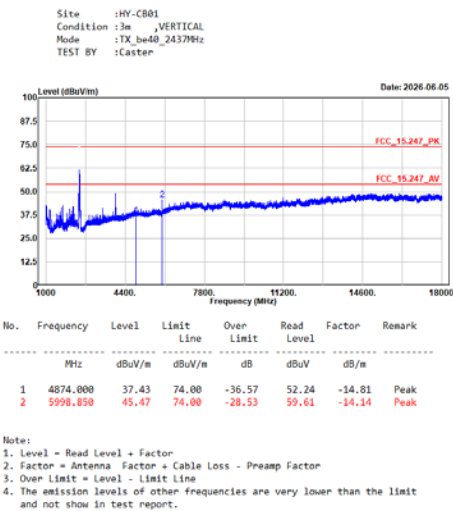

TX_be40_2452MHz_H

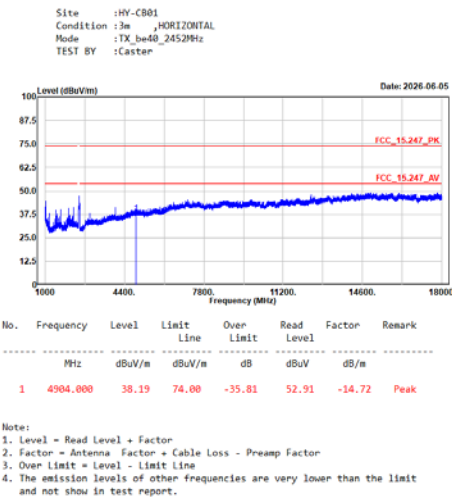


TX_be40_2452MHz_V

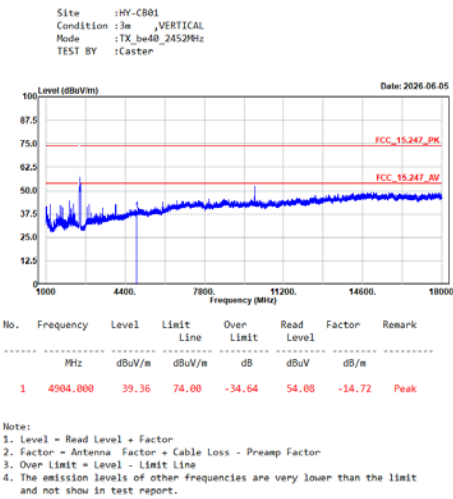

TX_be40_2437MHz_H

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_be40_2437MHz
TEST BY :Caster

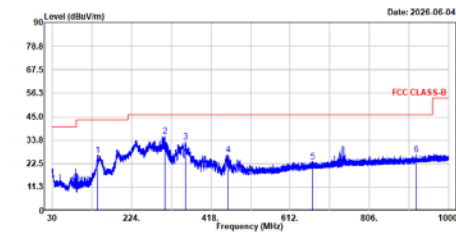


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	140.356	26.64	43.50	-16.86	51.11	-24.47	QP
2	305.614	35.65	46.00	-10.35	58.90	-23.25	QP
3	355.617	32.96	46.00	-13.04	55.18	-22.22	QP
4	468.272	26.78	46.00	-19.22	45.74	-18.96	QP
5	666.433	23.57	46.00	-22.43	38.44	-14.87	QP
6	919.896	26.78	46.00	-19.22	38.26	-11.48	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_be40_2437MHz_V

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_be40_2437MHz
TEST BY :Caster




No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	31.100	33.53	40.00	-6.47	58.72	-25.19	QP
2	188.408	22.47	43.50	-21.03	49.09	-26.62	QP
3	355.967	24.01	46.00	-21.99	46.21	-22.20	QP
4	572.828	21.85	46.00	-24.15	38.51	-16.66	QP
5	787.339	25.54	46.00	-20.46	38.51	-12.97	QP
6	954.398	26.96	46.00	-19.04	37.89	-10.93	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_b_2412MHz_H_Average

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_b_2412MHz
TEST BY :Caster

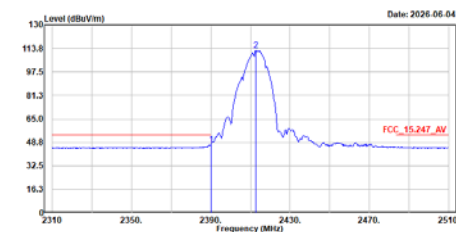


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2390.000	46.95	54.00	-7.05	16.96	29.99	Average
2	2412.000	112.18	-----	-----	82.24	29.94	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2412MHz_H_Peak


Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_b_2412MHz
TEST BY :Caster



No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2365.400	58.11	74.00	-15.89	28.24	29.87	Peak
2	2412.600	117.06	-----	-----	87.12	29.94	Peak


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2412MHz_V_Average

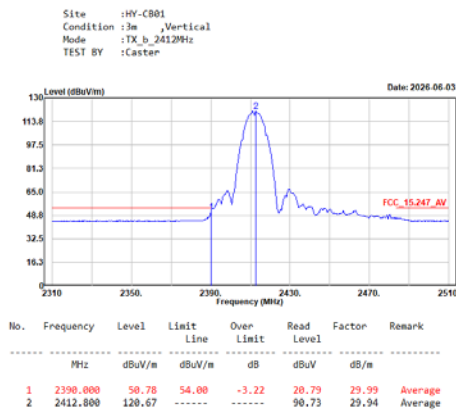


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2412MHz_V_Peak

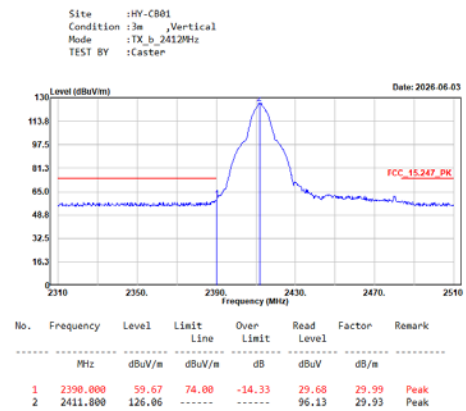


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over limit = Level - Limit line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2437MHz_H_Average

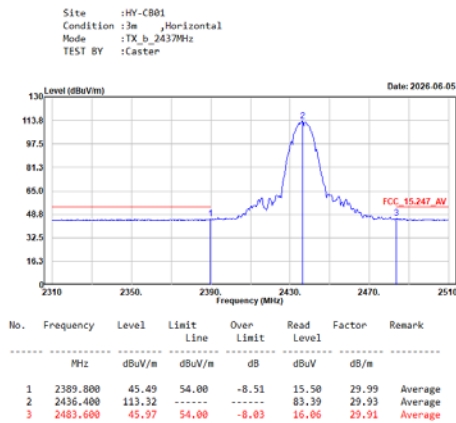


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2437MHz_H_Peak

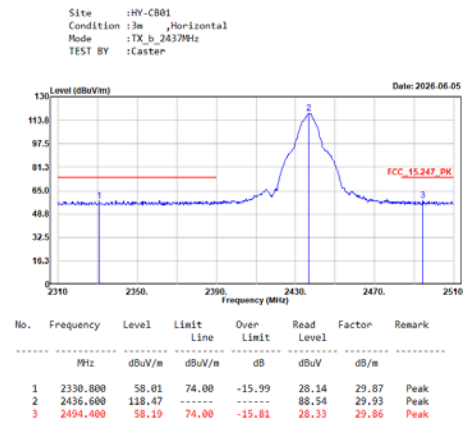


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_b_2437MHz_V_Average

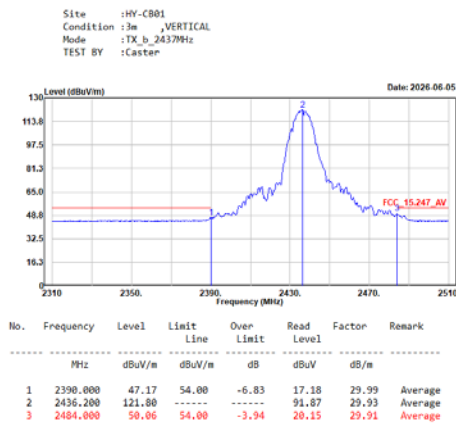


TX_b_2437MHz_V_Peak

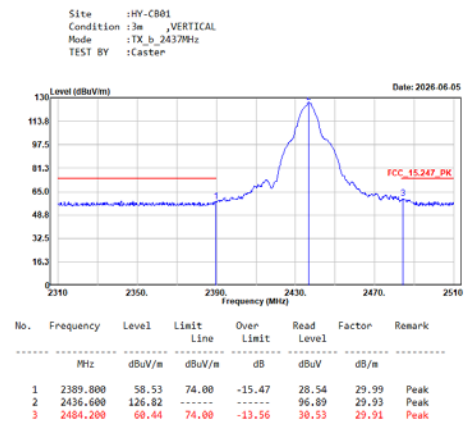

TX_b_2462MHz_H_Average

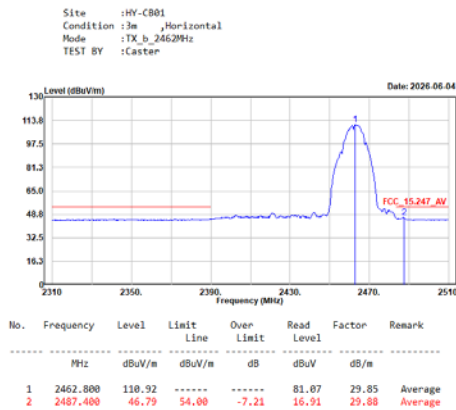


TX_b_2462MHz_H_Peak

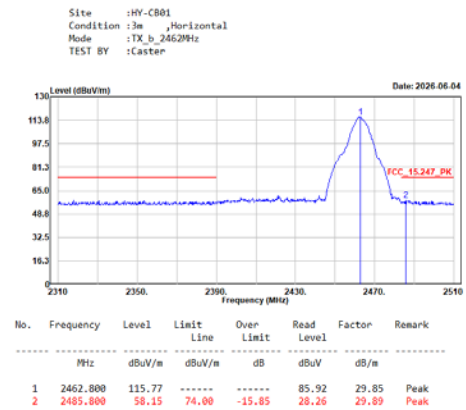


TX_b_2462MHz_V_Average




TX_b_2462MHz_V_Peak

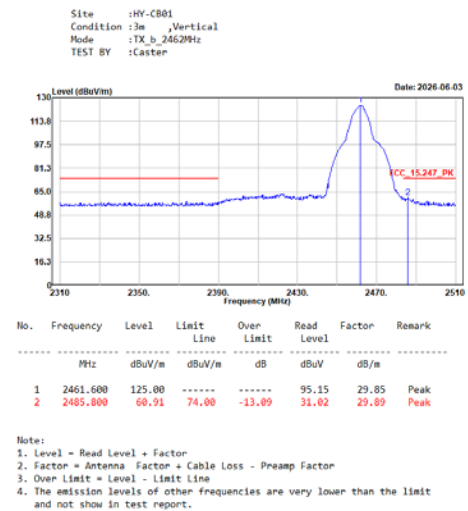


TX_g_2412MHz_H_Average

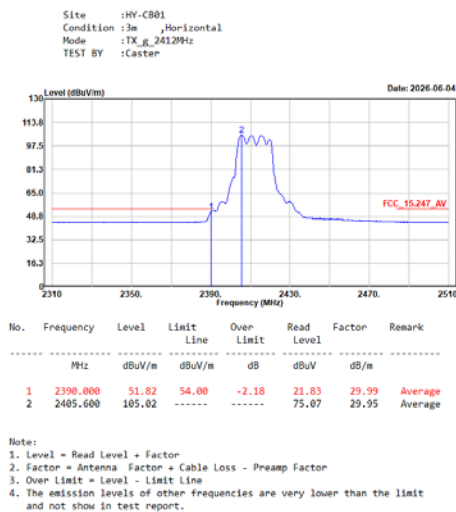

TX_g_2412MHz_H_Peak

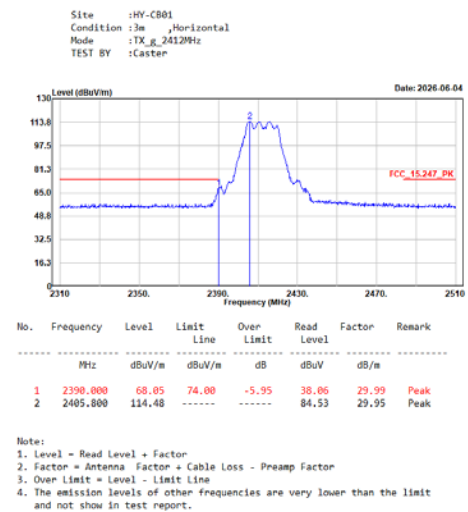


TX_g_2412MHz_V_Average

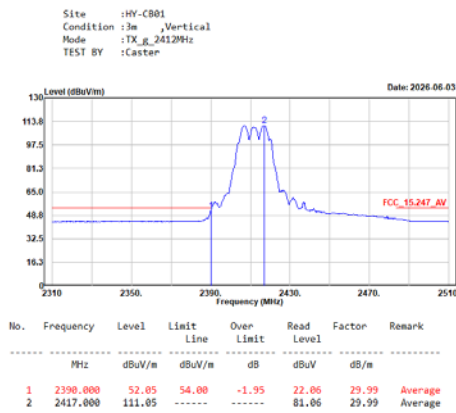


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2412MHz_V_Peak

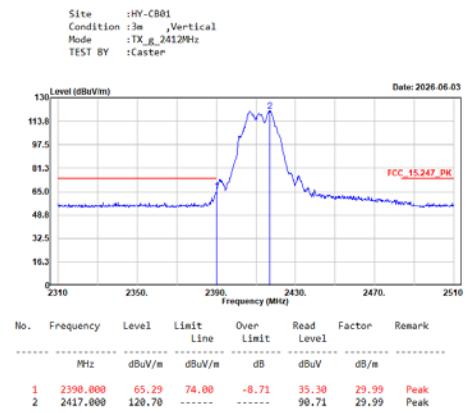


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2437MHz_H_Average

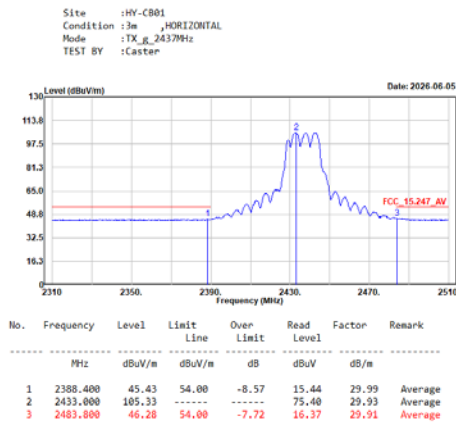


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2437MHz_H_Peak

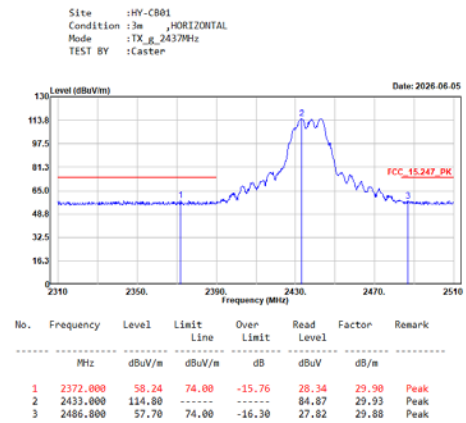


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_g_2437MHz_V_Average

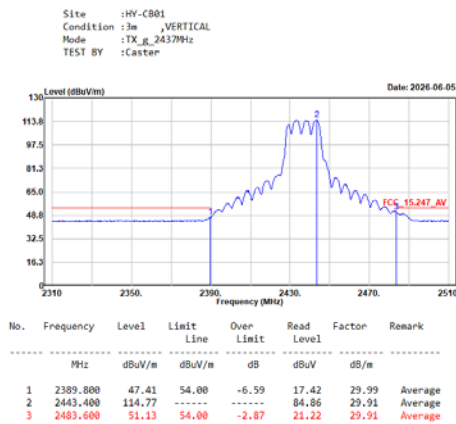


TX_g_2437MHz_V_Peak

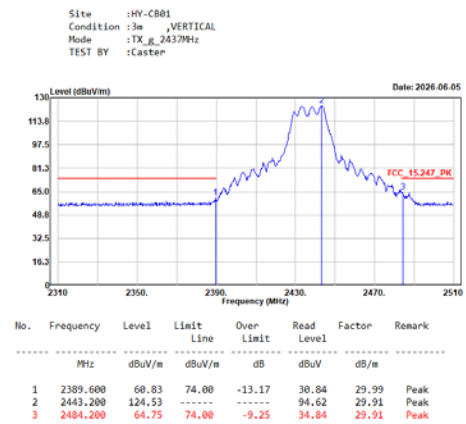

TX_g_2462MHz_H_Average

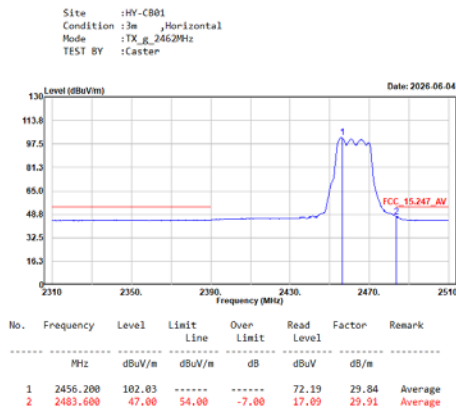

TX_g_2462MHz_H_Peak

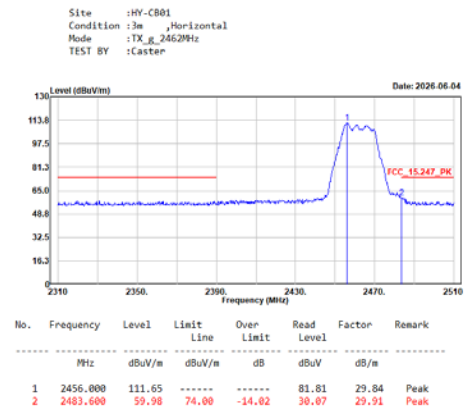


TX_g_2462MHz_V_Average




TX_g_2462MHz_V_Peak




TX_ac20_2412MHz_H_Average

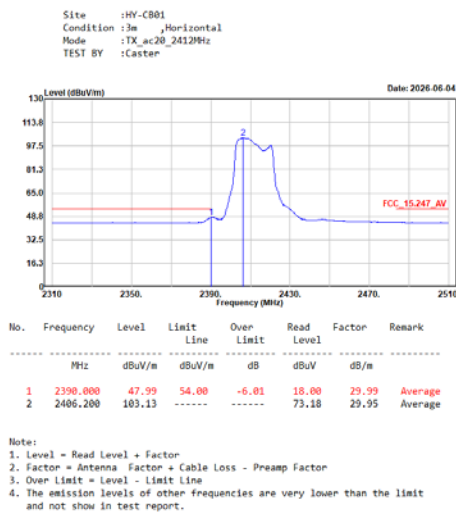

TX_ac20_2412MHz_H_Peak

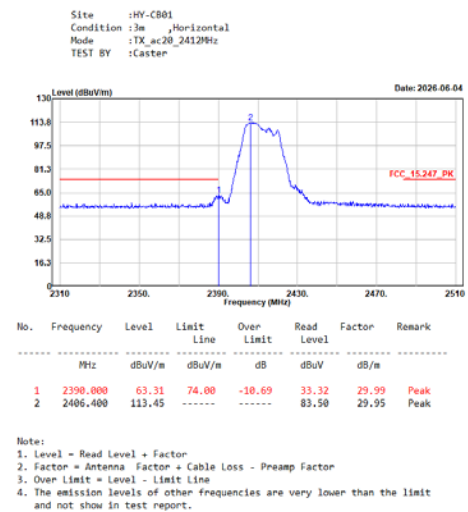


TX_ac20_2412MHz_V_Average

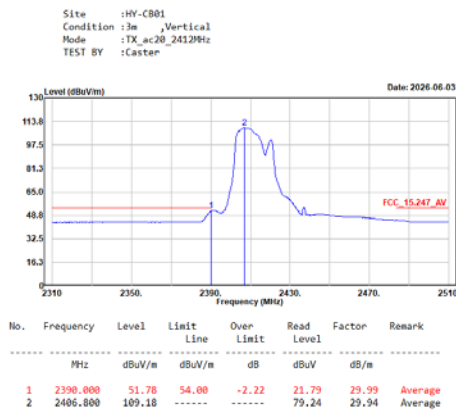


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_2412MHz_V_Peak

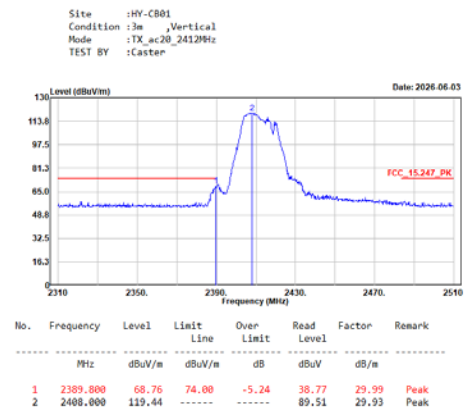


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over limit = Level - Limit line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_2437MHz_H_Average

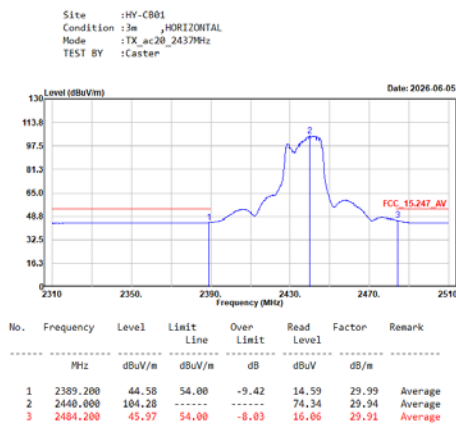

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_ac20_2437MHz_H_Peak

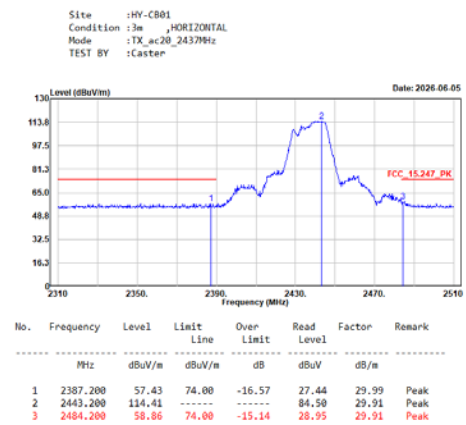

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_2437MHz_V_Average

Site :HY-CB01
Condition :3m_VERTICAL
Mode :TX_ac20_2437MHz
TEST BY :Caster

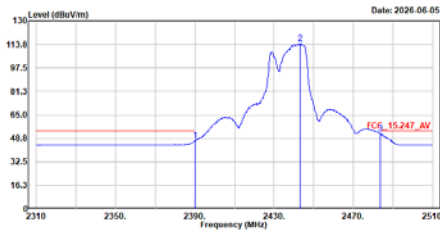


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2390.000	46.99	54.00	-7.01	17.00	29.99	Average
2	2443.000	114.13	-----	-----	84.22	29.91	Average
3	2483.600	51.91	54.00	-2.09	22.00	29.91	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_2437MHz_V_Peak

Site :HY-CB01
Condition :3m_VERTICAL
Mode :TX_ac20_2437MHz
TEST BY :Caster

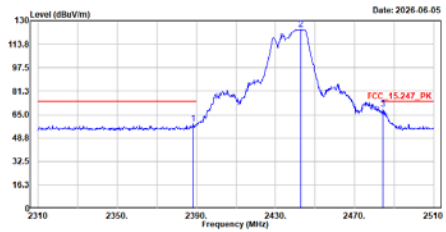


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2388.400	58.63	74.00	-15.37	28.64	29.99	Peak
2	2442.800	124.26	-----	-----	94.35	29.91	Peak
3	2484.200	68.47	74.00	-5.53	38.56	29.91	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_2462MHz_H_Average

Site :HY-CB01
Condition :3m_Horizontal
Mode :TX_ac20_2462MHz
TEST BY :Caster

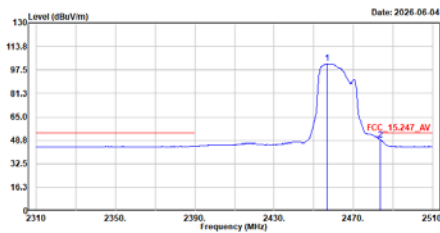


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2456.600	101.86	-----	-----	72.02	29.84	Average
2	2483.600	49.04	54.00	-4.96	19.13	29.91	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_2462MHz_H_Peak

Site :HY-CB01
Condition :3m_Horizontal
Mode :TX_ac20_2462MHz
TEST BY :Caster

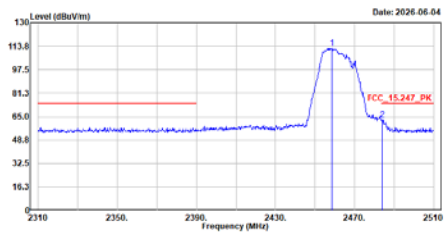


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2458.400	112.13	-----	-----	82.29	29.84	Peak
2	2483.800	62.67	74.00	-11.33	32.76	29.91	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_2462MHz_V_Average

Site :HY-CB01
Condition :3m_Vertical
Mode :TX_ac20_2462MHz
TEST BY :Caster

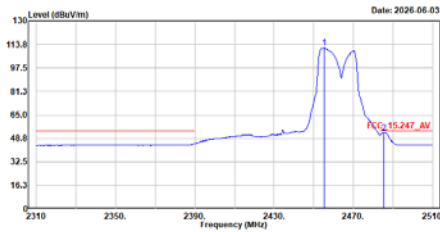


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2455.200	111.30	-----	-----	81.46	29.84	Average
2	2485.200	52.62	54.00	-1.38	22.72	29.90	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_2462MHz_V_Peak

Site :HY-CB01
Condition :3m_Vertical
Mode :TX_ac20_2462MHz
TEST BY :Caster

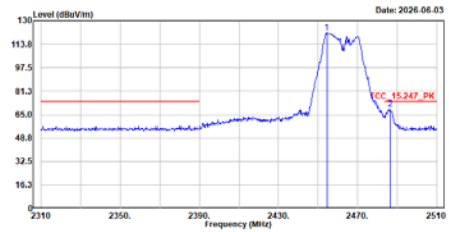


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2454.400	121.43	-----	-----	91.59	29.84	Peak
2	2486.600	68.72	74.00	-5.28	38.84	29.88	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_2422MHz_H_Average

Site :HY-CB01
Condition :3m_Horizontal
Mode :TX_ac40_2422MHz
TEST BY :Caster

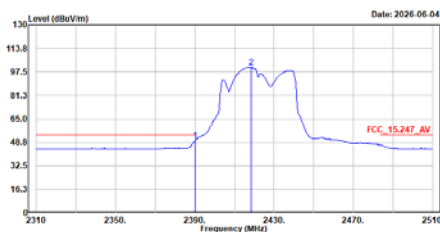


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2390.000	49.80	54.00	-4.20	19.81	29.99	Average
2	2418.400	100.70	-----	-----	70.70	30.00	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_2422MHz_H_Peak

Site :HY-CB01
Condition :3m_Horizontal
Mode :TX_ac40_2422MHz
TEST BY :Caster

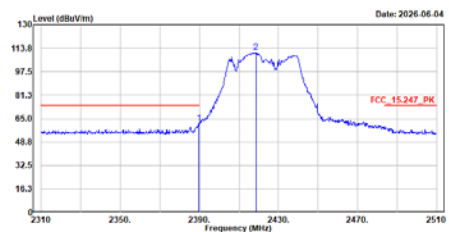


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2389.800	61.70	74.00	-12.30	31.71	29.99	Peak
2	2418.600	110.65	-----	-----	80.64	30.01	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_2422MHz_V_Average

Site :HY-CB01
Condition :3m_Vertical
Mode :TX_ac40_2422MHz
TEST BY :Caster

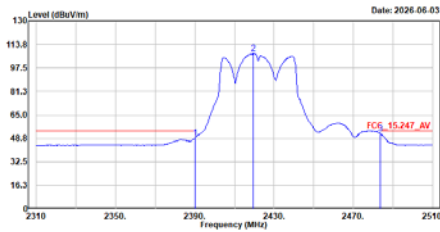


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2390.000	49.16	54.00	-4.84	19.17	29.99	Average
2	2419.600	107.30	54.00	53.30	77.28	30.02	Average
3	2483.600	51.89	54.00	-2.11	21.98	29.91	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_2422MHz_V_Peak

Site :HY-CB01
Condition :3m_Vertical
Mode :TX_ac40_2422MHz
TEST BY :Caster

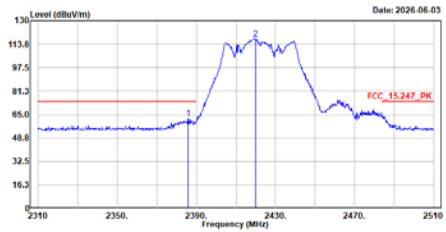


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2385.800	62.08	74.00	-11.92	32.09	29.99	Peak
2	2419.800	117.28	74.00	43.28	87.26	30.02	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_2437MHz_H_Average

Site :HY-CB01
Condition :3m_HORIZONTAL
Mode :TX_ac40_2437MHz
TEST BY :Caster

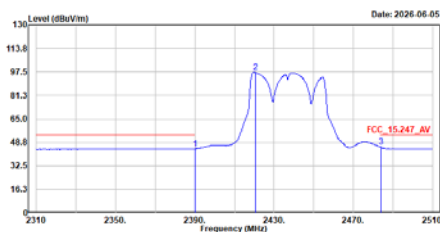


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2390.000	44.39	54.00	-9.61	14.40	29.99	Average
2	2420.600	97.27	54.00	43.27	67.26	30.01	Average
3	2483.000	45.62	54.00	-8.38	15.71	29.91	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_2437MHz_H_Peak

Site :HY-CB01
Condition :3m_HORIZONTAL
Mode :TX_ac40_2437MHz
TEST BY :Caster

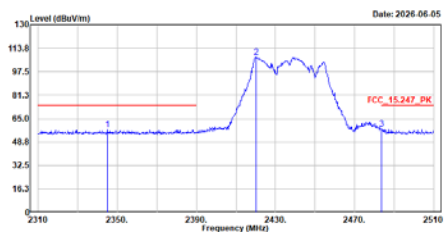


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2345.200	57.32	74.00	-16.68	27.36	29.96	Peak
2	2420.200	107.54	74.00	33.54	77.52	30.02	Peak
3	2483.600	57.87	74.00	-16.13	27.96	29.91	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_2437MHz_V_Average

Site :HY-CB01
Condition :3m_VERTICAL
Mode :TX_ac40_2437MHz
TEST BY :Caster

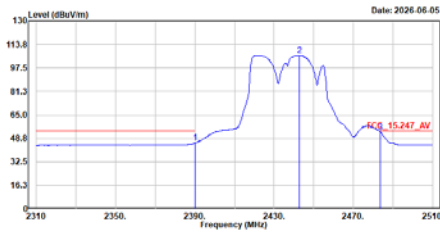


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	2390.000	45.43	54.00	-8.57	15.44	29.99	Average
2	2442.600	106.17	-----	-----	76.26	29.91	Average
3	2483.600	52.81	54.00	-1.19	22.90	29.91	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_2437MHz_V_Peak

Site :HY-CB01
Condition :3m_VERTICAL
Mode :TX_ac40_2437MHz
TEST BY :Caster

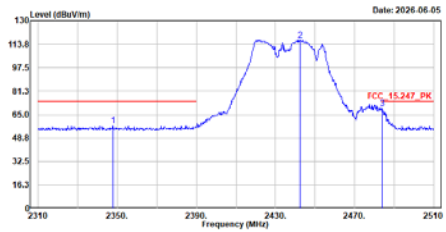


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	2347.800	57.34	74.00	-16.66	27.38	29.96	Peak
2	2442.400	116.49	-----	-----	86.57	29.92	Peak
3	2483.800	69.33	74.00	-4.67	39.42	29.91	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_2452MHz_H_Average

Site :HY-CB01
Condition :3m_Horizontal
Mode :TX_ac40_2452MHz
TEST BY :Caster

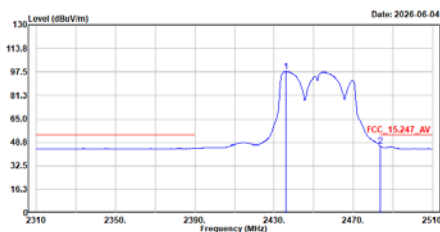


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	2435.800	97.75	-----	-----	67.82	29.93	Average
2	2483.600	46.23	54.00	-7.77	16.32	29.91	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_2452MHz_H_Peak

Site :HY-CB01
Condition :3m_Horizontal
Mode :TX_ac40_2452MHz
TEST BY :Caster

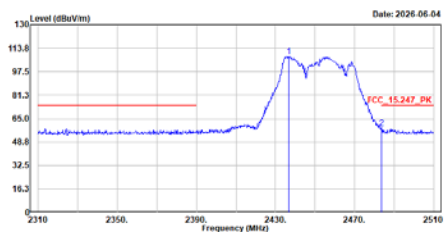


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	2436.800	108.02	-----	-----	78.09	29.93	Peak
2	2483.600	58.28	74.00	-15.72	28.37	29.91	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_2452MHz_V_Average

Site :HY-CB01
Condition :3m_Vertical
Mode :TX_ac40_2452MHz
TEST BY :Caster

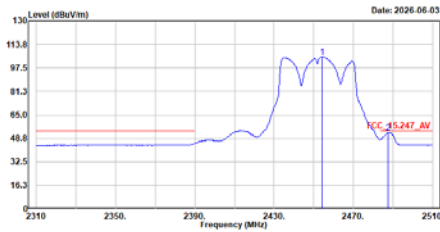


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2452.200	105.08	-----	-----	75.24	29.84	Average
2	2487.600	52.70	54.00	-1.30	22.82	29.88	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_2452MHz_V_Peak

Site :HY-CB01
Condition :3m_Vertical
Mode :TX_ac40_2452MHz
TEST BY :Caster

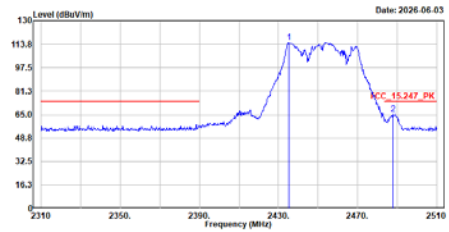


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2435.200	114.94	-----	-----	85.01	29.93	Peak
2	2487.600	65.28	74.00	-8.72	35.40	29.88	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_2412MHz_H_Average

Site :HY-CB01
Condition :3m_Horizontal
Mode :TX_be20_2412MHz
TEST BY :Caster

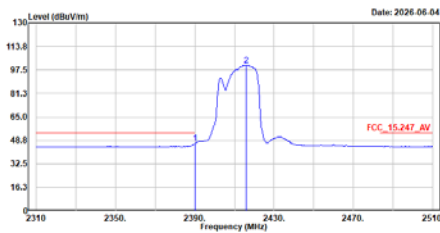


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2390.000	46.60	54.00	-7.40	16.61	29.99	Average
2	2415.000	100.61	-----	-----	70.63	29.98	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_2412MHz_H_Peak


Site :HY-CB01
Condition :3m_Horizontal
Mode :TX_be20_2412MHz
TEST BY :Caster

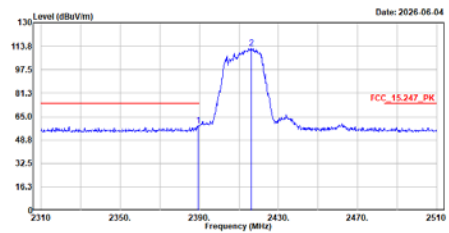

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2389.400	58.67	74.00	-15.33	28.68	29.99	Peak
2	2416.400	112.35	-----	-----	82.37	29.98	Peak


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_2412MHz_V_Average

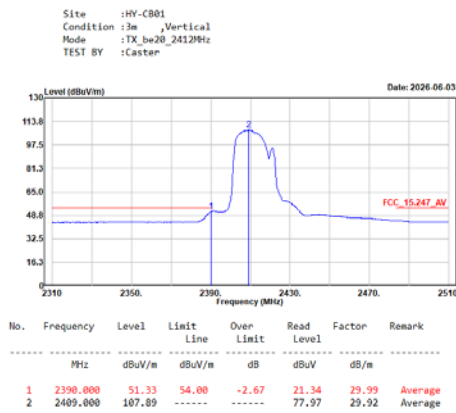


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_2412MHz_V_Peak

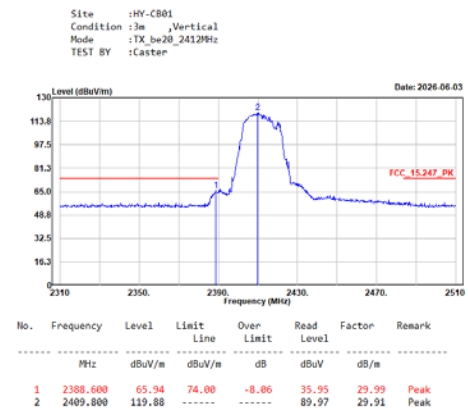


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over limit = Level - Limit line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_2437MHz_H_Average

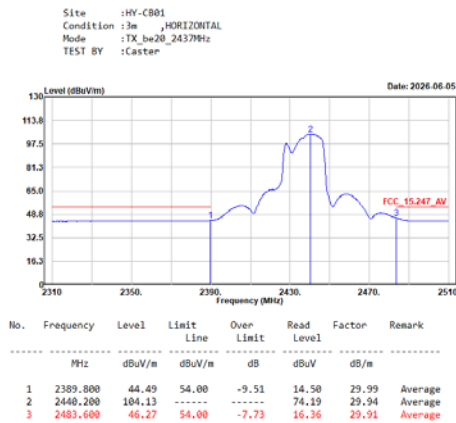

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_be20_2437MHz_H_Peak

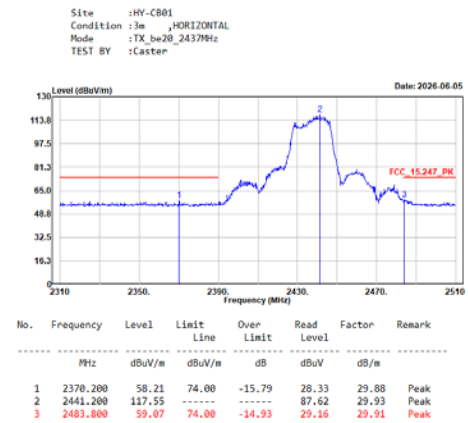

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_2437MHz_V_Average

Site :HY-CB01
Condition :3m_VERTICAL
Mode :TX_be20_2437MHz
TEST BY :Caster

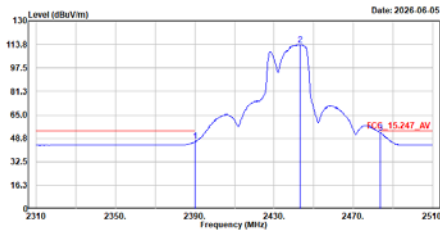


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2390.000	46.38	54.00	-7.62	16.39	29.99	Average
2	2443.000	113.36	-----	-----	83.45	29.91	Average
3	2483.600	52.55	54.00	-1.45	22.64	29.91	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_2437MHz_V_Peak

Site :HY-CB01
Condition :3m_VERTICAL
Mode :TX_be20_2437MHz
TEST BY :Caster

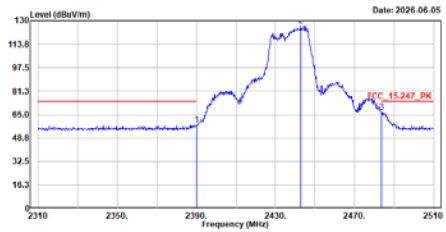


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2390.000	57.97	74.00	-16.03	27.98	29.99	Peak
2	2442.800	126.45	-----	-----	96.54	29.91	Peak
3	2483.600	66.74	74.00	-7.26	36.83	29.91	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_2462MHz_H_Average

Site :HY-CB01
Condition :3m_Horizontal
Mode :TX_be20_2462MHz
TEST BY :Caster

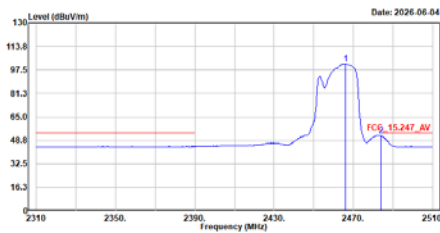


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2466.000	101.55	-----	-----	71.70	29.85	Average
2	2483.600	52.04	54.00	-1.96	22.13	29.91	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_2462MHz_H_Peak

Site :HY-CB01
Condition :3m_Horizontal
Mode :TX_be20_2462MHz
TEST BY :Caster

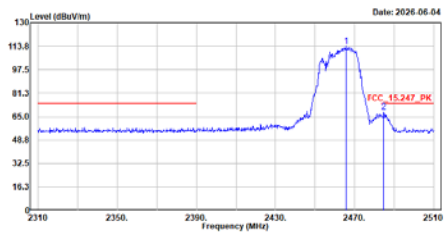


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2465.600	113.58	-----	-----	83.73	29.85	Peak
2	2484.800	68.11	74.00	-5.89	38.21	29.90	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_2462MHz_V_Average

Site :HY-CB01
Condition :3m_Vertical
Mode :TX_be20_2462MHz
TEST BY :Caster

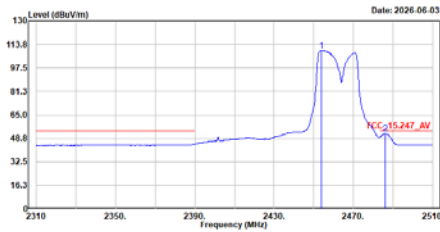


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2453.800	109.63	54.00	-1.86	79.79	29.84	Average
2	2486.000	52.14	54.00	-1.86	22.25	29.89	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_2462MHz_V_Peak

Site :HY-CB01
Condition :3m_Vertical
Mode :TX_be20_2462MHz
TEST BY :Caster

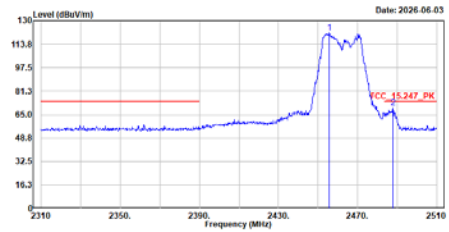


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2455.800	121.76	54.00	-4.48	91.92	29.84	Peak
2	2487.800	69.52	54.00	-4.48	39.64	29.88	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_2422MHz_H_Average

Site :HY-CB01
Condition :3m_Horizontal
Mode :TX_be40_2422MHz
TEST BY :Caster

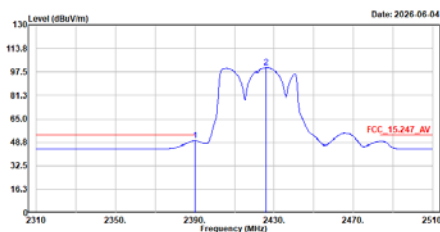


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2390.000	50.08	54.00	-3.92	20.09	29.99	Average
2	2425.000	100.51	54.00	-3.92	70.55	29.96	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_2422MHz_H_Peak

Site :HY-CB01
Condition :3m_Horizontal
Mode :TX_be40_2422MHz
TEST BY :Caster

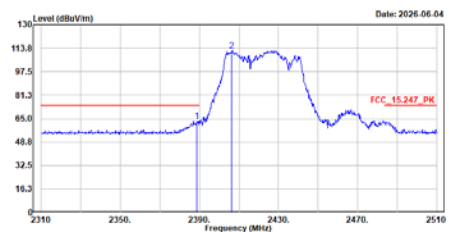


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2388.800	63.42	54.00	-10.58	33.43	29.99	Peak
2	2406.400	111.89	54.00	-10.58	81.94	29.95	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_2422MHz_V_Average

Site :HY-CB01
Condition :3m_Vertical
Mode :TX_be40_2422MHz
TEST BY :Caster

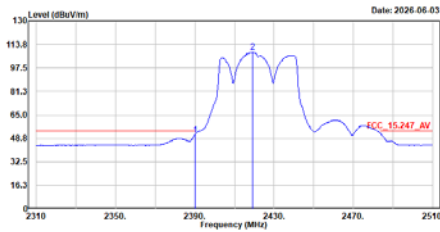


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2390.000	51.17	54.00	-2.83	21.18	29.99	Average
2	2419.200	108.17	-----	-----	78.16	30.01	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_2422MHz_V_Peak

Site :HY-CB01
Condition :3m_Vertical
Mode :TX_be40_2422MHz
TEST BY :Caster

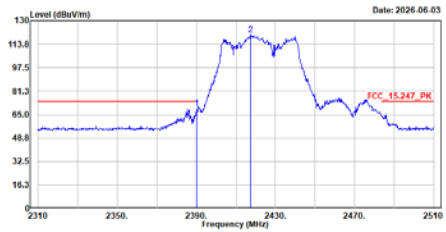


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2390.000	68.99	74.00	-5.01	39.00	29.99	Peak
2	2417.400	128.22	-----	-----	90.23	29.99	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_2437MHz_H_Average

Site :HY-CB01
Condition :3m_HORIZONTAL
Mode :TX_be40_2437MHz
TEST BY :Caster

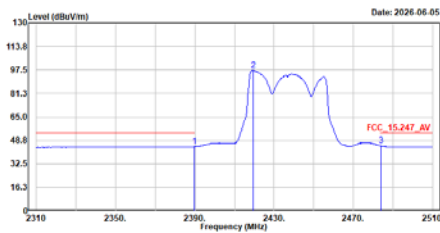


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2389.800	44.42	54.00	-9.58	14.43	29.99	Average
2	2419.400	97.09	-----	-----	67.08	30.01	Average
3	2483.000	44.90	54.00	-9.02	15.07	29.91	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_2437MHz_H_Peak

Site :HY-CB01
Condition :3m_HORIZONTAL
Mode :TX_be40_2437MHz
TEST BY :Caster

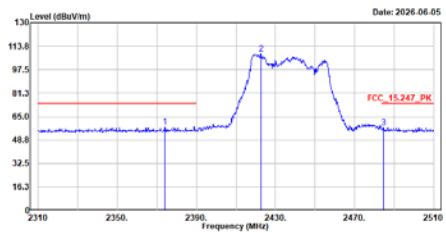


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2374.000	57.99	74.00	-16.01	28.07	29.92	Peak
2	2422.600	108.41	-----	-----	78.42	29.99	Peak
3	2484.600	57.43	74.00	-16.57	27.53	29.90	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_2437MHz_V_Average

Site :HY-CB01
Condition :3m_VERTICAL
Mode :TX_be40_2437MHz
TEST BY :Caster

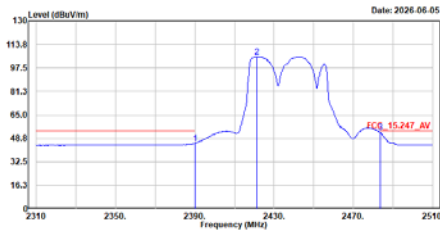


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	2390.000	45.32	54.00	-8.68	15.33	29.99	Average
2	2421.400	105.22	54.00	51.22	75.21	30.01	Average
3	2483.600	52.96	54.00	-1.04	23.05	29.91	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_2437MHz_V_Peak

Site :HY-CB01
Condition :3m_VERTICAL
Mode :TX_be40_2437MHz
TEST BY :Caster

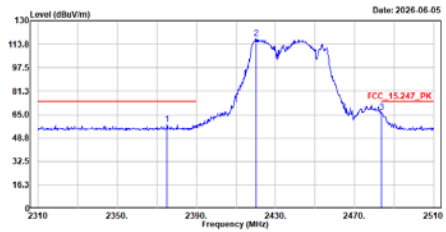


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	2375.200	58.48	74.00	-15.52	28.55	29.93	Peak
2	2420.200	117.76	54.00	63.76	87.74	30.02	Peak
3	2483.600	66.48	74.00	-7.52	36.57	29.91	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_2452MHz_H_Average

Site :HY-CB01
Condition :3m_Horizontal
Mode :TX_be40_2452MHz
TEST BY :Caster

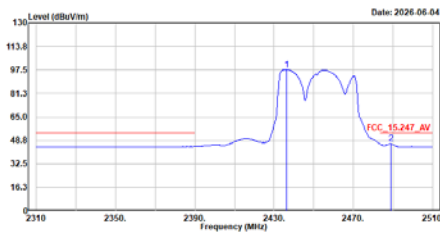


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	2436.200	97.65	54.00	43.65	67.72	29.93	Average
2	2488.800	46.46	54.00	-7.54	16.59	29.87	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_2452MHz_H_Peak


Site :HY-CB01
Condition :3m_Horizontal
Mode :TX_be40_2452MHz
TEST BY :Caster

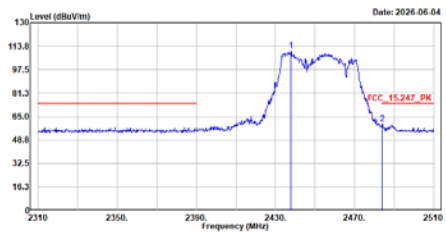


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	2437.800	110.52	54.00	56.52	80.59	29.93	Peak
2	2484.000	60.06	74.00	-13.94	30.15	29.91	Peak

Note:





1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

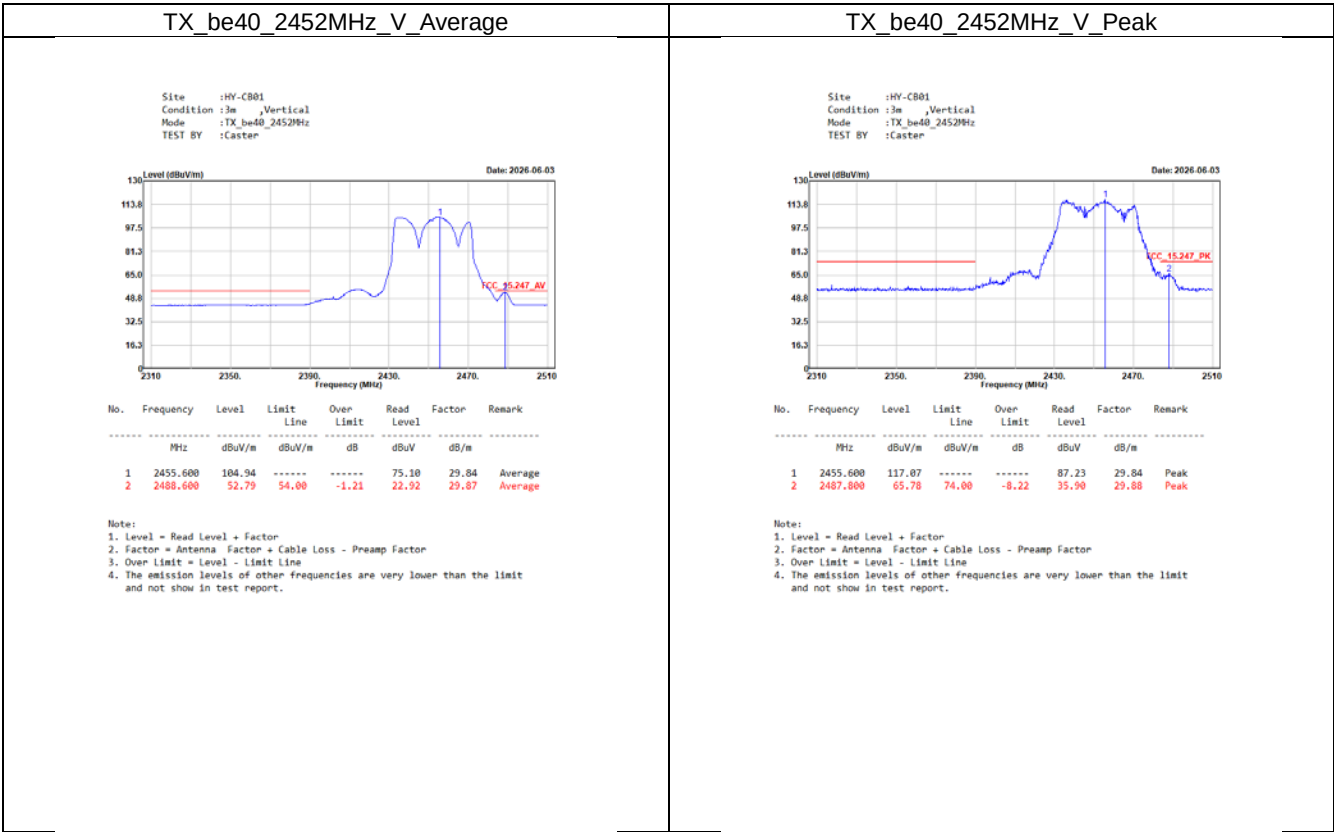


Worst-Case Emissions Above 18 GHz

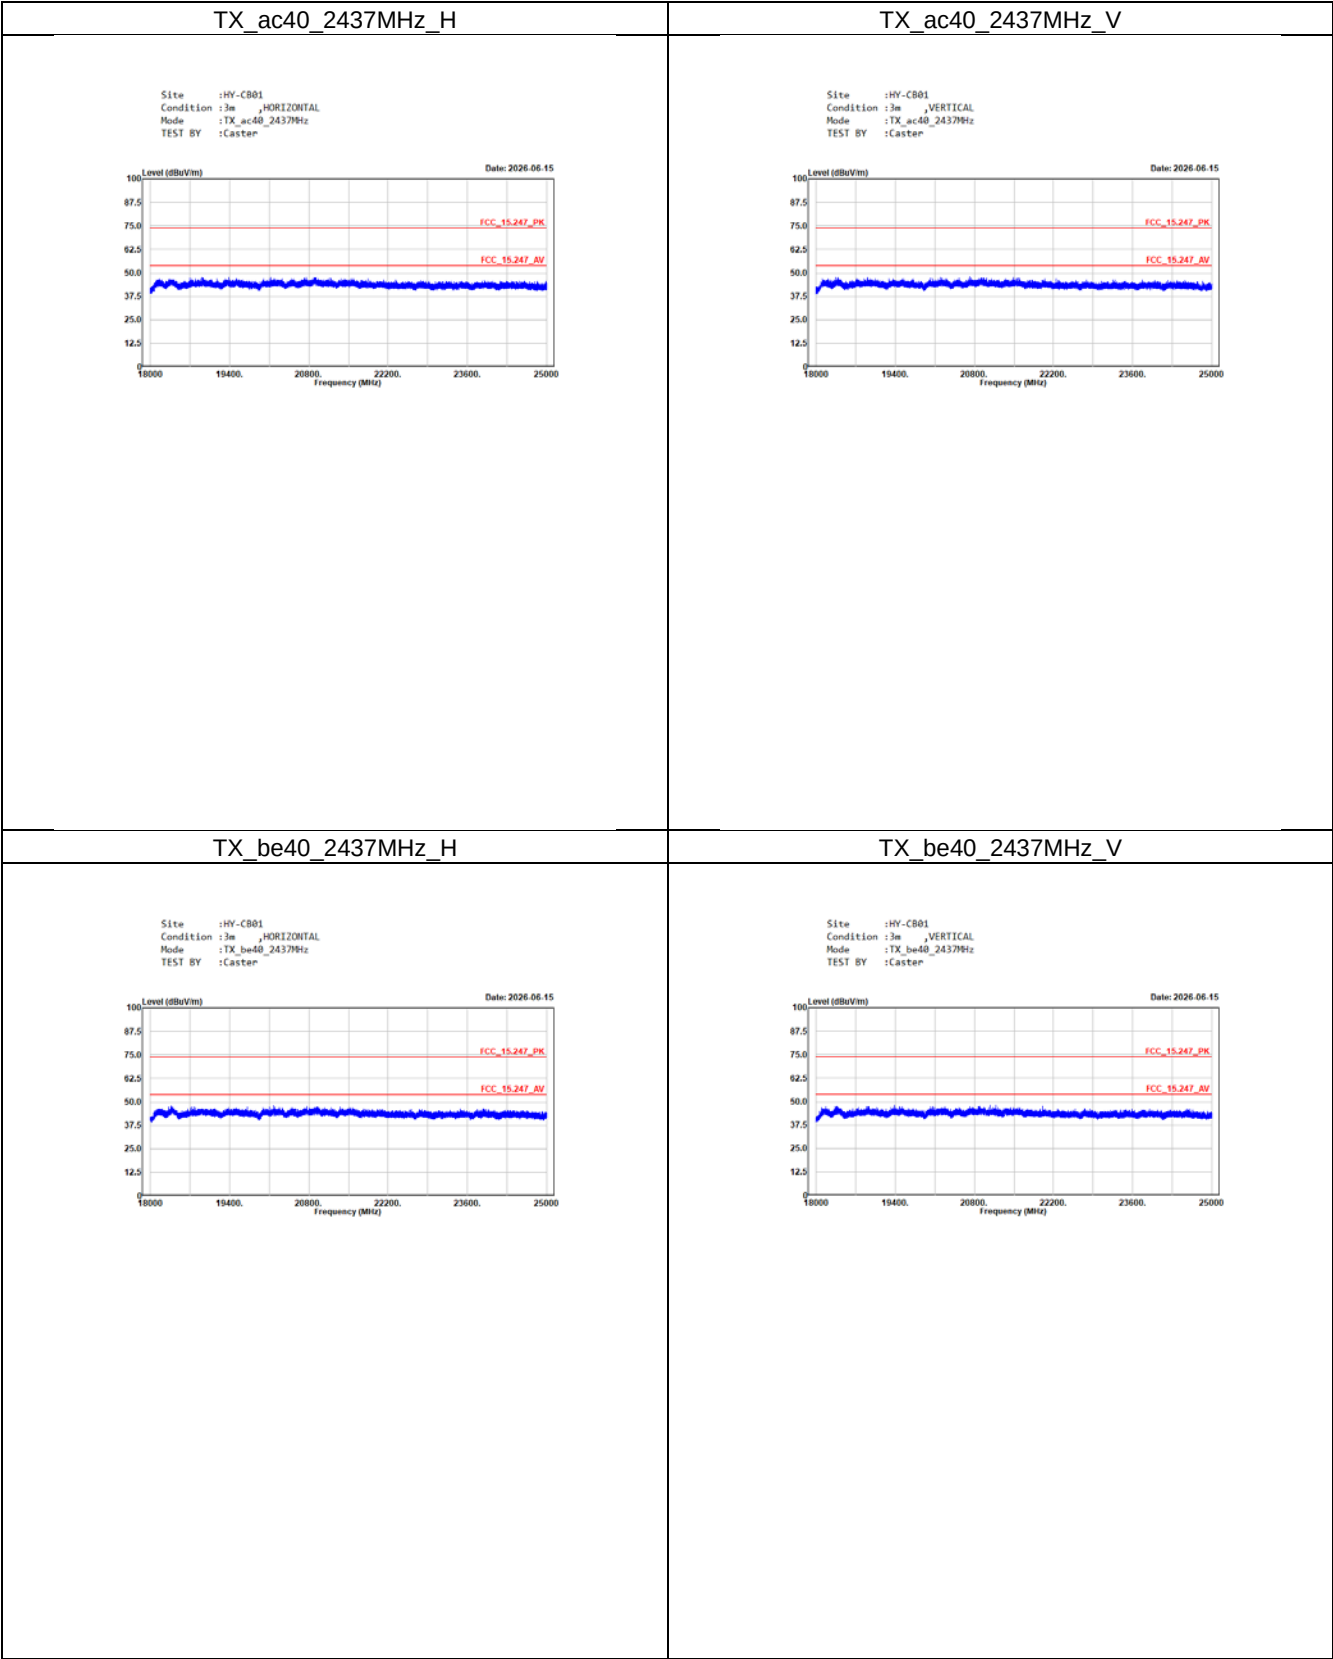


Co-location

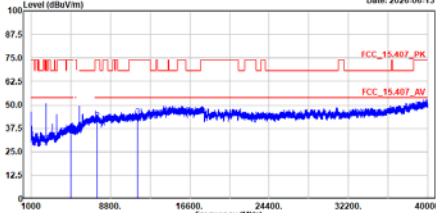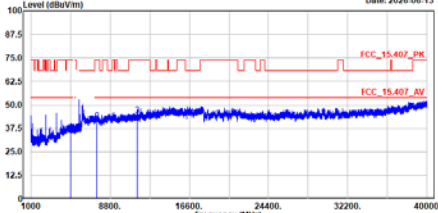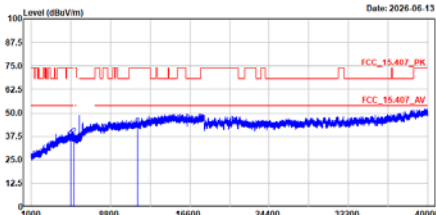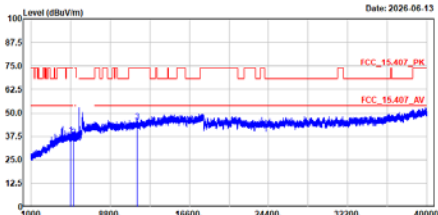TX_b_2437MHz+TX_a_5745MHz+5GNR_n77_100M_1RB0_CH650000_H	TX_b_2437MHz+TX_a_5745MHz+5GNR_n77_100M_1RB0_CH650000_V																																																																																
Site :HY-CB01 Condition :3m_HORIZONTAL Mode :TX_b_2437MHz+TX_a_5745MHz+5GNR_n77_100M_1RB0_CH650000 TEST BY :Caster Level (dBuV/m) Date: 2026.06.13  <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><td></td><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td></td></tr><tr><td>1</td><td>4874.000</td><td>35.49</td><td>74.00</td><td>-38.51</td><td>50.30</td><td>-14.81</td><td>Peak</td></tr><tr><td>2</td><td>7500.000</td><td>41.33</td><td>74.00</td><td>-32.67</td><td>52.88</td><td>-11.55</td><td>Peak</td></tr><tr><td>3</td><td>11490.000</td><td>43.58</td><td>74.00</td><td>-30.42</td><td>52.93</td><td>-9.35</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	4874.000	35.49	74.00	-38.51	50.30	-14.81	Peak	2	7500.000	41.33	74.00	-32.67	52.88	-11.55	Peak	3	11490.000	43.58	74.00	-30.42	52.93	-9.35	Peak	Site :HY-CB01 Condition :3m_VERTICAL Mode :TX_b_2437MHz+TX_a_5745MHz+5GNR_n77_100M_1RB0_CH650000 TEST BY :Caster Level (dBuV/m) Date: 2026.06.13  <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><td></td><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td></td></tr><tr><td>1</td><td>4874.000</td><td>35.44</td><td>74.00</td><td>-38.56</td><td>50.25</td><td>-14.81</td><td>Peak</td></tr><tr><td>2</td><td>7500.000</td><td>41.48</td><td>74.00</td><td>-32.52</td><td>53.03</td><td>-11.55</td><td>Peak</td></tr><tr><td>3</td><td>11490.000</td><td>44.62</td><td>74.00</td><td>-29.38</td><td>53.97</td><td>-9.35</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	4874.000	35.44	74.00	-38.56	50.25	-14.81	Peak	2	7500.000	41.48	74.00	-32.52	53.03	-11.55	Peak	3	11490.000	44.62	74.00	-29.38	53.97	-9.35	Peak
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																											
1	4874.000	35.49	74.00	-38.51	50.30	-14.81	Peak																																																																										
2	7500.000	41.33	74.00	-32.67	52.88	-11.55	Peak																																																																										
3	11490.000	43.58	74.00	-30.42	52.93	-9.35	Peak																																																																										
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																											
1	4874.000	35.44	74.00	-38.56	50.25	-14.81	Peak																																																																										
2	7500.000	41.48	74.00	-32.52	53.03	-11.55	Peak																																																																										
3	11490.000	44.62	74.00	-29.38	53.97	-9.35	Peak																																																																										
TX_b_2437MHz+TX_a_5745MHz+LTE_B41_20M_1RB0_40620_H	TX_b_2437MHz+TX_a_5745MHz+LTE_B41_20M_1RB0_40620_V																																																																																
Site :HY-CB01 Condition :3m_HORIZONTAL Mode :TX_b_2437MHz+TX_a_5745MHz+LTE_B41_20M_1RB0_40620 TEST BY :Caster Level (dBuV/m) Date: 2026.06.13  <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><td></td><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td></td></tr><tr><td>1</td><td>4874.000</td><td>36.53</td><td>74.00</td><td>-37.47</td><td>51.34</td><td>-14.81</td><td>Peak</td></tr><tr><td>2</td><td>5186.000</td><td>37.32</td><td>74.00</td><td>-36.68</td><td>537.32</td><td>-500.00</td><td>Peak</td></tr><tr><td>3</td><td>11490.000</td><td>42.73</td><td>74.00</td><td>-31.27</td><td>52.08</td><td>-9.35</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	4874.000	36.53	74.00	-37.47	51.34	-14.81	Peak	2	5186.000	37.32	74.00	-36.68	537.32	-500.00	Peak	3	11490.000	42.73	74.00	-31.27	52.08	-9.35	Peak	Site :HY-CB01 Condition :3m_VERTICAL Mode :TX_b_2437MHz+TX_a_5745MHz+LTE_B41_20M_1RB0_40620 TEST BY :Caster Level (dBuV/m) Date: 2026.06.13  <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><td></td><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td></td></tr><tr><td>1</td><td>4874.000</td><td>38.28</td><td>74.00</td><td>-35.72</td><td>53.09</td><td>-14.81</td><td>Peak</td></tr><tr><td>2</td><td>5186.000</td><td>36.84</td><td>74.00</td><td>-37.16</td><td>51.56</td><td>-14.72</td><td>Peak</td></tr><tr><td>3</td><td>11490.000</td><td>45.45</td><td>74.00</td><td>-28.55</td><td>54.80</td><td>-9.35</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	4874.000	38.28	74.00	-35.72	53.09	-14.81	Peak	2	5186.000	36.84	74.00	-37.16	51.56	-14.72	Peak	3	11490.000	45.45	74.00	-28.55	54.80	-9.35	Peak
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																											
1	4874.000	36.53	74.00	-37.47	51.34	-14.81	Peak																																																																										
2	5186.000	37.32	74.00	-36.68	537.32	-500.00	Peak																																																																										
3	11490.000	42.73	74.00	-31.27	52.08	-9.35	Peak																																																																										
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																											
1	4874.000	38.28	74.00	-35.72	53.09	-14.81	Peak																																																																										
2	5186.000	36.84	74.00	-37.16	51.56	-14.72	Peak																																																																										
3	11490.000	45.45	74.00	-28.55	54.80	-9.35	Peak																																																																										


TX_b_2437MHz+TX_a_5745MHz+WCDMA_B5_CH4182_H

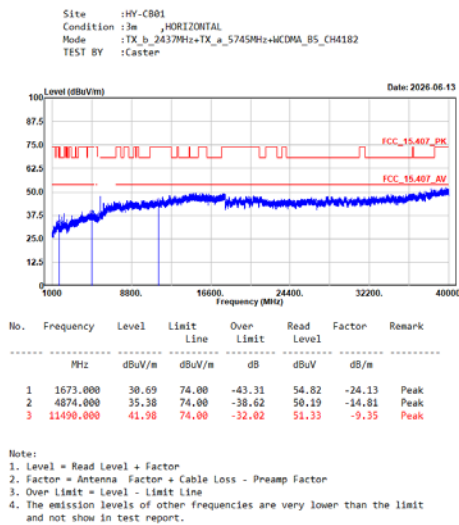


TX_b_2437MHz+TX_a_5745MHz+WCDMA_B5_CH4182_V




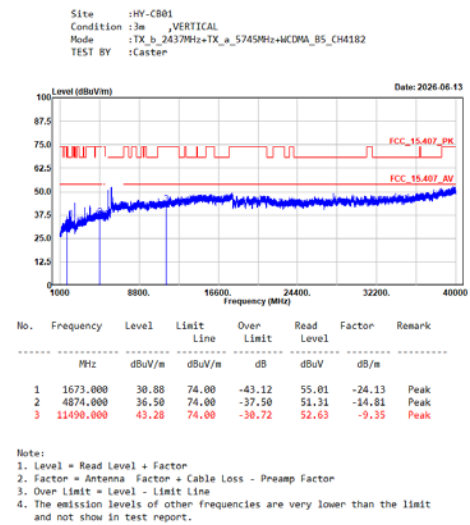


TX_b_2437MHz+TX_a_5745MHz+5GNR_n77_100M_1RB0_CH650000_H

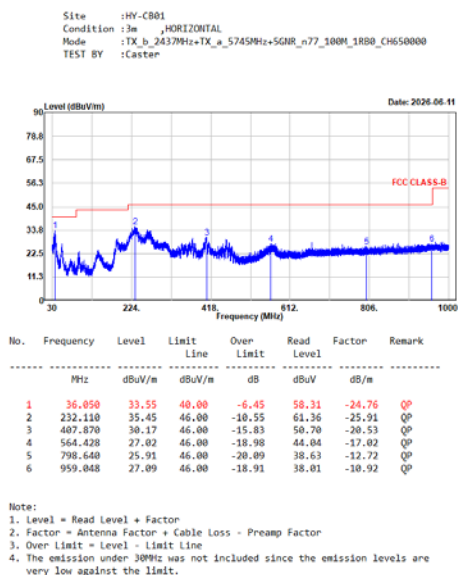

TX_b_2437MHz+TX_a_5745MHz+5GNR_n77_100M_1RB0_CH650000_V

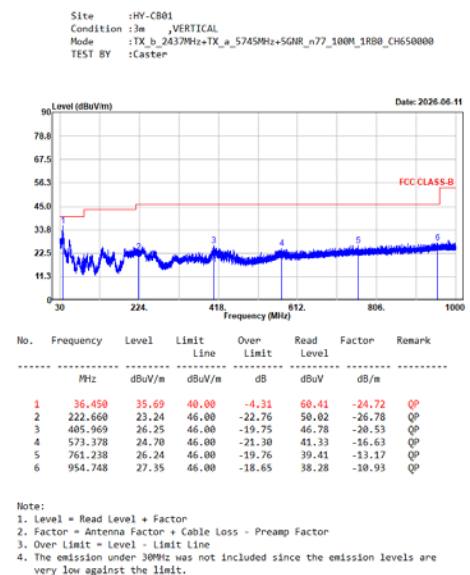

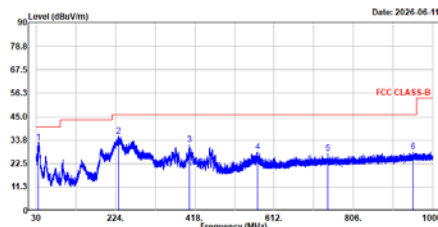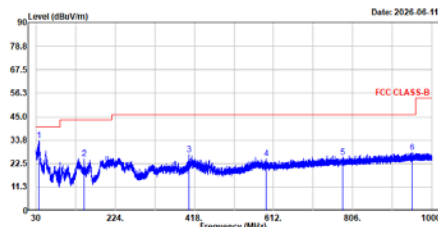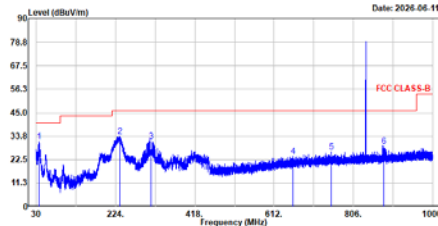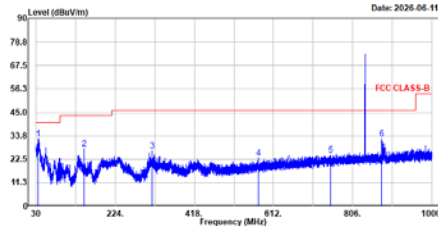TX_b_2437MHz+TX_a_5745MHz+LTE_B41_20M_1RB0_40 620_H	TX_b_2437MHz+TX_a_5745MHz+LTE_B41_20M_1RB0_40 620_V																																																																																																																																
Site :HY-CB01 Condition :3m ,HORIZONTAL Mode :TX_b_2437MHz+TX_a_5745MHz+LTE_B41_20M_1RB0_40620 TEST BY :Caster  <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>35.750</td><td>32.50</td><td>40.00</td><td>-7.50</td><td>57.32</td><td>-24.82</td><td>QP</td></tr><tr><td>2</td><td>231.010</td><td>35.53</td><td>46.00</td><td>-10.47</td><td>61.56</td><td>-26.03</td><td>QP</td></tr><tr><td>3</td><td>405.069</td><td>31.56</td><td>46.00</td><td>-14.44</td><td>52.09</td><td>-20.53</td><td>QP</td></tr><tr><td>4</td><td>571.028</td><td>28.12</td><td>46.00</td><td>-17.88</td><td>44.85</td><td>-16.73</td><td>QP</td></tr><tr><td>5</td><td>742.587</td><td>27.41</td><td>46.00</td><td>-18.59</td><td>40.79</td><td>-13.38</td><td>QP</td></tr><tr><td>6</td><td>952.298</td><td>28.04</td><td>46.00</td><td>-17.96</td><td>39.02</td><td>-10.98</td><td>QP</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission under 30MHz was not included since the emission levels are very low against the limit.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	35.750	32.50	40.00	-7.50	57.32	-24.82	QP	2	231.010	35.53	46.00	-10.47	61.56	-26.03	QP	3	405.069	31.56	46.00	-14.44	52.09	-20.53	QP	4	571.028	28.12	46.00	-17.88	44.85	-16.73	QP	5	742.587	27.41	46.00	-18.59	40.79	-13.38	QP	6	952.298	28.04	46.00	-17.96	39.02	-10.98	QP	Site :HY-CB01 Condition :3m ,VERTICAL Mode :TX_b_2437MHz+TX_a_5745MHz+LTE_B41_20M_1RB0_40620 TEST BY :Caster  <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>36.250</td><td>33.59</td><td>40.00</td><td>-6.41</td><td>58.33</td><td>-24.74</td><td>QP</td></tr><tr><td>2</td><td>148.506</td><td>24.71</td><td>43.50</td><td>-18.79</td><td>48.77</td><td>-24.06</td><td>QP</td></tr><tr><td>3</td><td>405.419</td><td>26.91</td><td>46.00</td><td>-19.09</td><td>47.44</td><td>-20.53</td><td>QP</td></tr><tr><td>4</td><td>594.579</td><td>24.73</td><td>46.00</td><td>-21.27</td><td>40.85</td><td>-16.12</td><td>QP</td></tr><tr><td>5</td><td>780.789</td><td>25.40</td><td>46.00</td><td>-20.60</td><td>38.40</td><td>-13.00</td><td>QP</td></tr><tr><td>6</td><td>951.948</td><td>27.76</td><td>46.00</td><td>-18.24</td><td>38.75</td><td>-10.99</td><td>QP</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission under 30MHz was not included since the emission levels are very low against the limit.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	36.250	33.59	40.00	-6.41	58.33	-24.74	QP	2	148.506	24.71	43.50	-18.79	48.77	-24.06	QP	3	405.419	26.91	46.00	-19.09	47.44	-20.53	QP	4	594.579	24.73	46.00	-21.27	40.85	-16.12	QP	5	780.789	25.40	46.00	-20.60	38.40	-13.00	QP	6	951.948	27.76	46.00	-18.24	38.75	-10.99	QP
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																											
1	35.750	32.50	40.00	-7.50	57.32	-24.82	QP																																																																																																																										
2	231.010	35.53	46.00	-10.47	61.56	-26.03	QP																																																																																																																										
3	405.069	31.56	46.00	-14.44	52.09	-20.53	QP																																																																																																																										
4	571.028	28.12	46.00	-17.88	44.85	-16.73	QP																																																																																																																										
5	742.587	27.41	46.00	-18.59	40.79	-13.38	QP																																																																																																																										
6	952.298	28.04	46.00	-17.96	39.02	-10.98	QP																																																																																																																										
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																											
1	36.250	33.59	40.00	-6.41	58.33	-24.74	QP																																																																																																																										
2	148.506	24.71	43.50	-18.79	48.77	-24.06	QP																																																																																																																										
3	405.419	26.91	46.00	-19.09	47.44	-20.53	QP																																																																																																																										
4	594.579	24.73	46.00	-21.27	40.85	-16.12	QP																																																																																																																										
5	780.789	25.40	46.00	-20.60	38.40	-13.00	QP																																																																																																																										
6	951.948	27.76	46.00	-18.24	38.75	-10.99	QP																																																																																																																										
TX_b_2437MHz+TX_a_5745MHz+WCDMA_B5_CH4182_H	TX_b_2437MHz+TX_a_5745MHz+WCDMA_B5_CH4182_V																																																																																																																																
Site :HY-CB01 Condition :3m ,HORIZONTAL Mode :TX_b_2437MHz+TX_a_5745MHz+WCDMA_B5_CH4182 TEST BY :Caster  <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>36.150</td><td>31.10</td><td>40.00</td><td>-8.90</td><td>55.06</td><td>-24.76</td><td>QP</td></tr><tr><td>2</td><td>234.211</td><td>33.70</td><td>46.00</td><td>-12.30</td><td>59.38</td><td>-25.68</td><td>QP</td></tr><tr><td>3</td><td>310.565</td><td>31.32</td><td>46.00</td><td>-14.68</td><td>54.37</td><td>-23.05</td><td>QP</td></tr><tr><td>4</td><td>658.832</td><td>24.12</td><td>46.00</td><td>-21.88</td><td>39.11</td><td>-14.99</td><td>QP</td></tr><tr><td>5</td><td>751.637</td><td>26.01</td><td>46.00</td><td>-19.99</td><td>39.29</td><td>-13.28</td><td>QP</td></tr><tr><td>6</td><td>880.344</td><td>28.78</td><td>46.00</td><td>-17.22</td><td>40.81</td><td>-12.03</td><td>QP</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission under 30MHz was not included since the emission levels are very low against the limit.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	36.150	31.10	40.00	-8.90	55.06	-24.76	QP	2	234.211	33.70	46.00	-12.30	59.38	-25.68	QP	3	310.565	31.32	46.00	-14.68	54.37	-23.05	QP	4	658.832	24.12	46.00	-21.88	39.11	-14.99	QP	5	751.637	26.01	46.00	-19.99	39.29	-13.28	QP	6	880.344	28.78	46.00	-17.22	40.81	-12.03	QP	Site :HY-CB01 Condition :3m ,Vertical Mode :TX_b_2437MHz+TX_a_5745MHz+WCDMA_B5_CH4182 TEST BY :Caster  <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>35.350</td><td>32.23</td><td>40.00</td><td>-7.77</td><td>57.13</td><td>-24.90</td><td>QP</td></tr><tr><td>2</td><td>148.506</td><td>27.54</td><td>43.50</td><td>-15.96</td><td>51.60</td><td>-24.06</td><td>QP</td></tr><tr><td>3</td><td>314.515</td><td>26.41</td><td>46.00</td><td>-19.59</td><td>49.29</td><td>-22.88</td><td>QP</td></tr><tr><td>4</td><td>574.628</td><td>23.19</td><td>46.00</td><td>-22.81</td><td>39.77</td><td>-16.58</td><td>QP</td></tr><tr><td>5</td><td>751.887</td><td>24.34</td><td>46.00</td><td>-21.66</td><td>37.61</td><td>-13.27</td><td>QP</td></tr><tr><td>6</td><td>877.744</td><td>32.26</td><td>46.00</td><td>-13.74</td><td>44.33</td><td>-12.07</td><td>QP</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission under 30MHz was not included since the emission levels are very low against the limit.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	35.350	32.23	40.00	-7.77	57.13	-24.90	QP	2	148.506	27.54	43.50	-15.96	51.60	-24.06	QP	3	314.515	26.41	46.00	-19.59	49.29	-22.88	QP	4	574.628	23.19	46.00	-22.81	39.77	-16.58	QP	5	751.887	24.34	46.00	-21.66	37.61	-13.27	QP	6	877.744	32.26	46.00	-13.74	44.33	-12.07	QP
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																											
1	36.150	31.10	40.00	-8.90	55.06	-24.76	QP																																																																																																																										
2	234.211	33.70	46.00	-12.30	59.38	-25.68	QP																																																																																																																										
3	310.565	31.32	46.00	-14.68	54.37	-23.05	QP																																																																																																																										
4	658.832	24.12	46.00	-21.88	39.11	-14.99	QP																																																																																																																										
5	751.637	26.01	46.00	-19.99	39.29	-13.28	QP																																																																																																																										
6	880.344	28.78	46.00	-17.22	40.81	-12.03	QP																																																																																																																										
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																											
1	35.350	32.23	40.00	-7.77	57.13	-24.90	QP																																																																																																																										
2	148.506	27.54	43.50	-15.96	51.60	-24.06	QP																																																																																																																										
3	314.515	26.41	46.00	-19.59	49.29	-22.88	QP																																																																																																																										
4	574.628	23.19	46.00	-22.81	39.77	-16.58	QP																																																																																																																										
5	751.887	24.34	46.00	-21.66	37.61	-13.27	QP																																																																																																																										
6	877.744	32.26	46.00	-13.74	44.33	-12.07	QP																																																																																																																										