


**Plot 24: DUT: TD-LTE digital mobile phone; EUT Model: S26Ultra**

|                                   |                               |
|-----------------------------------|-------------------------------|
| Test Date                         | 2026-04-26                    |
| ConvF                             | 1.51                          |
| Probe                             | SN 08/21 EPGO352              |
| Area Scan                         | dx=8mm, dy=8mm, h= 5.00 mm    |
| Zoom Scan                         | 5x5x7, dx=8mm, dy=8mm, dz=5mm |
| Phantom                           | Validation plane              |
| Device Position                   | Back Side                     |
| Band                              | LTE Band 12/17 (RB 1)         |
| Signal                            | LTE (Crest factor: 1.0)       |
| Frequency (MHz)                   | 711                           |
| Relative permittivity (real part) | 41.92                         |
| Conductivity (S/m)                | 0.91                          |

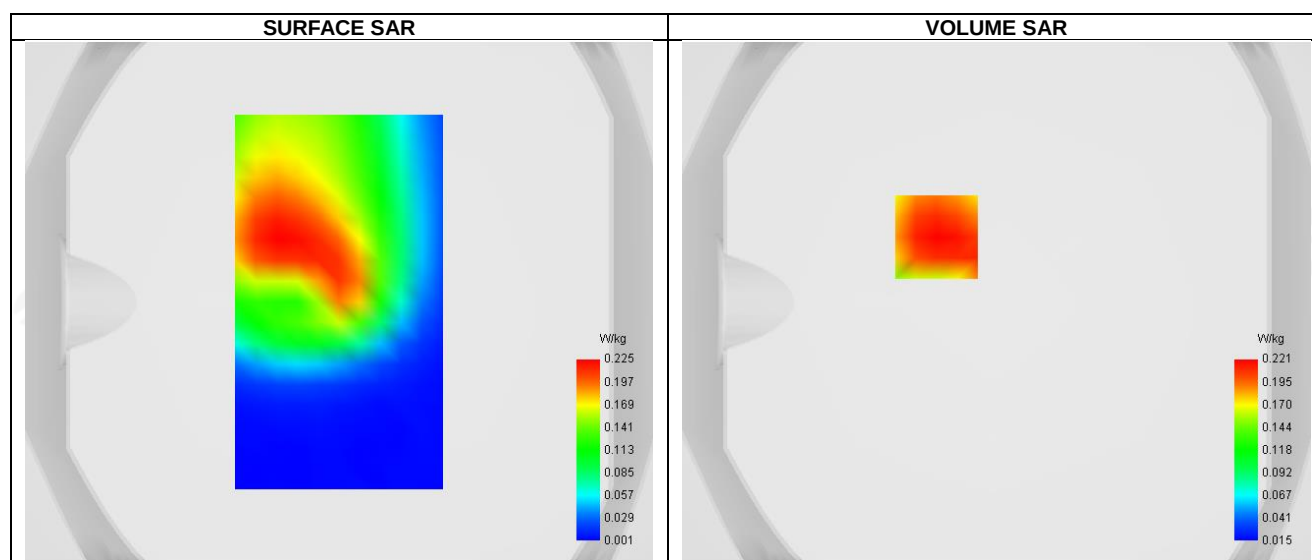


Maximum location: X=-23.00, Y=25.00 ; SAR Peak: 0.30 W/kg

**D. SAR 1g & 10g**


|                                                       |           |
|-------------------------------------------------------|-----------|
| SAR 10g (W/Kg)                                        | 0.145     |
| SAR 1g (W/Kg)                                         | 0.215     |
| Horizontal validation criteria: minimum distance (mm) | 12.000000 |
| Vertical validation criteria: SAR ratio M2/M1 (%)     | 72.850611 |

## E. Z Axis Scan

| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 | 24.00 | 29.00 |
|------------|-------|-------|-------|-------|-------|-------|-------|
| SAR (W/Kg) | 0.284 | 0.221 | 0.161 | 0.116 | 0.084 | 0.061 | 0.044 |

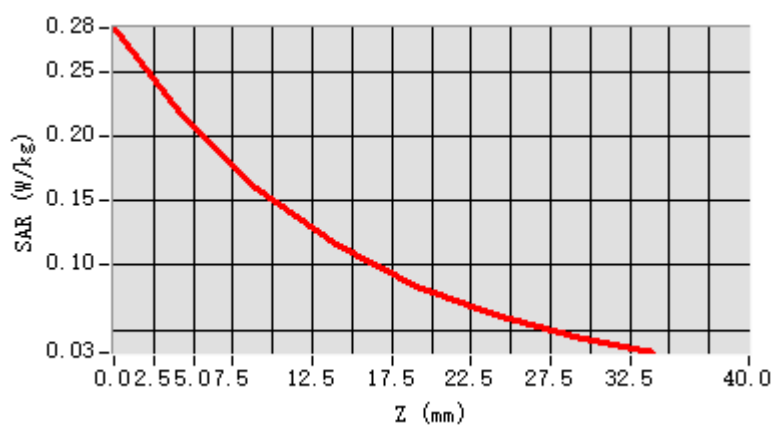


## F. 3D Image

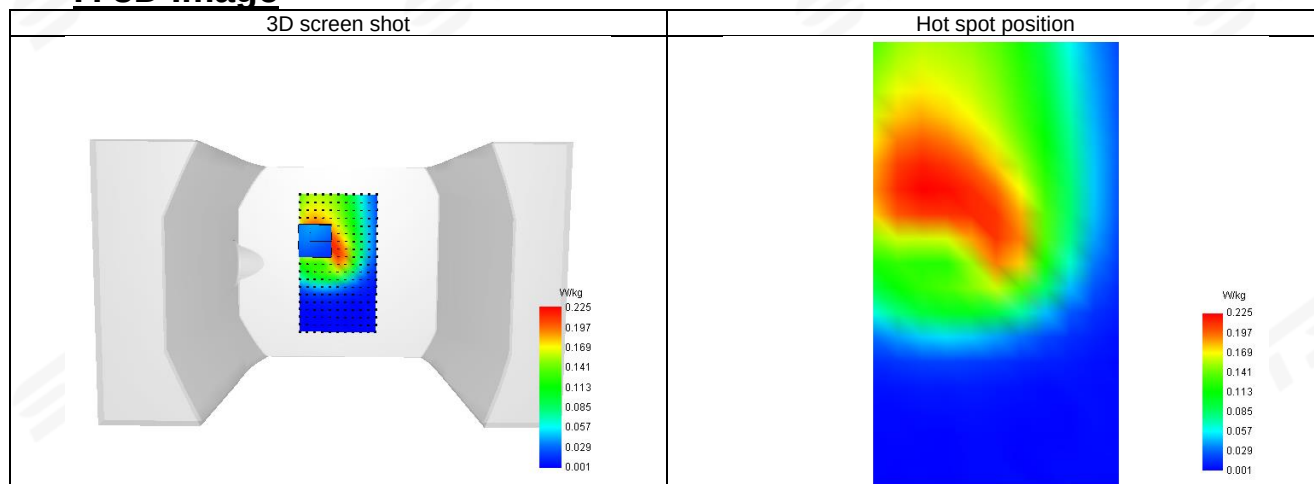

**Plot 25: DUT: TD-LTE digital mobile phone; EUT Model: S26Ultr**

|                                   |                               |
|-----------------------------------|-------------------------------|
| Test Date                         | 2026-04-29                    |
| ConvF                             | 1.73                          |
| Probe                             | SN 08/21 EPGO352              |
| Area Scan                         | dx=8mm, dy=8mm, h= 5.00 mm    |
| Zoom Scan                         | 5x5x7, dx=8mm, dy=8mm, dz=5mm |
| Phantom                           | Right Cheek                   |
| Device Position                   | Cheek                         |
| Band                              | LTE Band 25/2 (RB 1)          |
| Signal                            | LTE (Crest factor: 1.0)       |
| Frequency (MHz)                   | 1882.5                        |
| Relative permittivity (real part) | 39.89                         |
| Conductivity (S/m)                | 1.44                          |

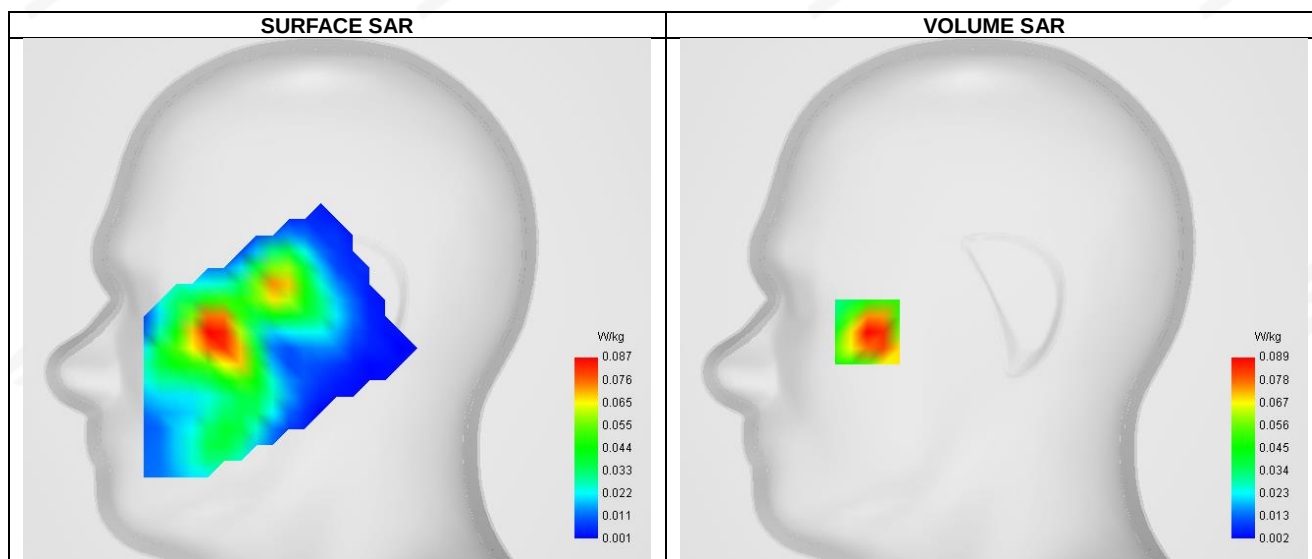


Maximum location: X=-63.00, Y=-16.00 ; SAR Peak: 0.13 W/kg

**D. SAR 1g & 10g**


|                                                       |           |
|-------------------------------------------------------|-----------|
| SAR 10g (W/Kg)                                        | 0.053     |
| SAR 1g (W/Kg)                                         | 0.086     |
| Horizontal validation criteria: minimum distance (mm) | 16.000000 |
| Vertical validation criteria: SAR ratio M2/M1 (%)     | 68.672902 |

**E. Z Axis Scan**

|            |       |       |       |       |       |       |       |
|------------|-------|-------|-------|-------|-------|-------|-------|
| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 | 24.00 | 29.00 |
| SAR (W/Kg) | 0.120 | 0.089 | 0.061 | 0.043 | 0.030 | 0.021 | 0.015 |

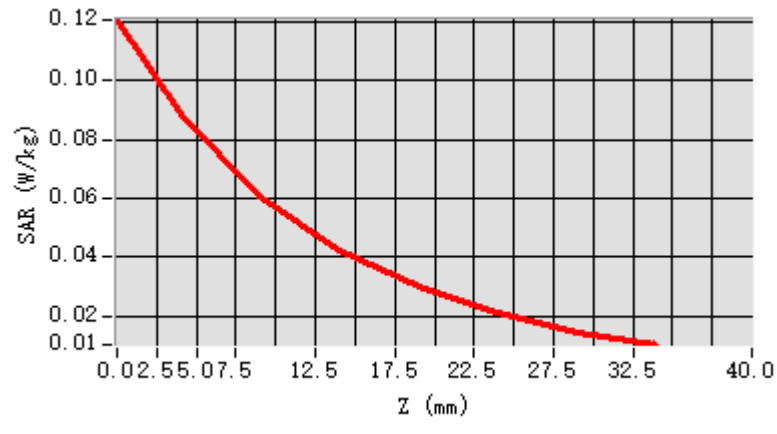


## F. 3D Image

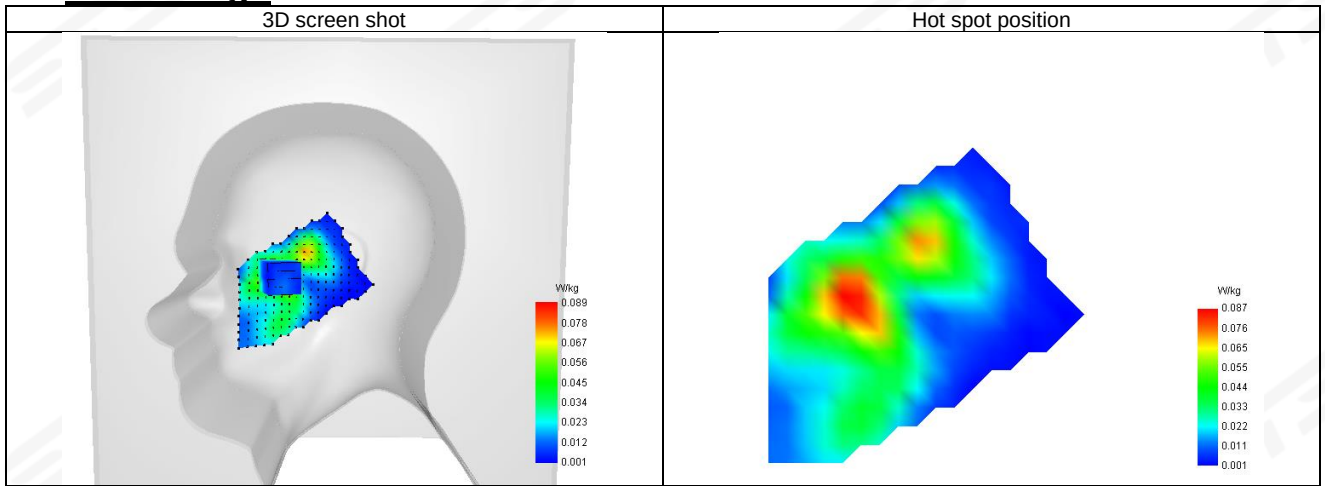

**Plot 26: DUT: TD-LTE digital mobile phone; EUT Model: S26Ultra**

|                                   |                               |
|-----------------------------------|-------------------------------|
| Test Date                         | 2026-04-29                    |
| ConvF                             | 1.73                          |
| Probe                             | SN 08/21 EPGO352              |
| Area Scan                         | dx=8mm, dy=8mm, h= 5.00 mm    |
| Zoom Scan                         | 5x5x7, dx=8mm, dy=8mm, dz=5mm |
| Phantom                           | Validation plane              |
| Device Position                   | Back Side                     |
| Band                              | LTE Band 25/2 (RB 1)          |
| Signal                            | LTE (Crest factor: 1.0)       |
| Frequency (MHz)                   | 1882.5                        |
| Relative permittivity (real part) | 39.89                         |
| Conductivity (S/m)                | 1.44                          |

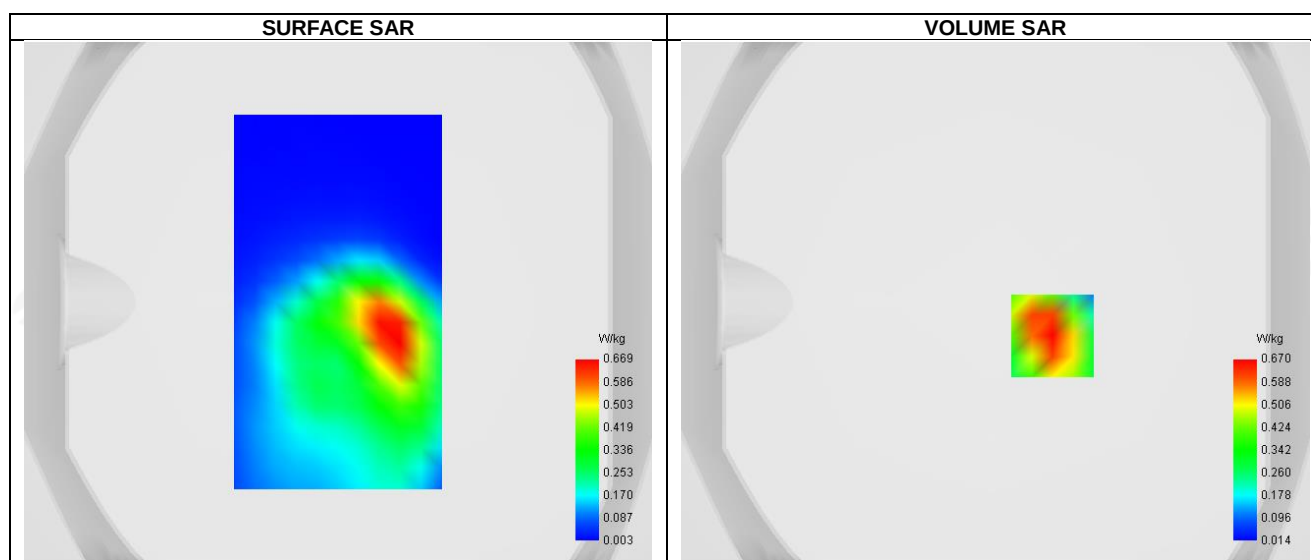


Maximum location: X=22.00, Y=-13.00 ; SAR Peak: 1.05 W/kg

**D. SAR 1g & 10g**


|                                                       |           |
|-------------------------------------------------------|-----------|
| SAR 10g (W/Kg)                                        | 0.352     |
| SAR 1g (W/Kg)                                         | 0.605     |
| Horizontal validation criteria: minimum distance (mm) | 16.000000 |
| Vertical validation criteria: SAR ratio M2/M1 (%)     | 58.272371 |

## E. Z Axis Scan

| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 | 24.00 | 29.00 |
|------------|-------|-------|-------|-------|-------|-------|-------|
| SAR (W/Kg) | 1.019 | 0.670 | 0.390 | 0.234 | 0.141 | 0.085 | 0.053 |

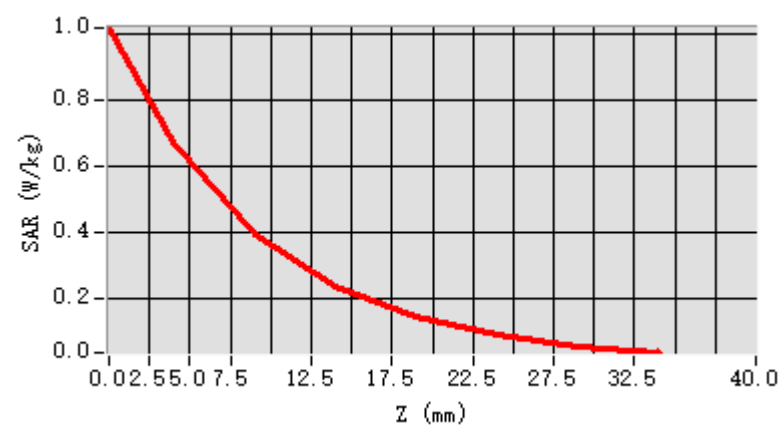


## F. 3D Image

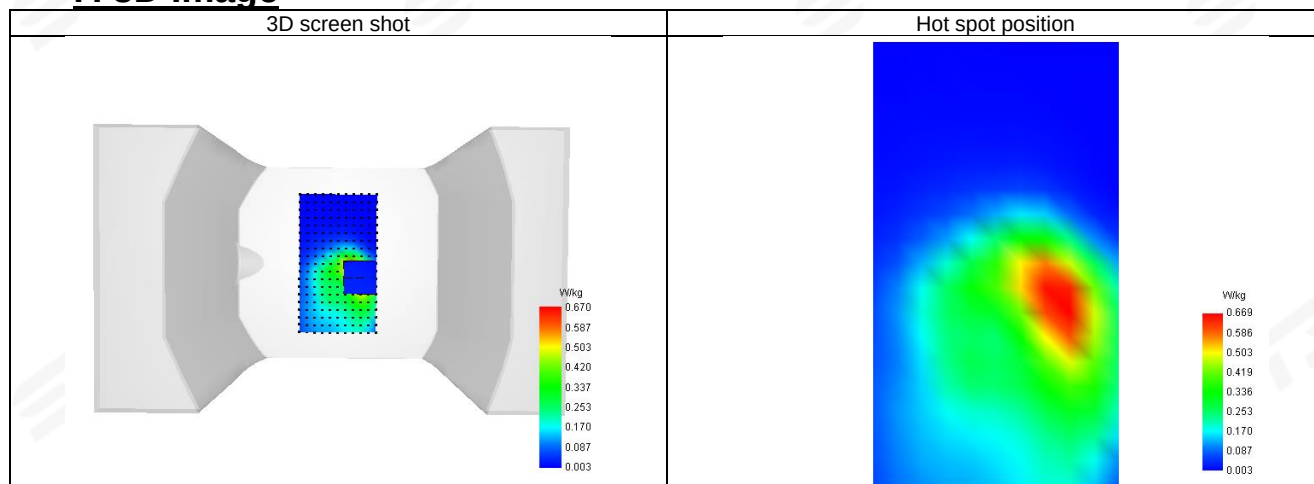

**Plot 27: DUT: TD-LTE digital mobile phone; EUT Model: S26Ultr**

|                                   |                               |
|-----------------------------------|-------------------------------|
| Test Date                         | 2026-04-28                    |
| ConvF                             | 1.49                          |
| Probe                             | SN 08/21 EPGO352              |
| Area Scan                         | dx=8mm, dy=8mm, h= 5.00 mm    |
| Zoom Scan                         | 5x5x7, dx=8mm, dy=8mm, dz=5mm |
| Phantom                           | Right Cheek                   |
| Device Position                   | Cheek                         |
| Band                              | LTE Band 26 (RB 1)            |
| Signal                            | LTE (Crest factor: 1.0)       |
| Frequency (MHz)                   | 831.5                         |
| Relative permittivity (real part) | 42.35                         |
| Conductivity (S/m)                | 0.91                          |

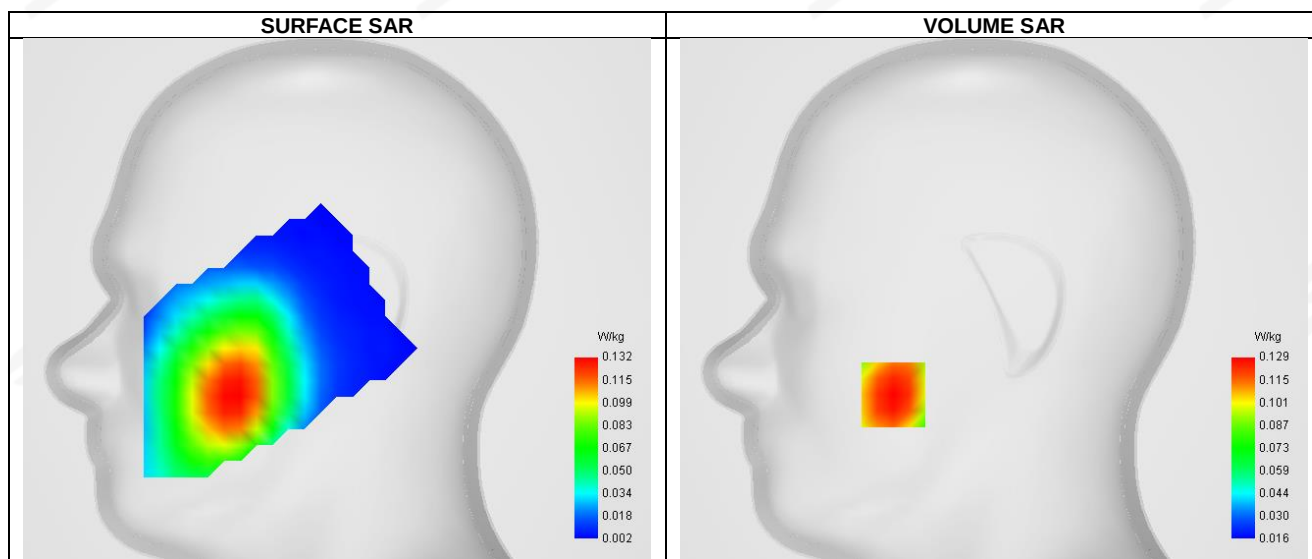


Maximum location: X=-50.00, Y=-47.00 ; SAR Peak: 0.16 W/kg

**D. SAR 1g & 10g**


|                                                       |           |
|-------------------------------------------------------|-----------|
| SAR 10g (W/Kg)                                        | 0.096     |
| SAR 1g (W/Kg)                                         | 0.127     |
| Horizontal validation criteria: minimum distance (mm) | 16.000000 |
| Vertical validation criteria: SAR ratio M2/M1 (%)     | 68.465315 |

**E. Z Axis Scan**

|            |       |       |       |       |       |       |       |
|------------|-------|-------|-------|-------|-------|-------|-------|
| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 | 24.00 | 29.00 |
| SAR (W/Kg) | 0.153 | 0.129 | 0.106 | 0.088 | 0.070 | 0.053 | 0.040 |

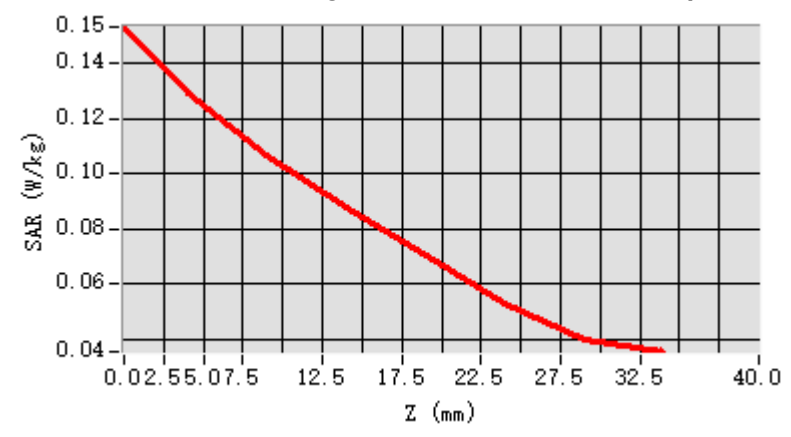


## F. 3D Image

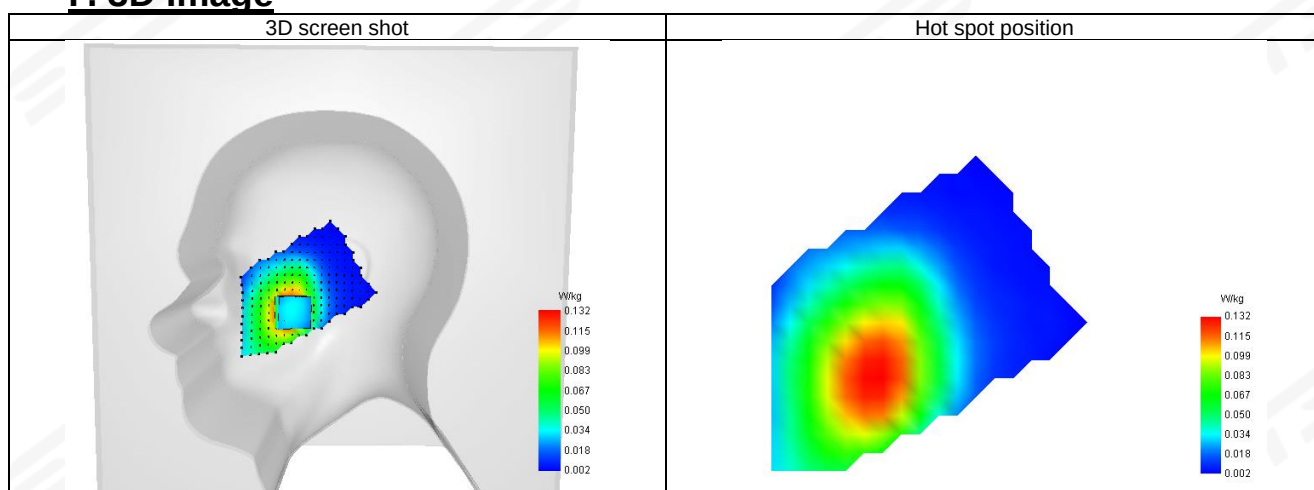

**Plot 28: DUT: TD-LTE digital mobile phone; EUT Model: S26Ultra**

|                                   |                               |
|-----------------------------------|-------------------------------|
| Test Date                         | 2026-04-28                    |
| ConvF                             | 1.49                          |
| Probe                             | SN 08/21 EPGO352              |
| Area Scan                         | dx=8mm, dy=8mm, h= 5.00 mm    |
| Zoom Scan                         | 5x5x7, dx=8mm, dy=8mm, dz=5mm |
| Phantom                           | Validation plane              |
| Device Position                   | Back Side                     |
| Band                              | LTE Band 26 (RB 1)            |
| Signal                            | LTE (Crest factor: 1.0)       |
| Frequency (MHz)                   | 831.5                         |
| Relative permittivity (real part) | 42.35                         |
| Conductivity (S/m)                | 0.91                          |

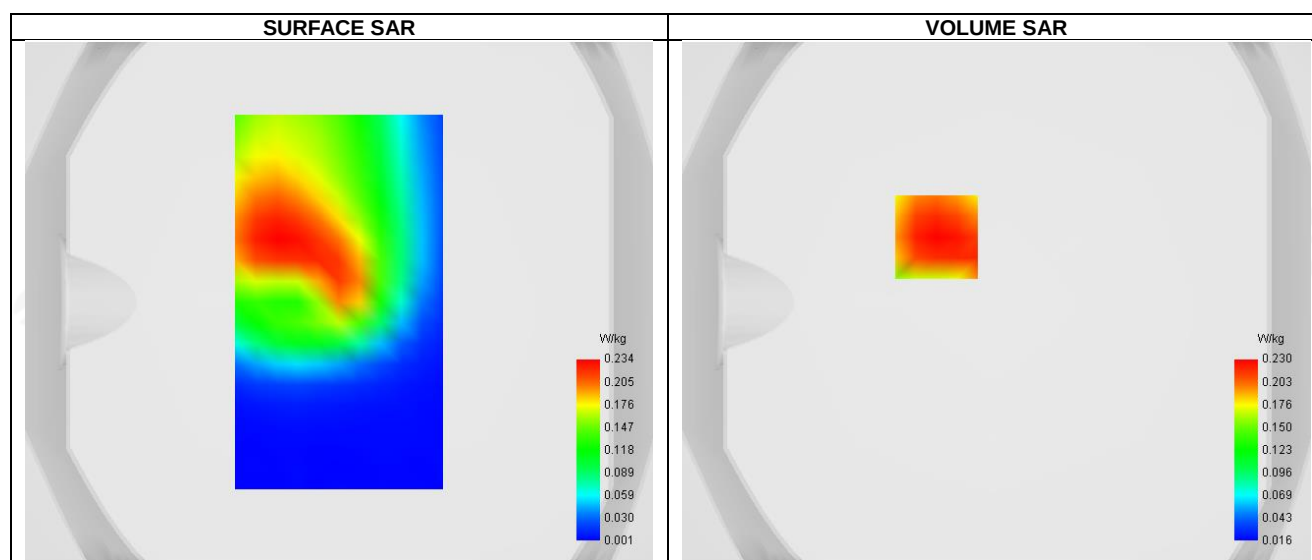


Maximum location: X=-23.00, Y=25.00 ; SAR Peak: 0.31 W/kg

**D. SAR 1g & 10g**


|                                                       |           |
|-------------------------------------------------------|-----------|
| SAR 10g (W/Kg)                                        | 0.150     |
| SAR 1g (W/Kg)                                         | 0.228     |
| Horizontal validation criteria: minimum distance (mm) | 11.221541 |
| Vertical validation criteria: SAR ratio M2/M1 (%)     | 52.102114 |

## E. Z Axis Scan

| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 | 24.00 | 29.00 |
|------------|-------|-------|-------|-------|-------|-------|-------|
| SAR (W/Kg) | 0.293 | 0.230 | 0.168 | 0.120 | 0.087 | 0.063 | 0.045 |

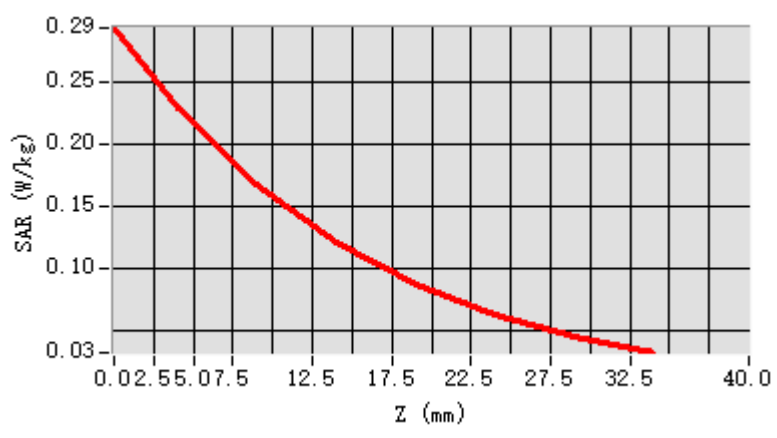


## F. 3D Image

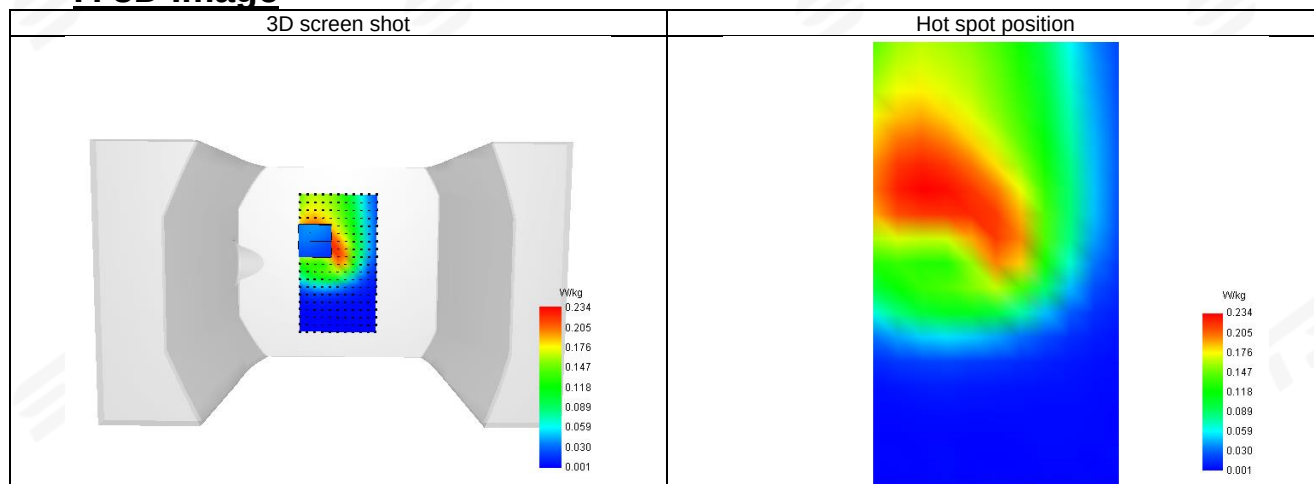

**Plot 29: DUT: TD-LTE digital mobile phone; EUT Model: S26Ultr**

|                                   |                               |
|-----------------------------------|-------------------------------|
| Test Date                         | 2026-04-30                    |
| ConvF                             | 1.70                          |
| Probe                             | SN 08/21 EPGO352              |
| Area Scan                         | dx=8mm, dy=8mm, h= 5.00 mm    |
| Zoom Scan                         | 5x5x7, dx=8mm, dy=8mm, dz=5mm |
| Phantom                           | Right Cheek                   |
| Device Position                   | Cheek                         |
| Band                              | LTE Band 38 (RB 1)            |
| Signal                            | LTE (Crest factor: 1.0)       |
| Frequency (MHz)                   | 2580                          |
| Relative permittivity (real part) | 39.61                         |
| Conductivity (S/m)                | 1.96                          |

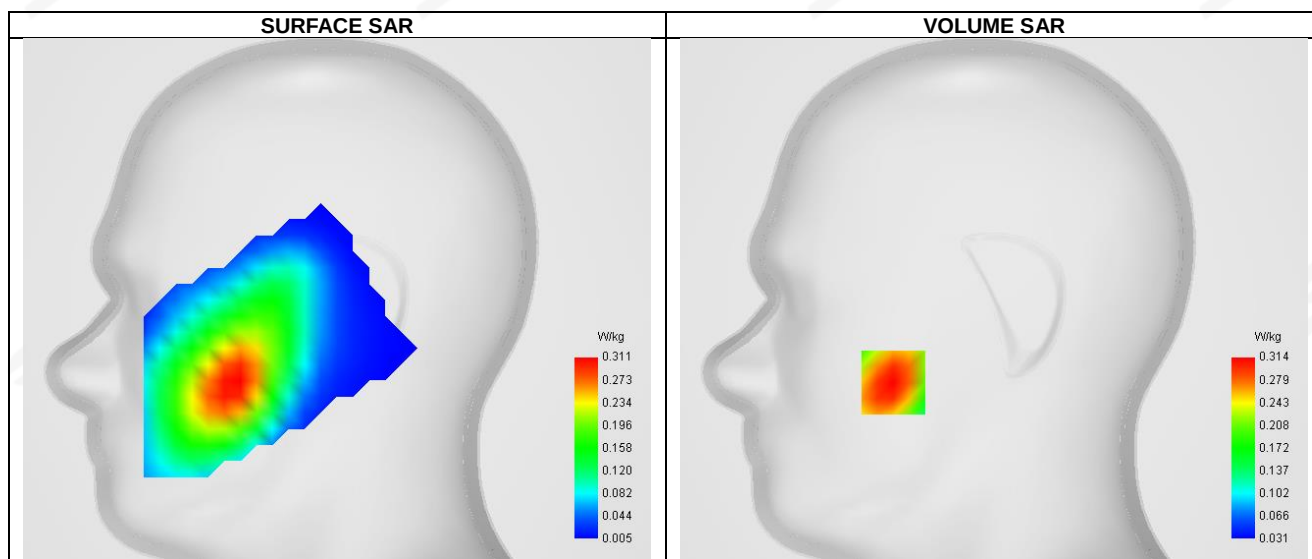


Maximum location: X=-50.00, Y=-41.00 ; SAR Peak: 0.39 W/kg

**D. SAR 1g & 10g**


|                                                       |           |
|-------------------------------------------------------|-----------|
| SAR 10g (W/Kg)                                        | 0.223     |
| SAR 1g (W/Kg)                                         | 0.306     |
| Horizontal validation criteria: minimum distance (mm) | 22.627417 |
| Vertical validation criteria: SAR ratio M2/M1 (%)     | 78.416993 |

**E. Z Axis Scan**

|            |       |       |       |       |       |       |       |
|------------|-------|-------|-------|-------|-------|-------|-------|
| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 | 24.00 | 29.00 |
| SAR (W/Kg) | 0.388 | 0.314 | 0.247 | 0.193 | 0.151 | 0.114 | 0.089 |

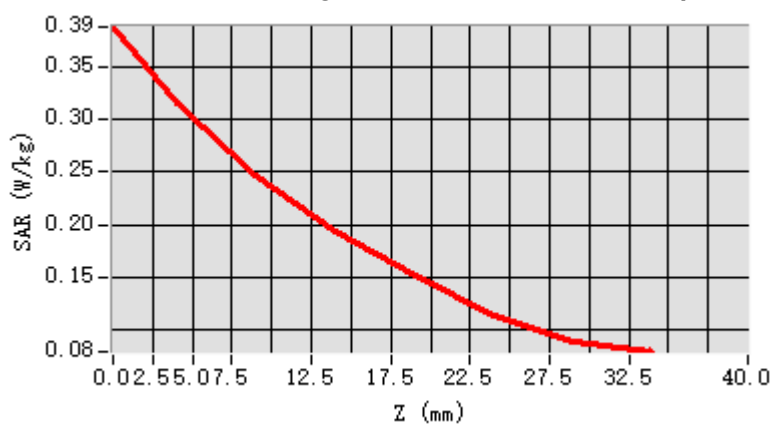


## F. 3D Image

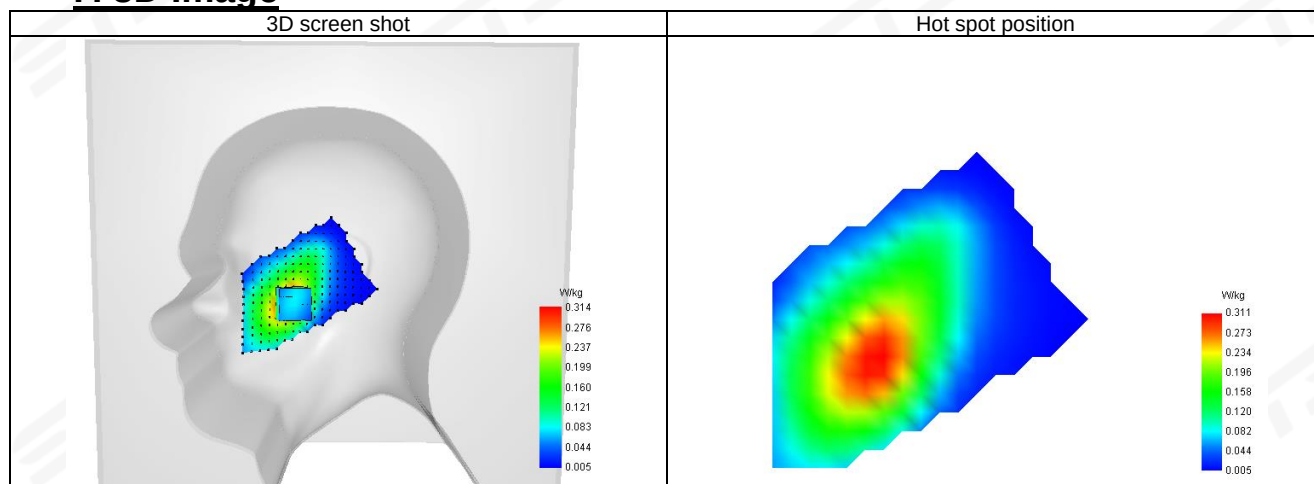

**Plot 30: DUT: TD-LTE digital mobile phone; EUT Model: S26Ultra**

|                                   |                               |
|-----------------------------------|-------------------------------|
| Test Date                         | 2026-04-30                    |
| ConvF                             | 1.70                          |
| Probe                             | SN 08/21 EPGO352              |
| Area Scan                         | dx=8mm, dy=8mm, h= 5.00 mm    |
| Zoom Scan                         | 5x5x7, dx=8mm, dy=8mm, dz=5mm |
| Phantom                           | Validation plane              |
| Device Position                   | Back Side                     |
| Band                              | LTE Band 38 (RB 1)            |
| Signal                            | LTE (Crest factor: 1.0)       |
| Frequency (MHz)                   | 2580                          |
| Relative permittivity (real part) | 39.61                         |
| Conductivity (S/m)                | 1.96                          |

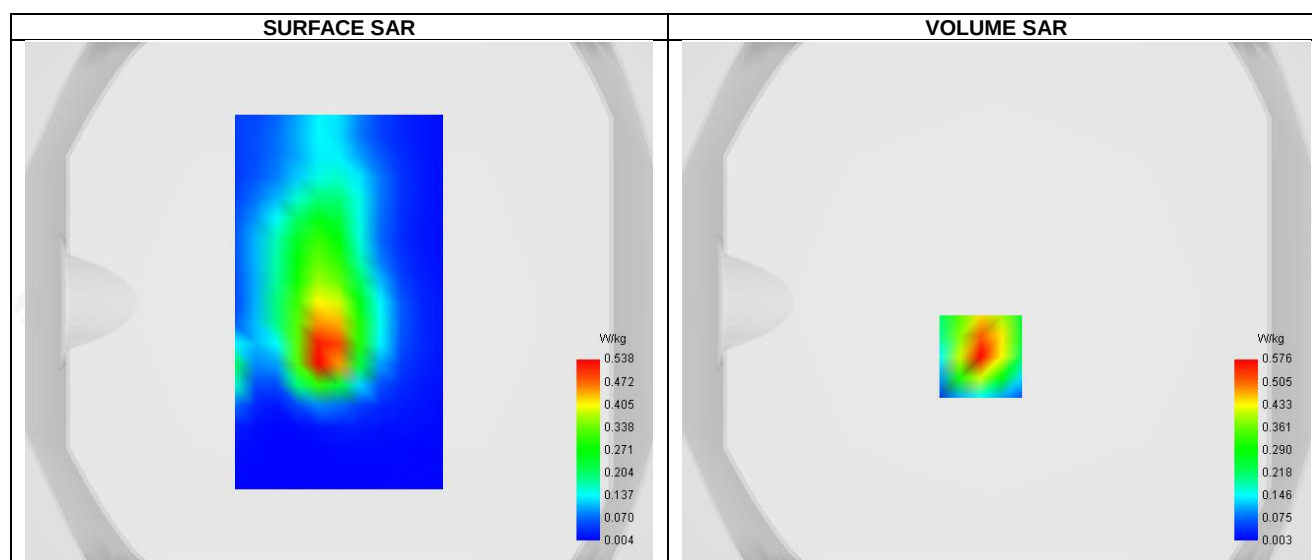


Maximum location: X=-6.00, Y=-21.00 ; SAR Peak: 0.91 W/kg

**D. SAR 1g & 10g**


|                                                       |           |
|-------------------------------------------------------|-----------|
| SAR 10g (W/Kg)                                        | 0.260     |
| SAR 1g (W/Kg)                                         | 0.529     |
| Horizontal validation criteria: minimum distance (mm) | 11.313708 |
| Vertical validation criteria: SAR ratio M2/M1 (%)     | 53.184633 |

## E. Z Axis Scan

| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 | 24.00 | 29.00 |
|------------|-------|-------|-------|-------|-------|-------|-------|
| SAR (W/Kg) | 0.921 | 0.576 | 0.306 | 0.163 | 0.085 | 0.047 | 0.027 |

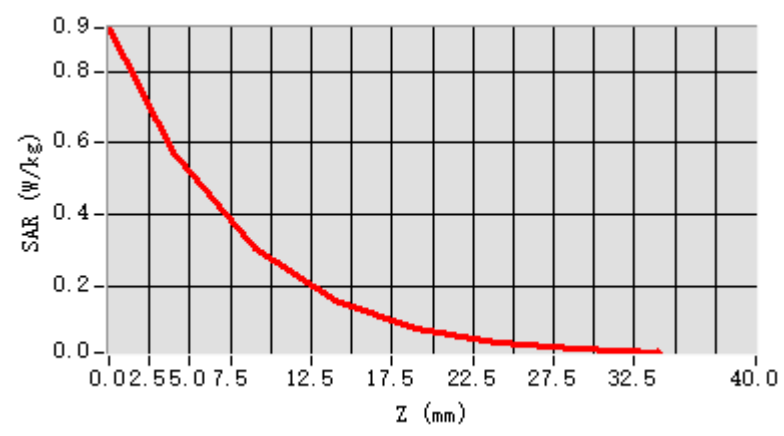


## F. 3D Image

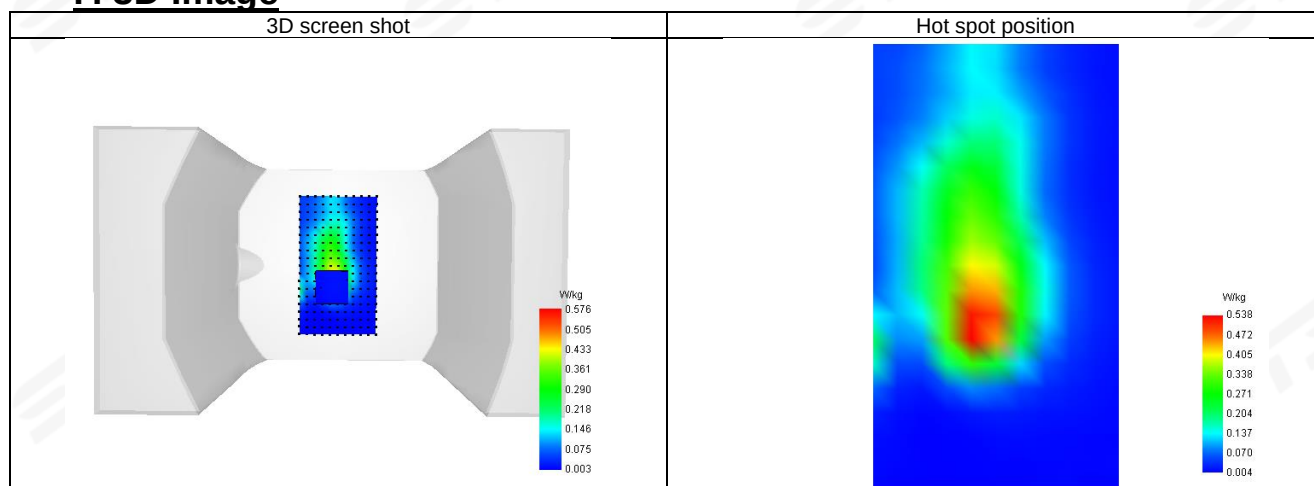

**Plot 31: DUT: TD-LTE digital mobile phone; EUT Model: S26Ultra**

|                                   |                               |
|-----------------------------------|-------------------------------|
| Test Date                         | 2026-04-29                    |
| ConvF                             | 1.82                          |
| Probe                             | SN 08/21 EPGO352              |
| Area Scan                         | dx=8mm, dy=8mm, h= 5.00 mm    |
| Zoom Scan                         | 5x5x7, dx=8mm, dy=8mm, dz=5mm |
| Phantom                           | Right Cheek                   |
| Device Position                   | Cheek                         |
| Band                              | LTE Band 40 (RB 1)            |
| Signal                            | LTE (Crest factor: 1.0)       |
| Frequency (MHz)                   | 2315                          |
| Relative permittivity (real part) | 40.14                         |
| Conductivity (S/m)                | 1.70                          |

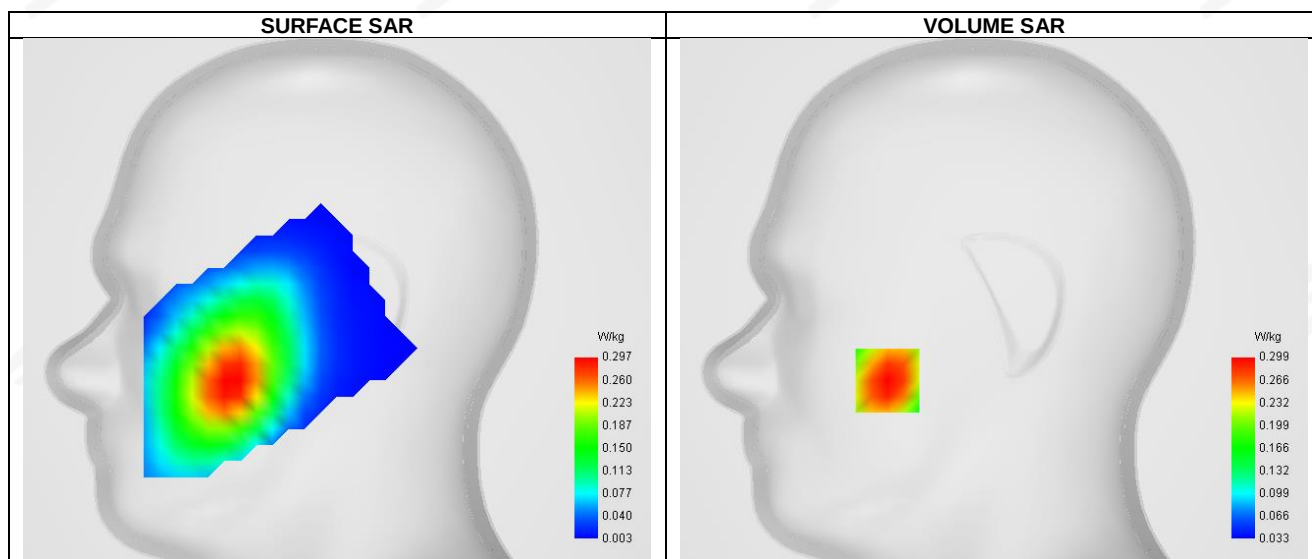


Maximum location: X=-53.00, Y=-40.00 ; SAR Peak: 0.37 W/kg

**D. SAR 1g & 10g**


|                                                       |           |
|-------------------------------------------------------|-----------|
| SAR 10g (W/Kg)                                        | 0.213     |
| SAR 1g (W/Kg)                                         | 0.292     |
| Horizontal validation criteria: minimum distance (mm) | 16.000000 |
| Vertical validation criteria: SAR ratio M2/M1 (%)     | 79.598662 |

**E. Z Axis Scan**

|            |       |       |       |       |       |       |       |
|------------|-------|-------|-------|-------|-------|-------|-------|
| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 | 24.00 | 29.00 |
| SAR (W/Kg) | 0.366 | 0.299 | 0.238 | 0.189 | 0.150 | 0.113 | 0.086 |

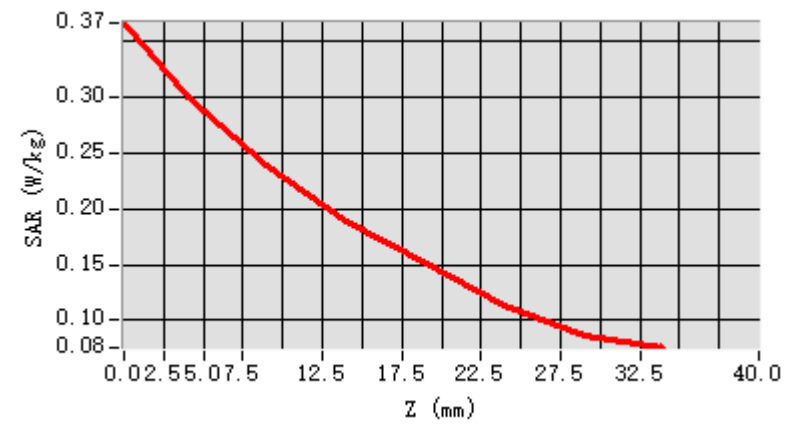


## F. 3D Image

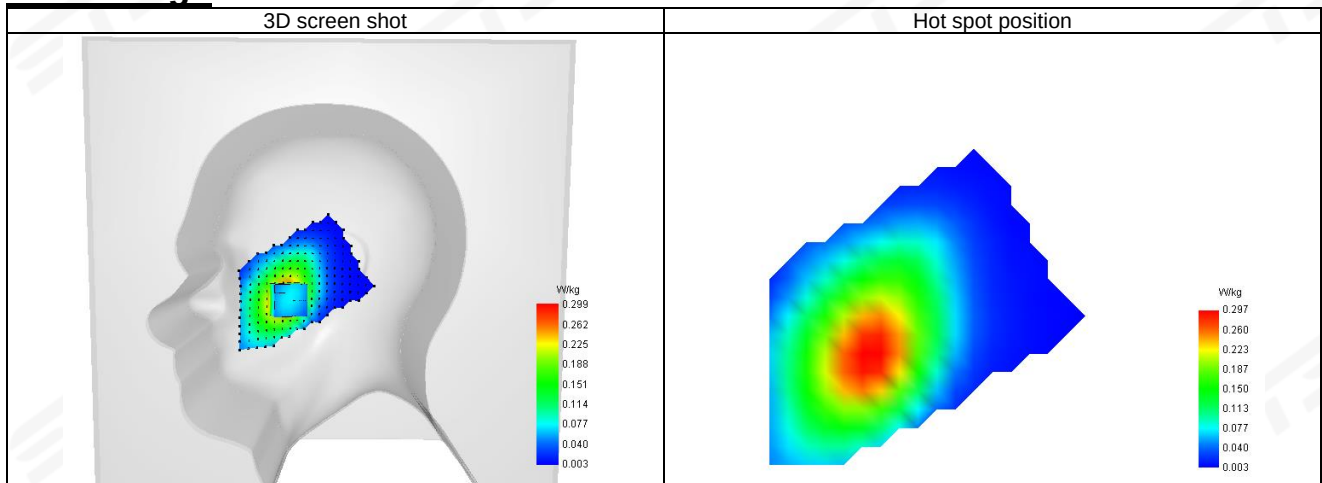

**Plot 32: DUT: TD-LTE digital mobile phone; EUT Model: S26Ultra**

|                                   |                               |
|-----------------------------------|-------------------------------|
| Test Date                         | 2026-04-29                    |
| ConvF                             | 1.82                          |
| Probe                             | SN 08/21 EPGO352              |
| Area Scan                         | dx=8mm, dy=8mm, h= 5.00 mm    |
| Zoom Scan                         | 5x5x7, dx=8mm, dy=8mm, dz=5mm |
| Phantom                           | Validation plane              |
| Device Position                   | Back Side                     |
| Band                              | LTE Band 40 (RB 1)            |
| Signal                            | LTE (Crest factor: 1.0)       |
| Frequency (MHz)                   | 2315                          |
| Relative permittivity (real part) | 40.14                         |
| Conductivity (S/m)                | 1.70                          |

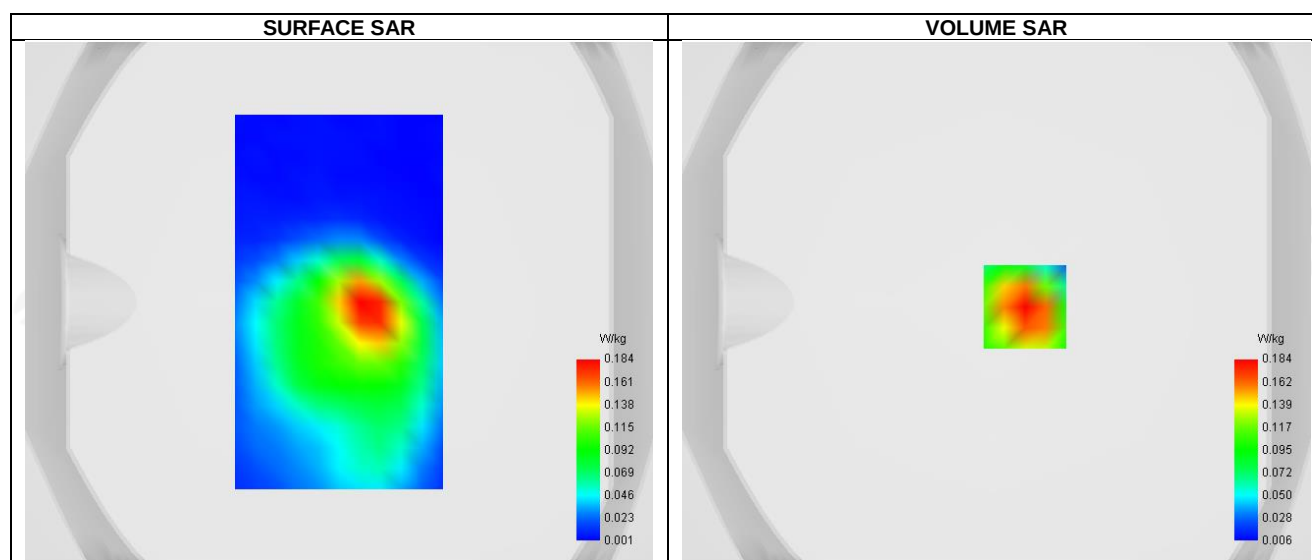


Maximum location: X=11.00, Y=-2.00 ; SAR Peak: 0.28 W/kg

**D. SAR 1g & 10g**


|                                                       |           |
|-------------------------------------------------------|-----------|
| SAR 10g (W/Kg)                                        | 0.098     |
| SAR 1g (W/Kg)                                         | 0.174     |
| Horizontal validation criteria: minimum distance (mm) | 16.000000 |
| Vertical validation criteria: SAR ratio M2/M1 (%)     | 57.774110 |

## E. Z Axis Scan

| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 | 24.00 | 29.00 |
|------------|-------|-------|-------|-------|-------|-------|-------|
| SAR (W/Kg) | 0.282 | 0.184 | 0.106 | 0.064 | 0.039 | 0.024 | 0.017 |

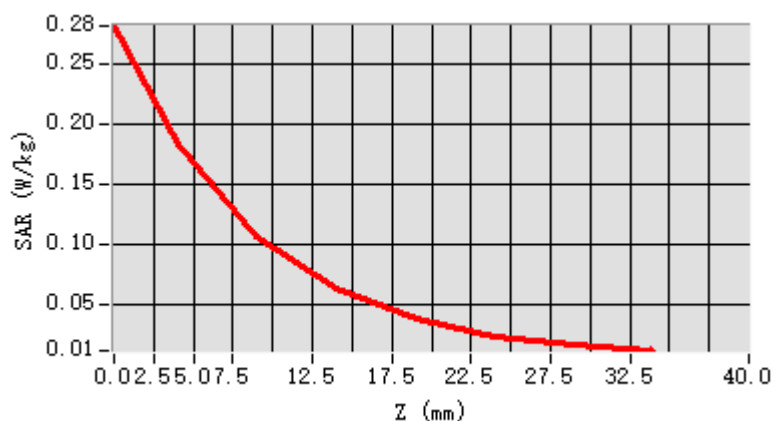


## F. 3D Image

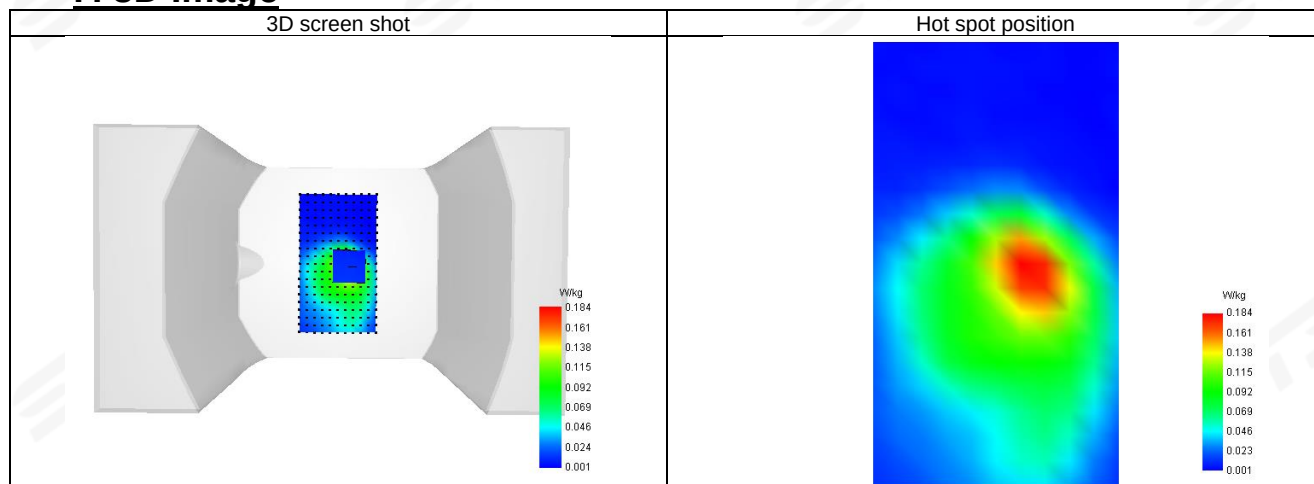

**Plot 33: DUT: TD-LTE digital mobile phone; EUT Model: S26Ultra**

|                                   |                               |
|-----------------------------------|-------------------------------|
| Test Date                         | 2026-04-30                    |
| ConvF                             | 1.70                          |
| Probe                             | SN 08/21 EPGO352              |
| Area Scan                         | dx=8mm, dy=8mm, h= 5.00 mm    |
| Zoom Scan                         | 5x5x7, dx=8mm, dy=8mm, dz=5mm |
| Phantom                           | Right Cheek                   |
| Device Position                   | Cheek                         |
| Band                              | LTE Band 41 (RB 1)            |
| Signal                            | LTE (Crest factor: 1.0)       |
| Frequency (MHz)                   | 2680                          |
| Relative permittivity (real part) | 38.94                         |
| Conductivity (S/m)                | 2.05                          |

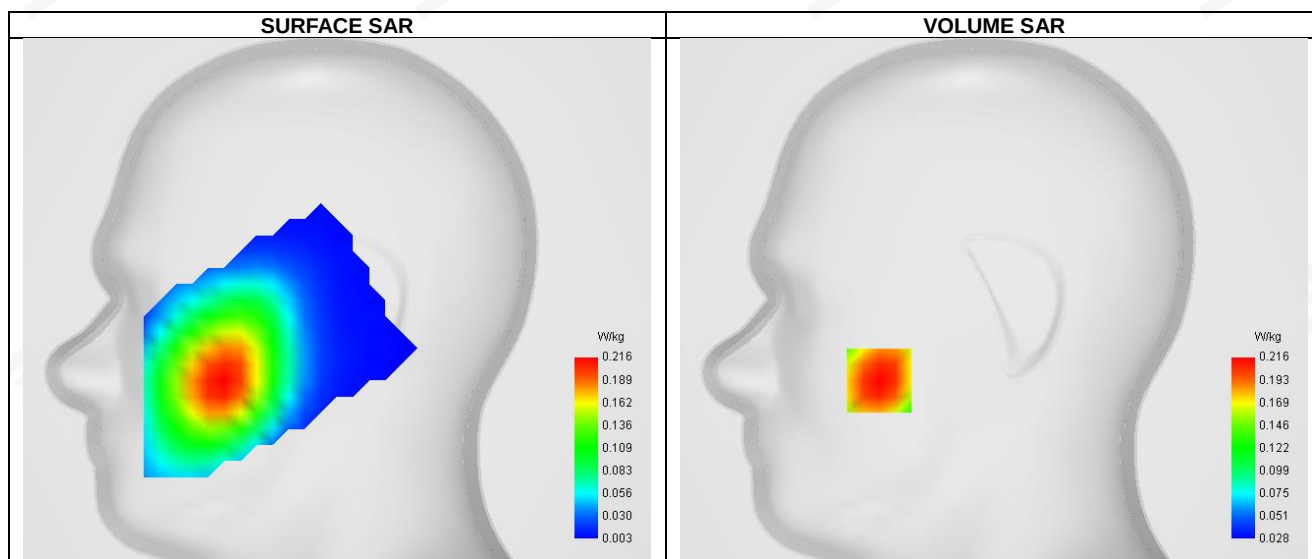


Maximum location: X=-57.00, Y=-40.00 ; SAR Peak: 0.26 W/kg

**D. SAR 1g & 10g**


|                                                       |           |
|-------------------------------------------------------|-----------|
| SAR 10g (W/Kg)                                        | 0.160     |
| SAR 1g (W/Kg)                                         | 0.213     |
| Horizontal validation criteria: minimum distance (mm) | 11.297158 |
| Vertical validation criteria: SAR ratio M2/M1 (%)     | 80.790960 |

**E. Z Axis Scan**

|            |       |       |       |       |       |       |       |
|------------|-------|-------|-------|-------|-------|-------|-------|
| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 | 24.00 | 29.00 |
| SAR (W/Kg) | 0.262 | 0.216 | 0.177 | 0.143 | 0.115 | 0.086 | 0.063 |

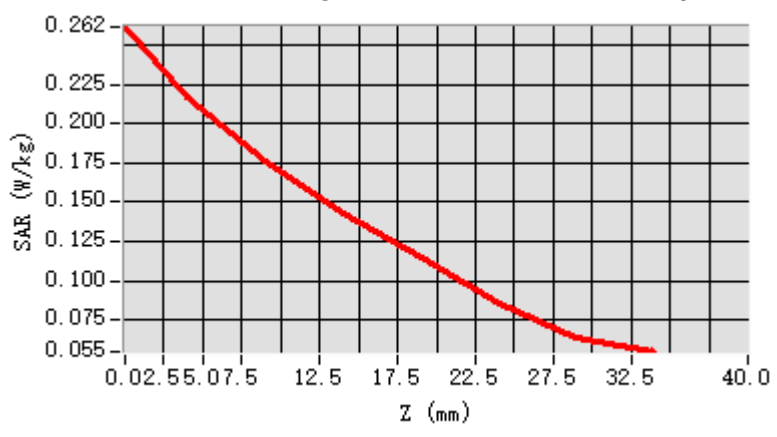


## F. 3D Image

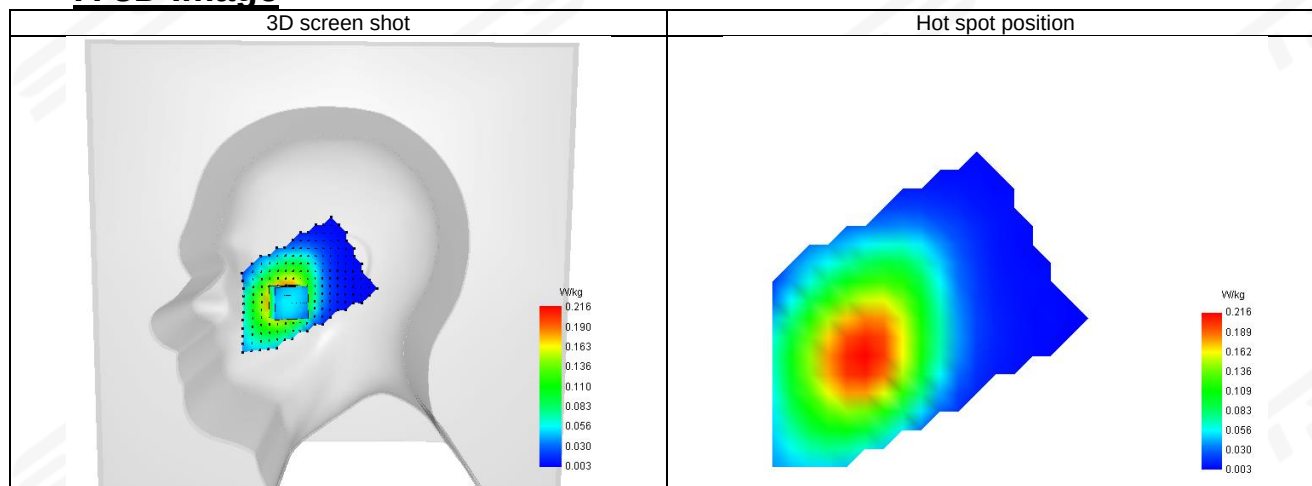

**Plot 34: DUT: TD-LTE digital mobile phone; EUT Model: S26Ultra**


|                                   |                               |
|-----------------------------------|-------------------------------|
| Test Date                         | 2026-04-30                    |
| ConvF                             | 1.70                          |
| Probe                             | SN 08/21 EPGO352              |
| Area Scan                         | dx=8mm, dy=8mm, h= 5.00 mm    |
| Zoom Scan                         | 5x5x7, dx=8mm, dy=8mm, dz=5mm |
| Phantom                           | Validation plane              |
| Device Position                   | Back Side                     |
| Band                              | LTE Band 41 (RB 1)            |
| Signal                            | LTE (Crest factor: 1.0)       |
| Frequency (MHz)                   | 2680                          |
| Relative permittivity (real part) | 38.94                         |
| Conductivity (S/m)                | 2.05                          |

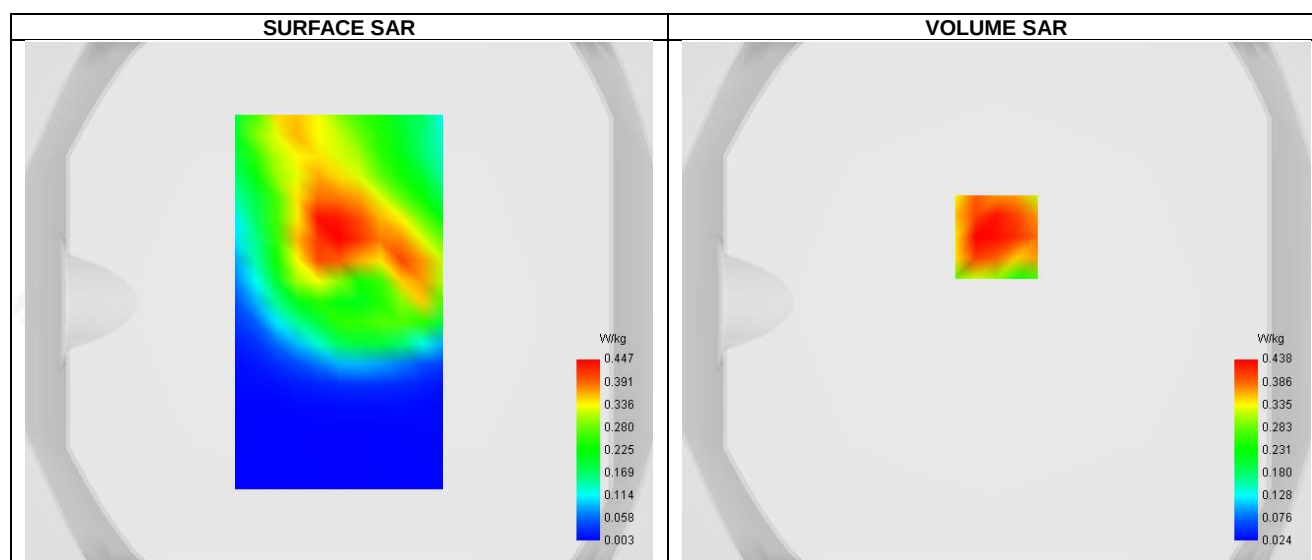**D. SAR 1g & 10g**


|                                                       |           |
|-------------------------------------------------------|-----------|
| SAR 10g (W/Kg)                                        | 0.280     |
| SAR 1g (W/Kg)                                         | 0.426     |
| Horizontal validation criteria: minimum distance (mm) | 12.000000 |
| Vertical validation criteria: SAR ratio M2/M1 (%)     | 64.133250 |

### E. Z Axis Scan

| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 | 24.00 | 29.00 |
|------------|-------|-------|-------|-------|-------|-------|-------|
| SAR (W/Kg) | 0.642 | 0.438 | 0.281 | 0.219 | 0.136 | 0.111 | 0.065 |

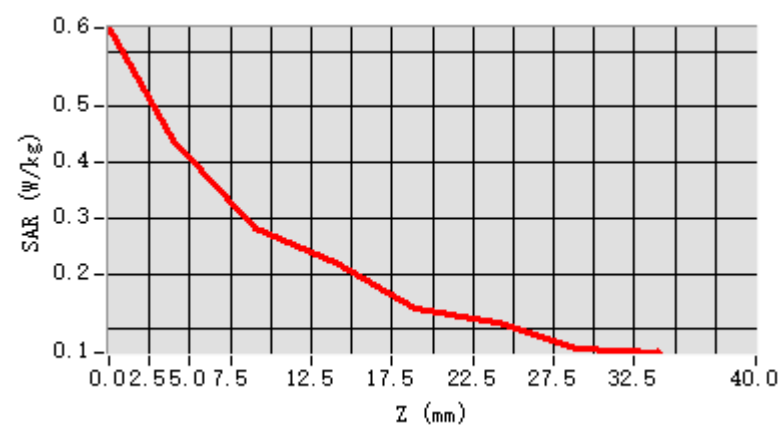


### F. 3D Image

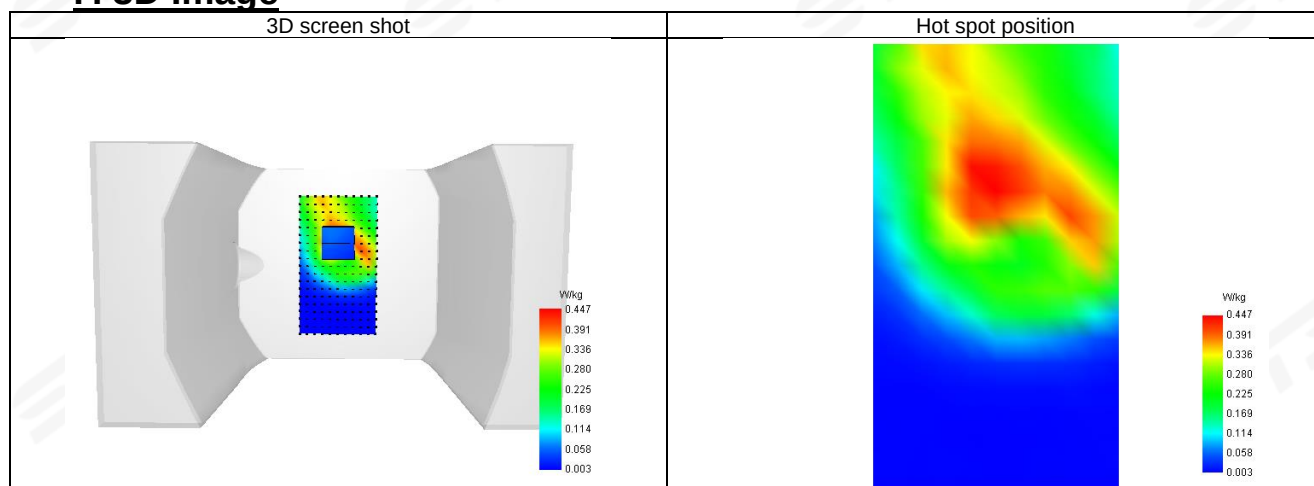

**Plot 35: DUT: TD-LTE digital mobile phone; EUT Model: S26Ultra**

|                                   |                               |
|-----------------------------------|-------------------------------|
| Test Date                         | 2026-04-29                    |
| ConvF                             | 1.54                          |
| Probe                             | SN 08/21 EPGO352              |
| Area Scan                         | dx=8mm, dy=8mm, h= 5.00 mm    |
| Zoom Scan                         | 5x5x7, dx=8mm, dy=8mm, dz=5mm |
| Phantom                           | Right Cheek                   |
| Device Position                   | Cheek                         |
| Band                              | LTE Band 66/4 (RB 1)          |
| Signal                            | LTE (Crest factor: 1.0)       |
| Frequency (MHz)                   | 1745                          |
| Relative permittivity (real part) | 39.81                         |
| Conductivity (S/m)                | 1.37                          |

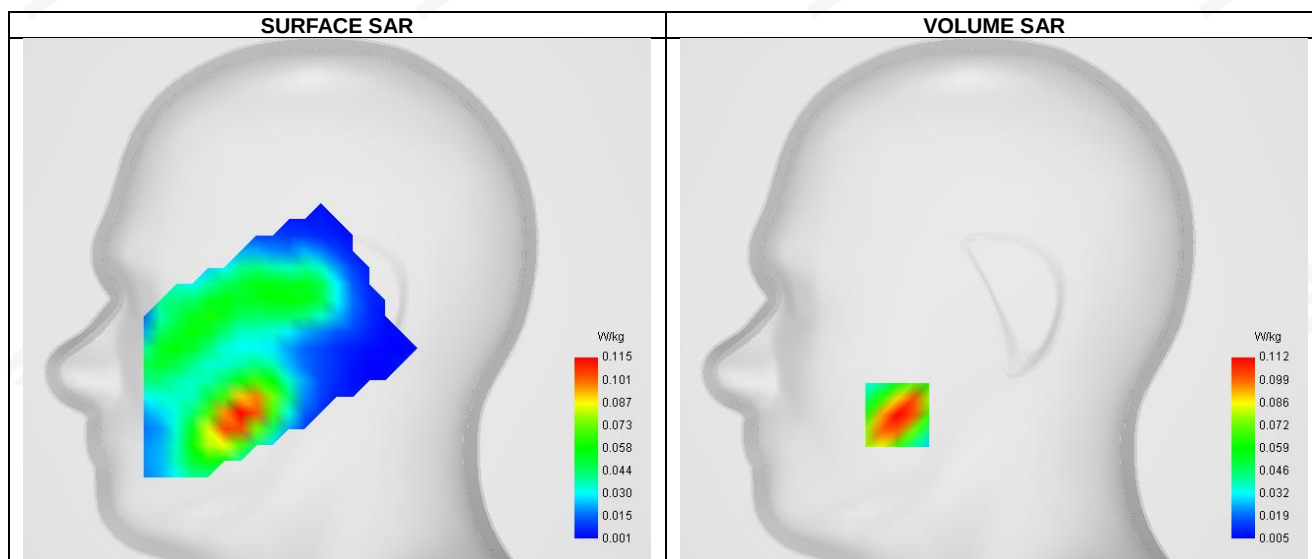


Maximum location: X=-48.00, Y=-57.00 ; SAR Peak: 0.16 W/kg

**D. SAR 1g & 10g**


|                                                       |           |
|-------------------------------------------------------|-----------|
| SAR 10g (W/Kg)                                        | 0.063     |
| SAR 1g (W/Kg)                                         | 0.106     |
| Horizontal validation criteria: minimum distance (mm) | 16.000000 |
| Vertical validation criteria: SAR ratio M2/M1 (%)     | 65.846956 |

**E. Z Axis Scan**

|            |       |       |       |       |       |       |       |
|------------|-------|-------|-------|-------|-------|-------|-------|
| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 | 24.00 | 29.00 |
| SAR (W/Kg) | 0.159 | 0.112 | 0.074 | 0.050 | 0.035 | 0.024 | 0.016 |

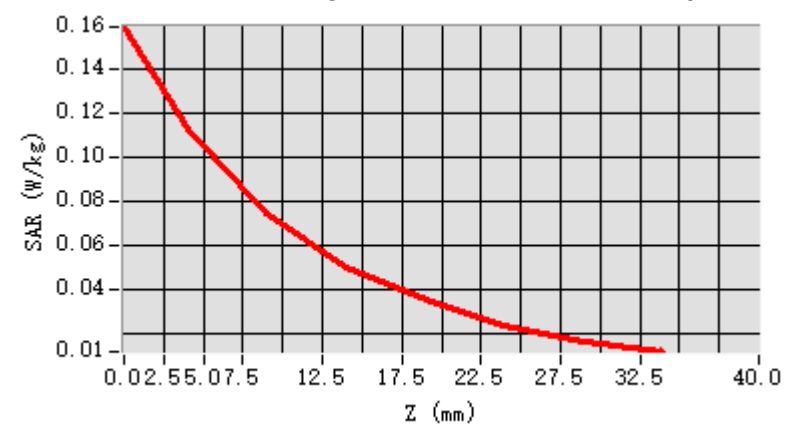


## F. 3D Image

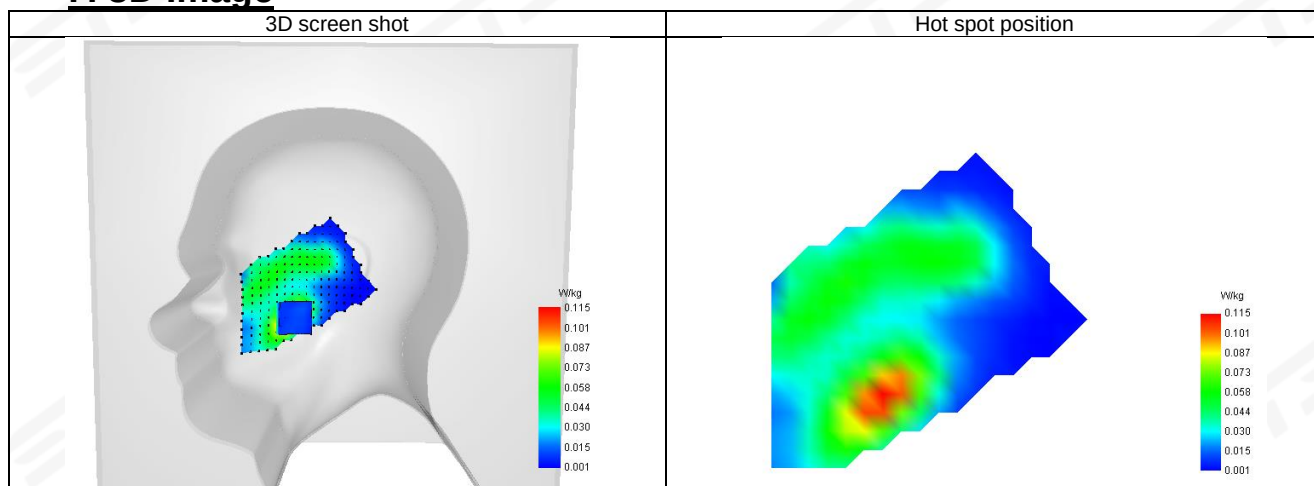

**Plot 36: DUT: TD-LTE digital mobile phone; EUT Model: S26Ultra**

|                                   |                               |
|-----------------------------------|-------------------------------|
| Test Date                         | 2026-04-29                    |
| ConvF                             | 1.54                          |
| Probe                             | SN 08/21 EPGO352              |
| Area Scan                         | dx=8mm, dy=8mm, h= 5.00 mm    |
| Zoom Scan                         | 5x5x7, dx=8mm, dy=8mm, dz=5mm |
| Phantom                           | Validation plane              |
| Device Position                   | Back Side                     |
| Band                              | LTE Band 66/4 (RB 1)          |
| Signal                            | LTE (Crest factor: 1.0)       |
| Frequency (MHz)                   | 1745                          |
| Relative permittivity (real part) | 39.81                         |
| Conductivity (S/m)                | 1.37                          |

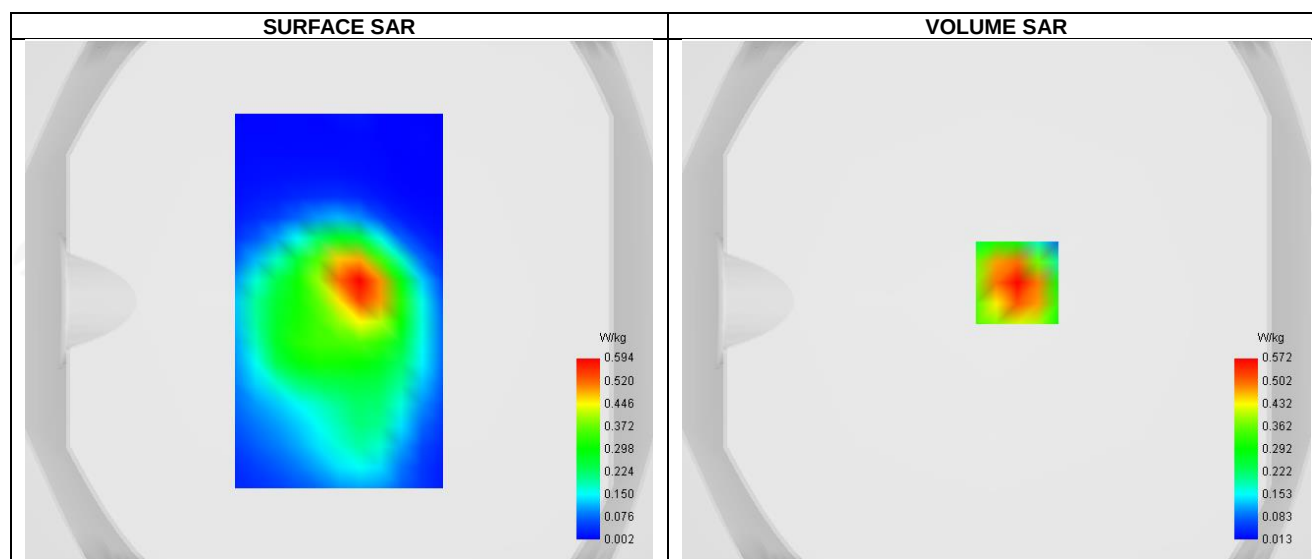


Maximum location: X=8.00, Y=7.00 ; SAR Peak: 0.85 W/kg

**D. SAR 1g & 10g**


|                                                       |           |
|-------------------------------------------------------|-----------|
| SAR 10g (W/Kg)                                        | 0.307     |
| SAR 1g (W/Kg)                                         | 0.538     |
| Horizontal validation criteria: minimum distance (mm) | 17.888544 |
| Vertical validation criteria: SAR ratio M2/M1 (%)     | 60.127693 |

### E. Z Axis Scan

| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 | 24.00 | 29.00 |
|------------|-------|-------|-------|-------|-------|-------|-------|
| SAR (W/Kg) | 0.844 | 0.572 | 0.344 | 0.208 | 0.126 | 0.079 | 0.051 |

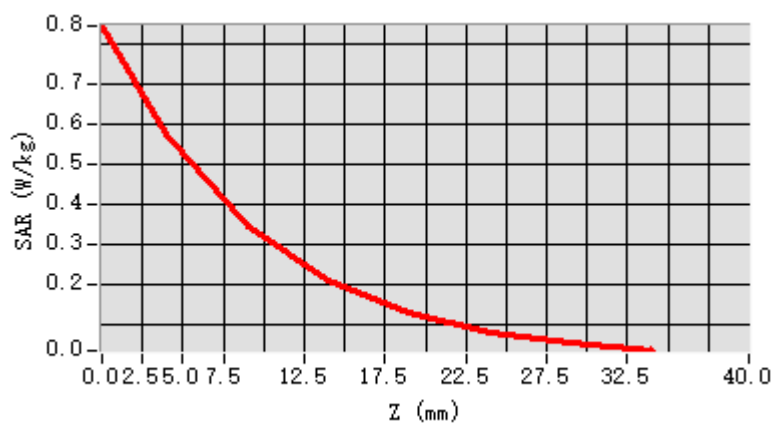

### F. 3D Image

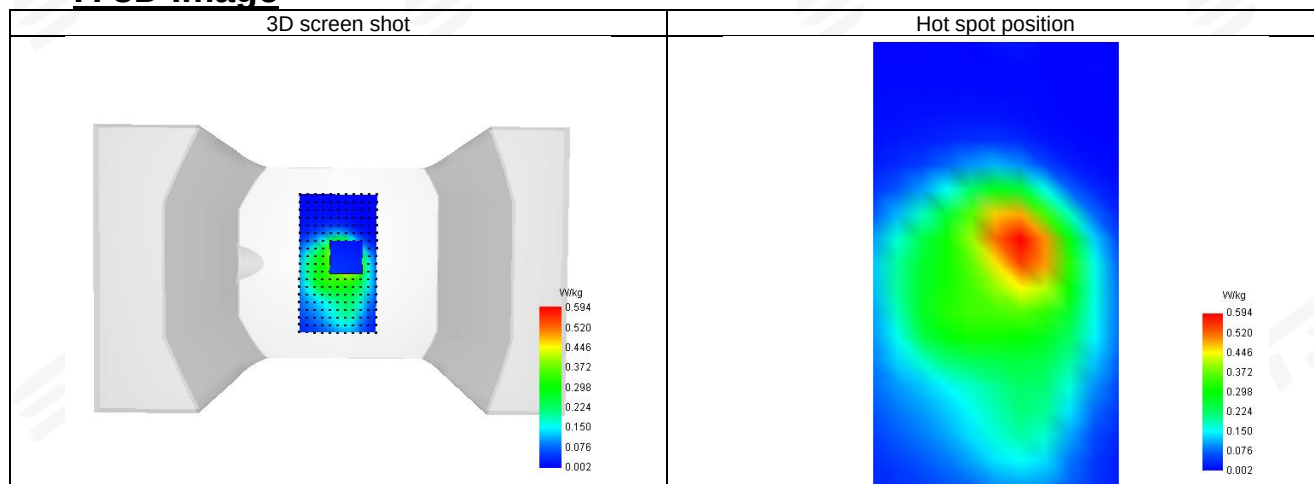



## Appendix C. Probe Calibration and Dipole Calibration Report

Refer the appendix Calibration Report.

※※※※※END OF THE REPORT※※※※※