

RF Exposure Report

FCC ID: 2BVZB-AW6068

Report No. : SSP26050054-2H

Applicant : Huizhou Hongrongxin Technology Co., LTD

Product Name : 3-IN-1 MAGNETIC CHARGER

Model Name : AW6068

Test Standard : FCC CFR 47 PART 1, 1.1310

Date of Issue : 2026-09-03

Shenzhen CCUT Quality Technology Co., Ltd.

1F, Building 35, Changxing Technology Industrial Park, Yutang Street, Guangming District, Shenzhen,
Guangdong, China; (Tel.:+86-755-23406590 website: www.zrlklab.com)

This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen CCUT Quality Technology Co., Ltd.

Test Report Basic Information

Applicant:	Huizhou Hongrongxin Technology Co., LTD 501, Building 17, No. 6, Xinhua Avenue, Chenjiang Street, Zhongkai High-tech Address of Applicant.....:	Zone, Huizhou, Guangdong, China
Manufacturer:	Huizhou Hongrongxin Technology Co., LTD 501, Building 17, No. 6, Xinhua Avenue, Chenjiang Street, Zhongkai High-tech Address of Manufacturer.....:	Zone, Huizhou, Guangdong, China
Product Name:	3-IN-1 MAGNETIC CHARGER	
Brand Name:	-	
Main Model:	AW6068	
Test Standard:	FCC CFR 47 PART 1, 1.1310 KDB 680106 D01 Wireless Power Transfer v04	
Date of Test	2026-05-08 to 2026-05-20	
Test Result:	PASS	
Tested By	<u>Colin Chen</u> (Colin Chen)	
Reviewed By:	<u>Lorzix Luo</u> (Lorzix Luo)	
Authorized Signatory:	<u>Lahm Peng</u> (Lahm Peng)	
Note : This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen CCUT Quality Technology Co., Ltd.. All test data presented in this test report is only applicable to presented test sample.		

CONTENTS

1. General Information.....	5
1.1 Product Information	5
1.2 Test Setup Information.....	6
1.3 Test Facilities.....	6
1.4 List of Measurement Instruments	7
1.5 Measurement Uncertainty	7
2. RF Exposure.....	8
2.1 Standard and Limit.....	8
2.2 Test Procedures	8
2.3 Test Data and Results.....	9
Annex A. Test Photos.....	10

Revision History

Revision	Issue Date	Description	Revised By
V1.0	2026-09-03	Initial Release	Lahm Peng

1. General Information

1.1 Product Information

Product Name:	3-IN-1 MAGNETIC CHARGER
Trade Name:	-
Model Name:	AW6068
Rated Voltage:	Input Port Type-C: 5V/2A, 9V/2A Output Power by Device Phone: 5W/7.5W/10W/15W (Max) Earbuds: 3W (Max) Watch: 2.5W (Max)
Test Sample No:	SSP26050054-1
Hardware Version:	V1.0
Software Version:	V1.0
Note 1: The test data is gathered from a production sample, provided by the manufacturer.	

Wireless Specification	
Wireless Standard:	WPC (QI)
Operating Frequency:	110.5-205kHz
Modulation:	ASK
Antenna Gain:	0dBi
Type of Antenna:	Coil Antenna
Type of Device:	☐ Portable Device ☒ Mobile Device

1.2 Test Setup Information

List of Test Modes			
Test Mode	Description	Remark	
TM1	Wireless charging 15W (Phone)	110.5-205kHz	
TM2	Wireless charging 10W (Phone)	110.5-205kHz	
TM3	Wireless charging 7.5W (Phone)	110.5-205kHz	
TM4	Wireless charging 5W (Phone)	110.5-205kHz	
TM5	Wireless charging 3W (Earbuds)	110.5-205kHz	
TM6	Wireless charging 2.5W (Watch)	110.5-205kHz	
Note: All modes have been tested and only the worst mode TM1 data is represented in the report.			
List and Details of Auxiliary Cable			
Description	Length (cm)	Shielded/Unshielded	With/Without Ferrite
-	-	-	-
List and Details of Auxiliary Equipment			
Equipment	Model	Serial No.	Manufacturer
Adapter	CD289	10375	UGREEN
Mobile phone	iPhone 16	HYG6PQMWK	Apple
Earbuds	Galaxy Buds3	-	SEC
Watch	Galaxy Watch7	-	SEC

1.3 Test Facilities

Laboratory Name:	Shenzhen CCUT Quality Technology Co., Ltd. 1F, Building 35, Changxing Technology Industrial Park, Yutang Street, Guangming District, Shenzhen, Guangdong, China
CNAS Laboratory No.:	L18863
A2LA Certificate No.:	6983.01
FCC Registration No.:	583813
ISED Registration No.:	CN0164

1.4 List of Measurement Instruments

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Electromagnet-ic radiation tester	WAVECONTROL	SMP3	23SL0158	2025-07-16	2026-07-15
Electromagnet-ic field probe	WAVECONTROL	WP400-3	24WP120170	2025-07-16	2026-07-15
Test Software	WAVECONTROL	SMP	N/A	N/A	N/A

1.5 Measurement Uncertainty

Test Item	Uncertainty
E-field	0.6 dB
H-field	0.6 dB

2. RF Exposure

2.1 Standard and Limit

The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in 1.1307(b)


Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500			f/300	6
1500–100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500			f/1500	30
1500–100,000			1.0	30

f = frequency in MHz

2.2 Test Procedures

- 1) The RF exposure test was performed in anechoic chamber.
- 2) E and H-field measurements should be made with the center of the probe at a distance of 20cm surrounding the device and 20 cm above the top surface of the primary/client pair.
These measurements should be repeated for three different client battery levels, 1%, 50%, and 99%.
- 3) The highest emission level was recorded and compared with limit as soon as measurement of each points were completed.
- 4) The EUT was measured according to the dictates of KDB 680106 D01 v04.

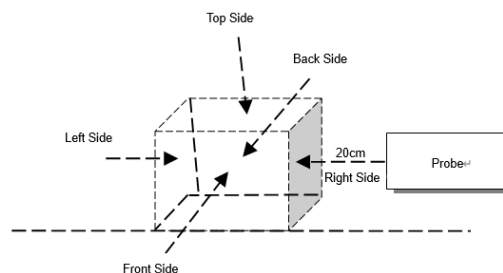

Test Setup Block Diagram

2.3 Test Data and Results

The report reflects data for the worst mode only.

Test condition 1: Mode 1 operating mode with client device (1 % battery status of client device).

Maximum permissible Exposure (Watch:110.5kHz-205kHz)				
Client device	Test sides	Test distance(cm)	E-field(V/m)	H-field(A/m)
<1%	Top	20	1.02	0.32
<1%	Left	20	0.78	0.25
<1%	Right	20	0.92	0.19
<1%	Front	20	0.44	0.21
<1%	Back	20	0.81	0.26
Limit			614	1.63
50% Margin Limit			307	0.815


Test condition 1: Mode 1 operating mode with client device (50 % battery status of client device).

Maximum permissible Exposure (Watch:110.5kHz-205kHz)				
Battery levels	Test sides	Test distance(cm)	E-field(V/m)	H-field(A/m)
<50%	Top	20	0.96	0.25
<50%	Left	20	0.72	0.15
<50%	Right	20	0.83	0.17
<50%	Front	20	0.42	0.13
<50%	Back	20	0.66	0.14
Limit			614	1.63
50% Margin Limit			307	0.815

Test condition 1: Mode 1 operating mode with client device (99 % battery status of client device).

Maximum permissible Exposure (Watch:110.5kHz-205kHz)				
Battery levels	Test sides	Test distance(cm)	E-field(V/m)	H-field(A/m)
<99%	Top	20	0.88	0.20
<99%	Left	20	0.68	0.11
<99%	Right	20	0.70	0.13
<99%	Front	20	0.33	0.09
<99%	Back	20	0.38	0.07
Limit			614	1.63
50% Margin Limit			307	0.815

Annex A. Test Photos

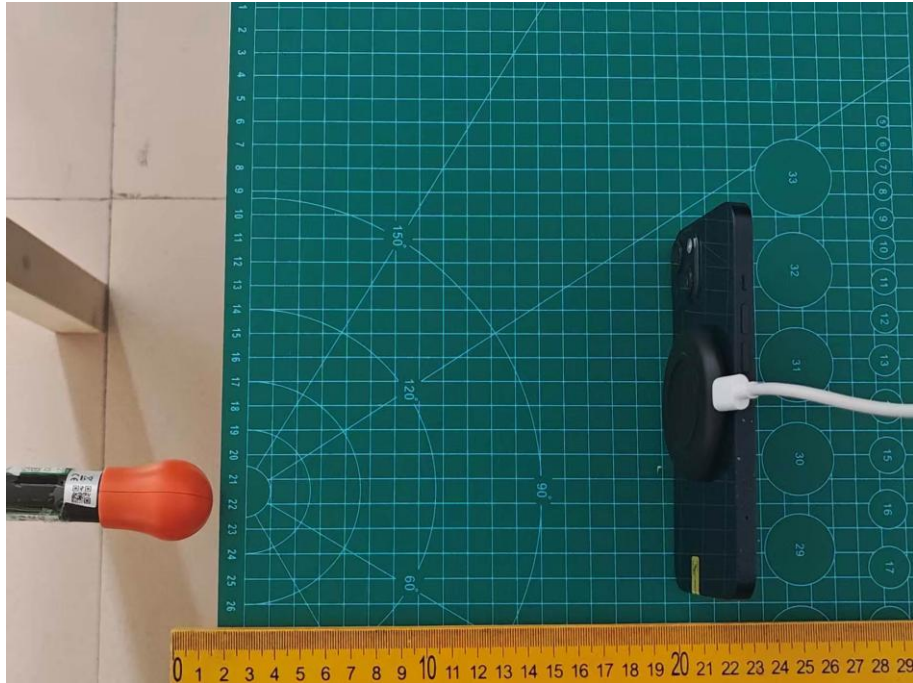Test View 1

******* END OF REPORT *******