

TEST REPORT

Applicant Name: Shenzhen HPYJ Technology Co., Ltd
Address: 4F, Bldg A, No. 210 Jiuwei Rd, Jiuwei Community Hangcheng Subdistrict, Bao'an, Shenzhen, Guangdong, China
Report Number: 2601Q00730E-SA
FCC ID: 2BVZR-HP-N350

Test Standard (s)

FCC 47 CFR part 2.1093

Sample Description

Product Type: 4G POC LTE Walkie Talkie
Model No.: HP-N350
Multiple Model(s) No.: HP-N351, HP-N353, HP-N355, HP-N356, HP-N357, HP-N358, HP-N352
Trade Mark: **HPYJ**
Serial Numbers: 3HH4-1
Date Received: 2026/02/10
Date of Test: 2026/03/10
Issue Date: 2026/05/21

Test Result:	Pass▲
--------------	-------

▲ In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Danil . Qiu

Danil Qiu
SAR Engineer

Approved By:

Bob Lu

Bob Lu
SAR Engineer

Note: The information marked*is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.

This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

Bay Area Compliance Laboratories Corp. (Shenzhen)

5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China
Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

Attestation of Test Results			
Frequency Band	Highest Reported 1g SAR(W/kg)		Limits (W/kg)
	Head(Face Up) SAR (Gap 25mm)	Body SAR (Gap 0mm)	
LTE Band 2	0.43	0.79	1.6
LTE Band 5	0.21	0.49	
LTE Band 7	0.15	0.44	
LTE Band 12&17	0.08	0.17	
LTE Band 13	0.15	0.26	
LTE Band 38	0.10	0.21	
LTE Band 41	0.09	0.28	
LTE Band 66&4	0.11	0.21	
Simultaneous(tx)	0.47	0.98	
Applicable Standards	FCC 47 CFR part 2.1093 Radiofrequency radiation exposure evaluation: portable devices		
	RF Exposure Procedures: TCB Workshop April 2019 (Tissue Simulating Liquids)		
	IEEE 1528:2013 IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques		
	KDB procedures KDB 447498 D01 General RF Exposure Guidance v06 KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04 KDB 865664 D02 RF Exposure Reporting v01r02 KDB 941225 D05 SAR for LTE Devices v02r05		
Note: This wireless device has been shown to be capable of compliance for localized specific absorption rate (SAR) for General Population/Uncontrolled Exposure limits specified in FCC 47 CFR part 2.1093 and has been tested in accordance with the measurement procedures specified in IEEE 1528-2013 and RF exposure KDB procedures. The results and statements contained in this report pertain only to the device(s) evaluated.			

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	4
EUT DESCRIPTION	5
TECHNICAL SPECIFICATION	5
REFERENCE, STANDARDS, AND GUIDELINES	6
SAR LIMITS	6
FACILITIES	7
DESCRIPTION OF TEST SYSTEM	8
EQUIPMENT LIST AND CALIBRATION	15
EQUIPMENT'S LIST & CALIBRATION INFORMATION	15
SAR MEASUREMENT SYSTEM VERIFICATION	16
LIQUID VERIFICATION	16
SYSTEM ACCURACY VERIFICATION	19
SAR SYSTEM VALIDATION DATA	20
EUT TEST STRATEGY AND METHODOLOGY	24
TEST POSITIONS FOR FRONT-OF-FACE CONFIGURATIONS	24
TEST POSITIONS FOR BODY-WORN AND OTHER CONFIGURATIONS	25
TEST DISTANCE FOR SAR EVALUATION	25
SAR EVALUATION PROCEDURE	26
CONDUCTED OUTPUT POWER MEASUREMENT	27
TEST PROCEDURE	27
DESCRIPTION OF TEST CONFIGURATION	28
MAXIMUM TARGET OUTPUT POWER	30
TEST RESULTS	31
STANDALONE SAR TEST EXCLUSION CONSIDERATIONS	50
ANTENNAS LOCATION:	50
STANDALONE SAR TEST EXCLUSION CONSIDERATIONS:	50
STANDALONE SAR ESTIMATION:	51
SAR MEASUREMENT RESULTS	52
TEST RESULTS:	52
SAR MEASUREMENT VARIABILITY	57
SAR DUT HOLDER PERTURBATIONS	58
SAR SIMULTANEOUS TRANSMISSION DESCRIPTION	59
SAR PLOTS	60
APPENDIX A MEASUREMENT UNCERTAINTY	92
APPENDIX B EUT TEST POSITION PHOTOS	93
FACE UP SETUP PHOTO (25MM)	94
BODY BACK WITH BELT CLIP SETUP PHOTO (0MM)	94
APPENDIX C CALIBRATION CERTIFICATES	95

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	2601Q00730E-SA	Original Report	2026/05/21

EUT DESCRIPTION

This report has been prepared on behalf of **Shenzhen HPYJ Technology Co., Ltd** and their product **4G POC LTE Walkie Talkie**, Model: **HP-N350, HP-N351, HP-N353, HP-N355, HP-N356, HP-N357, HP-N358, HP-N352**, Test Model: **HP-N350**, FCC ID: **2BVZR-HP-N350** or the EUT (Equipment under Test) as referred to in the rest of this report.

**All measurement and test data in this report was gathered from production sample serial numbers: 3HH4-1 (Assigned by BACL, Shenzhen). The EUT supplied by the applicant was received on 2026/02/10.*

Technical Specification

Product Type:	Portable
Exposure Category:	Population / Uncontrolled
Antenna Type(s):	Monopole Antenna for WWAN Ceramic Antenna for Bluetooth and BLE
Body-Worn Accessories:	Belt Clip
Proximity Sensor:	None
Operation modes:	LTE, Bluetooth, BLE
Frequency Band:	LTE Band 2: 1850-1910 MHz(TX) LTE Band 4: 1710-1755MHz(TX) LTE Band 5: 824-849 MHz(TX) LTE Band 7: 2500-2570 MHz(TX) LTE Band 12: 699-716 MHz(TX) LTE Band 13: 777-787 MHz(TX) LTE Band 17: 704-716 MHz(TX) LTE Band 38: 2570-2620 MHz(TX) LTE Band 41: 2496-2690 MHz(TX) LTE Band 66: 1710-1780MHz(TX) Bluetooth: 2402-2480MHz(TX) BLE 1M&2M:2402-2480MHz(TX)
Dimensions (L×W×H):	92 mm (L) * 55 mm (W) * 30 mm (H) (including PTT antenna and Belt Clip) (The dimensions are the same for each model)
Rated Input Voltage:	DC 3.7V from Rechargeable Battery
Normal Operation:	Face Up and Body
Note: The Multiple models are electrically identical with the test mode except model name, color and outer speaker enclosure. Please refer to the declaration letter [#] for more detail, which was provided by applicant.	

REFERENCE, STANDARDS, AND GUIDELINES

FCC:

The Report and Order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 mW/g as recommended by the ANSI/IEEE standard C95.1-1992 [6] for an uncontrolled environment (Paragraph 65). According to the Supplement C of OET Bulletin 65 "Evaluating Compliance with FCC Guide-lines for Human Exposure to Radio frequency Electromagnetic Fields", released on Jun 29, 2001 by the FCC, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits. SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body worn devices. The limit below which the exposure to RF is considered safe by regulatory bodies in North America is 1.6 mW/g average over 1 gram of tissue mass.

SAR Limits

FCC Limit

EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average (averaged over the whole body)	0.08	0.4
Spatial Peak (averaged over any 1 g of tissue)	1.6	8.0
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0

Population/Uncontrolled Environments are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments are defined as locations where there is exposure that maybe incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).

General Population/Uncontrolled environments Spatial Peak limit 1.6W/kg Body(Face Up) SAR applied to the EUT.

FACILITIES


The test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect data is located at 5F(B-West) ,6F,7F,the 3rd Phase of Wan Li Industrial Building D,Shihua Rd, FuTian Free Trade Zone, Shenzhen, China

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 715558, the FCC Designation No.: CN5045.

Each test item follows test standards and with no deviation.


DESCRIPTION OF TEST SYSTEM

These measurements were performed with the automated near-field scanning system DASY6 from Schmid & Partner Engineering AG (SPEAG) which is the Fifth generation of the system shown in the figure hereinafter:

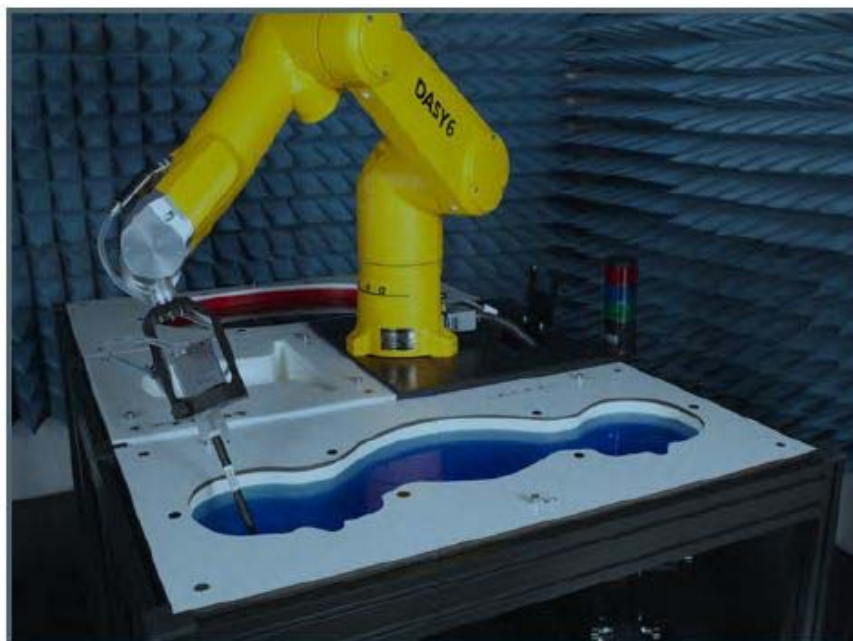

DASY6 System Description

The DASY6 system for performing compliance tests consists of the following items:

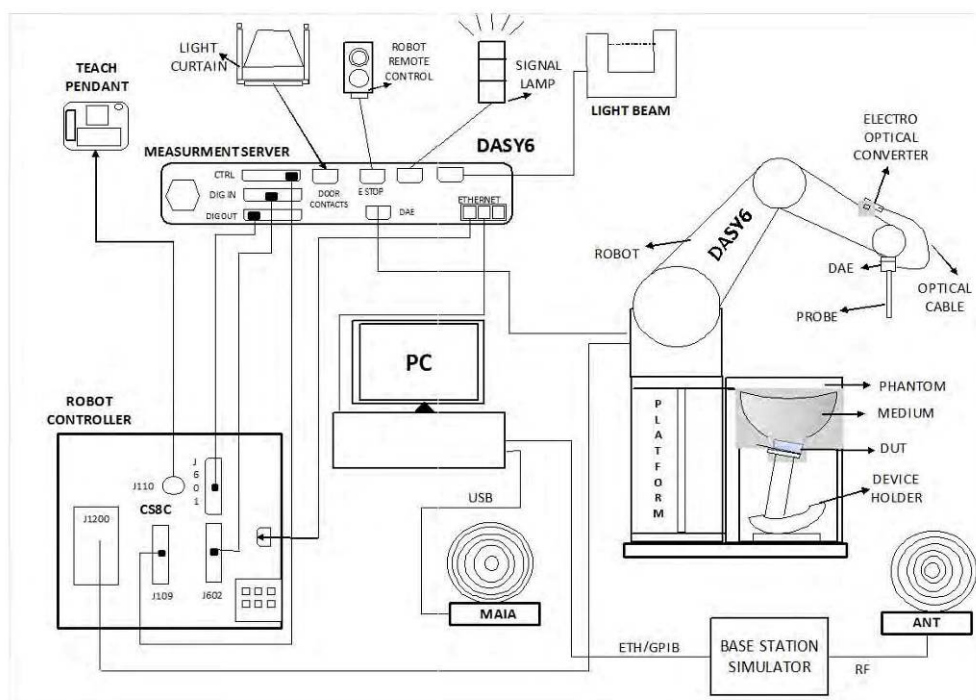

- A standard high precision 6-axis robot (Staubli TX=RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal application, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win7 professional operating system and the DASY52 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

DASY6 Measurement Server

The DASY6 measurement server is based on a PC/104 CPU board with a 400 MHz Intel ULV Celeron, 128 MB chip-disk and 128 MB RAM. The necessary circuits for communication with the DAE4 (or DAE3) electronics box, as well as the 16-bit AD converter system for optical detection and digital I/O interface are contained on the DASY6 I/O board, which is directly connected to the PC/104 bus of the CPU board.



The measurement server performs all real-time data evaluations of field measurements and surface detection, controls robot movements, and handles safety operations. The PC operating system cannot interfere with these time-critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program- controlled robot movements. Furthermore, the measurement server is equipped with an expansion port, which is reserved for future applications. Please note that this expansion port does not have a standardized pinout, and therefore only devices provided by SPEAG can be connected. Connection of devices from any other supplier could seriously damage the measurement server.

Data Acquisition Electronics

The data acquisition electronics (DAE4) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.

The input impedance of both the DAE4 as well as of the DAE3 box is 200M Ω ; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

EX3DV4 E-Field Probes

Frequency	4 MHz - 10 GHz Linearity: ± 0.2 dB (30 MHz - 10 GHz)
Directivity	± 0.1 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)
Dynamic Range	10 μ W/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%.
Compatibility	DASY3, DASY4, DASY52 SAR and higher, EASY6, EASY4/MRI

SAM Twin Phantom

The SAM Twin Phantom (shown in front of DASY6) is a fiberglass shell phantom with shell thickness 2 mm, except in the ear region where the thickness is increased to 6 mm. The phantom has three measurement areas: 1) Left Head, 2) Right Head, and 3) Flat Section. For larger devices, the use of the ELI-Phantom (shown behind DASY6) is required. For devices such as glasses with a wireless link, the Face Down Phantom is the most suitable (between the SAM Twin and ELI phantoms).

When the phantom is mounted inside allocated slot of the DASY6 platform, phantom reference points can be taught directly in the DASY5 V5.2 software. When the DASY6 platform is used to mount the


Phantom, some of the phantom teaching points cannot be reached by the robot in DASY5 V5.2. A special tool called P1a-P2aX-Former is provided to transform two of the three points, P1 and P2, to reachable locations. To use these new teaching points, a revised phantom configuration file is required.

In addition to our standard broadband liquids, the phantom can be used with the following tissue simulating liquids:

Sugar-water-based liquids can be left permanently in the phantom. Always cover the liquid when the system is not in use to prevent changes in liquid parameters due to water evaporation.

DGBE-based liquids should be used with care. As DGBE is a softener for most plastics, the liquid should be taken out of the phantom, and the phantom should be dried when the system is not in use (desirable at least once a week).

Do not use other organic solvents without previously testing the solvent resistivity of the phantom. Approximately 25 liters of liquid is required to fill the SAM Twin phantom.

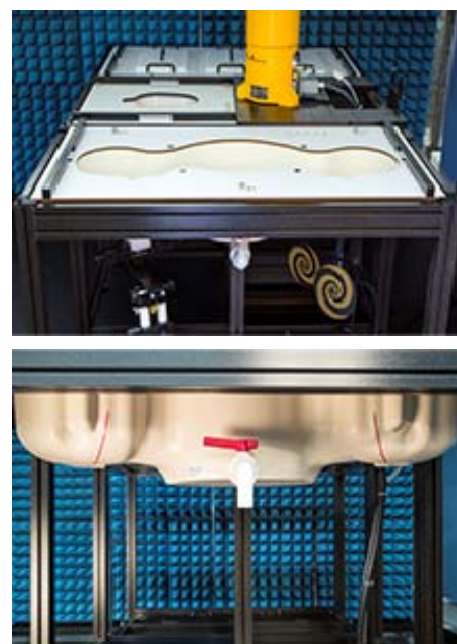


ELI Phantom

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30MHz to 6 GHz. ELI is fully compatible with the latest draft of the standard IEEE 1528 and the use of all known tissue simulating liquids. ELI has been optimized for performance and can be integrated into a SPEAG standard phantom table. A cover is provided to prevent evaporation of water and changes in liquid parameters. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points.

The phantom can be used with the following tissue simulating liquids:

- Sugar-water-based liquids can be left permanently in the phantom. Always cover the liquid when the system is not in use to prevent changes in liquid parameters due to water evaporation.
- DGBE-based liquids should be used with care. As DGBE is a softener for most plastics, the liquid should be taken out of the phantom, and the phantom should be dried when the system is not in use (desirable at least once a week).
- Do not use other organic solvents without previously testing the solvent resistivity of the phantom.

Approximately 25 liters of liquid is required to fill the ELI phantom.

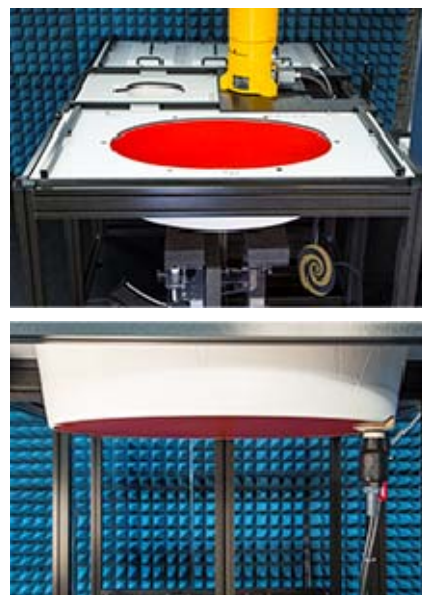

Robots

The DASY6 system uses the high-precision industrial robots TX60L, TX90XL, and RX160L from Staubli SA (France). The TX robot family - the successor of the well-known RX robot family - continues to offer the features important for DASY6 applications:

- High precision (repeatability 0.02mm)
- High reliability (industrial design)
- Low maintenance costs (virtually maintenance free due to direct drive gears; no belt drives)
- Jerk-free straight movements (brushless synchrony motors; no stepper motors)
- Low ELF interference (motor control fields shielded via the closed metallic construction shields)

The robots are controlled by the Staubli CS8c robot controllers. All information regarding the use and maintenance of the robot arm and the robot controller is provided

Calibration Frequency Points for EX3DV4 E-Field Probes SN: 7896 Calibrated: 2025/12/11

Calibration Frequency Point (MHz)	Frequency Range (MHz)		Conversion Factor		
	From	To	X	Y	Z
750 Head	650	850	9.40	9.40	9.40
900 Head	850	1000	9.00	9.00	9.00
1750 Head	1650	1850	7.89	7.89	7.89
1900 Head	1850	2000	7.55	7.55	7.55
2300 Head	2200	2400	7.40	7.40	7.40
2450 Head	2400	2500	7.15	7.15	7.15
2600 Head	2500	2700	7.00	7.00	7.00
3300 Head	3200	3400	6.60	6.60	6.60
3500 Head	3400	3600	6.45	6.45	6.45
3700 Head	3600	3800	6.25	6.25	6.25
3900 Head	3800	4000	6.18	6.18	6.18
5250 Head	5140	5360	5.11	5.11	5.11
5600 Head	5490	5700	4.51	4.51	4.51
5800 Head	5700	5900	4.61	4.61	4.61
6500 Head	5900	7200	5.20	5.20	5.20

SAR Scan Procedures**Step 1: Power Reference Measurement**

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 1.4 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scans

Area scans are defined prior to the measurement process being executed with a user defined variable spacing between each measurement point (integral) allowing low uncertainty measurements to be conducted. Scans defined for FCC applications utilize a 15mm² step integral, with 1.5mm interpolation used to locate the peak SAR area used for zoom scan assessments.

Where the system identifies multiple SAR peaks (which are within 25% of peak value) the system will provide the user with the option of assessing each peak location individually for zoom scan averaging.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 mm ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2)$ mm ± 0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan (Cube Scan Averaging)

The averaging zoom scan volume utilized in the DASY5 software is in the shape of a cube and the side dimension of a 1 g or 10 g mass is dependent on the density of the liquid representing the simulated tissue. A density of 1000 kg/m³ is used to represent the head and body tissue density and not the phantom liquid density, in order to be consistent with the definition of the liquid dielectric properties, i.e. the side length of the 1g cube is 5mm, with the side length of the 10g cube is 21.5mm.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			$\leq 2 \text{ GHz}: \leq 8 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 5 \text{ mm}^*$	$3 - 4 \text{ GHz}: \leq 5 \text{ mm}^*$ $4 - 6 \text{ GHz}: \leq 4 \text{ mm}^*$
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		$\leq 5 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 4 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 3 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	$\leq 4 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 3 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 2.5 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1) \text{ mm}$	
Minimum zoom scan volume	x, y, z		$\geq 30 \text{ mm}$	$3 - 4 \text{ GHz}: \geq 28 \text{ mm}$ $4 - 5 \text{ GHz}: \geq 25 \text{ mm}$ $5 - 6 \text{ GHz}: \geq 22 \text{ mm}$
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB Publication 447498 is $\leq 1.4 \text{ W/kg}$, $\leq 8 \text{ mm}$, $\leq 7 \text{ mm}$ and $\leq 5 \text{ mm}$ zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 4: Power Drift Measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

When the cube intersects with the surface of the phantom, it is oriented so that 3 vertices touch the surface of the shell or the center of a face is tangent to the surface. The face of the cube closest to the surface is modified in order to conform to the tangent surface.

The zoom scan integer steps can be user defined so as to reduce uncertainty, but normal practice for typical test applications (including FCC) utilize a physical step of 7 x 7 x 7 (5mm x 5mm x 5mm) providing a volume of 30 mm in the X & Y & Z axis.

Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE 1528:2013

Recommended Tissue Dielectric Parameters for Head liquid

Table A.3 – Dielectric properties of the head tissue-equivalent liquid

Frequency MHz	Relative permittivity ϵ_r	Conductivity (σ) S/m
300	45,3	0,87
450	43,5	0,87
750	41,9	0,89
835	41,5	0,90
900	41,5	0,97
1 450	40,5	1,20
1 500	40,4	1,23
1 640	40,2	1,31
1 750	40,1	1,37
1 800	40,0	1,40
1 900	40,0	1,40
2 000	40,0	1,40
2 100	39,8	1,49
2 300	39,5	1,67
2 450	39,2	1,80
2 600	39,0	1,96
3 000	38,5	2,40
3 500	37,9	2,91
4 000	37,4	3,43
4 500	36,8	3,94
5 000	36,2	4,45
5 200	36,0	4,66
5 400	35,8	4,86
5 600	35,5	5,07
5 800	35,3	5,27
6 000	35,1	5,48

NOTE For convenience, permittivity and conductivity values at those frequencies which are not part of the original data provided by Drossos et al. [33] or the extension to 5 800 MHz are provided (i.e. the values shown *in italics*). These values were linearly interpolated between the values in this table that are immediately above and below these values, except the values at 6 000 MHz that were linearly extrapolated from the values at 3 000 MHz and 5 800 MHz.

EQUIPMENT LIST AND CALIBRATION


Equipment's List & Calibration Information

Equipment	Model	S/N	Calibration Date	Calibration Due Date
DASY5 Test Software	DASY52 52.10.4	N/A	NCR	NCR
DASY6 Measurement Server	DASY6 6.0.31	N/A	NCR	NCR
Data Acquisition Electronics	DAE4	1325	2025/09/28	2026/09/27
Dosimetric E-field Probes	EX3DV4	7896	2025/12/11	2026/12/10
Mounting Device	MD4HHTV5	SD 000 H01 KA	NCR	NCR
SAM Twin Phantom	SAM-Twin V8.0	1962	NCR	NCR
Dipole, 750MHz	D750V3	1229	2026/02/04	2029/02/03
Dipole, 1750MHz	D1750V2	1199	2026/02/05	2029/02/04
Dipole, 1900MHz	D1900V2	5d231	2026/02/04	2029/02/03
Dipole, 2600MHz	D2600V2	1207	2026/02/04	2029/02/03
Head Tissue Simulating Liquid	HBBL600-10000V6	2200808-2	Each Time	/
Network Analyzer	E5071C	SER MY46519680	2025/04/29	2026/04/28
Dielectric Assessment Kit	DAK-3.5	1248	NCR	NCR
MXG Analog Signal Generator	N5181A	MY48180408	2025/09/22	2026/09/21
USB wideband power sensor	U2021XA	MY52350001	2025/04/29	2026/04/28
Directional Coupler	855673	3307	NCR	NCR
20dB Attenuator	2	BH9879	NCR	NCR
3dB Attenuator	Unknown	F-03-EM220	2025/06/26	2026/06/25
RF Power Amplifier	5205FE	1014	NCR	NCR
Wideband Radio Communication Tester	CMW500	141718	2025/07/18	2026/07/17
Spectrum Analyzer	FSV40	101942	2025/09/01	2026/08/31
Thermometer	DTM3000	N/A	2025/09/23	2026/09/22
Temperature & Humidity Meter	10316377	N/A	2025/09/23	2026/09/22

NCR: No Calibration Required.

SAR MEASUREMENT SYSTEM VERIFICATION

Liquid Verification

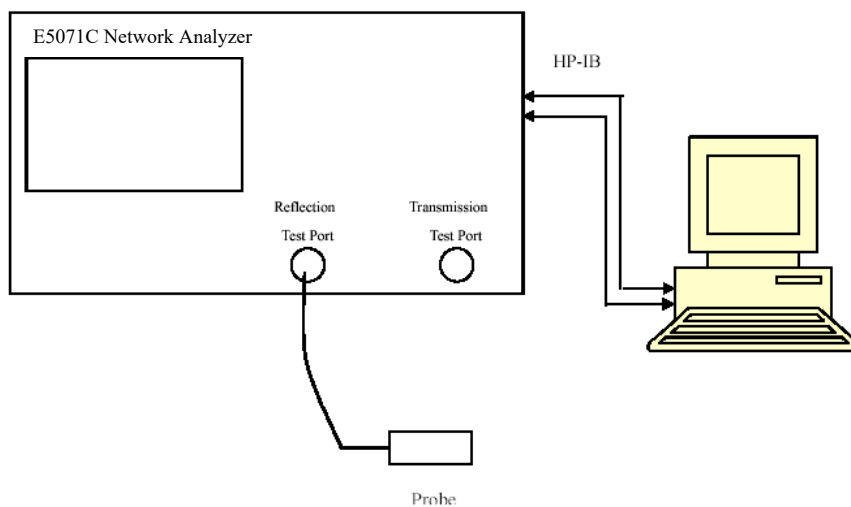

Liquid Verification Setup Block Diagram

Liquid Verification Results

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	O (S/m)	ϵ_r	O (S/m)	$\Delta\epsilon_r$	ΔO (S/m)	
704	Head Tissue Simulating Liquid	43.475	0.861	42.15	0.89	3.14	-3.26	±5
707.5	Head Tissue Simulating Liquid	43.403	0.865	42.13	0.89	3.02	-2.81	±5
711	Head Tissue Simulating Liquid	43.314	0.869	42.11	0.89	2.86	-2.36	±5
750	Head Tissue Simulating Liquid	43.298	0.886	41.9	0.89	3.34	-0.45	±5
782	Head Tissue Simulating Liquid	42.931	0.897	41.75	0.89	2.83	0.79	±5
829	Head Tissue Simulating Liquid	42.654	0.912	41.53	0.9	2.71	1.33	±5
836.5	Head Tissue Simulating Liquid	42.116	0.917	41.5	0.9	1.48	1.89	±5
844	Head Tissue Simulating Liquid	41.714	0.921	41.5	0.91	0.52	1.21	±5

*Liquid Verification above was performed on 2026/03/10.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	O (S/m)	ϵ_r	O (S/m)	$\Delta\epsilon_r$	ΔO (S/m)	
1720	Head Tissue Simulating Liquid	41.021	1.367	40.13	1.35	2.22	1.26	±5
1745	Head Tissue Simulating Liquid	40.915	1.381	40.1	1.37	2.03	0.8	±5
1750	Head Tissue Simulating Liquid	40.837	1.389	40.1	1.37	1.84	1.39	±5
1770	Head Tissue Simulating Liquid	40.455	1.398	40.06	1.38	0.99	1.3	±5

*Liquid Verification above was performed on 2026/03/10.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	O (S/m)	ϵ_r	O (S/m)	$\Delta\epsilon_r$	ΔO (S/m)	
1860	Head Tissue Simulating Liquid	40.408	1.384	40	1.4	1.02	-1.14	±5
1880	Head Tissue Simulating Liquid	40.218	1.395	40	1.4	0.55	-0.36	±5
1900	Head Tissue Simulating Liquid	40.152	1.413	40	1.4	0.38	0.93	±5

*Liquid Verification above was performed on 2026/03/10.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
2506	Head Tissue Simulating Liquid	39.607	1.824	39.13	1.86	1.22	-1.94	± 5
2510	Head Tissue Simulating Liquid	39.588	1.827	39.12	1.86	1.2	-1.77	± 5
2535	Head Tissue Simulating Liquid	39.574	1.846	39.09	1.89	1.24	-2.33	± 5
2550	Head Tissue Simulating Liquid	39.359	1.884	39.07	1.91	0.74	-1.36	± 5
2560	Head Tissue Simulating Liquid	39.35	1.932	39.05	1.92	0.77	0.63	± 5
2595	Head Tissue Simulating Liquid	38.745	1.954	39.01	1.95	-0.68	0.21	± 5
2600	Head Tissue Simulating Liquid	38.554	1.989	39	1.96	-1.14	1.48	± 5
2635	Head Tissue Simulating Liquid	38.391	2.035	38.96	2	-1.46	1.75	± 5
2680	Head Tissue Simulating Liquid	38.069	2.051	38.9	2.05	-2.14	0.05	± 5

*Liquid Verification above was performed on 2026/03/10.


System Accuracy Verification

Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of $\pm 10\%$. The validation results are tabulated below. And also the corresponding SAR plot is attached as well in the SAR plots files.

The spacing distances in the **System Verification Setup Block Diagram** is given by the following:

- $s = 15 \text{ mm} \pm 0,2 \text{ mm}$ for $300 \text{ MHz} \leq f \leq 1\,000 \text{ MHz}$;
- $s = 10 \text{ mm} \pm 0,2 \text{ mm}$ for $1\,000 \text{ MHz} < f \leq 3\,000 \text{ MHz}$;
- $s = 10 \text{ mm} \pm 0,2 \text{ mm}$ for $3\,000 \text{ MHz} < f \leq 6\,000 \text{ MHz}$.

System Verification Setup Block Diagram

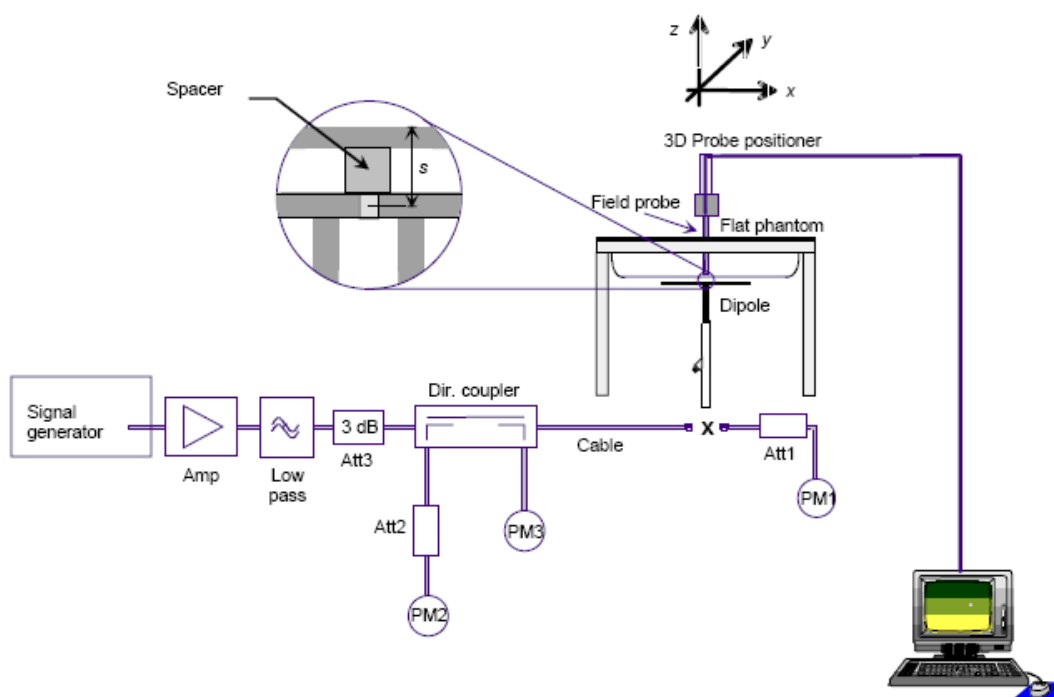

System Accuracy Check Results

Date	Frequency Band (MHz)	Liquid Type	Input Power (mW)	Measured SAR (W/kg)	Normalized to 1W (W/kg)	Target Value (W/Kg)	Delta (%)	Tolerance (%)
2026/03/10	750	Head	100	1g 0.823	8.23	8.5	-3.18	± 10
2026/03/10	1750	Head	100	1g 3.71	37.1	36.9	0.54	± 10
2026/03/10	1900	Head	100	1g 4.05	40.5	39.9	1.50	± 10
2026/03/10	2600	Head	100	1g 5.63	56.3	55.1	2.18	± 10

Note:

All the SAR values are normalized to 1Watt forward power.

SAR SYSTEM VALIDATION DATA

System Performance 750 MHz Head

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1229

Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 750$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 43.298$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(9.4, 9.4, 9.4) @ 750 MHz; Calibrated: 2025/12/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2025/9/28
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/Head 1750MHz Pin=100mW/Area Scan (7x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.961 W/kg

Configuration/Head 1750MHz Pin=100mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.54 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = 0.823 W/kg; SAR(10 g) = 0.537 W/kg

Smallest distance from peaks to all points 3 dB below = 17.9 mm

Ratio of SAR at M2 to SAR at M1 = 63.1%

Maximum value of SAR (measured) = 1.13 W/kg

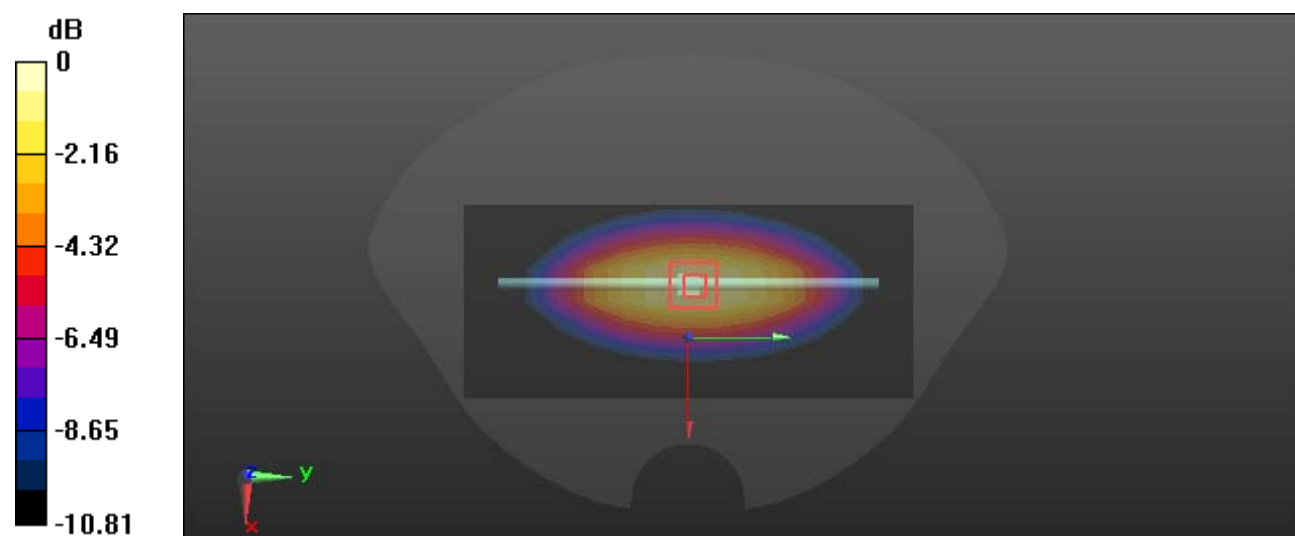

System Performance 1750 MHz Head**DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1199**

Communication System: UID 0, CW (0); Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.389$ S/m; $\epsilon_r = 40.837$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7.89, 7.89, 7.89) @ 1750 MHz; Calibrated: 2025/12/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2025/9/28
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/Head 1750MHz Pin=100mW/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 5.57 W/kg**Configuration/Head 1750MHz Pin=100mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 53.18 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 6.56 W/kg

SAR(1 g) = 3.71 W/kg; SAR(10 g) = 1.99 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 55.8%

Maximum value of SAR (measured) = 5.59 W/kg

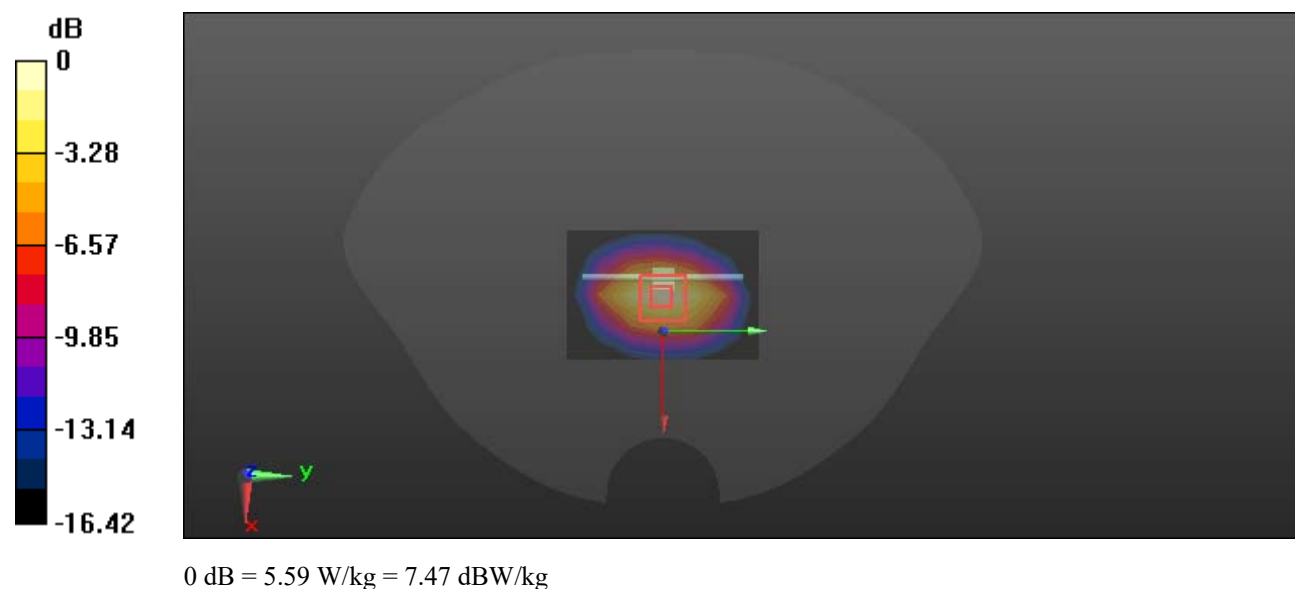

System Performance 1900 MHz Head**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d231**

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.413$ S/m; $\epsilon_r = 40.152$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7.55, 7.55, 7.55) @ 1900 MHz; Calibrated: 2025/12/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2025/9/28
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/Head 1900MHz Pin=100mW/Area Scan (9x13x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 5.89 W/kg**Configuration/Head 1900MHz Pin=100mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.36 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 7.89 W/kg

SAR(1 g) = 4.05 W/kg; SAR(10 g) = 1.99 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 50.9%

Maximum value of SAR (measured) = 6.54 W/kg

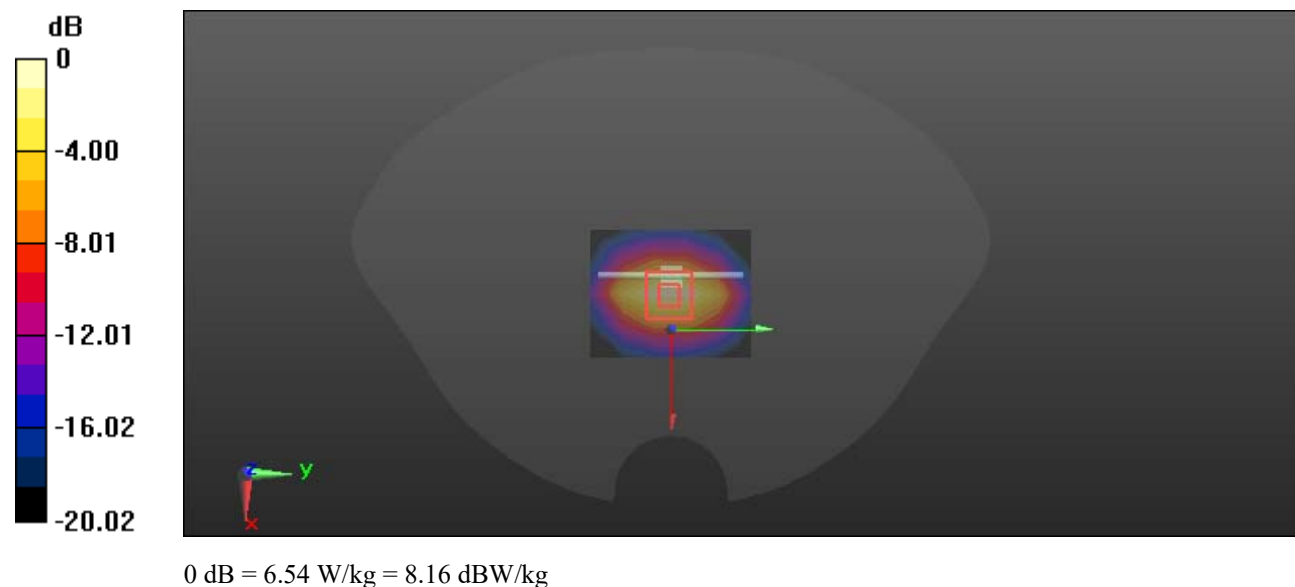

System Performance 2600 MHz Head

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1207

Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2600$ MHz; $\sigma = 1.989$ S/m; $\epsilon_r = 38.554$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7, 7, 7) @ 2600 MHz; Calibrated: 2025/12/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2025/9/28
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/Head 2600MHz Pin=100mW/Area Scan (9x10x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 7.90 W/kg

Configuration/Head 2600MHz Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 54.70 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 12.2 W/kg

SAR(1 g) = 5.63 W/kg; SAR(10 g) = 2.48 W/kg

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 46.5%

Maximum value of SAR (measured) = 9.70 W/kg

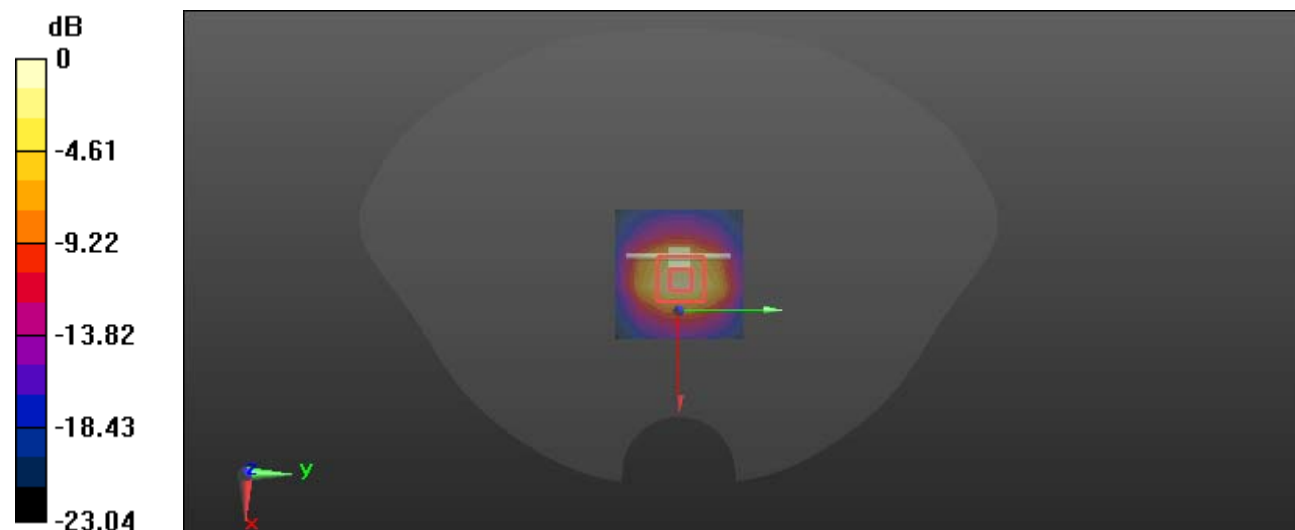

0 dB = 9.70 W/kg = 9.87 dBW/kg

EUT TEST STRATEGY AND METHODOLOGY

Test positions for Front-of-face configurations

Passive body-worn and audio accessories generally do not apply to the head SAR of PTT radios. Head SAR is measured with the front surface of the radio positioned at 2.5 cm parallel to a flat phantom. A phantom shell thickness of 2 mm is required. When the front of the radio has a contour or non-uniform surface with a variation of 1.0 cm or more, the average distance of such variations is used to establish the 2.5 cm test separation from the phantom.

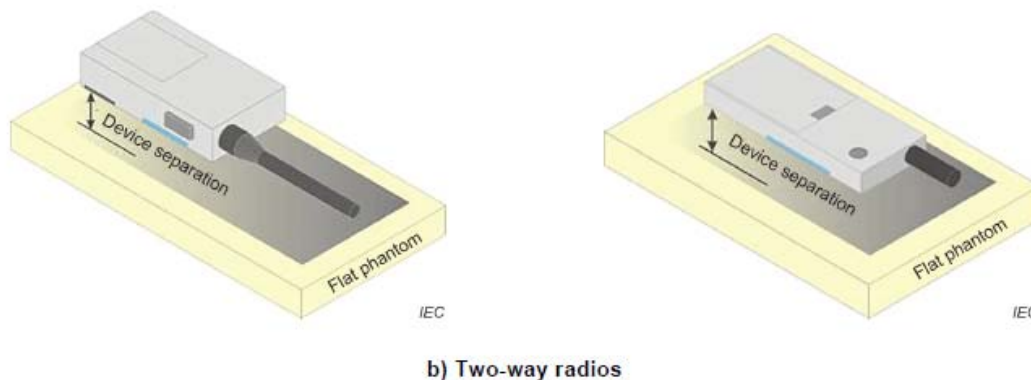


Figure 10 – Test positions for front-of-face devices

Test positions for body-worn and other configurations

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations. Devices with a headset output should be tested with a headset connected to the device. When multiple accessories that do not contain metallic components are supplied with the device, the device may be tested with only the accessory that dictates the closest spacing to the body. When multiple accessories that contain metallic components are supplied with the device, the device must be tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (e.g., the same metallic belt-clip used with different holsters with no other metallic components), only the accessory that dictates the closest spacing to the body must be tested.

Body-worn accessories may not always be supplied or available as options for some devices that are intended to be authorized for body-worn use. A separation distance of 1.5 cm between the back of the device and a flat phantom is recommended for testing body-worn SAR compliance under such circumstances. Other separation distances may be used, but they should not exceed 2.5 cm. In these cases, the device may use body-worn accessories that provide a separation distance greater than that tested for the device provided however that the accessory contains no metallic components.

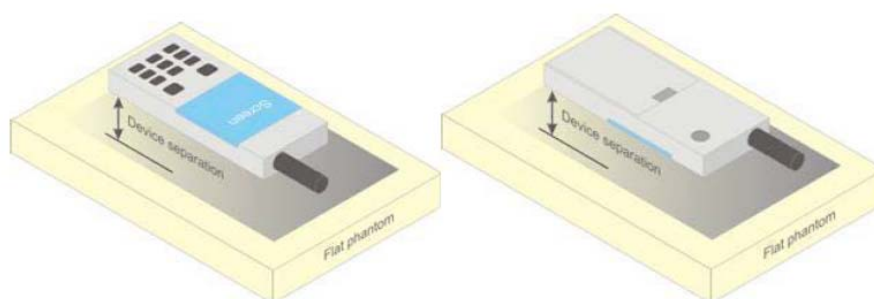


Figure 5 – Test positions for body-worn devices

Test Distance for SAR Evaluation

In this case the DUT(Device Under Test) is set directly against the phantom, the test distance is 0mm for Body Back mode; for Face Up mode the distance is 25mm.

SAR Evaluation Procedure

The evaluation was performed with the following procedure:

Step 1: Measurement of the SAR value at a fixed location above the ear point or central position was used as a reference value for assessing the power drop. The SAR at this point is measured at the start of the test and then again at the end of the testing.

Step 2: The SAR distribution at the exposed side of the head was measured at a distance of 4 mm from the inner surface of the shell. The area covered the entire dimension of the head or radiating structures of the EUT, the horizontal grid spacing was 15 mm x 15 mm, and the SAR distribution was determined by integrated grid of 1.5mm x 1.5mm. Based on these data, the area of the maximum absorption was determined by spline interpolation. The first Area Scan covers the entire dimension of the EUT to ensure that the hotspot was correctly identified.

Step 3: Around this point, a volume of 30 mm x 30 mm x 30 mm was assessed by measuring 7x 7 x 7 points. On the basis of this data set, the spatial peak SAR value was evaluated under the following procedure:

- 1) The data at the surface were extrapolated, since the center of the dipoles is 1.2 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.3 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.

- 2) The maximum Measured value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed by the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one dimensional splines with the "Not a knot"-condition (in x, y and z-directions). The volume was integrated with the trapezoidal-algorithm. One thousand points (10 x 10 x 10) were Measured to calculate the averages.


All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement of the SAR value at the same location as in Step 1. If the value changed by more than 5%, the evaluation was repeated.


CONDUCTED OUTPUT POWER MEASUREMENT

Test Procedure

The RF output of the transmitter was connected to the input of the Wireless Communication Test Set through Attenuator.

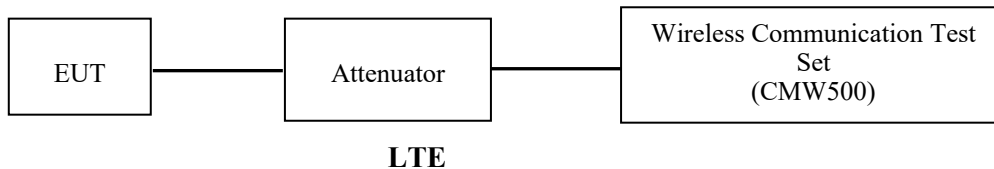

The RF output of the transmitter was connected to the input port of the USB Wideband Power Sensor through Attenuator.

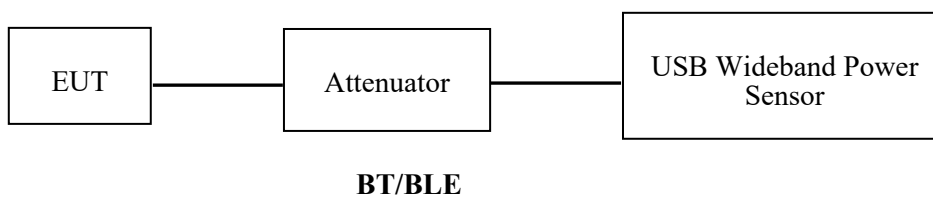

Description of Test Configuration

EUT Operation Condition:

EUT Operation Mode:	The system was configured for testing in each operation mode.
Equipment Modifications:	No
EUT Exercise Software:	No

The maximum power was configured per 3GPP Standard for each operation modes as below setting:

LTE (FDD):

The following tests were conducted according to the test requirements in 3GPP TS36.101

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	Table 6.2.4-2
	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

TDD-LTE

P TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$			$7680 \cdot T_s$		
5	$6592 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$20480 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Calculated Duty Cycle

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.67
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.33

We used configuration 0 for LTE Band 41&38 SAR test, that is 63.33%(1:1.58)for duty cycle.

Maximum Target Output Power

Max Target Power(dBm)				
Mode/Band	Channel			
	Low	Middle	High	Additional
LTE Band 2	24	24	25	/
LTE Band 4	22.3	22.3	22.3	/
LTE Band 5	24	24	24	/
LTE Band 7	23.4	23.4	23.4	/
LTE Band 12	24.2	24.2	24.2	/
LTE Band 13	23.7	23.7	23.7	/
LTE Band 17	23.1	23.1	23.1	/
LTE Band 38	23.4	23.4	23.4	/
LTE Band 41	22.7	22.7	22.7	/
LTE Band 66	22.3	22.3	22.3	/
Bluetooth BDR	3.0	3.5	2.0	4.5
Bluetooth EDR	5.5	6.0	4.5	6.5
BLE 1M	2.5	3.0	1.5	/
BLE 2M	3.0	3.5	2.0	/

Note: The Maximum Target Power for LTE bands corresponds to their maximum power in QPSK modes with maximum bandwidth.

Test Results**LTE Band 2:**

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	RB1#0	23.17	23.39	23.92
		RB1#3	23.22	23.34	24.07
		RB1#5	23.26	23.32	23.85
		RB3#0	23.15	23.42	23.89
		RB3#1	23.21	23.43	23.82
		RB3#3	23.16	23.38	23.85
		RB6#0	22.34	22.61	23.05
	16-QAM	RB1#0	22.84	22.41	22.9
		RB1#3	22.76	22.47	22.79
		RB1#5	22.74	22.43	22.91
		RB3#0	22.78	22.79	23.12
		RB3#1	22.77	22.82	23.14
		RB3#3	22.67	22.75	22.94
		RB6#0	21.39	21.79	22.25
3M	QPSK	RB1#0	23.03	23.34	24.16
		RB1#8	22.12	23.63	24.08
		RB1#14	22.88	23.16	24.16
		RB8#0	22.32	22.73	23.16
		RB8#4	22.32	22.46	23.18
		RB8#7	22.28	22.51	23.14
		RB15#0	22.19	22.54	23.13
	16-QAM	RB1#0	22.2	22.48	23.42
		RB1#8	22.24	22.59	23.49
		RB1#14	21.91	22.33	23.5
		RB8#0	21.42	21.74	22.27
		RB8#4	21.46	21.84	22.38
		RB8#7	21.42	21.73	22.26
		RB15#0	21.47	21.74	22.1
5M	QPSK	RB1#0	23.28	23.37	24.13
		RB1#13	23.06	23.56	24.18
		RB1#24	22.8	23.02	24.01
		RB12#0	22.26	22.59	23.33
		RB12#7	22.11	22.5	23.44
		RB12#13	22.16	22.53	23.26
		RB25#0	22.26	22.59	23.27
	16-QAM	RB1#0	22.45	22.5	23.87
		RB1#13	22.34	22.83	23.74
		RB1#24	22.06	22.27	23.81
		RB12#0	21.51	21.69	22.38
		RB12#7	21.58	21.97	22.47
		RB12#13	21.43	21.85	22.36
		RB25#0	21.37	21.87	22.51

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
10M	QPSK	RB1#0	22.99	22.28	24.2
		RB1#25	22.42	22.33	24.32
		RB1#49	22.44	22.72	24.12
		RB25#0	22.11	22.49	23.2
		RB25#12	22.21	22.24	23.06
		RB25#25	22.02	22.08	23.16
		RB50#0	22.06	22.49	23.46
	16-QAM	RB1#0	22.16	22.19	23.48
		RB1#25	21.76	22.51	23.71
		RB1#49	21.76	21.92	23.51
		RB12#0	22.33	22.4	23.36
		RB12#19	21.92	22.6	23.4
		RB12#38	21.85	22.46	23.28
		RB27#0	21.32	21.78	22.32
15M	QPSK	RB1#0	23.24	23.55	24.82
		RB1#37	23.58	23.44	24.55
		RB1#74	23.82	22.84	24.31
		RB36#0	23.59	22.48	23.86
		RB36#20	22.06	22.77	23.56
		RB36#39	22.16	22.14	23.48
		RB75#0	22.07	23.01	23.97
	16-QAM	RB1#0	22.53	22.75	24.27
		RB1#37	21.93	22.69	24.08
		RB1#74	23.15	21.96	23.6
		RB12#0	22.26	22.56	23.59
		RB12#31	21.96	22.78	23.49
		RB12#63	21.84	22.48	23.52
		RB27#0	21.43	21.84	22.62
20M	QPSK	RB1#0	22.68	23.54	23.55
		RB1#49	22.94	23.79	24.51
		RB1#99	22.86	22.75	24.16
		RB50#0	22.16	22.45	23.59
		RB50#24	22.08	22.14	23.6
		RB50#50	22.74	22.83	23.72
		RB100#0	22.05	23.18	23.59
	16-QAM	RB1#0	22.58	23.62	22.78
		RB1#49	22.31	23.32	23.8
		RB1#99	23.43	22.69	23.49
		RB12#0	22.35	22.85	22.8
		RB12#43	22.15	22.85	23.62
		RB12#88	22.09	22.75	23.52
		RB27#0	22.14	22	22.79

LTE Band 4:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	RB1#0	22.07	20.98	21.61
		RB1#3	21.90	20.95	21.62
		RB1#5	22.11	21.00	21.47
		RB3#0	21.95	21.06	21.67
		RB3#1	21.94	21.09	21.71
		RB3#3	21.85	21.06	21.58
		RB6#0	20.78	20.34	20.80
	16-QAM	RB1#0	21.30	20.01	20.59
		RB1#3	21.22	20.04	20.67
		RB1#5	21.34	20.19	20.63
		RB3#0	21.30	20.26	20.84
		RB3#1	21.35	20.37	21.08
		RB3#3	21.28	20.52	20.94
		RB6#0	19.97	19.47	19.93
3M	QPSK	RB1#0	22.10	21.01	21.82
		RB1#8	21.99	21.08	21.71
		RB1#14	22.03	21.03	21.79
		RB8#0	21.06	20.30	20.72
		RB8#4	20.90	20.46	20.84
		RB8#7	20.85	20.49	20.74
		RB15#0	20.99	20.36	20.79
	16-QAM	RB1#0	20.89	20.05	21.17
		RB1#8	20.86	20.20	21.07
		RB1#14	20.70	20.14	21.20
		RB8#0	20.07	19.30	19.87
		RB8#4	19.99	19.33	19.86
		RB8#7	19.85	19.45	19.92
		RB15#0	19.88	19.33	19.88
5M	QPSK	RB1#0	22.21	21.01	22.01
		RB1#13	22.08	21.27	21.78
		RB1#24	21.90	21.51	21.63
		RB12#0	21.07	20.49	20.82
		RB12#7	20.98	20.47	20.75
		RB12#13	20.86	20.54	20.82
		RB25#0	20.91	20.36	20.88
	16-QAM	RB1#0	21.17	20.11	21.55
		RB1#13	21.08	20.32	21.54
		RB1#24	20.87	20.35	21.58
		RB12#0	20.17	19.29	20.02
		RB12#7	20.09	19.43	19.96
		RB12#13	20.06	19.52	19.99
		RB25#0	19.90	19.35	20.06

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
10M	QPSK	RB1#0	22.11	20.95	21.70
		RB1#25	21.75	21.19	21.92
		RB1#49	21.32	21.23	21.74
		RB25#0	20.74	20.47	20.75
		RB25#12	20.44	20.49	20.76
		RB25#25	20.54	20.51	20.69
		RB50#0	20.57	20.31	20.56
	16-QAM	RB1#0	20.68	19.89	20.90
		RB1#25	20.59	20.31	21.26
		RB1#49	19.99	20.14	21.19
		RB12#0	20.90	19.88	20.69
		RB12#19	20.46	20.17	20.86
		RB12#38	20.41	20.12	20.73
		RB27#0	19.65	19.08	19.96
15M	QPSK	RB1#0	22.23	21.03	21.69
		RB1#37	21.69	21.18	22.13
		RB1#74	21.26	21.43	21.85
		RB36#0	20.63	20.44	20.92
		RB36#20	20.39	20.51	20.99
		RB36#39	20.46	20.49	20.86
		RB75#0	20.62	20.31	20.79
	16-QAM	RB1#0	21.13	20.23	20.84
		RB1#37	20.83	20.26	21.35
		RB1#74	20.40	20.49	21.32
		RB12#0	20.99	19.91	20.51
		RB12#31	20.28	20.27	20.69
		RB12#63	20.18	20.22	20.54
		RB27#0	19.83	19.41	20.09
20M	QPSK	RB1#0	22.08	20.98	20.99
		RB1#49	21.22	21.24	21.78
		RB1#99	20.82	21.52	21.44
		RB50#0	20.52	20.35	20.94
		RB50#24	20.39	20.56	20.98
		RB50#50	20.36	20.48	20.84
		RB100#0	20.31	20.34	20.80
	16-QAM	RB1#0	21.24	20.72	20.56
		RB1#49	20.68	20.93	21.30
		RB1#99	20.37	21.21	20.97
		RB12#0	20.77	20.06	20.18
		RB12#43	19.89	20.46	20.64
		RB12#88	19.92	20.34	20.42
		RB27#0	19.74	19.28	20.02

LTE Band 5:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	RB1#0	23.33	23.36	23.5
		RB1#3	23.3	23.53	23.48
		RB1#5	23.38	23.63	23.32
		RB3#0	23.49	23.48	23.3
		RB3#1	23.47	23.58	23.32
		RB3#3	23.51	23.55	23.33
		RB6#0	22.51	22.52	22.09
	16-QAM	RB1#0	22.2	22.33	22.62
		RB1#3	22.24	22.31	22.62
		RB1#5	22.31	22.36	22.61
		RB3#0	22.72	22.73	22.53
		RB3#1	22.78	22.7	22.5
		RB3#3	22.66	22.7	22.55
		RB6#0	21.85	21.84	21.33
3M	QPSK	RB1#0	23.24	23.26	23.46
		RB1#8	23.33	23.44	23.51
		RB1#14	23.11	23.23	23.21
		RB8#0	22.41	22.38	22.31
		RB8#4	22.45	22.6	22.16
		RB8#7	22.45	22.61	22.13
		RB15#0	22.3	22.45	22.19
	16-QAM	RB1#0	22.26	22.41	22.62
		RB1#8	22.18	22.53	22.8
		RB1#14	22.02	22.29	22.6
		RB8#0	21.55	21.62	21.65
		RB8#4	21.67	21.77	21.59
		RB8#7	21.51	21.75	21.48
		RB15#0	21.58	21.55	21.48
5M	QPSK	RB1#0	23.32	23.58	23.47
		RB1#13	23.39	23.7	23.45
		RB1#24	23.45	23.58	23.14
		RB12#0	22.34	22.4	22.44
		RB12#7	22.25	22.52	22.38
		RB12#13	22.37	22.55	22.32
		RB25#0	22.22	22.41	22.28
	16-QAM	RB1#0	22.6	22.46	23.17
		RB1#13	22.5	22.59	23.09
		RB1#24	22.45	22.52	22.78
		RB12#0	21.61	21.6	21.58
		RB12#7	21.68	21.62	21.7
		RB12#13	21.62	21.54	21.54
		RB25#0	21.39	21.64	21.59

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
10M	QPSK	RB1#0	23.46	23.71	23.89
		RB1#25	23.34	23.55	23.64
		RB1#49	23.45	23.70	23.23
		RB25#0	22.32	22.26	22.49
		RB25#12	22.52	22.57	22.68
		RB25#25	22.45	22.42	22.20
		RB50#0	22.19	22.25	22.27
	16-QAM	RB1#0	22.30	22.22	23.00
		RB1#25	22.02	22.43	22.86
		RB1#49	22.04	22.70	22.52
		RB12#0	22.31	22.23	22.83
		RB12#19	22.27	22.40	22.54
		RB12#38	22.19	22.71	22.30
		RB27#0	21.30	21.39	21.74

LTE Band 7:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	RB1#0	22.8	22.88	22.49
		RB1#13	22.83	22.88	22.43
		RB1#24	22.86	22.91	22.2
		RB12#0	21.79	22.16	21.62
		RB12#7	21.73	21.99	21.43
		RB12#13	21.82	21.94	21.58
		RB25#0	21.74	22.01	21.43
	16-QAM	RB1#0	22.5	21.97	21.59
		RB1#13	22.45	22.21	21.6
		RB1#24	22.54	22.16	21.22
		RB12#0	21.1	21.23	20.69
		RB12#7	21.14	21.17	20.64
		RB12#13	21.09	21.25	20.85
		RB25#0	21.13	21.1	20.71
10M	QPSK	RB1#0	22.53	22.63	22.81
		RB1#25	22.63	22.95	22.72
		RB1#49	22.54	22.92	22.51
		RB25#0	21.67	21.88	21.56
		RB25#12	21.53	21.81	21.57
		RB25#25	21.62	21.85	21.64
		RB50#0	21.53	21.73	21.49
	16-QAM	RB1#0	21.32	21.48	21.88
		RB1#25	21.43	22.02	21.85
		RB1#49	21.33	21.87	21.48
		RB12#0	21.78	21.86	21.41
		RB12#19	21.58	21.84	21.29
		RB12#38	21.52	21.83	21.34
		RB27#0	20.71	21.08	20.49
15M	QPSK	RB1#0	22.62	22.83	23.28
		RB1#37	22.37	22.9	22.86
		RB1#74	22.86	22.98	22.44
		RB36#0	21.68	22.07	21.64
		RB36#20	21.84	22.03	21.54
		RB36#39	21.59	21.99	21.61
		RB75#0	21.51	22.03	21.57
	16-QAM	RB1#0	21.87	21.87	22.66
		RB1#37	21.67	22.11	22.16
		RB1#74	21.97	22.08	21.64
		RB12#0	21.87	22.05	21.76
		RB12#31	21.89	21.96	21.37
		RB12#63	21.83	21.99	21.41
		RB27#0	21.04	20.84	21.26

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
20M	QPSK	RB1#0	22.65	22.93	23.04
		RB1#49	22.59	22.86	22.59
		RB1#99	22.44	22.89	22.52
		RB50#0	21.75	22.1	21.8
		RB50#24	21.71	21.94	21.46
		RB50#50	21.69	21.84	21.52
		RB100#0	21.71	21.98	21.47
	16-QAM	RB1#0	22.01	22.36	22.45
		RB1#49	22.13	22.71	22.16
		RB1#99	21.63	22.73	21.56
		RB12#0	21.98	22.28	21.91
		RB12#43	21.4	22.03	21.39
		RB12#88	21.37	22.06	21.84
		RB27#0	20.73	20.54	21.15

LTE Band 12:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	RB1#0	23.65	23.33	23.79
		RB1#3	23.56	23.20	23.29
		RB1#5	23.60	23.51	23.14
		RB3#0	23.78	23.27	23.36
		RB3#1	23.66	23.37	23.27
		RB3#3	23.56	23.34	23.32
		RB6#0	22.71	22.33	22.26
	16-QAM	RB1#0	22.65	22.06	22.82
		RB1#3	22.67	21.97	22.42
		RB1#5	22.62	22.16	22.19
		RB3#0	22.98	22.38	22.52
		RB3#1	22.94	22.34	22.49
		RB3#3	22.85	22.39	22.47
		RB6#0	22.03	21.27	20.93
3M	QPSK	RB1#0	23.59	22.93	23.92
		RB1#8	23.42	23.26	23.54
		RB1#14	23.20	23.48	22.82
		RB8#0	22.62	22.47	22.66
		RB8#4	22.75	22.35	22.51
		RB8#7	22.71	22.32	22.58
		RB15#0	22.58	22.26	22.39
	16-QAM	RB1#0	22.63	21.80	23.28
		RB1#8	22.54	22.25	22.74
		RB1#14	22.17	22.40	22.14
		RB8#0	21.53	21.03	21.85
		RB8#4	21.55	21.18	21.47
		RB8#7	21.47	21.12	21.49
		RB15#0	21.50	21.27	21.34
5M	QPSK	RB1#0	23.66	23.03	24.13
		RB1#13	23.50	23.18	23.80
		RB1#24	23.10	23.62	22.96
		RB12#0	22.74	22.85	23.06
		RB12#7	22.54	22.29	22.88
		RB12#13	22.63	22.34	22.75
		RB25#0	22.36	22.35	22.66
	16-QAM	RB1#0	22.79	22.00	23.79
		RB1#13	22.60	22.29	23.64
		RB1#24	22.08	22.93	22.62
		RB12#0	21.65	21.03	22.06
		RB12#7	21.68	21.25	21.89
		RB12#13	21.74	21.06	21.52
		RB25#0	21.52	21.24	21.77

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
10M	QPSK	RB1#0	23.42	23.52	23.55
		RB1#25	23.69	23.92	24.11
		RB1#49	23.27	23.84	23.67
		RB25#0	22.68	22.86	22.96
		RB25#12	22.44	22.58	22.95
		RB25#25	22.56	22.34	22.67
		RB50#0	22.28	22.26	22.40
	16-QAM	RB1#0	22.48	22.14	22.22
		RB1#25	21.72	22.17	23.30
		RB1#49	21.95	23.13	22.40
		RB12#0	22.46	21.96	22.04
		RB12#19	21.93	22.11	23.00
		RB12#38	21.97	22.06	22.74
		RB27#0	21.05	21.40	21.79

LTE Band 13:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	RB1#0	23.2	/	23.6
		RB1#13	23.52	/	23.58
		RB1#24	23.62	/	23.19
		RB12#0	22.58	/	22.68
		RB12#7	22.68	/	22.36
		RB12#13	22.59	/	22.47
		RB25#0	22.63	/	22.5
	16-QAM	RB1#0	22.91	/	22.69
		RB1#13	23.27	/	22.84
		RB1#24	23.36	/	22.37
		RB12#0	21.77	/	21.77
		RB12#7	21.88	/	21.53
		RB12#13	21.76	/	21.72
		RB25#0	21.65	/	21.68
10M	QPSK	RB1#0	/	23.21	/
		RB1#25	/	23.39	/
		RB1#49	/	22.96	/
		RB25#0	/	22.52	/
		RB25#12	/	22.44	/
		RB25#25	/	22.48	/
		RB50#0	/	22.2	/
	16-QAM	RB1#0	/	21.89	/
		RB1#25	/	22.4	/
		RB1#49	/	21.88	/
		RB12#0	/	22.54	/
		RB12#19	/	22.32	/
		RB12#38	/	22.37	/
		RB27#0	/	21.55	/

LTE Band 17:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	RB1#0	22.14	22.15	22.99
		RB1#13	22.09	22.76	22.82
		RB1#24	22.53	23.01	21.98
		RB12#0	21.49	21.65	21.56
		RB12#7	21.37	21.87	21.29
		RB12#13	21.26	21.75	21.34
		RB25#0	21.16	21.48	21.49
	16-QAM	RB1#0	20.91	21.13	22.49
		RB1#13	21.03	21.78	22.3
		RB1#24	21.49	22.04	21.44
		RB12#0	20.07	20.8	20.79
		RB12#7	20.21	20.91	20.4
		RB12#13	20.14	20.85	20.62
		RB25#0	19.96	20.57	20.6
10M	QPSK	RB1#0	21.92	21.57	21.79
		RB1#25	22.51	22.67	22.98
		RB1#49	22.71	22.21	22.07
		RB25#0	21.41	21.65	21.59
		RB25#12	21.66	21.55	21.43
		RB25#25	21.54	21.59	21.53
		RB50#0	21.19	21.17	21.19
	16-QAM	RB1#0	20.51	20.62	21.05
		RB1#25	21.1	21.57	22.21
		RB1#49	21.53	21.23	21.24
		RB12#0	21.33	21.55	21.69
		RB12#19	21.84	21.64	21.25
		RB12#38	21.52	21.59	21.34
		RB27#0	20.56	20.47	20.71

LTE Band 38:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	RB1#0	23.17	23.3	23.16
		RB1#13	23.05	23.32	23.29
		RB1#24	23.1	23.11	23.23
		RB12#0	21.85	22.03	21.91
		RB12#7	22.04	22.13	22.07
		RB12#13	21.87	22.07	21.98
		RB25#0	21.85	21.93	21.9
	16-QAM	RB1#0	21.98	22.24	22.04
		RB1#13	21.94	22.28	22.03
		RB1#24	21.93	22.3	22.09
		RB12#0	20.95	21.17	20.95
		RB12#7	20.87	21.27	21.11
		RB12#13	20.84	21.06	21.09
		RB25#0	20.95	21.02	21.14
10M	QPSK	RB1#0	22.85	22.97	22.93
		RB1#25	23.1	23.12	23.13
		RB1#49	23.07	22.98	23.03
		RB25#0	21.74	21.83	21.9
		RB25#12	21.8	22.09	21.98
		RB25#25	21.8	21.89	21.9
		RB50#0	21.68	21.82	21.89
	16-QAM	RB1#0	21.87	21.86	22.1
		RB1#25	22.14	21.84	22.15
		RB1#49	21.97	21.95	22.07
		RB12#0	22.06	22.03	22.05
		RB12#19	22.12	22.16	22.04
		RB12#38	22.15	21.95	22
		RB27#0	20.97	21.07	21.21
15M	QPSK	RB1#0	23.06	22.99	23.17
		RB1#37	23.13	23.02	23.16
		RB1#74	23.23	23.17	23.28
		RB36#0	22.07	22	22.09
		RB36#20	22.21	22.24	22.24
		RB36#39	22.15	22.1	22.05
		RB75#0	22.01	22.02	22.11
	16-QAM	RB1#0	22.34	21.84	22.34
		RB1#37	22.3	22.1	22.22
		RB1#74	22.33	21.96	22.35
		RB12#0	21.81	22.08	22.01
		RB12#31	22.12	22.35	22.18
		RB12#63	21.99	22.02	21.21
		RB27#0	21.13	21.38	20.46

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
20M	QPSK	RB1#0	22.36	22.61	22.62
		RB1#49	22.66	22.85	22.97
		RB1#99	22.44	22.62	22.73
		RB50#0	21.62	21.56	21.58
		RB50#24	21.74	21.83	21.85
		RB50#50	21.73	21.74	21.58
		RB100#0	21.48	21.61	21.52
	16-QAM	RB1#0	20.97	21.23	21.22
		RB1#49	21.4	21.54	21.48
		RB1#99	21.26	21.37	21.26
		RB12#0	21.11	20.86	21.25
		RB12#43	21.56	21.4	21.38
		RB12#88	21.18	21.05	21.23
		RB27#0	20.42	20.52	20.71

LTE Band 41:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	2550 MHz (dBm)	Middle Channel (dBm)	2635 MHz (dBm)	High Channel (dBm)
5M	QPSK	RB1#0	21.83	22.31	22.20	21.97	22.24
		RB1#13	22.03	22.43	22.29	22.08	22.25
		RB1#24	22.08	22.52	22.21	22.23	22.35
		RB12#0	20.90	21.25	21.24	20.9	21.26
		RB12#7	20.96	21.24	21.36	21.11	21.35
		RB12#13	20.86	21.18	21.30	20.82	21.42
		RB25#0	20.78	21.24	21.29	20.73	21.37
	16-QAM	RB1#0	20.62	21.46	21.20	20.76	21.31
		RB1#13	20.46	21.47	21.30	20.59	21.45
		RB1#24	20.63	21.43	21.28	20.6	21.27
		RB12#0	19.38	20.39	19.97	19.47	20.02
		RB12#7	19.44	20.43	20.22	19.44	20.21
		RB12#13	19.33	20.31	20.15	19.32	20.23
		RB25#0	19.61	20.22	20.17	19.6	20.22
10M	QPSK	RB1#0	21.71	22.28	22.29	21.73	22.44
		RB1#25	22.18	22.37	22.13	22.21	22.11
		RB1#49	22.04	22.23	22.24	22.08	22.19
		RB25#0	20.82	21.13	21.06	20.86	21.11
		RB25#12	20.74	21.20	21.26	20.7	21.32
		RB25#25	20.75	21.22	21.23	20.78	21.29
		RB50#0	20.73	21.11	21.14	20.72	21.22
	16-QAM	RB1#0	20.43	21.07	21.23	20.43	21.34
		RB1#25	20.59	21.14	21.46	20.7	21.44
		RB1#49	20.66	21.06	21.35	20.67	21.49
		RB12#0	20.55	21.33	21.22	20.51	21.29
		RB12#19	20.65	21.32	21.37	20.67	21.51
		RB12#38	20.65	21.36	21.27	20.7	21.32
		RB27#0	19.61	20.34	20.26	19.6	20.4
15M	QPSK	RB1#0	21.80	22.17	22.13	21.87	22.11
		RB1#37	22.14	22.45	22.25	22.28	22.35
		RB1#74	22.08	22.33	22.41	22.11	22.36
		RB36#0	20.91	21.28	21.26	20.9	21.35
		RB36#20	21.14	21.41	21.46	21.1	21.47
		RB36#39	21.07	21.43	21.42	21.11	21.51
		RB75#0	20.88	21.36	21.29	21.02	21.27
	16-QAM	RB1#0	20.77	21.16	21.34	20.74	21.41
		RB1#37	21.04	21.30	21.42	21.18	21.51
		RB1#74	21.01	21.16	21.47	21.14	21.48
		RB12#0	20.52	21.22	21.15	20.53	21.16
		RB12#31	20.75	21.51	21.39	20.71	21.47
		RB12#63	20.65	21.17	21.40	20.68	21.36
		RB27#0	19.75	20.56	20.31	19.73	20.37

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	2570 MHz (dBm)	Middle Channel (dBm)	2645 MHz (dBm)	High Channel (dBm)
20M	QPSK	RB1#0	21.76	22.20	22.41	21.89	22.35
		RB1#49	22.13	22.27	22.62	22.21	22.37
		RB1#99	22.13	22.12	22.25	22.15	22.21
		RB50#0	20.85	21.29	21.35	20.98	21.36
		RB50#24	20.89	21.37	21.51	20.9	21.46
		RB50#50	20.86	21.25	21.32	20.97	21.34
		RB100#0	20.85	21.20	21.29	20.83	21.15
	16-QAM	RB1#0	20.39	21.39	21.00	20.5	21.14
		RB1#49	20.74	21.52	21.31	20.71	21.39
		RB1#99	20.69	21.40	21.14	20.72	21.16
		RB12#0	20.36	21.12	21.06	20.43	21.14
		RB12#43	20.84	21.45	21.40	20.8	21.38
		RB12#88	20.58	21.18	21.27	20.64	21.28
		RB27#0	19.95	20.68	20.38	20.07	20.33

LTE Band 66:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	RB1#0	21.96	21.49	21.23
		RB1#3	21.9	21.4	21.15
		RB1#5	22.04	21.61	21.21
		RB3#0	21.77	21.61	21.16
		RB3#1	21.89	21.5	21.11
		RB3#3	21.84	21.66	21.18
		RB6#0	20.67	20.54	20.34
	16-QAM	RB1#0	21.19	20.36	20.04
		RB1#3	21.2	20.44	20.12
		RB1#5	21.22	20.54	20.13
		RB3#0	21.19	20.76	20.41
		RB3#1	21.24	20.83	20.46
		RB3#3	21.11	20.89	20.46
		RB6#0	19.62	20	19.31
3M	QPSK	RB1#0	22.17	21.43	21.26
		RB1#8	22.16	21.5	21.36
		RB1#14	21.82	21.61	21.05
		RB8#0	20.88	20.54	20.42
		RB8#4	20.81	20.69	20.41
		RB8#7	20.86	20.72	20.42
		RB15#0	20.79	20.68	20.38
	16-QAM	RB1#0	21.22	20.4	20.17
		RB1#8	21.42	20.54	20.21
		RB1#14	21.06	20.35	19.96
		RB8#0	19.9	19.74	19.22
		RB8#4	20.03	19.73	19.37
		RB8#7	19.91	19.75	19.16
		RB15#0	19.8	19.83	19.14
5M	QPSK	RB1#0	21.88	21.56	21.53
		RB1#13	21.8	21.72	21.44
		RB1#24	21.61	21.79	21.13
		RB12#0	20.76	20.55	20.34
		RB12#7	20.82	20.69	20.57
		RB12#13	20.62	20.66	20.33
		RB25#0	20.7	20.61	20.33
	16-QAM	RB1#0	21.41	20.7	20.39
		RB1#13	21.45	20.8	20.54
		RB1#24	21.37	20.78	20.32
		RB12#0	19.82	19.89	19.35
		RB12#7	20.01	19.9	19.38
		RB12#13	19.75	20	19.27
		RB25#0	19.86	19.76	19.22


Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
10M	QPSK	RB1#0	22.08	21.27	21.99
		RB1#25	21.96	21.58	21.53
		RB1#49	21.58	21.77	21.20
		RB25#0	20.76	20.57	20.93
		RB25#12	20.69	20.77	20.74
		RB25#25	20.50	20.71	20.60
		RB50#0	20.47	20.67	20.33
	16-QAM	RB1#0	21.19	20.06	20.05
		RB1#25	20.93	20.27	20.21
		RB1#49	20.54	20.37	20.01
		RB12#0	20.68	20.30	20.01
		RB12#19	20.52	20.64	20.24
		RB12#38	20.32	20.78	20.19
		RB27#0	19.57	19.61	19.13
15M	QPSK	RB1#0	22.03	21.23	21.23
		RB1#37	21.87	21.79	21.35
		RB1#74	21.42	21.80	21.29
		RB36#0	20.81	20.45	20.68
		RB36#20	20.56	20.78	20.56
		RB36#39	20.45	20.72	20.49
		RB75#0	20.38	20.56	20.37
	16-QAM	RB1#0	21.34	20.41	20.12
		RB1#37	20.87	20.95	20.38
		RB1#74	20.48	20.95	20.27
		RB12#0	20.68	20.45	20.01
		RB12#31	20.52	20.85	20.25
		RB12#63	20.05	20.92	20.14
		RB27#0	19.60	20.00	19.30
20M	QPSK	RB1#0	21.43	21.15	21.35
		RB1#49	21.49	21.69	21.45
		RB1#99	21.25	21.52	21.38
		RB50#0	20.67	20.85	20.74
		RB50#24	20.59	20.75	20.71
		RB50#50	20.42	20.71	20.67
		RB100#0	20.36	20.80	20.58
	16-QAM	RB1#0	21.07	20.28	20.57
		RB1#49	20.41	20.99	20.92
		RB1#99	20.05	20.76	20.63
		RB12#0	20.66	19.87	20.16
		RB12#43	20.28	20.73	20.34
		RB12#88	19.69	20.40	20.13
		RB27#0	19.53	20.07	19.20

Bluetooth:

Mode	Channel frequency (MHz)	RF Output Power (dBm)
BDR(GFSK)	2402	2.37
	2432	4.23
	2441	3.07
	2480	1.49
EDR($\pi/4$ -DQPSK)	2402	4.17
	2432	5.72
	2441	5.08
	2480	3.55
EDR(8DPSK)	2402	4.92
	2432	6.17
	2441	5.53
	2480	3.96
BLE 1Mbps	2402	1.94
	2440	2.76
	2480	0.95
BLE 2Mbps	2402	2.57
	2440	3.38
	2480	1.51

STANDALONE SAR TEST EXCLUSION CONSIDERATIONS

Antennas Location:

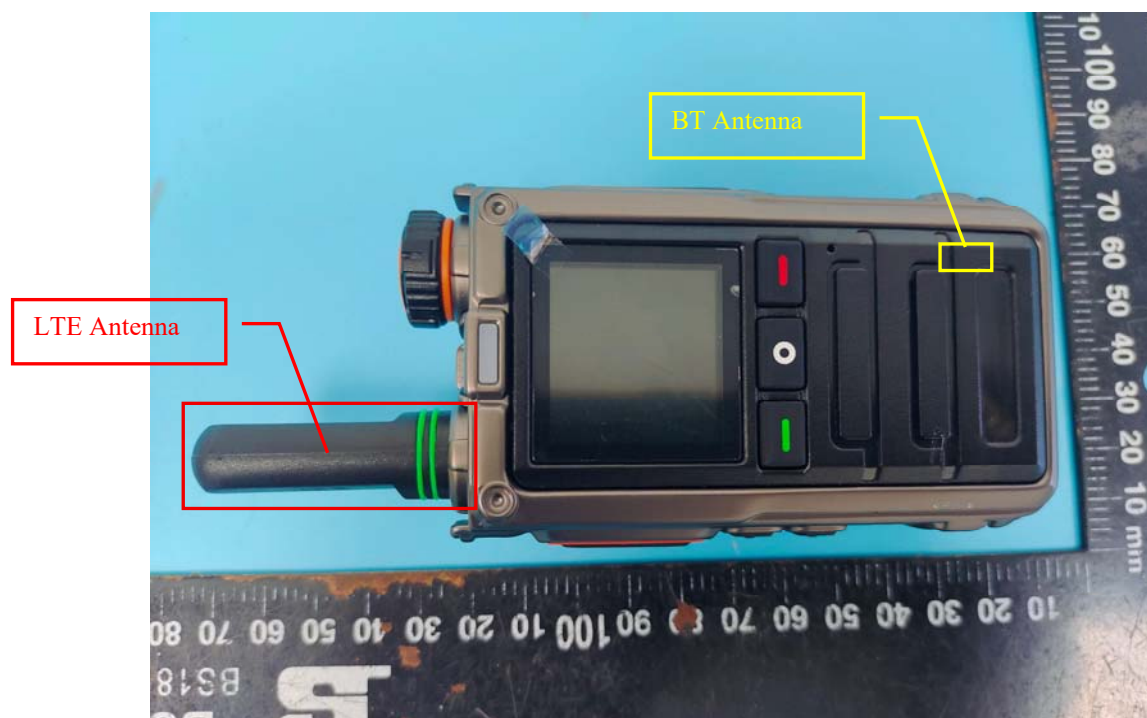

EUT Front View

Standalone SAR test exclusion considerations:

Mode	Frequency (MHz)	Max Target Power (dBm)	Max Target Power (mW)	Distance (mm)	Calculated value	Threshold (1-g)	SAR Test Exclusion
Bluetooth	2480	6.5	4.47	0	1.4	3.0	Yes

Note: The Bluetooth based peak power for calculation.

NOTE:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$\left[\frac{(\text{max. power of channel, including tune-up tolerance, mW})}{(\text{min. test separation distance, mm})} \right] \cdot \sqrt{f(\text{GHz})} \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR, where}$$

1. $f(\text{GHz})$ is the RF channel transmit frequency in GHz.
2. Power and distance are rounded to the nearest mW and mm before calculation.
3. The result is rounded to one decimal place for comparison.
4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

According to KDB 447498 D01 General RF Exposure Guidance v06, clause 4.3. General SAR test exclusion guidance:

c) For frequencies below 100 MHz, the following may be considered for SAR test exclusion (also illustrated in Appendix C):

- 1) For test separation distances > 50 mm and < 200 mm, the power threshold at the corresponding test separation distance at 100 MHz in step b) is multiplied by $[1 + \log(100/f(\text{MHz}))]$
- 2) For test separation distances ≤ 50 mm, the power threshold determined by the equation in c) 1) for 50 mm and 100 MHz is multiplied by $\frac{1}{2}$
- 3) SAR measurement procedures are not established below 100 MHz.

Standalone SAR estimation:

Mode	Frequency (MHz)	Max Target Power (dBm)	Max Target Power (mW)	Distance (mm)	Estimated 1-g (W/kg)
BT Head(Face Up)	2480	6.5	4.47	25	0.04
BT Body	2480	6.5	4.47	0	0.19

Note: The Bluetooth based peak power for calculation.

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$$\left[\frac{(\text{max. power of channel, including tune-up tolerance, mW})}{(\text{min. test separation distance, mm})} \right] \cdot \left[\sqrt{f(\text{GHz})/x} \right]$$

W/kg for test separation distances ≤ 50 mm;

where $x = 7.5$ for 1-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

SAR MEASUREMENT RESULTS

This page summarizes the results of the performed dosimetry evaluation.

Test Results:

Environmental Conditions:

Temperature:	19.8 ~ 21.1 °C
Relative Humidity:	49 ~ 61%
ATM Pressure:	101.6 kPa
Test Date:	2026/03/10

* Testing was performed by Bob Lu, Danil Qiu.

LTE Band 2:

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Face Up (25 mm)	1860	20	1RB	/	/	/	/	/	/
	1880	20	1RB	/	/	/	/	/	/
	1900	20	1RB	24.51	25	1.119	0.383	0.43	1#
	1900	20	50%RB	23.72	25	1.343	0.199	0.27	2#
Body Back With Belt Clip (0mm)	1860	20	1RB	/	/	/	/	/	/
	1880	20	1RB	/	/	/	/	/	/
	1900	20	1RB	24.51	25	1.119	0.706	0.79	3#
	1900	20	50%RB	23.72	25	1.343	0.511	0.69	4#

LTE Band 5:

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Face Up (25mm)	829	10	1RB	/	/	/	/	/	/
	836.5	10	1RB	23.71	24	1.069	0.194	0.21	5#
	844	10	1RB	/	/	/	/	/	/
	836.5	10	50%RB	22.57	24	1.39	0.147	0.20	6#
Body Back With Belt Clip (0mm)	829	10	1RB	/	/	/	/	/	/
	836.5	10	1RB	23.71	24	1.069	0.463	0.49	7#
	844	10	1RB	/	/	/	/	/	/
	836.5	10	50%RB	22.57	24	1.39	0.351	0.49	8#

LTE Band 7:

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Face Up (25mm)	2510	20	1RB	/	/	/	/	/	/
	2535	20	1RB	22.93	23.4	1.114	0.138	0.15	9#
	2560	20	1RB	/	/	/	/	/	/
	2535	20	50%RB	22.1	23.4	1.349	0.106	0.14	10#
Body Back With Belt Clip (0mm)	2510	20	1RB	/	/	/	/	/	/
	2535	20	1RB	22.93	23.4	1.114	0.396	0.44	11#
	2560	20	1RB	/	/	/	/	/	/
	2535	20	50%RB	22.1	23.4	1.349	0.317	0.43	12#

LTE Band 12&17:

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Face Up (25mm)	704	10	1RB	/	/	/	/	/	/
	707.5	10	1RB	23.92	24.2	1.067	0.056	0.06	13#
	711	10	1RB	/	/	/	/	/	/
	707.5	10	50%RB	22.86	24.2	1.361	0.059	0.08	14#
Body Back With Belt Clip (0mm)	704	10	1RB	/	/	/	/	/	/
	707.5	10	1RB	23.92	24.2	1.067	0.119	0.13	15#
	711	10	1RB	/	/	/	/	/	/
	707.5	10	50%RB	22.86	24.2	1.361	0.124	0.17	16#

Note: The LTE Band 17 is a subset of LTE Band 12, with the same modulation type, and the rated output power of LTE band 17 is not greater than LTE band 12, so LTE band 17 does not need to be tested.

LTE Band 13:

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Face Up (25mm)	782	10	1RB	23.39	23.7	1.074	0.136	0.15	17#
	782	10	50%RB	22.52	23.7	1.312	0.096	0.13	18#
Body Back With Belt Clip (0mm)	782	10	1RB	23.39	23.7	1.074	0.244	0.26	19#
	782	10	50%RB	22.52	23.7	1.312	0.114	0.15	20#

LTE Band 38:

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Face Up (25mm)	2580	20	1RB	/	/	/	/	/	/
	2595	20	1RB	22.85	23.4	1.135	0.084	0.10	21#
	2610	20	1RB	/	/	/	/	/	/
	2595	20	50%RB	21.83	23.4	1.435	0.065	0.09	22#
Body Back With Belt Clip (0mm)	2580	20	1RB	/	/	/	/	/	/
	2595	20	1RB	22.85	23.4	1.135	0.183	0.21	23#
	2610	20	1RB	/	/	/	/	/	/
	2595	20	50%RB	21.83	23.4	1.435	0.137	0.20	24#

Note: The power class 3 used for LTE Band 38 SAR testing.

LTE Band 41:

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Face Up (25mm)	2506	20	1RB	/	/	/	/	/	/
	2550	20	1RB	/	/	/	/	/	/
	2595	20	1RB	22.62	22.7	1.019	0.085	0.09	25#
	2635	20	1RB	/	/	/	/	/	/
	2680	20	1RB	/	/	/	/	/	/
	2595	20	50%RB	22.51	22.7	1.045	0.066	0.07	26#
Body Back With Belt Clip (0mm)	2506	20	1RB	/	/	/	/	/	/
	2550	20	1RB	/	/	/	/	/	/
	2595	20	1RB	22.62	22.7	1.019	0.278	0.28	27#
	2635	20	1RB	/	/	/	/	/	/
	2680	20	1RB	/	/	/	/	/	/
	2595	20	50%RB	22.51	22.7	1.045	0.235	0.25	28#

Note:

1. The frequency range of LTE Band 41 is 2490~ 2680MHz. Per KDB 447498 D01, according to the following formula Calculate N_c is 5.

KDB procedures, the following should be applied to determine the number of required test channels. The test channels should be evenly spread across the transmission frequency band of each wireless mode.¹⁴

$$N_c = \text{Round} \left\{ \left[100(f_{\text{high}} - f_{\text{low}}) / f_c \right]^{0.5} \times (f_c / 100)^{0.2} \right\},$$

where

- N_c is the number of test channels, rounded to the nearest integer,
- f_{high} and f_{low} are the highest and lowest channel frequencies within the transmission band,
- f_c is the mid-band channel frequency,
- all frequencies are in MHz.

2. The power class 3 used for LTE Band 41 SAR testing.

LTE Band 66&4:

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Face Up (25mm)	1720	20	1RB	/	/	/	/	/	/
	1745	20	1RB	21.69	22.3	1.151	0.093	0.11	29#
	1770	20	1RB	/	/	/	/	/	/
	1745	20	50%RB	20.85	22.3	1.396	0.073	0.10	30#
Body Back With Belt Clip (0mm)	1720	20	1RB	/	/	/	/	/	/
	1745	20	1RB	21.69	22.3	1.151	0.184	0.21	31#
	1770	20	1RB	/	/	/	/	/	/
	1745	20	50%RB	20.85	22.3	1.396	0.146	0.20	32#

Note: The LTE Band 4 is a subset of LTE Band 66, with the same modulation type, and the rated output power of LTE band 4 is not greater than LTE band 66, so LTE band 4 does not need to be tested.

Note:

1. When the 1-g SAR is ≤ 0.8 W/Kg, testing for other channels are optional.
2. SAR for LTE band exposure configurations is measured according to the procedures of KDB 941225 D05 SAR for LTE Devices v02r05.
3. KDB 941225 D05-SAR for higher order modulation is required only when the highest maximum output power for the configuration in the higher order modulation is > 0.5 dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg
4. KDB 941225 D05-For QPSK with 100% RB allocation, when the reported SAR measured for the Highest output power channel is < 1.45 W/kg, tests for the remaining required test channels are optional.
5. KDB 941225 D05- For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg.
6. KDB 941225 D05- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offset the upper edge, middle and lower edge of each required test channel.
7. KDB 941225 D05- other channel bandwidths SAR test is required when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is > 0.5 dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.

SAR Measurement Variability

In accordance with published RF Exposure KDB procedure 865664 D01 SAR measurement 100 MHz to 6 GHz v01. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results:

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

The Highest Measured SAR Configuration in Each Frequency Band

Head (Face Up)

SAR probe calibration point	Frequency Band	Freq.(MHz)	EUT Position	Meas. SAR (W/kg)		Largest to Smallest SAR Ratio
				Original	Repeated	
/	/	/	/	/	/	/

Body

SAR probe calibration point	Frequency Band	Freq.(MHz)	EUT Position	Meas. SAR (W/kg)		Largest to Smallest SAR Ratio
				Original	Repeated	
/	/	/	/	/	/	/

Note:

1. Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not > 1.20 .
2. The measured SAR results **do not** have to be scaled to the maximum tune-up tolerance to determine if repeated measurements are required.
3. SAR measurement variability must be assessed for each frequency band, which is determined by the **SAR probe calibration point and tissue-equivalent medium** used for the device measurements.

SAR DUT HOLDER PERTURBATIONS

In accordance with TCB workshop October 2016:

1) SAR perturbation due to test device holders, depending on antenna locations, buttons locations on phones or device, form factor (e.g. dongles etc.), the measured SAR could be influenced by the relative positions of the test device and its holder

2) SAR measurement standards have included protocols to evaluate this with a flat phantom, with and without the device holder

3) When the highest reported SAR of an antenna is > 1.2 W/kg, holder perturbation verification is required for each antenna, using the highest SAR configuration among all applicable frequency bands in the same exact device and holder positions used for head and body SAR measurements; i.e. same device/button locations in the holder

Per IEEE 1528: 2013/Annex E/E.4.1.1: Device holder perturbation tolerance for a specific test device: Type B When it is unknown if a device holder perturbs the fields of a test device, the SAR uncertainty shall be assessed with a flat phantom (see Clause 5) by comparing the SAR with and without the device holder according to the following tests:

The SAR tolerance for device holder disturbance is computed using Equation (E.21) and entered in the corresponding row of the appropriate uncertainty table with an assumed rectangular probability distribution and $\nu_i = \infty$ degrees of freedom:

$$SAR_{\text{tolerance}} [\%] = 100 \times \left(\frac{SAR_{\text{w/holder}} - SAR_{\text{w/o holder}}}{SAR_{\text{w/o holder}}} \right) \quad (\text{E.21})$$

The Highest Measured SAR Configuration among all applicable Frequency Band

Frequency Band	Freq.(MHz)	EUT Position	Meas. SAR (W/kg)		The Device holder perturbation uncertainty
			With holder	Without holder	
/	/	/	/	/	/

SAR SIMULTANEOUS TRANSMISSION DESCRIPTION

Simultaneous Transmission:

Description of Simultaneous Transmit Capabilities		
Transmitter Combination	Simultaneous?	Hotspot?
WWAN(LTE) Antenna + Bluetooth	√	×

Simultaneous SAR test exclusion considerations:

Mode (SAR1+SAR2)	Position	Reported SAR(W/kg)		Σ SAR < 1.6W/kg
		SAR1	SAR2	
MAX.WWAN(LTE) + Bluetooth	Face Up	0.43	0.04	0.47
	Body	0.79	0.19	0.98

Conclusion:

Sum of SAR: Σ SAR $\leq$ 1.6 W/kg therefore simultaneous transmission SAR with Volume Scans is **not** required.

SAR Plots

Plot 1#:

DUT: 4G POC LTE Walkie Talkie; Type: HP-N350; Serial: 3HH4-1

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.413$ S/m; $\epsilon_r = 40.152$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7.55, 7.55, 7.55) @ 1900 MHz; Calibrated: 2025/12/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2025/9/28
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Face Up/LTE Band 2 1RB High/Area Scan (7x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.426 W/kg

Face Up/LTE Band 2 1RB High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.717 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.579 W/kg

SAR(1 g) = 0.383 W/kg; SAR(10 g) = 0.248 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 64.4%

Maximum value of SAR (measured) = 0.445 W/kg

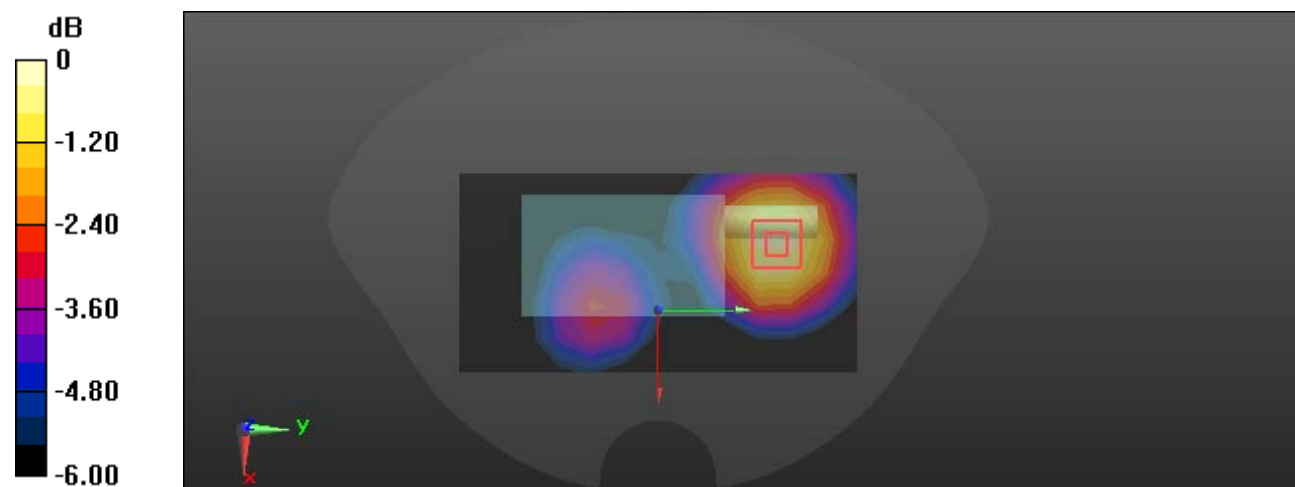

0 dB = 0.445 W/kg = -3.52 dBW/kg

Plot 2#:**DUT: 4G POC LTE Walkie Talkie; Type: HP-N350; Serial: 3HH4-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.413$ S/m; $\epsilon_r = 40.152$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7.55, 7.55, 7.55) @ 1900 MHz; Calibrated: 2025/12/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2025/9/28
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Face Up/LTE Band 2 50%RB Mid/Area Scan (7x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.221 W/kg

Face Up/LTE Band 2 50%RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.298 V/m; Power Drift = 0.19 dB


Peak SAR (extrapolated) = 0.301 W/kg

SAR(1 g) = 0.199 W/kg; SAR(10 g) = 0.129 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 64.2%

Maximum value of SAR (measured) = 0.232 W/kg

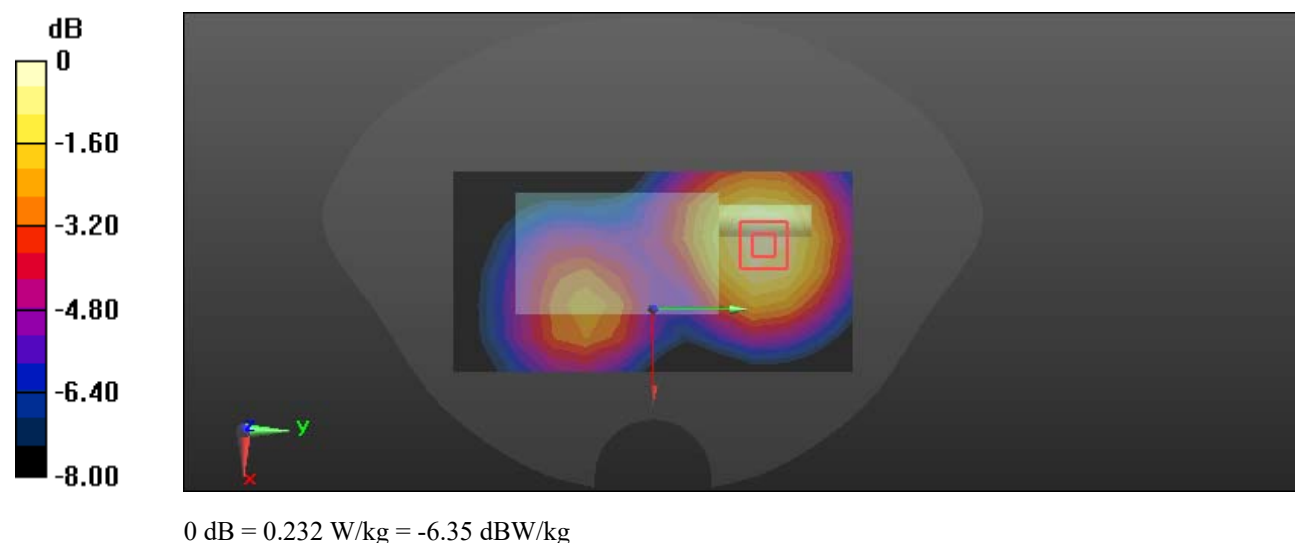

Plot 3#:**DUT: 4G POC LTE Walkie Talkie; Type: HP-N350; Serial: 3HH4-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.413$ S/m; $\epsilon_r = 40.152$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7.55, 7.55, 7.55) @ 1900 MHz; Calibrated: 2025/12/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2025/9/28
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/LTE Band 2 1RB High/Area Scan (7x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.798 W/kg

Body Back/LTE Band 2 1RB High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.12 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.706 W/kg; SAR(10 g) = 0.450 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 63.3%

Maximum value of SAR (measured) = 0.828 W/kg

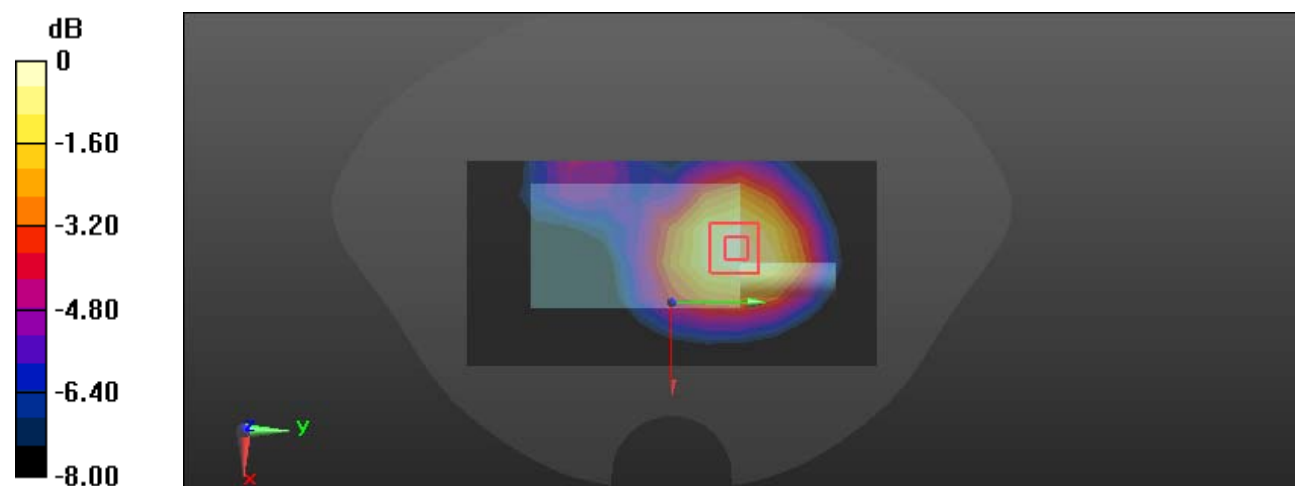

0 dB = 0.828 W/kg = -0.82 dBW/kg

Plot 4#:**DUT: 4G POC LTE Walkie Talkie; Type: HP-N350; Serial: 3HH4-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.413$ S/m; $\epsilon_r = 40.152$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7.55, 7.55, 7.55) @ 1900 MHz; Calibrated: 2025/12/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2025/9/28
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/LTE Band 2 50%RB Mid/Area Scan (7x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.568 W/kg

Body Back/LTE Band 2 50%RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.15 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.790 W/kg

SAR(1 g) = 0.511 W/kg; SAR(10 g) = 0.325 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 63.2%

Maximum value of SAR (measured) = 0.598 W/kg

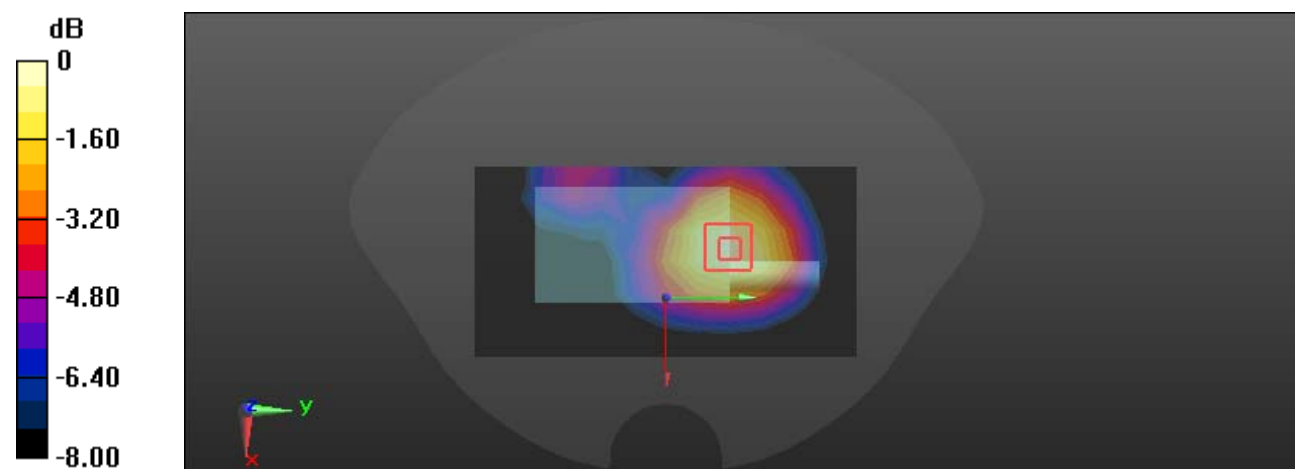

0 dB = 0.598 W/kg = -2.23 dBW/kg

Plot 5#:**DUT: 4G POC LTE Walkie Talkie; Type: HP-N350; Serial: 3HH4-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 836.5 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.917$ S/m; $\epsilon_r = 42.116$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(9.4, 9.4, 9.4) @ 836.5 MHz; Calibrated: 2025/12/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2025/9/28
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Face Up/LTE Band 5 1RB Mid/Area Scan (7x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.211 W/kg

Face Up/LTE Band 5 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.42 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 0.253 W/kg

SAR(1 g) = 0.194 W/kg; SAR(10 g) = 0.145 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 76.1%

Maximum value of SAR (measured) = 0.215 W/kg

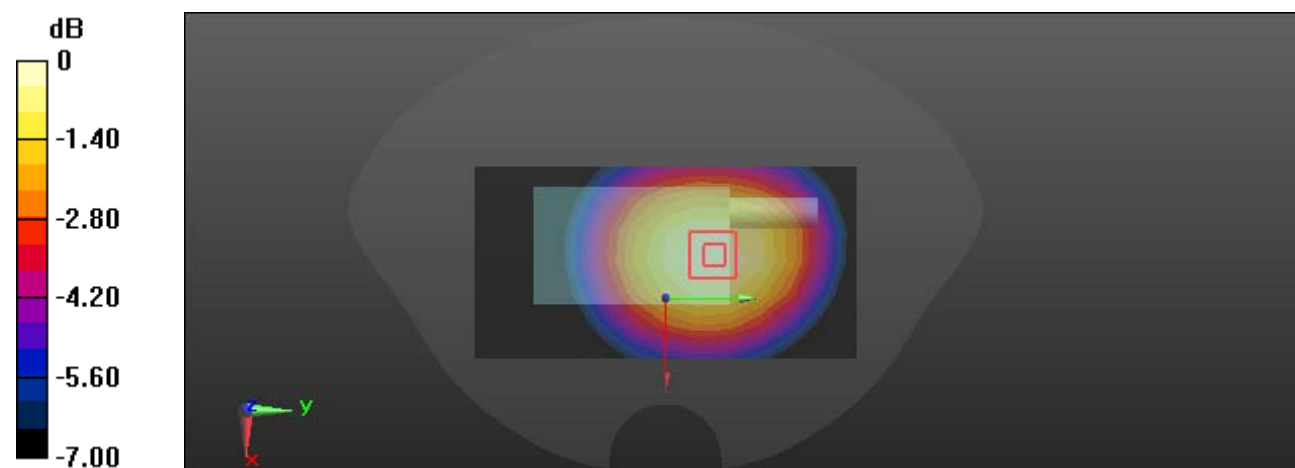

0 dB = 0.215 W/kg = -6.68 dBW/kg

Plot 6#:**DUT: 4G POC LTE Walkie Talkie; Type: HP-N350; Serial: 3HH4-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 836.5 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.917$ S/m; $\epsilon_r = 42.116$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(9.4, 9.4, 9.4) @ 836.5 MHz; Calibrated: 2025/12/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2025/9/28
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Face Up/LTE Band 5 50%RB Mid/Area Scan (7x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.160 W/kg

Face Up/LTE Band 5 50%RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.61 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 0.192 W/kg

SAR(1 g) = 0.147 W/kg; SAR(10 g) = 0.110 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 75.9%

Maximum value of SAR (measured) = 0.163 W/kg

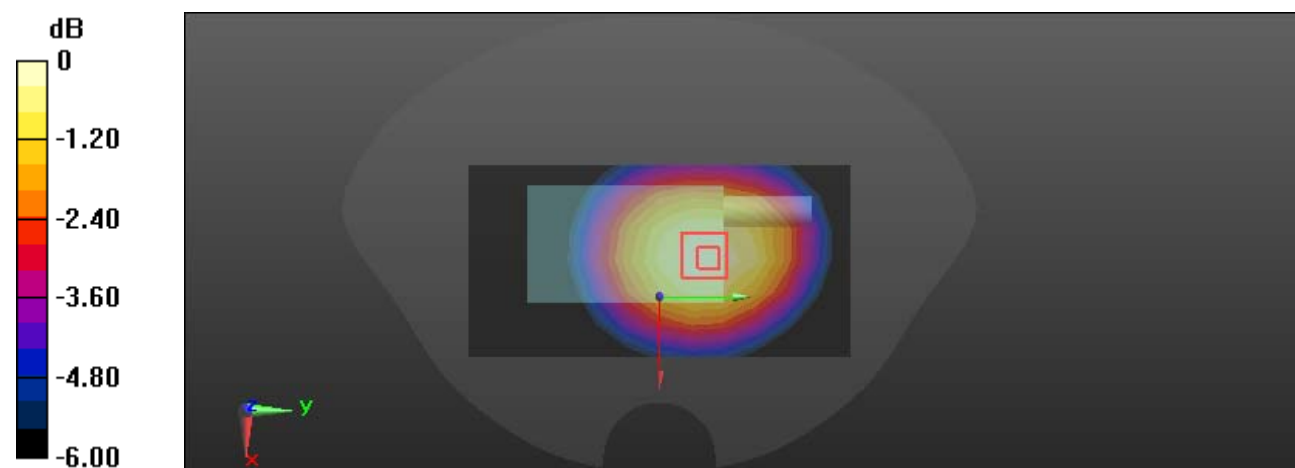

0 dB = 0.163 W/kg = -7.88 dBW/kg

Plot 7#:**DUT: 4G POC LTE Walkie Talkie; Type: HP-N350; Serial: 3HH4-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 836.5 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.917$ S/m; $\epsilon_r = 42.116$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(9.4, 9.4, 9.4) @ 836.5 MHz; Calibrated: 2025/12/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2025/9/28
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/LTE Band 5 1RB Mid/Area Scan (7x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.511 W/kg

Body Back/LTE Band 5 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.60 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.625 W/kg

SAR(1 g) = 0.463 W/kg; SAR(10 g) = 0.342 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 76.1%

Maximum value of SAR (measured) = 0.513 W/kg

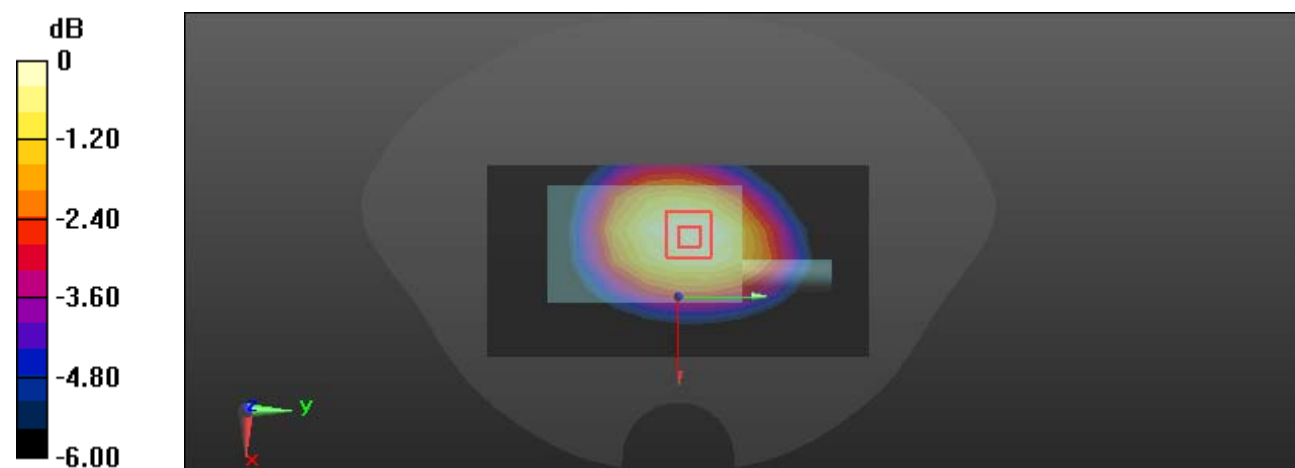

0 dB = 0.513 W/kg = -2.90 dBW/kg

Plot 8#:**DUT: 4G POC LTE Walkie Talkie; Type: HP-N350; Serial: 3HH4-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 836.5 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.917$ S/m; $\epsilon_r = 42.116$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(9.4, 9.4, 9.4) @ 836.5 MHz; Calibrated: 2025/12/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2025/9/28
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/LTE Band 5 50%RB Mid/Area Scan (7x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.383 W/kg

Body Back/LTE Band 5 50%RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.85 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.477 W/kg

SAR(1 g) = 0.351 W/kg; SAR(10 g) = 0.259 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 75.9%

Maximum value of SAR (measured) = 0.390 W/kg

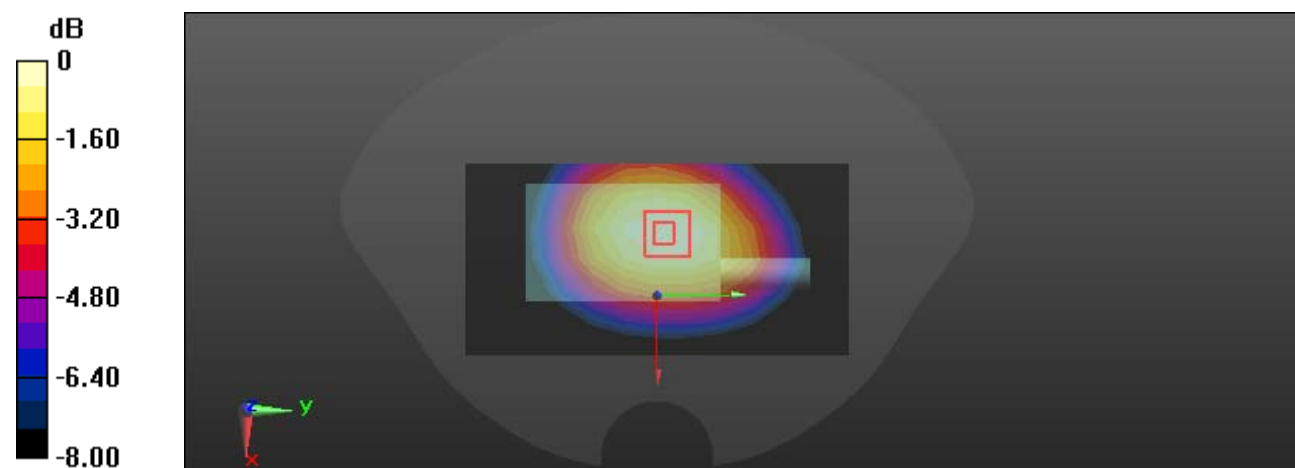

0 dB = 0.390 W/kg = -4.09 dBW/kg

Plot 9#:**DUT: 4G POC LTE Walkie Talkie; Type: HP-N350; Serial: 3HH4-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 2535 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2535$ MHz; $\sigma = 1.846$ S/m; $\epsilon_r = 39.574$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7, 7, 7) @ 2535 MHz; Calibrated: 2025/12/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2025/9/28
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Face Up/LTE Band 7 1RB Mid/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.160 W/kg

Face Up/LTE Band 7 1RB Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.507 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 0.244 W/kg

SAR(1 g) = 0.138 W/kg; SAR(10 g) = 0.081 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 55.3%

Maximum value of SAR (measured) = 0.168 W/kg

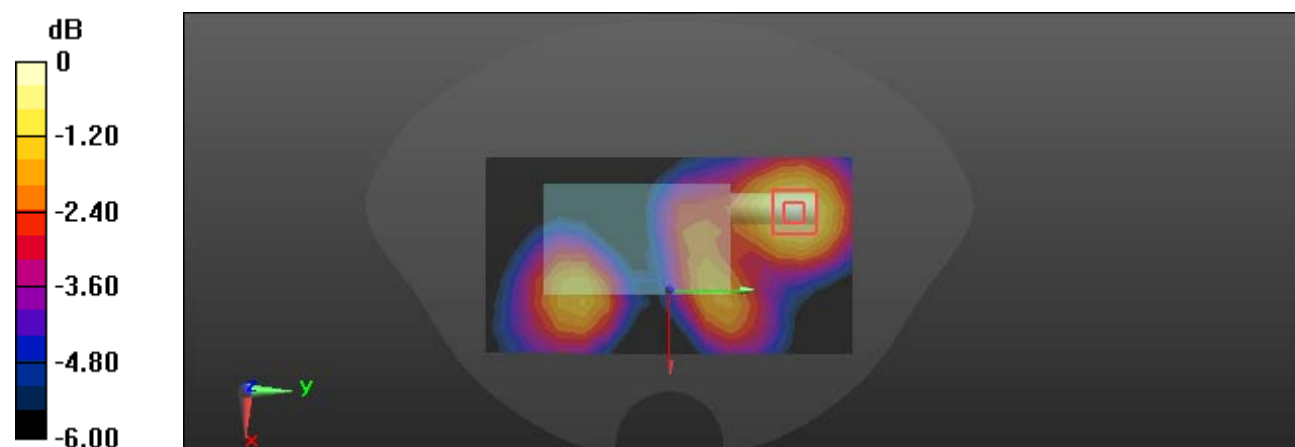

0 dB = 0.168 W/kg = -7.75 dBW/kg

Plot 10#:**DUT: 4G POC LTE Walkie Talkie; Type: HP-N350; Serial: 3HH4-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 2535 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2535$ MHz; $\sigma = 1.846$ S/m; $\epsilon_r = 39.574$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7, 7, 7) @ 2535 MHz; Calibrated: 2025/12/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2025/9/28
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Face Up/LTE Band 7 50%RB Mid/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.125 W/kg

Face Up/LTE Band 7 50%RB Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.453 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 0.189 W/kg

SAR(1 g) = 0.106 W/kg; SAR(10 g) = 0.062 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 54.6%

Maximum value of SAR (measured) = 0.128 W/kg

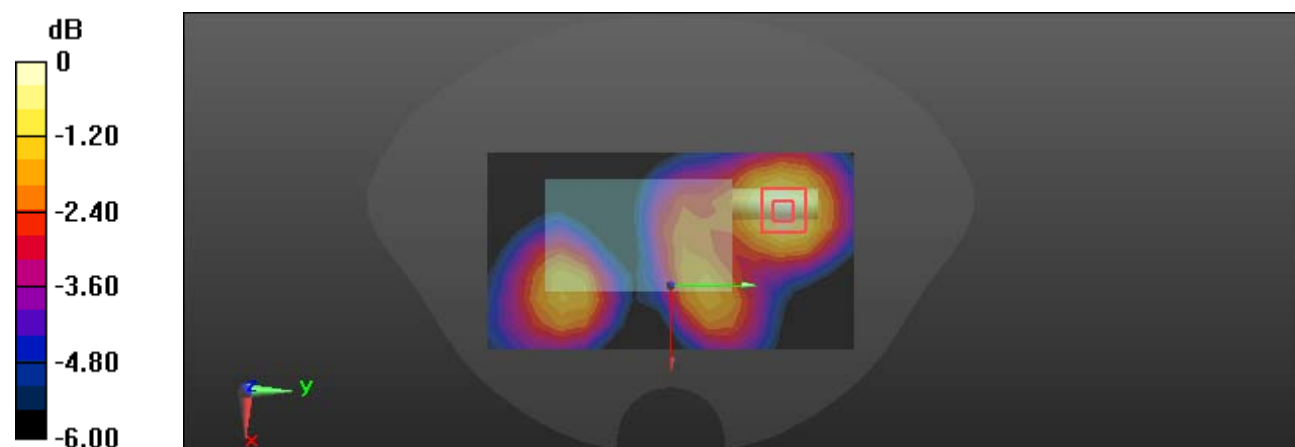

0 dB = 0.128 W/kg = -8.93 dBW/kg

Plot 11#:**DUT: 4G POC LTE Walkie Talkie; Type: HP-N350; Serial: 3HH4-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 2535 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2535$ MHz; $\sigma = 1.846$ S/m; $\epsilon_r = 39.574$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7, 7, 7) @ 2535 MHz; Calibrated: 2025/12/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2025/9/28
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/LTE Band 7 1RB Mid/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.472 W/kg

Body Back/LTE Band 7 1RB Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.698 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 0.719 W/kg

SAR(1 g) = 0.396 W/kg; SAR(10 g) = 0.225 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 54.1%

Maximum value of SAR (measured) = 0.484 W/kg

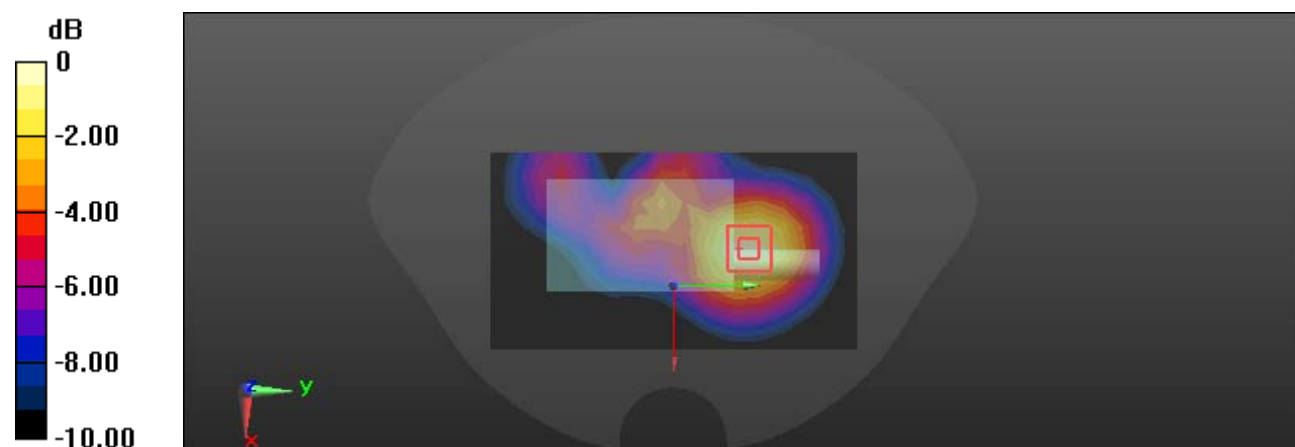

0 dB = 0.484 W/kg = -3.15 dBW/kg

Plot 12#:**DUT: 4G POC LTE Walkie Talkie; Type: HP-N350; Serial: 3HH4-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 2535 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2535$ MHz; $\sigma = 1.846$ S/m; $\epsilon_r = 39.574$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7, 7, 7) @ 2535 MHz; Calibrated: 2025/12/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2025/9/28
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/LTE Band 7 50%RB Mid/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.374 W/kg

Body Back/LTE Band 7 50%RB Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.702 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.574 W/kg

SAR(1 g) = 0.317 W/kg; SAR(10 g) = 0.180 W/kg

Smallest distance from peaks to all points 3 dB below = 23.4 mm

Ratio of SAR at M2 to SAR at M1 = 54.4%

Maximum value of SAR (measured) = 0.385 W/kg

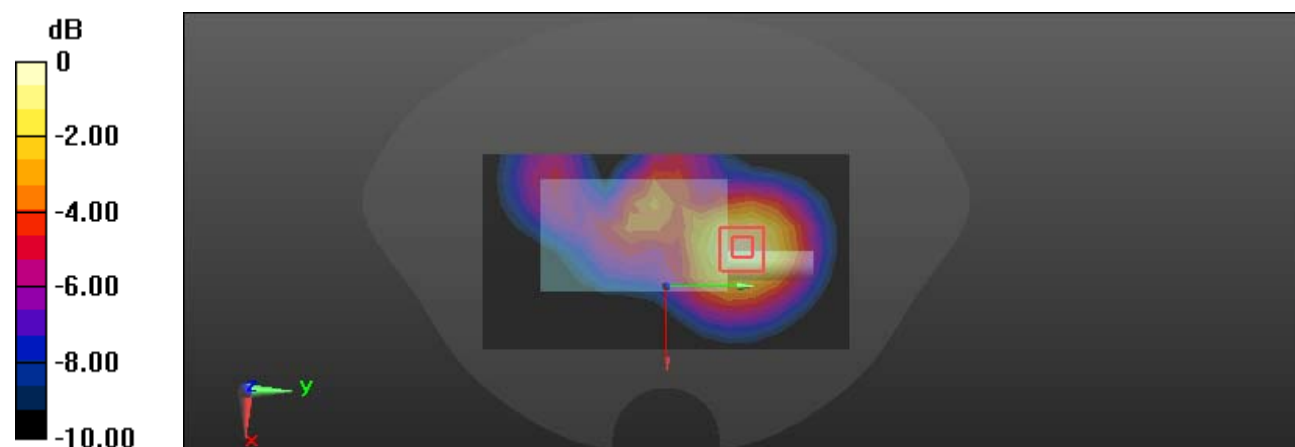

0 dB = 0.385 W/kg = -4.15 dBW/kg

Plot 13#:**DUT: 4G POC LTE Walkie Talkie; Type: HP-N350; Serial: 3HH4-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 707.5 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.865$ S/m; $\epsilon_r = 43.403$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(9.4, 9.4, 9.4) @ 707.5 MHz; Calibrated: 2025/12/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2025/9/28
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Face Up/LTE Band 12 1RB Mid/Area Scan (7x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0607 W/kg

Face Up/LTE Band 12 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.936 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 0.0740 W/kg

SAR(1 g) = 0.056 W/kg; SAR(10 g) = 0.042 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 75.7%

Maximum value of SAR (measured) = 0.0627 W/kg

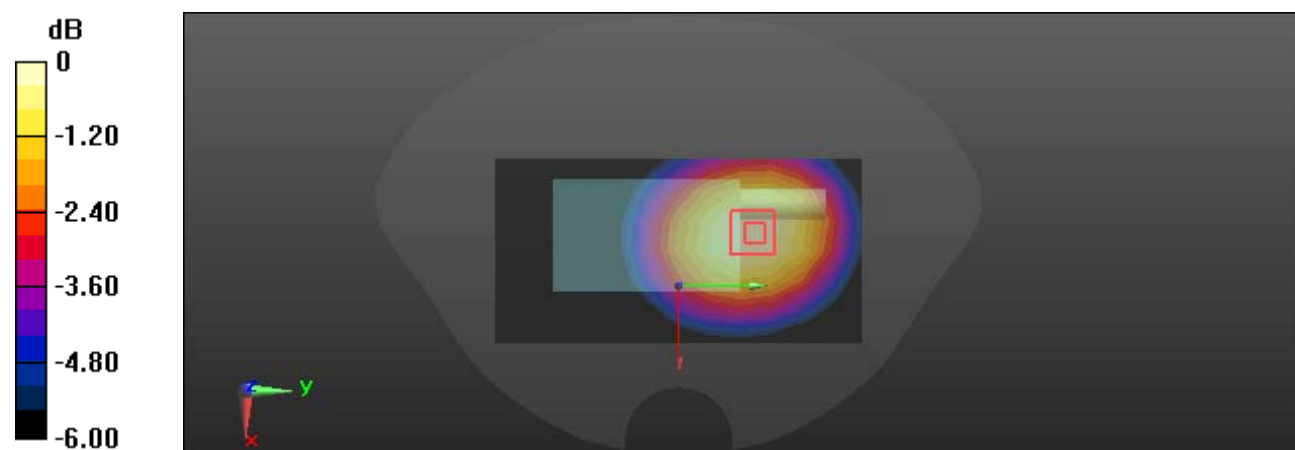

0 dB = 0.0627 W/kg = -12.03 dBW/kg

Plot 14#:**DUT: 4G POC LTE Walkie Talkie; Type: HP-N350; Serial: 3HH4-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 707.5 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.865$ S/m; $\epsilon_r = 43.403$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(9.4, 9.4, 9.4) @ 707.5 MHz; Calibrated: 2025/12/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2025/9/28
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Face Up/LTE Band 12 50%RB Mid/Area Scan (7x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0629 W/kg

Face Up/LTE Band 12 50%RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.072 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 0.0780 W/kg

SAR(1 g) = 0.059 W/kg; SAR(10 g) = 0.044 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 75.6%

Maximum value of SAR (measured) = 0.0654 W/kg

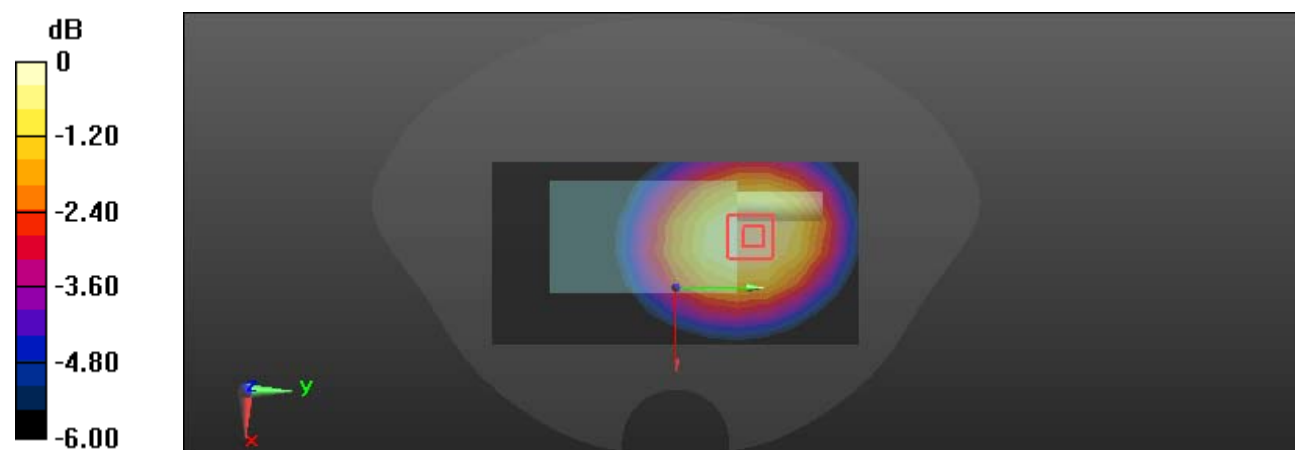

0 dB = 0.0654 W/kg = -11.84 dBW/kg

Plot 15#:**DUT: 4G POC LTE Walkie Talkie; Type: HP-N350; Serial: 3HH4-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 707.5 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.865$ S/m; $\epsilon_r = 43.403$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(9.4, 9.4, 9.4) @ 707.5 MHz; Calibrated: 2025/12/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2025/9/28
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/LTE Band 12 1RB Mid/Area Scan (7x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.131 W/kg

Body Back/LTE Band 12 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.39 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.163 W/kg

SAR(1 g) = 0.119 W/kg; SAR(10 g) = 0.086 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 73%

Maximum value of SAR (measured) = 0.135 W/kg

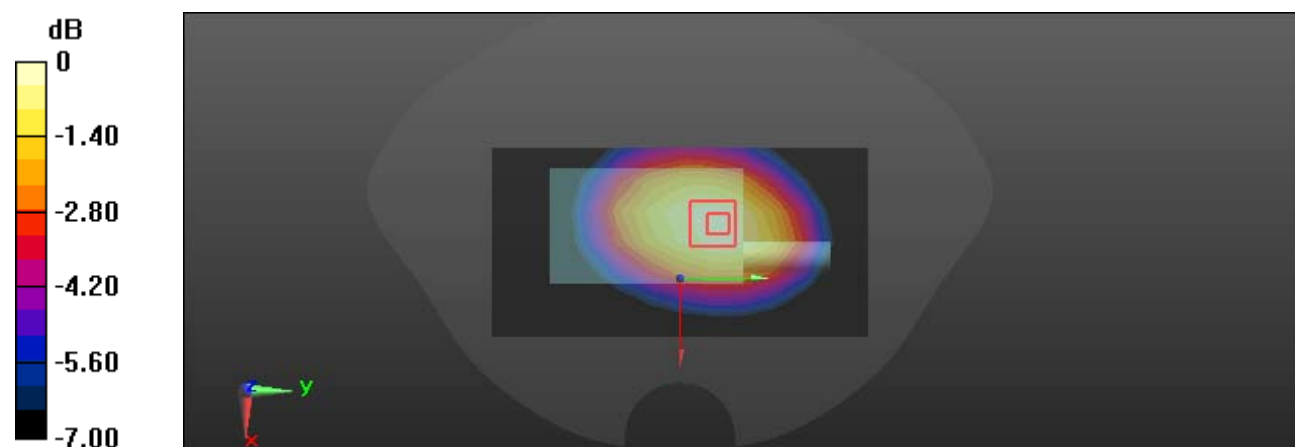

0 dB = 0.135 W/kg = -8.70 dBW/kg

Plot 16#:**DUT: 4G POC LTE Walkie Talkie; Type: HP-N350; Serial: 3HH4-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 707.5 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.865$ S/m; $\epsilon_r = 43.403$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(9.4, 9.4, 9.4) @ 707.5 MHz; Calibrated: 2025/12/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2025/9/28
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/LTE Band 12 50%RB Mid/Area Scan (7x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.133 W/kg

Body Back/LTE Band 12 50%RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.57 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.168 W/kg

SAR(1 g) = 0.124 W/kg; SAR(10 g) = 0.090 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 73.5%

Maximum value of SAR (measured) = 0.139 W/kg

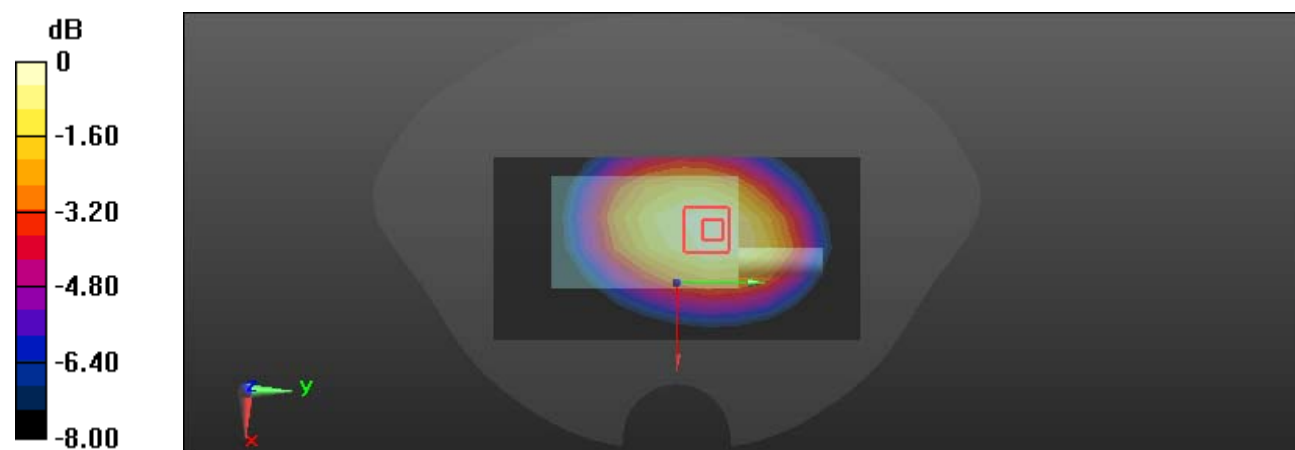

0 dB = 0.139 W/kg = -8.57 dBW/kg

Plot 17#:**DUT: 4G POC LTE Walkie Talkie; Type: HP-N350; Serial: 3HH4-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 782 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.897 \text{ S/m}$; $\epsilon_r = 42.931$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(9.4, 9.4, 9.4) @ 782 MHz; Calibrated: 2025/12/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2025/9/28
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Face Up/LTE Band 13 1RB Mid/Area Scan (7x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.146 W/kg

Face Up/LTE Band 13 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 11.96 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.178 W/kg

SAR(1 g) = 0.136 W/kg; SAR(10 g) = 0.102 W/kgSmallest distance from peaks to all points 3 dB below: Larger than measurement grid ($> 16 \text{ mm}$)

Ratio of SAR at M2 to SAR at M1 = 75.9%

Maximum value of SAR (measured) = 0.150 W/kg

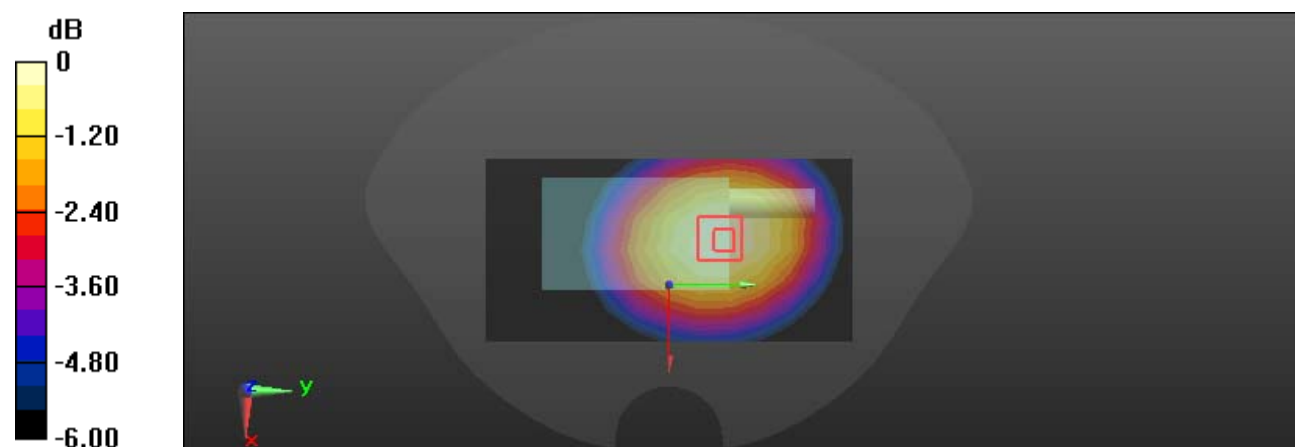

0 dB = 0.150 W/kg = -8.24 dBW/kg

Plot 18#:**DUT: 4G POC LTE Walkie Talkie; Type: HP-N350; Serial: 3HH4-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 782 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.897 \text{ S/m}$; $\epsilon_r = 42.931$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(9.4, 9.4, 9.4) @ 782 MHz; Calibrated: 2025/12/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2025/9/28
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Face Up/LTE Band 13 50%RB Mid/Area Scan (7x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.103 W/kg

Face Up/LTE Band 13 50%RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 10.11 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.126 W/kg

SAR(1 g) = 0.096 W/kg; SAR(10 g) = 0.072 W/kgSmallest distance from peaks to all points 3 dB below: Larger than measurement grid ($> 16 \text{ mm}$)

Ratio of SAR at M2 to SAR at M1 = 75.6%

Maximum value of SAR (measured) = 0.106 W/kg

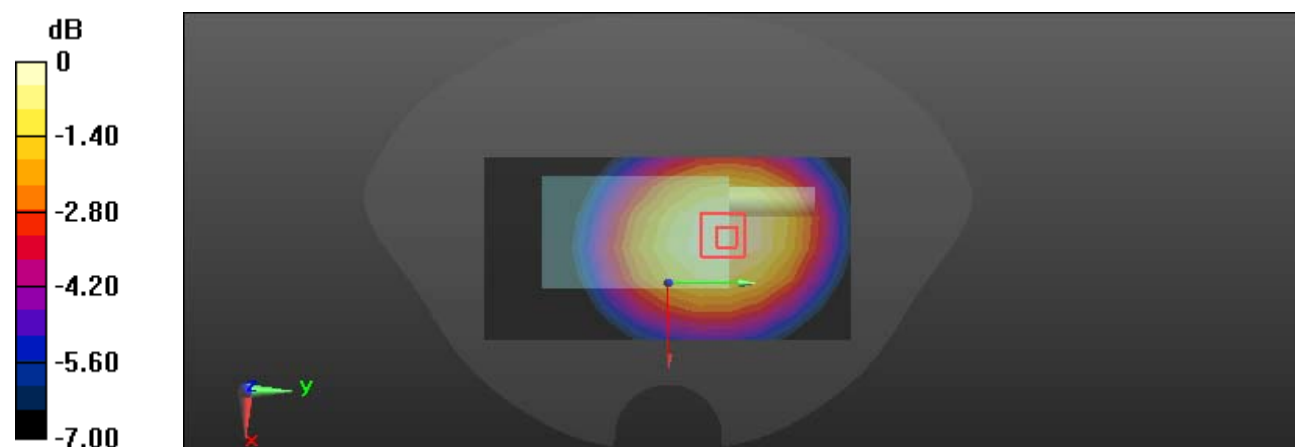

0 dB = 0.106 W/kg = -9.75 dBW/kg

Plot 19#:**DUT: 4G POC LTE Walkie Talkie; Type: HP-N350; Serial: 3HH4-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 782 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.897 \text{ S/m}$; $\epsilon_r = 42.931$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(9.4, 9.4, 9.4) @ 782 MHz; Calibrated: 2025/12/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2025/9/28
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/LTE Band 13 1RB Mid/Area Scan (7x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.275 W/kg

Body Back/LTE Band 13 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 16.47 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.347 W/kg

SAR(1 g) = 0.244 W/kg; SAR(10 g) = 0.172 W/kgSmallest distance from peaks to all points 3 dB below: Larger than measurement grid ($> 16 \text{ mm}$)

Ratio of SAR at M2 to SAR at M1 = 70%

Maximum value of SAR (measured) = 0.281 W/kg

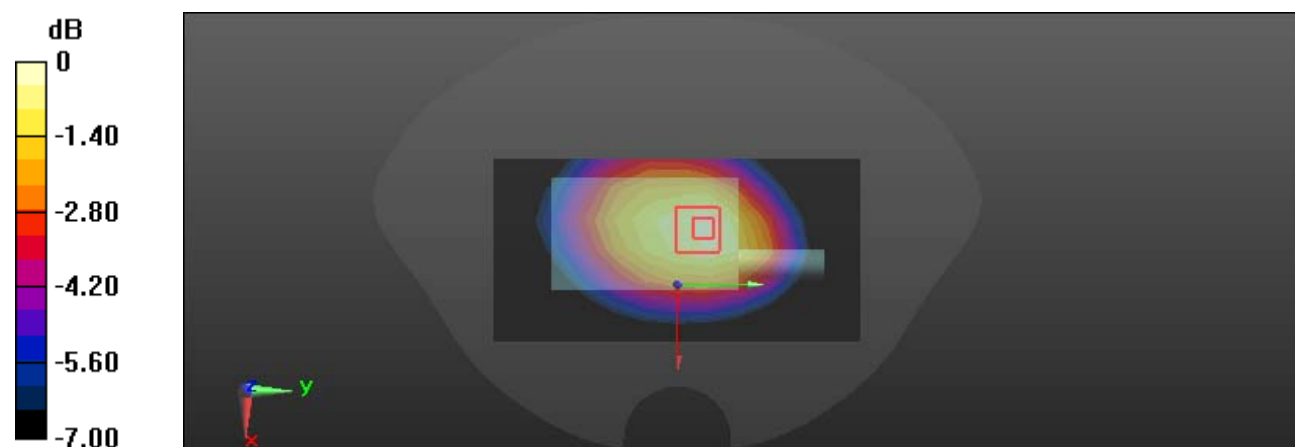

0 dB = 0.281 W/kg = -5.51 dBW/kg

Plot 20#:**DUT: 4G POC LTE Walkie Talkie; Type: HP-N350; Serial: 3HH4-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 782 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.897 \text{ S/m}$; $\epsilon_r = 42.931$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(9.4, 9.4, 9.4) @ 782 MHz; Calibrated: 2025/12/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2025/9/28
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/LTE Band 13 50%RB Mid/Area Scan (7x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.125 W/kg

Body Back/LTE Band 13 50%RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 11.12 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.169 W/kg

SAR(1 g) = 0.114 W/kg; SAR(10 g) = 0.081 W/kgSmallest distance from peaks to all points 3 dB below: Larger than measurement grid ($> 16 \text{ mm}$)

Ratio of SAR at M2 to SAR at M1 = 69.1%

Maximum value of SAR (measured) = 0.132 W/kg

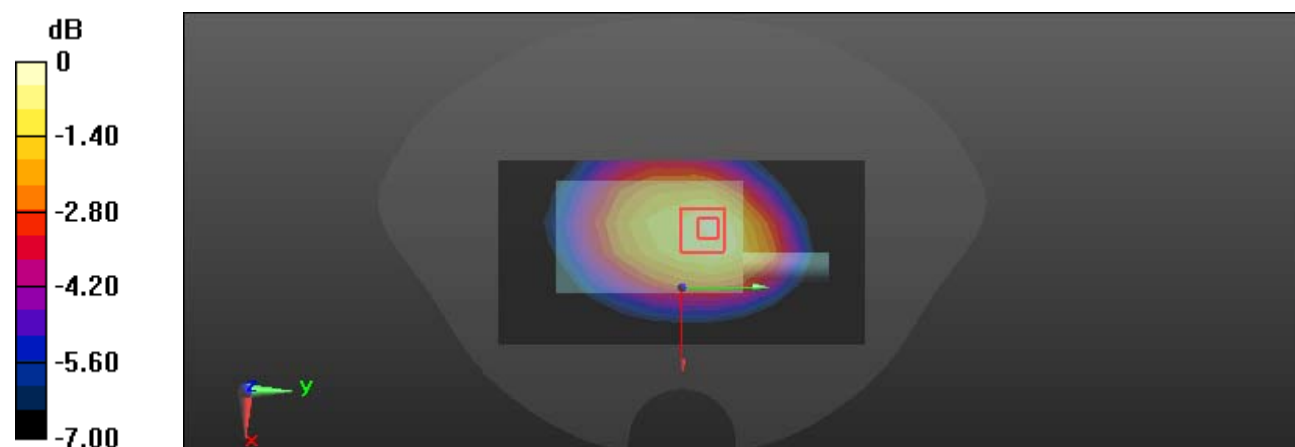

0 dB = 0.132 W/kg = -8.79 dBW/kg

Plot 21#:**DUT: 4G POC LTE Walkie Talkie; Type: HP-N350; Serial: 3HH4-1**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 2595 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.954$ S/m; $\epsilon_r = 38.745$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7, 7, 7) @ 2595 MHz; Calibrated: 2025/12/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2025/9/28
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Face Up/LTE Band 38 1RB Mid/Area Scan (9x14x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0967 W/kg

Face Up/LTE Band 38 1RB Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.327 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.149 W/kg

SAR(1 g) = 0.084 W/kg; SAR(10 g) = 0.048 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 55.6%

Maximum value of SAR (measured) = 0.102 W/kg

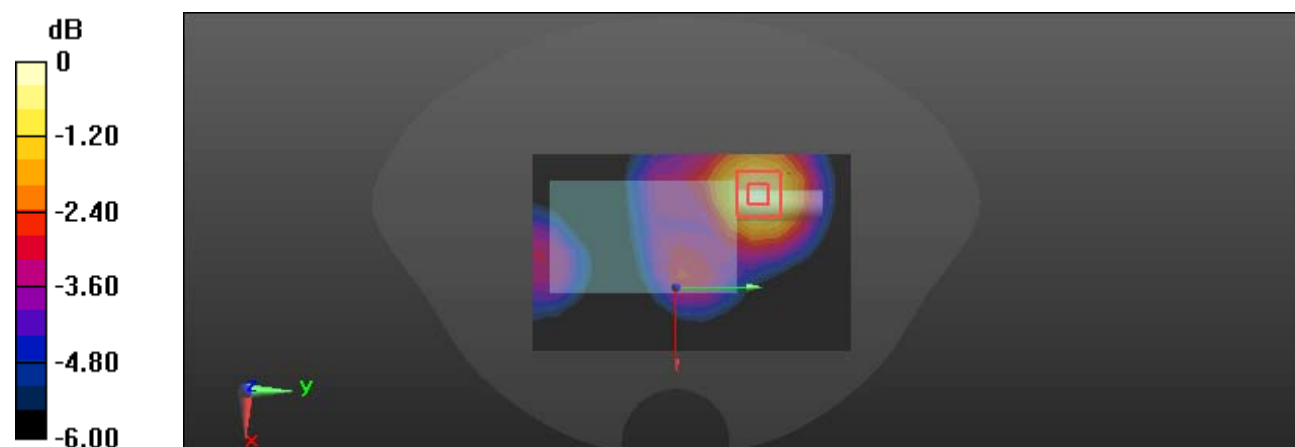

0 dB = 0.102 W/kg = -9.91 dBW/kg

Plot 22#:**DUT: 4G POC LTE Walkie Talkie; Type: HP-N350; Serial: 3HH4-1**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 2595 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.954$ S/m; $\epsilon_r = 38.745$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7, 7, 7) @ 2595 MHz; Calibrated: 2025/12/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2025/9/28
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Face Up/LTE Band 38 50%RB Mid/Area Scan (9x14x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0746 W/kg

Face Up/LTE Band 38 50%RB Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.674 V/m; Power Drift = -0.16 dB


Peak SAR (extrapolated) = 0.118 W/kg

SAR(1 g) = 0.065 W/kg; SAR(10 g) = 0.037 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 53.6%

Maximum value of SAR (measured) = 0.0790 W/kg

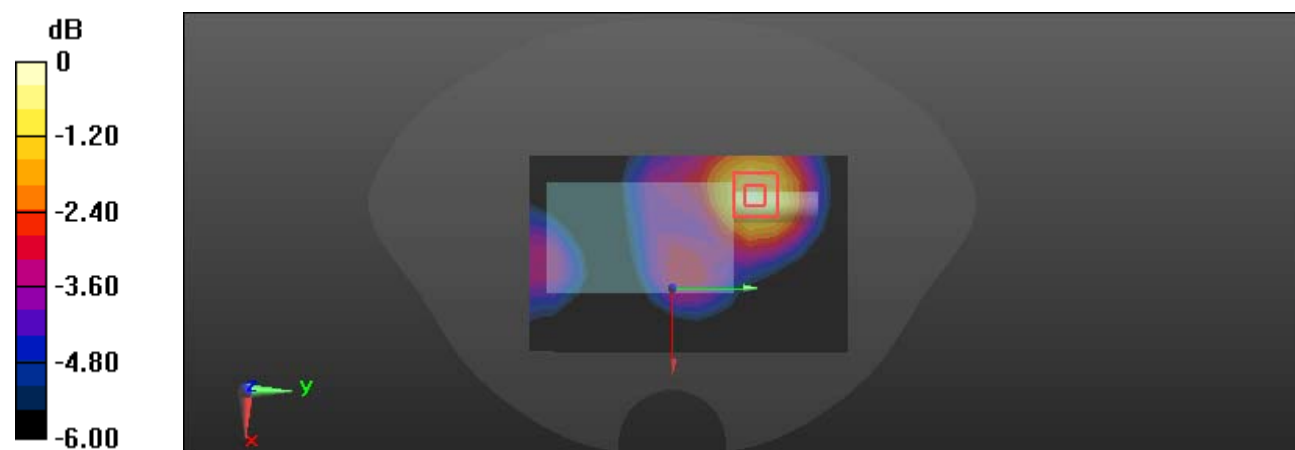

0 dB = 0.0790 W/kg = -11.02 dBW/kg

Plot 23#:**DUT: 4G POC LTE Walkie Talkie; Type: HP-N350; Serial: 3HH4-1**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.954$ S/m; $\epsilon_r = 38.745$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7, 7, 7) @ 2595 MHz; Calibrated: 2025/12/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2025/9/28
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/LTE Band 38 1RB Mid/Area Scan (9x14x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.219 W/kg

Body Back/LTE Band 38 1RB Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.977 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 0.336 W/kg

SAR(1 g) = 0.183 W/kg; SAR(10 g) = 0.103 W/kg

Smallest distance from peaks to all points 3 dB below = 19.2 mm

Ratio of SAR at M2 to SAR at M1 = 53.9%

Maximum value of SAR (measured) = 0.226 W/kg

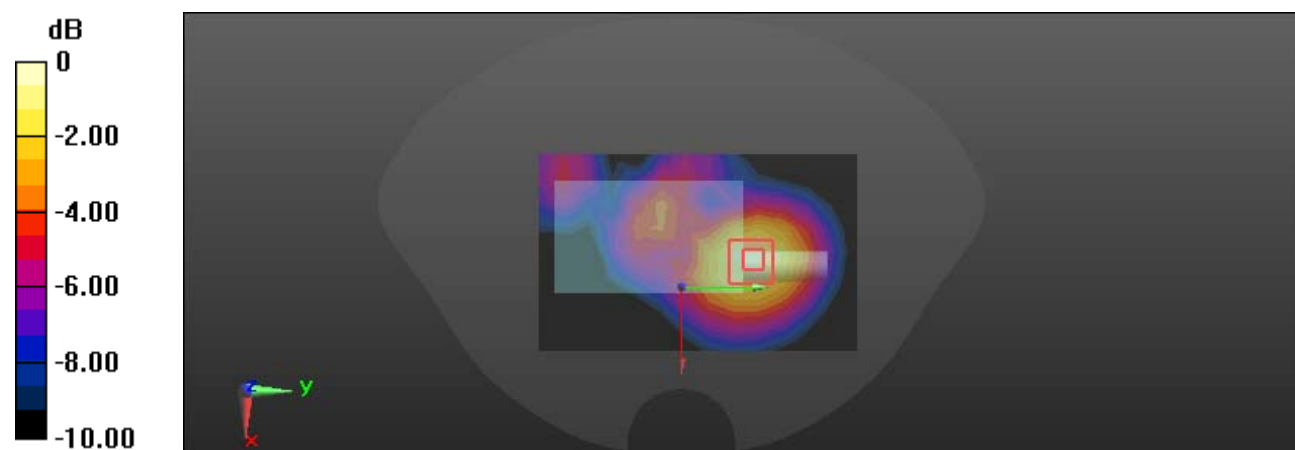

0 dB = 0.226 W/kg = -6.46 dBW/kg

Plot 24#:**DUT: 4G POC LTE Walkie Talkie; Type: HP-N350; Serial: 3HH4-1**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 2595 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.954$ S/m; $\epsilon_r = 38.745$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7, 7, 7) @ 2595 MHz; Calibrated: 2025/12/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2025/9/28
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/LTE Band 38 50%RB Mid/Area Scan (9x14x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.162 W/kg

Body Back/LTE Band 38 50%RB Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.937 V/m; Power Drift = -0.17 dB


Peak SAR (extrapolated) = 0.252 W/kg

SAR(1 g) = 0.137 W/kg; SAR(10 g) = 0.077 W/kg

Smallest distance from peaks to all points 3 dB below = 19.8 mm

Ratio of SAR at M2 to SAR at M1 = 54.2%

Maximum value of SAR (measured) = 0.169 W/kg

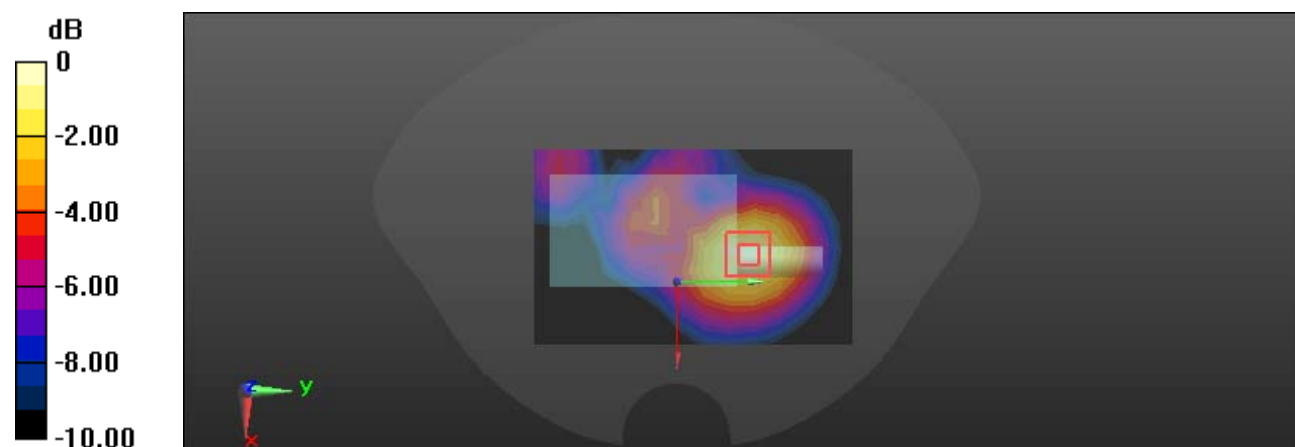

0 dB = 0.169 W/kg = -7.72 dBW/kg

Plot 25#:**DUT: 4G POC LTE Walkie Talkie; Type: HP-N350; Serial: 3HH4-1**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.954$ S/m; $\epsilon_r = 38.745$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7, 7, 7) @ 2595 MHz; Calibrated: 2025/12/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2025/9/28
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Face Up/LTE Band 41 1RB Mid/Area Scan (9x14x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.102 W/kg

Face Up/LTE Band 41 1RB Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.014 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.154 W/kg

SAR(1 g) = 0.085 W/kg; SAR(10 g) = 0.050 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 55.1%

Maximum value of SAR (measured) = 0.103 W/kg

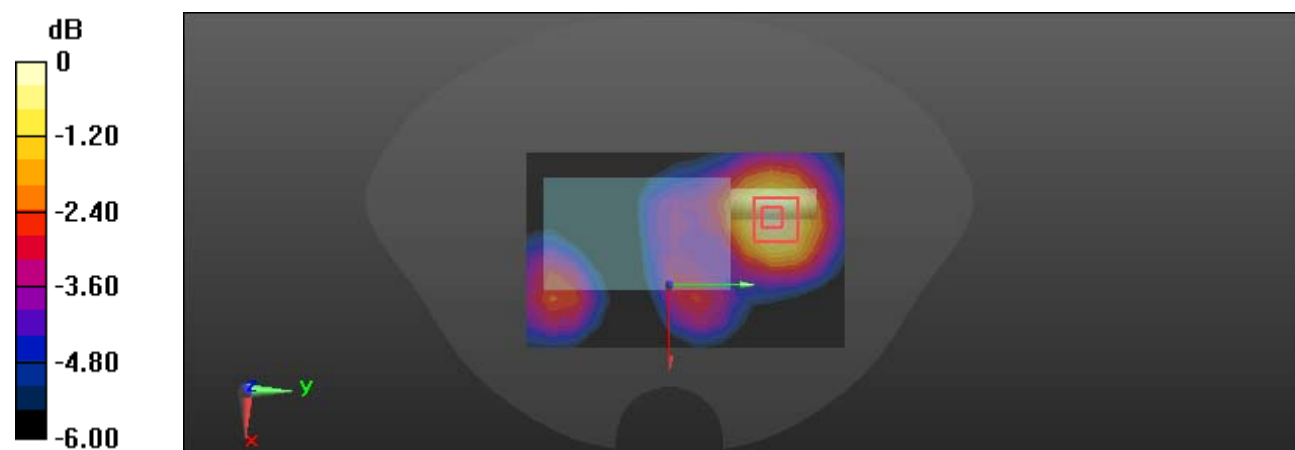

0 dB = 0.103 W/kg = -9.87 dBW/kg

Plot 26#:**DUT: 4G POC LTE Walkie Talkie; Type: HP-N350; Serial: 3HH4-1**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 2595 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.954$ S/m; $\epsilon_r = 38.745$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7, 7, 7) @ 2595 MHz; Calibrated: 2025/12/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2025/9/28
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Face Up/LTE Band 41 50%RB Mid/Area Scan (9x14x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0795 W/kg

Face Up/LTE Band 41 50%RB Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.356 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 0.121 W/kg

SAR(1 g) = 0.066 W/kg; SAR(10 g) = 0.038 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 54.7%

Maximum value of SAR (measured) = 0.0793 W/kg

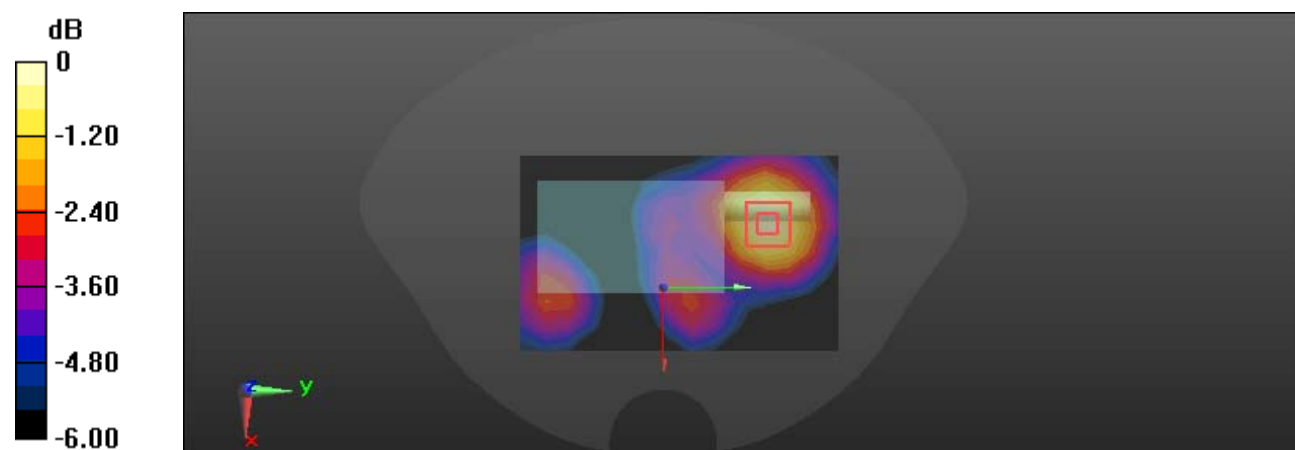

Plot 27#:**DUT: 4G POC LTE Walkie Talkie; Type: HP-N350; Serial: 3HH4-1**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.954$ S/m; $\epsilon_r = 38.745$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7, 7, 7) @ 2595 MHz; Calibrated: 2025/12/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2025/9/28
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/LTE Band 41 1RB Mid/Area Scan (9x14x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.317 W/kg

Body Back/LTE Band 41 1RB Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.275 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.428 W/kg

SAR(1 g) = 0.278 W/kg; SAR(10 g) = 0.201 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 68.6%

Maximum value of SAR (measured) = 0.318 W/kg

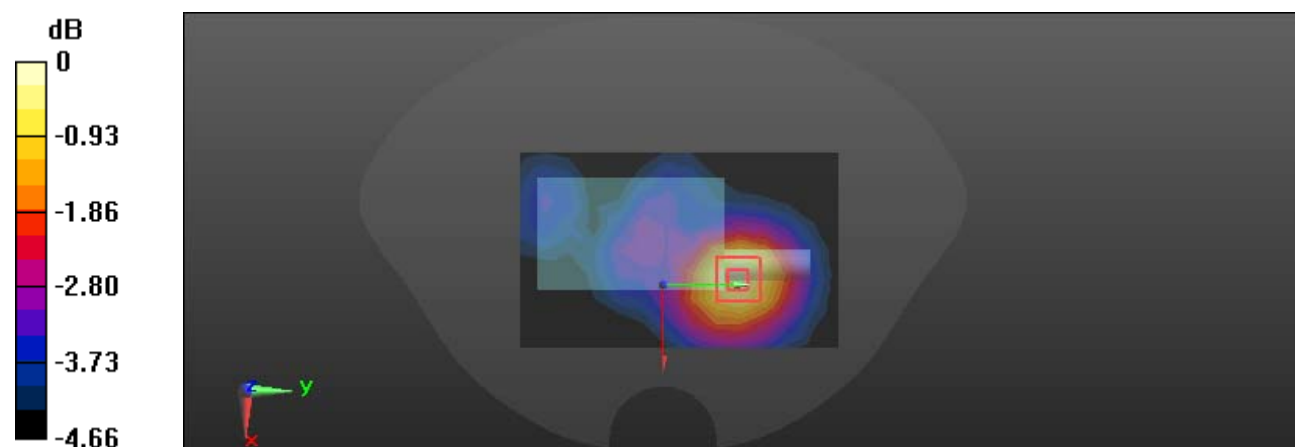

0 dB = 0.318 W/kg = -4.98 dBW/kg

Plot 28#:**DUT: 4G POC LTE Walkie Talkie; Type: HP-N350; Serial: 3HH4-1**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.954$ S/m; $\epsilon_r = 38.745$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7, 7, 7) @ 2595 MHz; Calibrated: 2025/12/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2025/9/28
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/LTE Band 41 50%RB Mid/Area Scan (9x14x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.272 W/kg

Body Back/LTE Band 41 50%RB Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.746 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.355 W/kg

SAR(1 g) = 0.235 W/kg; SAR(10 g) = 0.176 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 70.8%

Maximum value of SAR (measured) = 0.265 W/kg

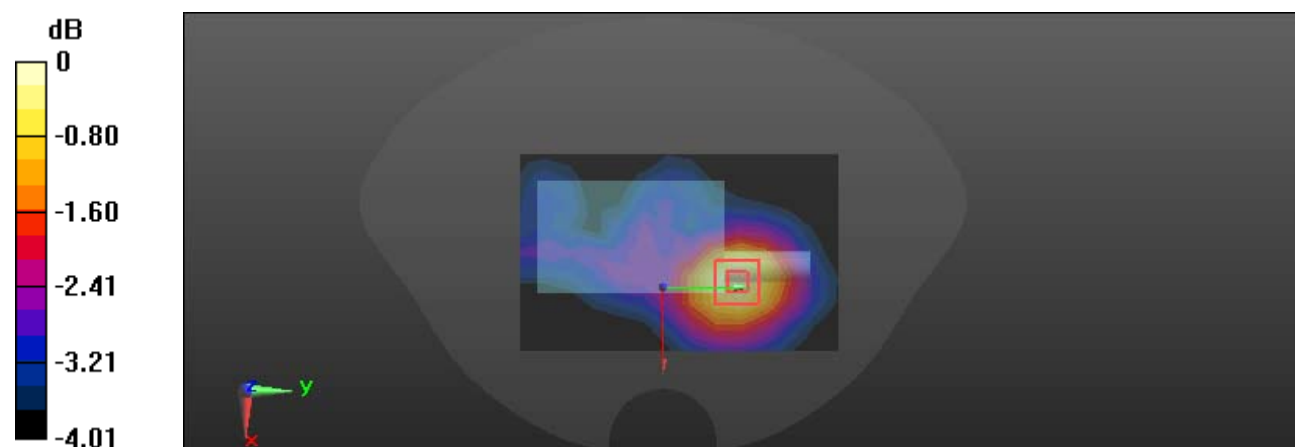

0 dB = 0.265 W/kg = -5.77 dBW/kg

Plot 29#:**DUT: 4G POC LTE Walkie Talkie; Type: HP-N350; Serial: 3HH4-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.381$ S/m; $\epsilon_r = 40.915$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7.89, 7.89, 7.89) @ 1745 MHz; Calibrated: 2025/12/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2025/9/28
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Face Up/LTE Band 66 1RB Mid/Area Scan (7x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.105 W/kg

Face Up/LTE Band 66 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.377 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.140 W/kg

SAR(1 g) = 0.093 W/kg; SAR(10 g) = 0.062 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 65.3%

Maximum value of SAR (measured) = 0.108 W/kg

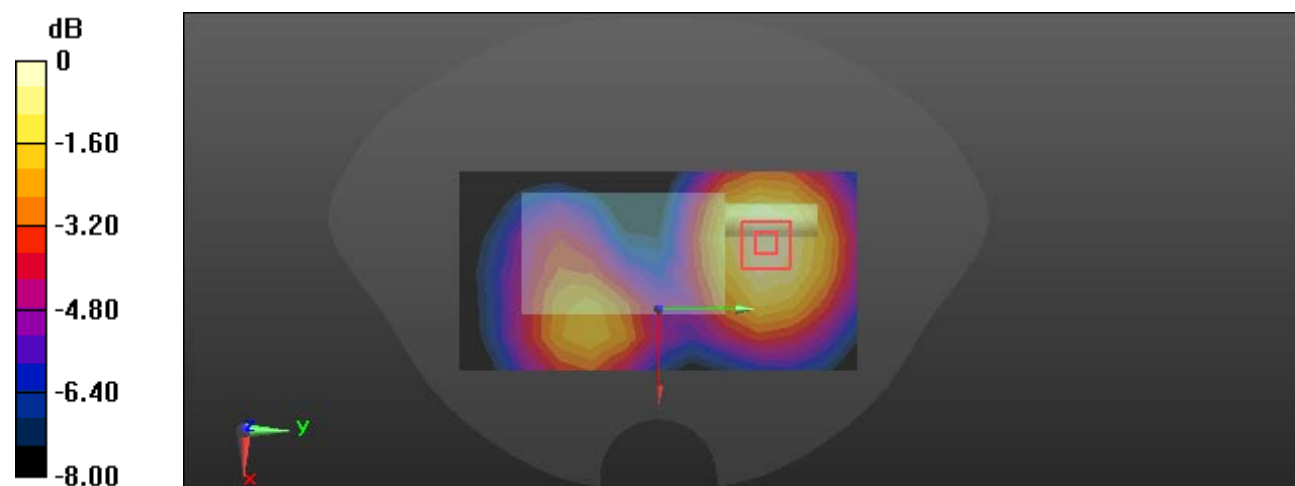

0 dB = 0.108 W/kg = -9.67 dBW/kg

Plot 30#:**DUT: 4G POC LTE Walkie Talkie; Type: HP-N350; Serial: 3HH4-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.381$ S/m; $\epsilon_r = 40.915$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7.89, 7.89, 7.89) @ 1745 MHz; Calibrated: 2025/12/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2025/9/28
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Face Up/LTE Band 66 50%RB Mid/Area Scan (7x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0825 W/kg

Face Up/LTE Band 66 50%RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.899 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 0.110 W/kg

SAR(1 g) = 0.073 W/kg; SAR(10 g) = 0.048 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 65.1%

Maximum value of SAR (measured) = 0.0852 W/kg

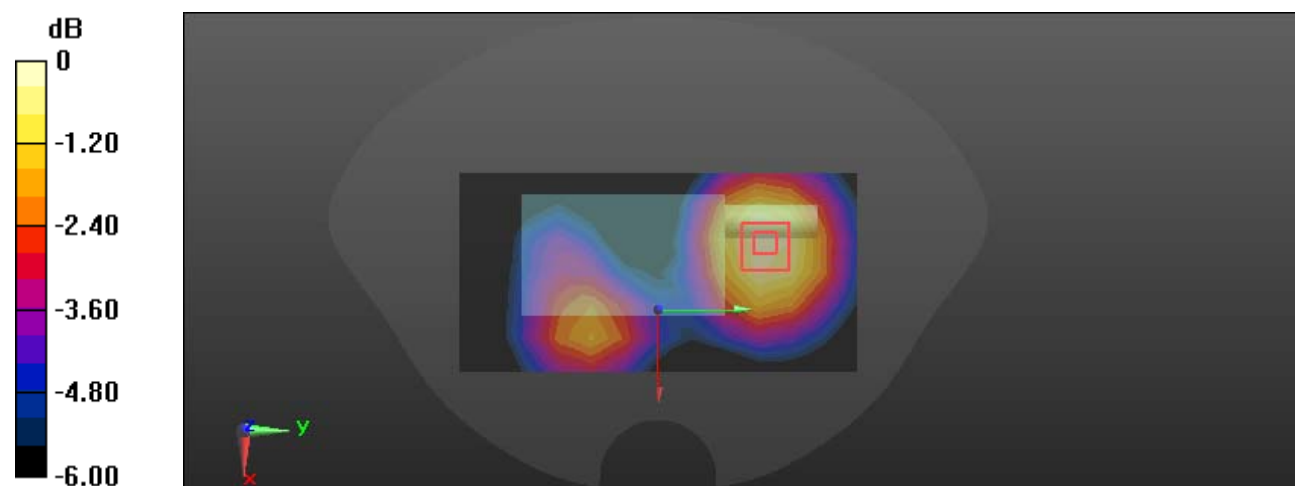

0 dB = 0.0852 W/kg = -10.70 dBW/kg

Plot 31#:**DUT: 4G POC LTE Walkie Talkie; Type: HP-N350; Serial: 3HH4-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.381$ S/m; $\epsilon_r = 40.915$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7.89, 7.89, 7.89) @ 1745 MHz; Calibrated: 2025/12/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2025/9/28
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/LTE Band 66 1RB Mid/Area Scan (7x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.208 W/kg

Body Back/LTE Band 66 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.310 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.279 W/kg

SAR(1 g) = 0.184 W/kg; SAR(10 g) = 0.118 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 64.5%

Maximum value of SAR (measured) = 0.213 W/kg

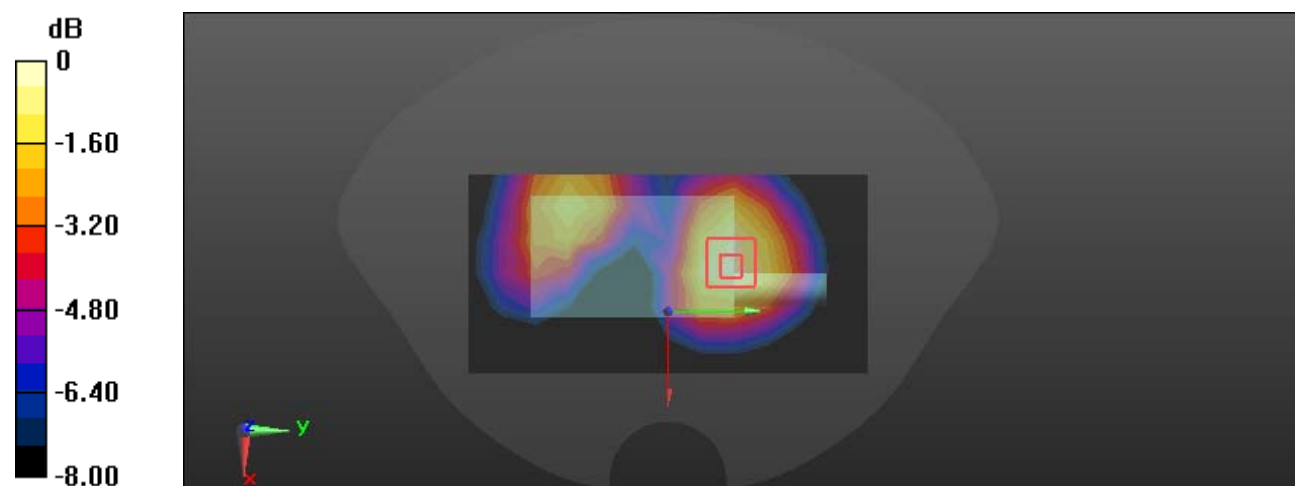

0 dB = 0.213 W/kg = -6.72 dBW/kg

Plot 32#:**DUT: 4G POC LTE Walkie Talkie; Type: HP-N350; Serial: 3HH4-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.381$ S/m; $\epsilon_r = 40.915$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7.89, 7.89, 7.89) @ 1745 MHz; Calibrated: 2025/12/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 2025/9/28
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/LTE Band 66 50%RB Mid/Area Scan (7x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.169 W/kg

Body Back/LTE Band 66 50%RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.598 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 0.222 W/kg

SAR(1 g) = 0.146 W/kg; SAR(10 g) = 0.094 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 64.3%

Maximum value of SAR (measured) = 0.171 W/kg

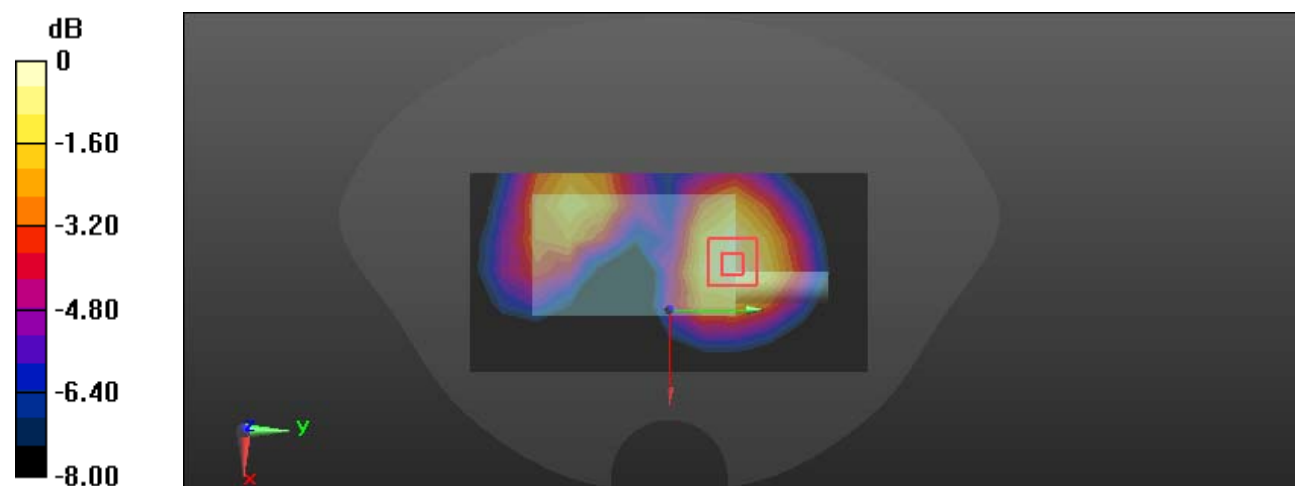

0 dB = 0.171 W/kg = -7.67 dBW/kg

APPENDIX A MEASUREMENT UNCERTAINTY

The uncertainty budget has been determined for the measurement system and is given in the following Table.


Measurement uncertainty evaluation for IEEE1528-2013 SAR test

Source of uncertainty	Tolerance/ uncertainty y ± %	Probability distributio n	Divisor	ci (1 g)	ci (10 g)	Standard uncertai nty ± %, (1 g)	Standard uncertai nty ± %, (10 g)
Measurement system							
Probe calibration	13.9	N	1	1	1	13.9	13.9
Axial Isotropy	4.7	R	$\sqrt{3}$	1	1	2.7	2.7
Hemispherical Isotropy	9.6	R	$\sqrt{3}$	0	0	0.0	0.0
Boundary effect	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Linearity	4.7	R	$\sqrt{3}$	1	1	2.7	2.7
Detection limits	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Modulation response	4.0	R	$\sqrt{3}$	1	1	2.3	2.3
Readout electronics	0.3	N	1	1	1	0.3	0.3
Response time	0.0	R	$\sqrt{3}$	1	1	0.0	0.0
Integration time	0.0	R	$\sqrt{3}$	1	1	0.0	0.0
RF ambient conditions – noise	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
RF ambient conditions—reflections	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Probe positioner mech. Restrictions	0.8	R	$\sqrt{3}$	1	1	0.5	0.5
Probe positioning with respect to phantom shell	6.7	R	$\sqrt{3}$	1	1	3.9	3.9
Extrapolation, interpolation, and integrations algorithms for max. SAR evaluation	3.9	R	$\sqrt{3}$	1	1	2.3	2.3
Test sample related							
Test sample positioning	2.8	N	1	1	1	2.8	2.8
Device holder uncertainty	6.3	N	1	1	1	6.3	6.3
Drift of output power	5.0	R	$\sqrt{3}$	1	1	2.9	2.9
SAR scaling	2.0	R	$\sqrt{3}$	1	1	1.2	1.2
Phantom and tissue parameters							
Phantom uncertainty (shape and thickness tolerances)	4.0	R	$\sqrt{3}$	1	1	2.3	2.3
Uncertainty in SAR correction for deviations in permittivity and conductivity	1.9	N	1	1	0.84	1.9	1.6
Liquid conductivity measurement	5.5	N	1	0.78	0.71	4.3	3.9
Liquid permittivity measurement	2.9	N	1	0.23	0.26	0.7	0.8
Liquid conductivity—temperature uncertainty	1.7	R	$\sqrt{3}$	0.78	0.71	0.8	0.7
Liquid permittivity—temperature uncertainty	2.7	R	$\sqrt{3}$	0.23	0.26	0.4	0.4
Combined standard uncertainty		RSS				12.2	12.0
Expanded uncertainty 95 % confidence interval)						24.3	23.9

APPENDIX B EUT TEST POSITION PHOTOS

Liquid depth $\geq 15\text{cm}$

Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962 Serial: 1962

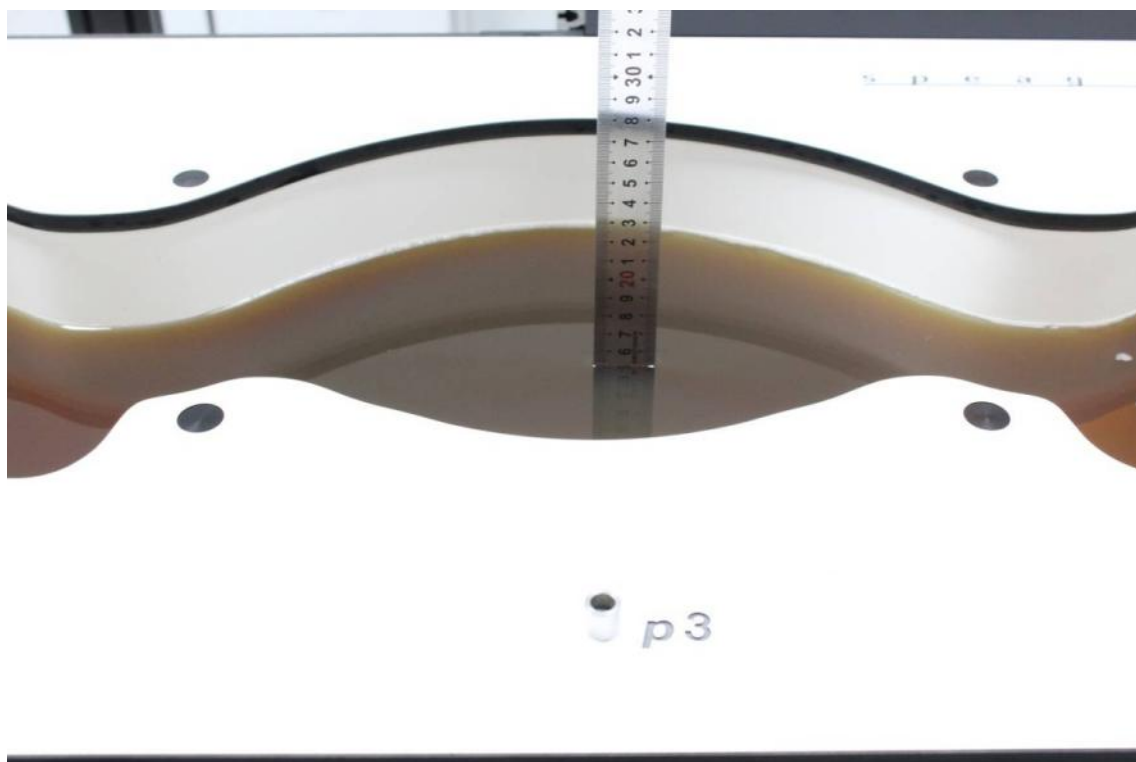

Face Up Setup Photo (25mm)



Body Back With Belt Clip Setup Photo (0mm)



APPENDIX C CALIBRATION CERTIFICATES

Please Refer to the Attachment.

******* END OF REPORT *******