

FCC TEST REPORT

FCC ID:2BW2K-D6

Applicant Name..... : Dongguan You & Me Electronics., Ltd.

Address..... : 2th Floor No.3 Building, Yongfa High Technology Park,
No.113 Jiaoping Road, Tangxia, Dongguan, Guangdong, China

Manufacturer Name..... : Dongguan You & Me Electronics., Ltd.

Address..... : 2th Floor No.3 Building, Yongfa High Technology Park,
No.113 Jiaoping Road, Tangxia, Dongguan, Guangdong, China

Product..... : 3 in 1 Wireless Charger

Model(s)..... : D6

Additional Model(s)..... : D6-25W, D6 25W, YM-D6, YM-D6 25W, YM-D6-25W, VC-D600

Trademark..... : /

Model Difference..... : D6 is tested model, other models are derivative models .The models are
identical in circuit, only different on the model names and colour.
So the test data of D6 can represent the remaining models.

Prepared by..... : Guangdong Zhonghan Testing Technology Co., Ltd.

Address..... : Room 104/201, Building 1, Yibaolai Industrial Park, Qiaotou, Fuhai Subdistrict,
Bao'an District, Shenzhen, Guangdong, China

Date of Receipt..... : June 24, 2026

Date of Test(s)..... : June 24, 2026 to June 30, 2026

Date of Issue..... : June 30, 2026

Test Requested..... : Select test(s) as requested by the client.

Standard..... : FCC CFR Title 47 Part 15 Subpart C

Test procedure..... : /

In the configuration tested, the EUT complied with the standards specified above.

Prepared by

Reviewed by:

Approved by:

Leon Li

Baret Wu

Levi Lee

Leon Li/ Engineer

Baret Wu/ Director

Levi Lee/ Manager

Note: This device described above has been tested by ZHT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report. This report shall not be reproduced except in full, without the written approval of ZHT, this document may be altered or revised by ZHT, personal only, and shall be noted in the revision of the document.



TABLE OF CONTENTS

1.TEST SUMMARY	3
2.GENERAL INFORMATION	4
2.1 GENERAL DESCRIPTION OF EUT	4
2.2 Test mode	5
2.3. Block Diagram of EUT Configuration	6
2.4 Test Conditions	6
3. DESCRIPTION OF SUPPORT UNITS (CONDUCTED MODE)	7
4.TEST FACILITY AND TEST INSTRUMENT USED	8
4.1 TEST FACILITY	8
4.2 EQUIPMENTS LIST FOR ALL TEST ITEMS	8
4.3 TESTING SOFTWARE	9
5.CONDUCTED EMISSION TEST	11
5.1 CONDUCTED EMISSION MEASUREMENT	11
5.1.1 POWER LINE CONDUCTED EMISSION Limits	11
5.1.2 TEST PROCEDURE	11
5.1.3 DEVIATION FROM TEST STANDARD	11
5.1.4 TEST SETUP	12
5.1.5 EUT OPERATING CONDITIONS	12
5.1.6 Test Result	13
6.RADIATED EMISSION MEASUREMENT	15
6.1 Radiated Emission Limits	15
6.2 Anechoic Chamber Test Setup Diagram	16
6.3 Test Procedure	16
6.4 DEVIATION FROM TEST STANDARD	16
6.5 Test Result	17
7.BANDWIDTH TEST	23
8.ANTENNA REQUIREMENT	27
9.TEST SETUP PHOTO	28
10.EUT CONSTRUCTIONAL DETAILS	28

**1.TEST SUMMARY**

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	Pass
Spurious Emission	15.209(a)(f)	Pass
20dB Bandwidth	15.215	Pass

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

2.GENERAL INFORMATION


2.1 GENERAL DESCRIPTION OF EUT

Product Name:	3 in 1 Wireless Charger
Test Model No.:	D6
Hardware version:	V1.0
Software version:	V1.0
Operation Frequency:	Phone: 115-205kHz, 360kHz Airpods: 115-205kHz Watch: 325kHz $\pm$ 1kHz
Modulation type:	ASK
Antenna Type:	Coil Antenna
Antenna gain:	0dBi
Ratings:	Input: DC 9V/ 12V/ 15V Phone Output: 25W Max Airpods Output: 5W Max Watch Output: 3W Max
Sample Number:	260624117YP001
Remark:The antenna gain is provided by the customer, if the data provided by the customer is not accurate, Guangdong Zhonghan Testing Technology Co., Ltd. does not assume any responsibility.	


2.2 Test mode

Test Modes:	
Mode 1	AC Mains + Mobile phone charging mode (360kHz) + AirPods charging mode + Apple Watch charging mode (Battery Status:≤1%)
Mode 2	AC Mains + Mobile phone charging mode (360kHz) + AirPods charging mode + Apple Watch charging mode (Battery Status:50%)
Mode 3	AC Mains + Mobile phone charging mode (360kHz) + AirPods charging mode + Apple Watch charging mode (Battery Status:≥98%)
Mode 4	AC Mains + Mobile phone charging mode (115-205kHz) + AirPods charging mode + Apple Watch charging mode (Battery Status:≤1%)
Mode 5	AC Mains + Mobile phone charging mode (115-205kHz) + AirPods charging mode + Apple Watch charging mode (Battery Status:50%)
Mode 6	AC Mains + Mobile phone charging mode (115-205kHz) + AirPods charging mode + Apple Watch charging mode (Battery Status:≥98%)
Mode 7	AC Mains + Mobile phone charging mode (115-205kHz) (Battery Status:≤1%)
Mode 8	AC Mains + Mobile phone charging mode (115-205kHz) (Battery Status:50%)
Mode 9	AC Mains + Mobile phone charging mode (115-205kHz) (Battery Status:≥98%)
Mode 10	AC Mains + Mobile phone charging mode (360kHz) (Battery Status:≤1%)
Mode 11	AC Mains + Mobile phone charging mode (360kHz) (Battery Status:50%)
Mode 12	AC Mains + Mobile phone charging mode (360kHz) (Battery Status:≥98%)
Mode 13	AC Mains + AirPods charging mode (Battery Status:≤1%)
Mode 14	AC Mains + AirPods charging mode (Battery Status:50%)
Mode 15	AC Mains + AirPods charging mode (Battery Status:≥98%)
Mode 16	AC Mains + Watch charging mode (Battery Status:≤1%)
Mode 17	AC Mains + Watch charging mode (Battery Status:50%)
Mode 18	AC Mains + Watch charging mode (Battery Status:≥98%)
Note: All modes were tested, only the worst-case was recorded in the report. Mode 1 is the worst mode.	

2.3. Block Diagram of EUT Configuration Conducted Emission

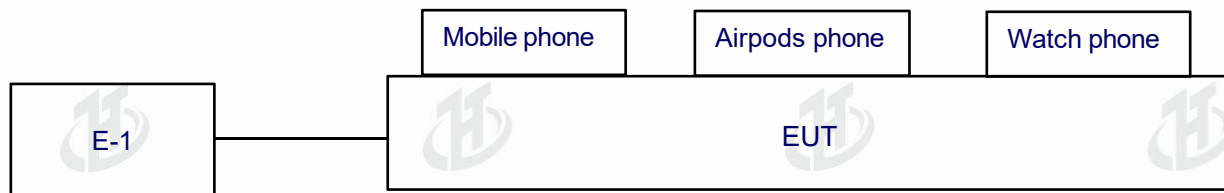

Radiated Emission

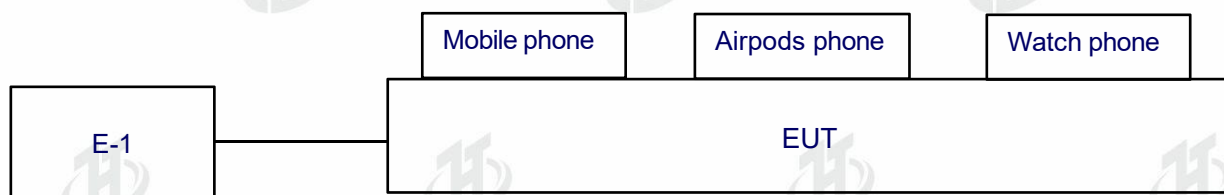

2.4 Test Conditions

Temperature: 25.6℃
Relative Humidity: 54.3 %

3. DESCRIPTION OF SUPPORT UNITS (CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	AC Adapter	iforg	191106C	/	AE
E-2	Mobile phone	Apple Inc.	iPhone 16 PLUS	/	AE
E-3	Airpods	Apple Inc.	A2031	/	AE
E-4	Apple Watch	Apple Inc.	ultra 2	/	AE
E-5	Mobile phone	Xiaomi Communications Co., Ltd.	Xiaomi 13	/	AE

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

4.TEST FACILITY AND TEST INSTRUMENT USED

4.1 TEST FACILITY

Guangdong Zhonghan Testing Technology Co., Ltd.
Add.: Room 104/201, Building 1, Yibaolai Industrial Park, Qiaotou, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

FCC Registration Number:255941
Designation Number: CN0325
IC Registered No.: 29832
CAB identifier: CN0143

4.2 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Equipment	Manufacturer	Model	Serial No.	Last Cal.	Next Cal.
1	Receiver	R&S	ESCI	100874	Apr. 24, 2026	Apr. 23, 2027
2	Loop Antenna	TESEQ	HLA6121	58357	Sept. 8, 2025	Sept. 7, 2026
3	Amplifier	Schwarzbeck	BBV 9743 B	00378	Apr. 24, 2026	Apr. 23, 2027
4	Amplifier	Schwarzbeck	BBV 9718 B	00040	May 8, 2026	May 7, 2027
5	Bilog Antenna	Schwarzbeck	VULB9162	00498	Apr. 25, 2026	Apr. 24, 2027
6	Horn Antenna	Schwarzbeck	BBHA9120D	02623	Apr. 25, 2026	Apr. 24, 2027
7	Horn Antenna	A.H.SYSTEMS	SAS574	588	Oct. 20, 2025	Oct. 19, 2026
8	Amplifier	AEROFLEX	100KHz-40GHz	097	Oct. 20, 2025	Oct. 19, 2026
9	Spectrum Analyzer	R&S	FSV40	101413	Oct. 20, 2025	Oct. 19, 2026
10	Spectrum Analyzer	KEYSIGHT	N9020A	MY53420208	Apr. 24, 2026	Apr. 23, 2027
11	WIDBAND RADIO COMMUNICATION TESTER	R&S	CMW500	109863	Apr. 24, 2026	Apr. 23, 2027
12	Single Generator	Agilent	N5182A	MY48180575	Apr. 24, 2026	Apr. 23, 2027
13	Power Sensor	MWRFTest	MW100-RFCB	/	Apr. 24, 2026	Apr. 23, 2027
14	Power Amplifier Shielding Room	EMToni	2m3m3m	/	Apr. 11, 2026	Apr. 10, 2031
15	CABLE	EMToni	DA800-NM-NM-11000MM	/	Apr. 24, 2026	Apr. 23, 2027

Conduction Test equipment

Equipment	Manufacturer	Model	Serial No.	Last Cal.	Next Cal.
Receiver	R&S	ESCI	100874	Apr. 24, 2026	Apr. 23, 2027
LISN	R&S	ENV216	102794	Aug. 22, 2025	Aug. 23, 2026
ISN CAT 6	Schwarzbeck	NTFM 8158	00318	Apr. 24, 2026	Apr. 23, 2027
ISN CAT 5	Schwarzbeck	CAT5 8158	00343	Apr. 24, 2026	Apr. 23, 2027
Capacitive Voltage Probe	Schwarzbeck	CVP 9222 C	00101	May 8, 2026	May 7, 2027
Current Transformer Clamp	Schwarzbeck	SW 9605	SW9605 #209	May 8, 2026	May 7, 2027
CABLE	EMToni	G223-NM-BNCM -2000MM	/	Apr. 24, 2026	Apr. 23, 2027

Conducted Test Instrument

Item	Equipment	Manufacturer	Model	Serial No.	Last Cal.	Next Cal.
1	Spectrum Analyzer	R&S	FSV40	101413	Oct. 20, 2025	Oct. 19, 2026
2	Spectrum Analyzer	KEYSIGHT	N9020A	MY53420208	Apr. 24, 2026	Apr. 23, 2027
3	Power Sensor	MWRFTest	MW100-RFCB	/	Apr. 24, 2026	Apr. 23, 2027

4.3 TESTING SOFTWARE

Project	Software name	Edition
Radiated Emission	EZ-EMC	FA-03A2 RE+
RF Test	MTS 8310	2.0.0.0

4.4 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$U=0.92\text{dB}$
2	RF conducted power	$U=0.16\text{dB}$
3	Spurious emissions conducted	$U=0.21\text{dB}$
4	All radiated emissions (9k-30MHz)	$U=1.6\text{dB}$
5	All radiated emissions (<1G)	$U=5.1\text{dB}$
6	All radiated emissions (>1G)	$U=4.65\text{dB}$
7	Temperature	$U=0.5^{\circ}\text{C}$
8	Humidity	$U=2\%$
9	Occupied Bandwidth	$U=4.96\%$
10	Power Spectral Density	$U=0.71\text{dB}$

Decision Rule

- ☒ Uncertainty is not included
☐ Uncertainty is included

5.CONDUCTED EMISSION TEST

5.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024
Test Frequency Range:	150kHz to 30MHz
Receiver setup:	RBW=9kHz, VBW=30kHz, Sweep time=auto

5.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	QP	AVG	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.


5.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

5.1.3 DEVIATION FROM TEST STANDARD

No deviation

5.1.4 TEST SETUP

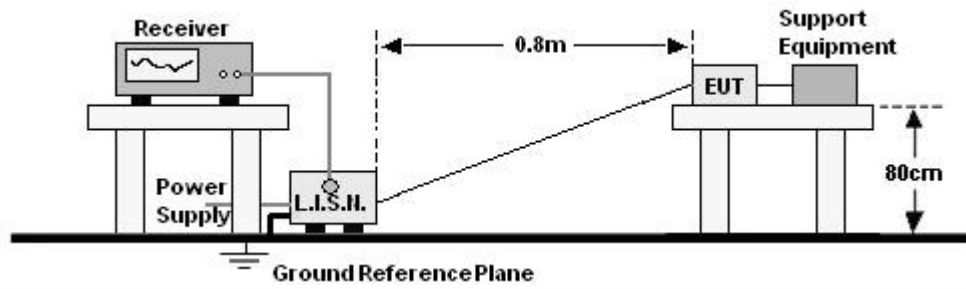


5.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

5.1.6 Test Result

Temperature:	24.2℃	Humidity	56.1%
Pressure:	101kPa	Phase :	L
Test Voltage:	AC 120V/60Hz	Test mode :	Mode 1

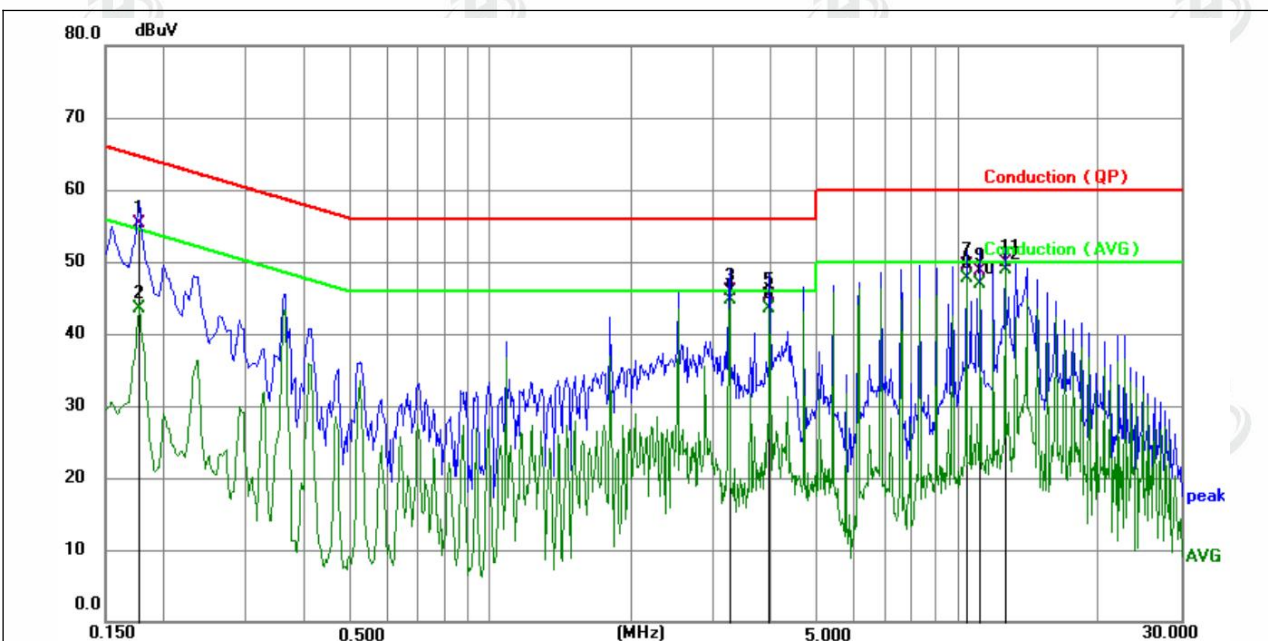


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1767	45.38	9.90	55.28	64.64	-9.36	QP	P	
2	0.1767	33.69	9.90	43.59	54.64	-11.05	AVG	P	
3	3.2414	35.83	10.08	45.91	56.00	-10.09	QP	P	
4	3.2414	34.53	10.08	44.61	46.00	-1.39	AVG	P	
5	3.9615	35.12	10.09	45.21	56.00	-10.79	QP	P	
6	3.9615	33.36	10.09	43.45	46.00	-2.55	AVG	P	
7	10.4414	39.40	10.08	49.48	60.00	-10.52	QP	P	
8	10.4414	37.65	10.08	47.73	50.00	-2.27	AVG	P	
9	11.1615	38.68	10.08	48.76	60.00	-11.24	QP	P	
10	11.1615	36.74	10.08	46.82	50.00	-3.18	AVG	P	
11	12.6014	39.86	10.09	49.95	60.00	-10.05	QP	P	
12 *	12.6014	38.85	10.09	48.94	50.00	-1.06	AVG	P	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Temperature:	24.2°C	Humidity	56.1%
Pressure:	101kPa	Phase :	N
Test Voltage:	AC 120V/60Hz	Test mode :	Mode 1

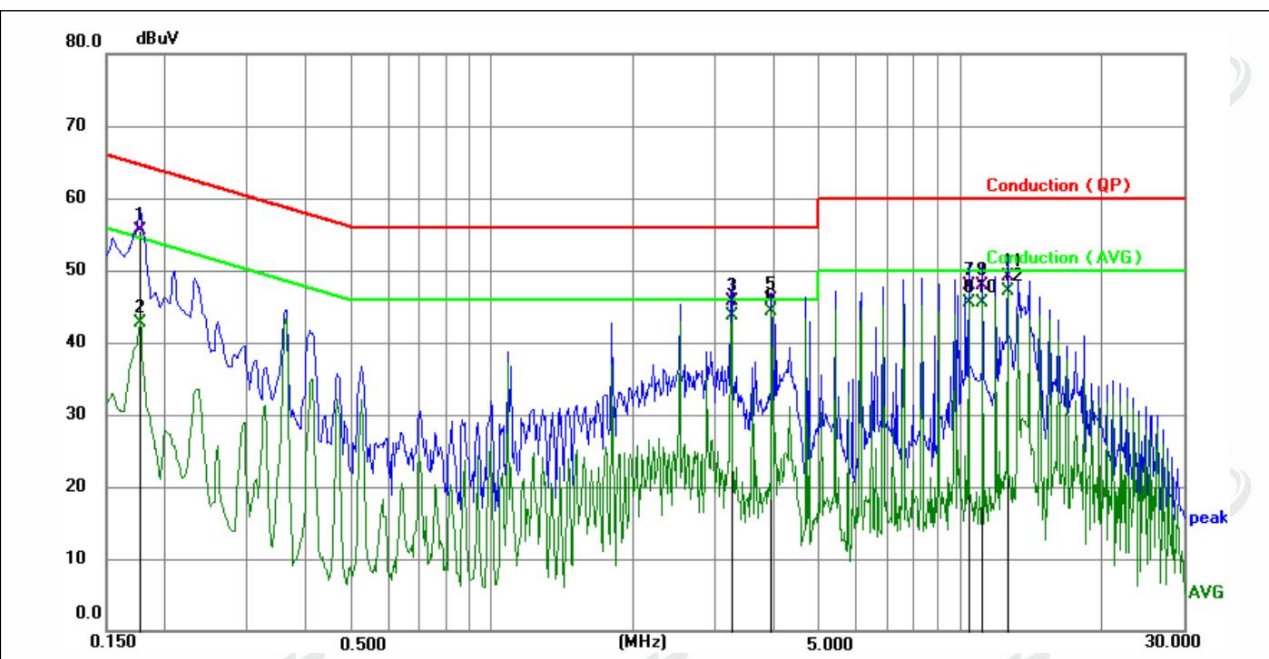

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1767	45.64	9.90	55.54	64.64	-9.10	QP	P	
2	0.1767	32.79	9.90	42.69	54.64	-11.95	AVG	P	
3	3.2414	35.53	10.08	45.61	56.00	-10.39	QP	P	
4	3.2414	33.62	10.08	43.70	46.00	-2.30	AVG	P	
5	3.9615	35.85	10.09	45.94	56.00	-10.06	QP	P	
6 *	3.9615	34.21	10.09	44.30	46.00	-1.70	AVG	P	
7	10.4414	37.87	10.08	47.95	60.00	-12.05	QP	P	
8	10.4414	35.50	10.08	45.58	50.00	-4.42	AVG	P	
9	11.1615	37.87	10.08	47.95	60.00	-12.05	QP	P	
10	11.1615	35.51	10.08	45.59	50.00	-4.41	AVG	P	
11	12.6014	38.98	10.09	49.07	60.00	-10.93	QP	P	
12	12.6014	37.01	10.09	47.10	50.00	-2.90	AVG	P	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

6.RADIATED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024				
Test Frequency Range:	9kHz to 1GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9kHz-150kHz	Quasi-peak	200Hz	600Hz	Peak Value
	150kHz-30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

6.1 Radiated Emission Limits

Limits for frequency below 30MHz


Frequency	Limit (uV/m)	Measurement Distance(m)	Remark
0.009-0.490	2400/F(kHz)	300	Peak Value
0.490-1.705	24000/F(kHz)	30	Quasi-peak Value
1.705-30	30	30	Quasi-peak Value

Limits for frequency Above 30MHz


Frequency	Limit (dBuV/m @3m)	Remark
30MHz-88MHz	40.00	Quasi-peak Value
88MHz-216MHz	43.50	Quasi-peak Value
216MHz-960MHz	46.00	Quasi-peak Value
960MHz-1GHz	54.00	Quasi-peak Value
Above 1GHz	54.00	Average Value
	74.00	Peak Value

6.2 Anechoic Chamber Test Setup Diagram

(A) Radiated Emission Test-Up Frequency Below 30MHz

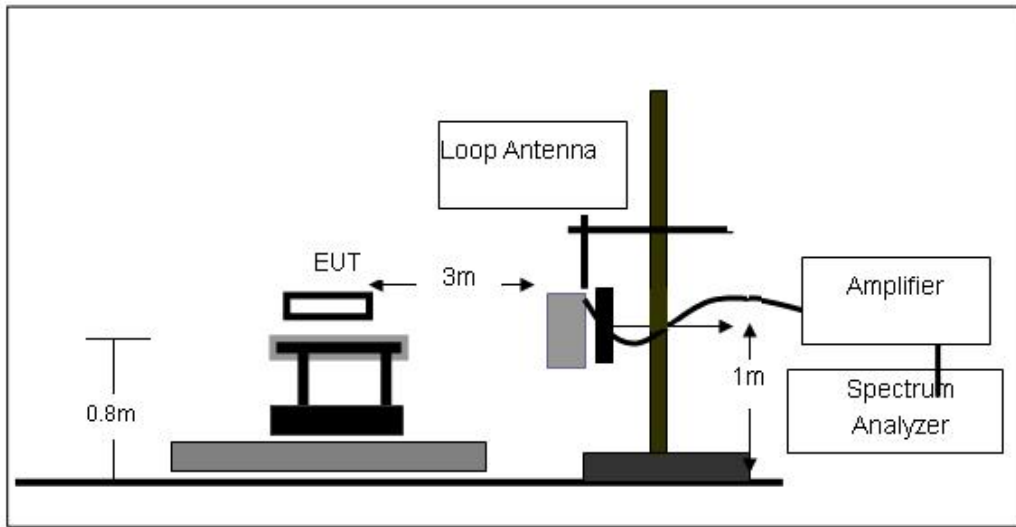

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

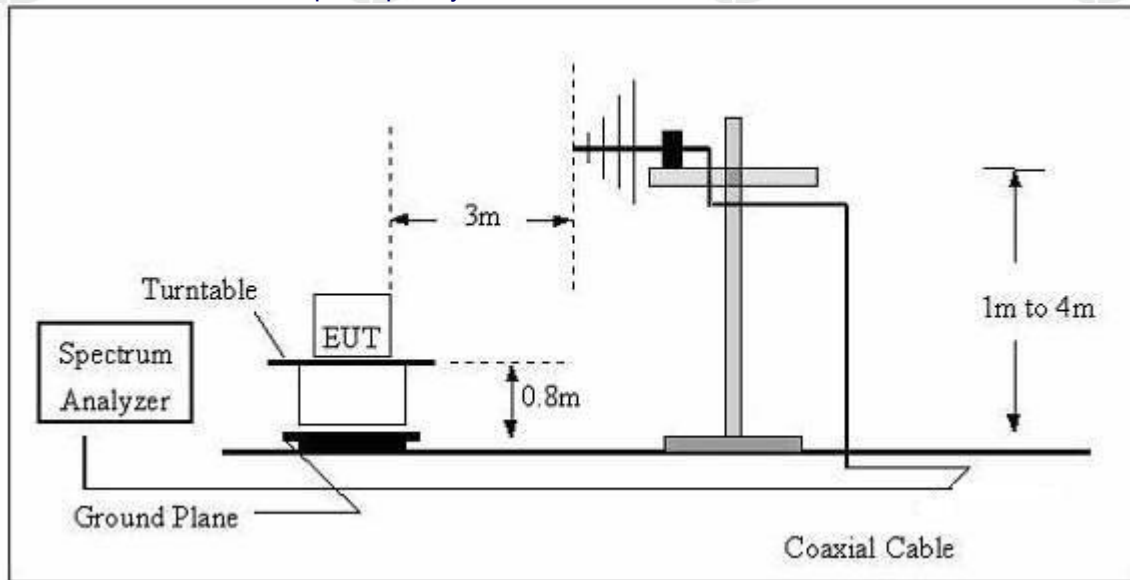

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024. The specification used was the FCC 15.209 and FCC 15.205 limits.

6.3 Test Procedure

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can move up and down between 1 to 4 meters to find out the maximum emission level. Broadband antenna (calibrated by dipole antenna) are used as a receiving antenna. Both horizontal and vertical polarization of the antenna are set on measurement.

6.4 DEVIATION FROM TEST STANDARD

No deviation



6.5 Test Result


Measurement data:

Note: Limit dBuV/m @3m = Limit dBuV/m @300m+ 80

Limit dBuV/m @3m = Limit dBuV/m @30m + 40

9 kHz~150KHz


Temperature:	24.2℃	Humidity	56.1%
Pressure:	101 kPa	Test Mode:	Mode 1
Test Voltage:	AC 120V/60Hz	Polarization:	Coaxial

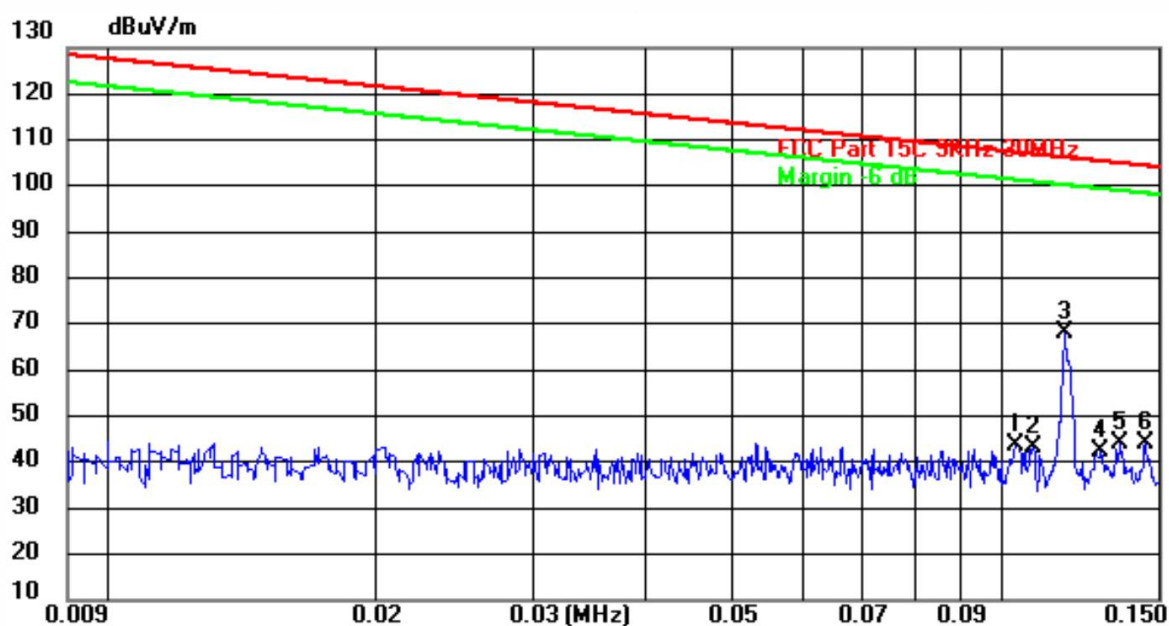

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.1040	23.57	20.06	43.63	107.26	-63.63	peak
2	0.1087	23.16	20.07	43.23	106.88	-63.65	peak
3 *	0.1180	48.14	20.08	68.22	106.17	-37.95	peak
4	0.1292	22.31	20.10	42.41	105.38	-62.97	peak
5	0.1355	23.92	20.11	44.03	104.97	-60.94	peak
6	0.1450	24.16	20.12	44.28	104.38	-60.10	peak



Temperature:	24.2°C	Humidity	56.1%
Pressure:	101 kPa	Test Mode:	Mode 1
Test Voltage:	AC 120V/60Hz	Polarization:	Coplanar

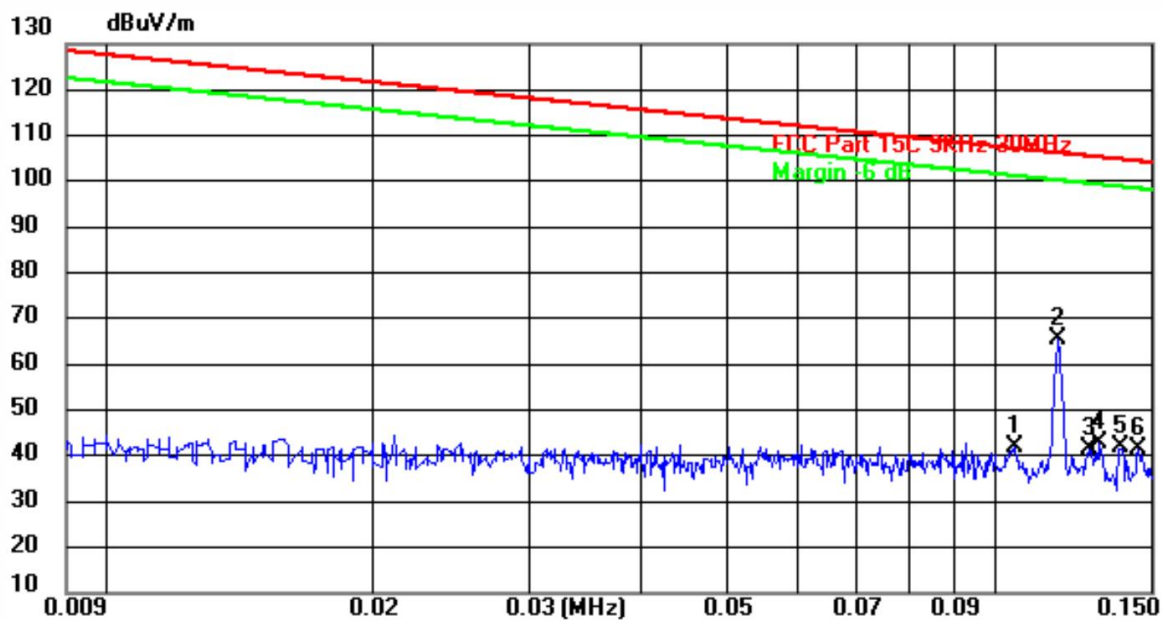


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.1053	21.69	20.07	41.76	107.16	-65.40	peak
2 *	0.1180	45.49	20.08	65.57	106.17	-40.60	peak
3	0.1280	21.21	20.10	41.31	105.46	-64.15	peak
4	0.1313	22.61	20.10	42.71	105.24	-62.53	peak
5	0.1389	21.99	20.11	42.10	104.75	-62.65	peak
6	0.1454	21.43	20.12	41.55	104.35	-62.80	peak



150kHz~30MHz


Temperature:	24.2℃	Humidity	56.1%
Pressure:	101 kPa	Test Mode:	Mode 1
Test Voltage:	AC 120V/60Hz	Polarization:	Coaxial

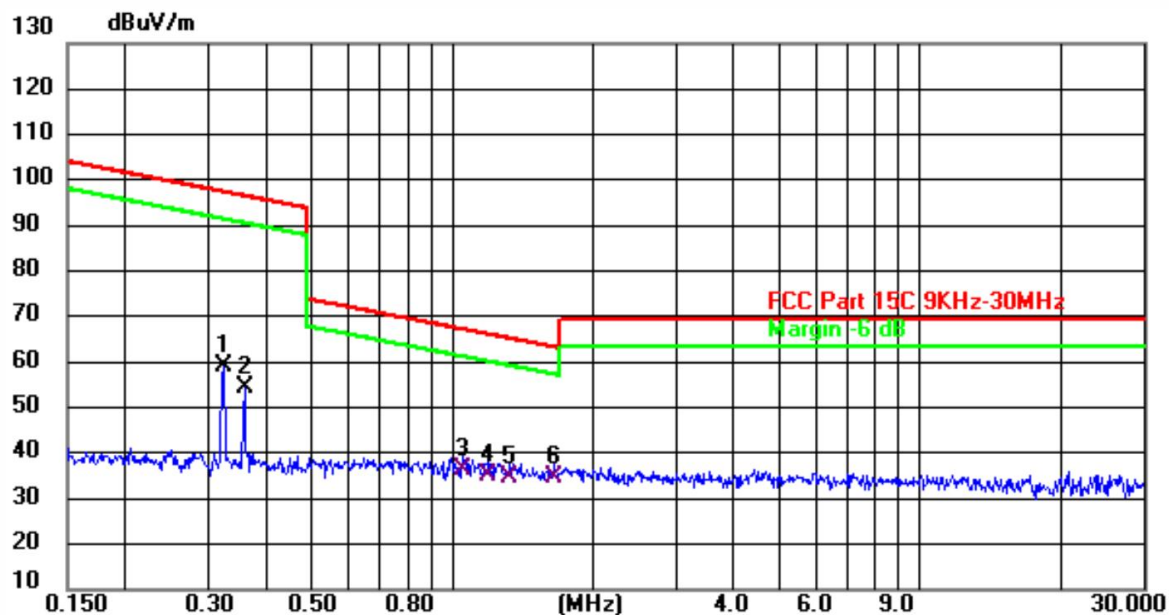

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.3251	38.93	20.14	59.07	97.36	-38.29	peak
2	0.3600	34.36	20.14	54.50	96.48	-41.98	peak
3	1.0483	16.34	19.88	36.22	67.19	-30.97	QP
4	1.1840	15.07	19.89	34.96	66.14	-31.18	QP
5	1.3237	14.84	19.91	34.75	65.17	-30.42	QP
6 *	1.6450	14.55	19.92	34.47	63.28	-28.81	QP




Temperature:	24.2℃	Humidity	56.1%
Pressure:	101 kPa	Test Mode:	Mode 1
Test Voltage:	AC 120V/60Hz	Polarization:	Coplanar

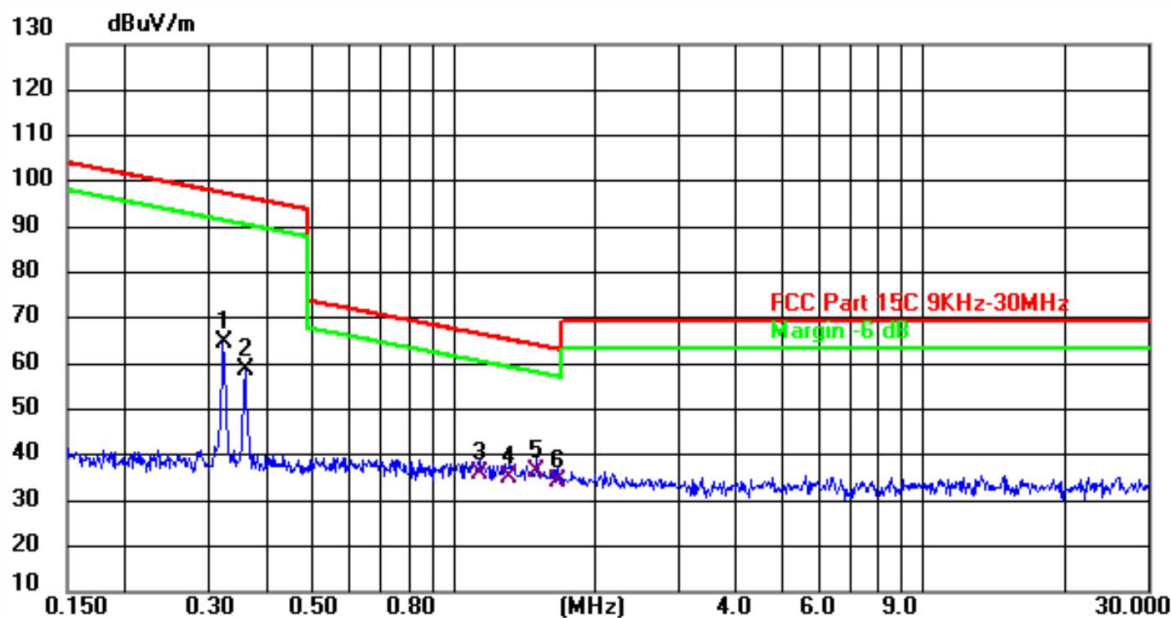

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.3251	44.63	20.14	64.77	97.36	-32.59	peak
2	0.3600	38.58	20.14	58.72	96.48	-37.76	peak
3	1.1290	16.13	19.89	36.02	66.55	-30.53	QP
4	1.3098	15.26	19.91	35.17	65.26	-30.09	QP
5 *	1.5032	16.26	19.91	36.17	64.06	-27.89	QP
6	1.6624	14.23	19.92	34.15	63.19	-29.04	QP


30MHz-1GHz

Temperature:	24.2°C	Humidity	56.1%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz	Test mode :	Mode 1

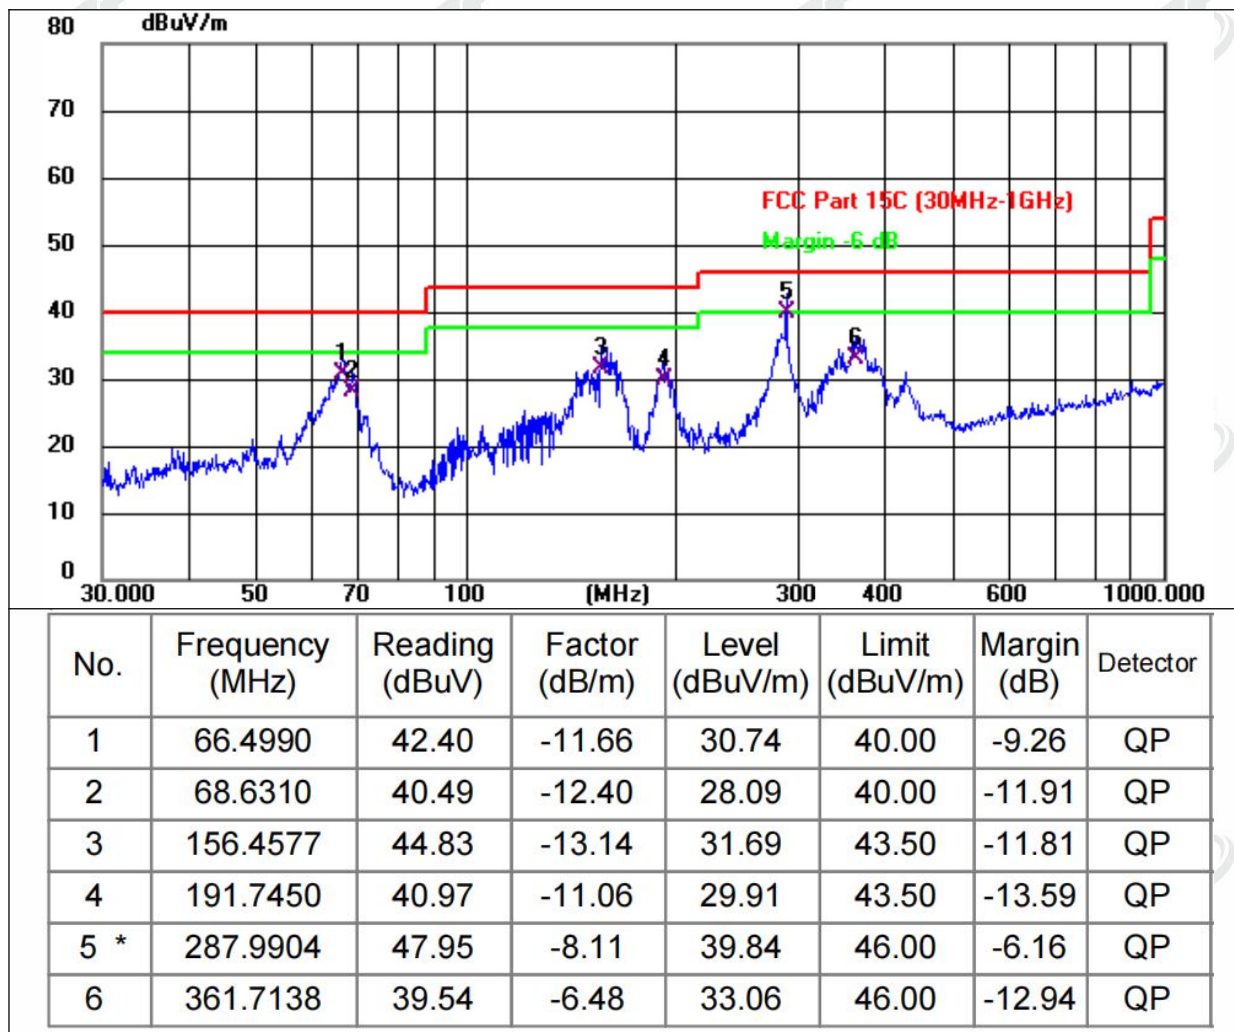



Temperature:	24.2°C	Humidity	56.1%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz	Test mode :	Mode 1

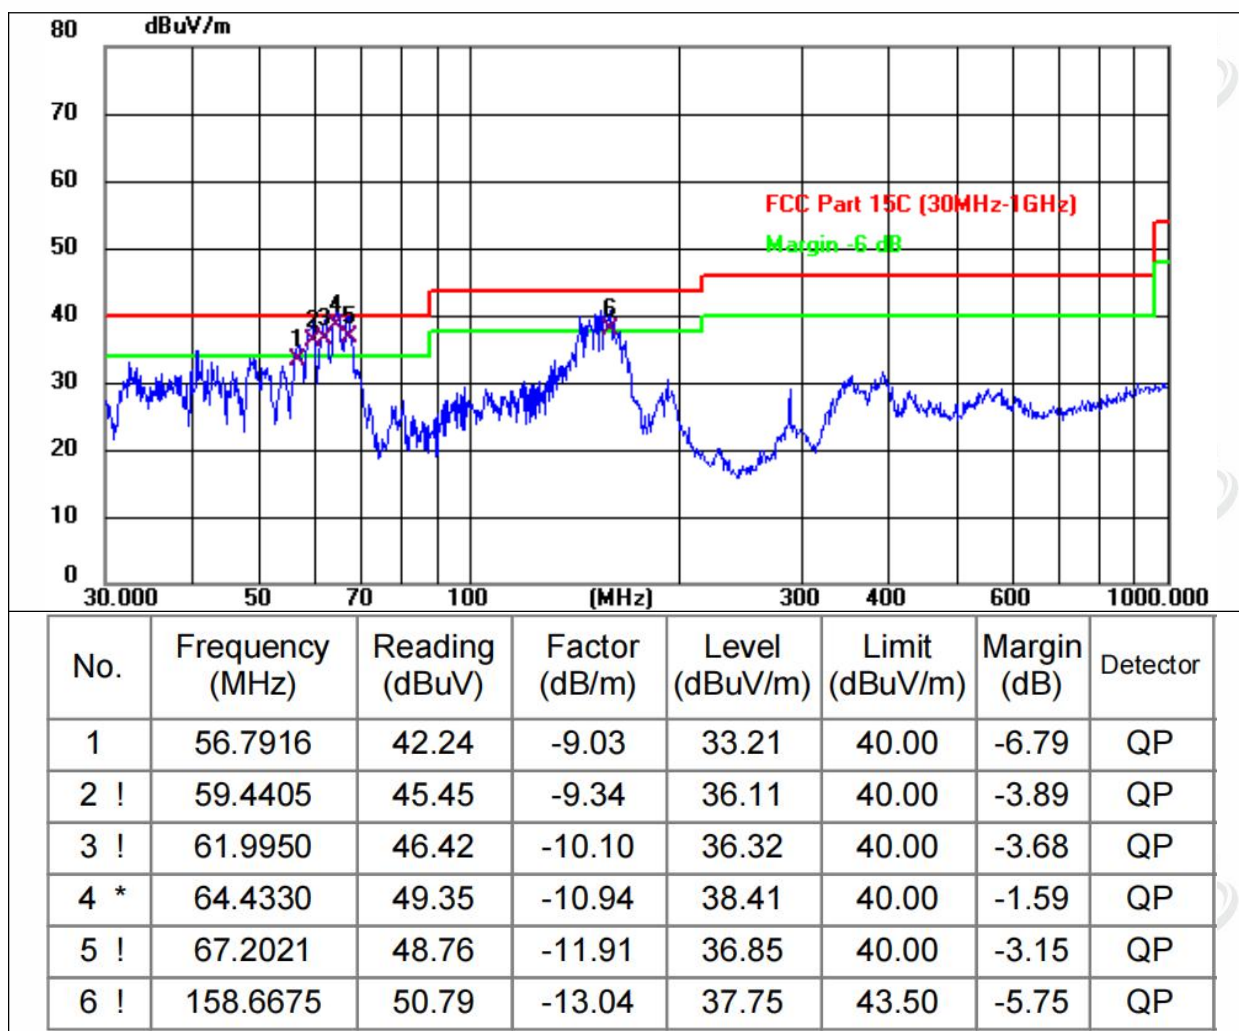

Remarks:


1. Factor = Antenna Factor + Cable Loss – Preamplifier Factor
2. Level = Reading + Factor
3. Margin = Emission Level- Limit.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



7.BANDWIDTH TEST

1. Set RBW = 10Hz or 1%-5%OBW.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

TEST SETUP

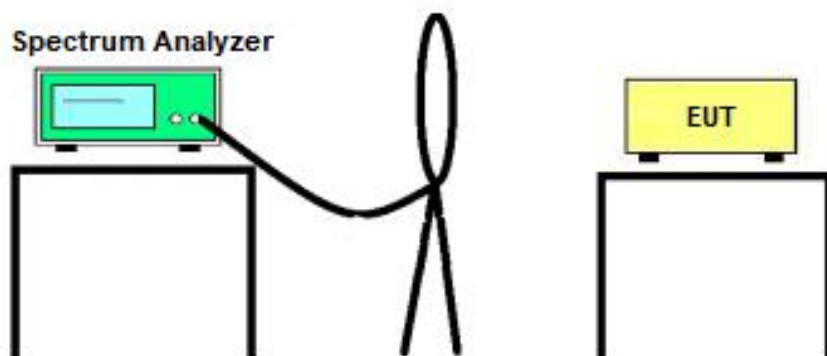




Temperature:	25.5 °C	Relative Humidity:	54%
Pressure:	101kPa		

Coil	Frequency (kHz)	20dB bandwidth (kHz)	Result
Phone coil (115-205kHz)	127.8	0.025	Pass
Phone coil (360kHz)	360	0.029	Pass
Airpods coil	118	0.025	Pass
Watch coil	325.1	0.24	Pass


Phone coil
(115-205kHz)



Phone coil
(360kHz)

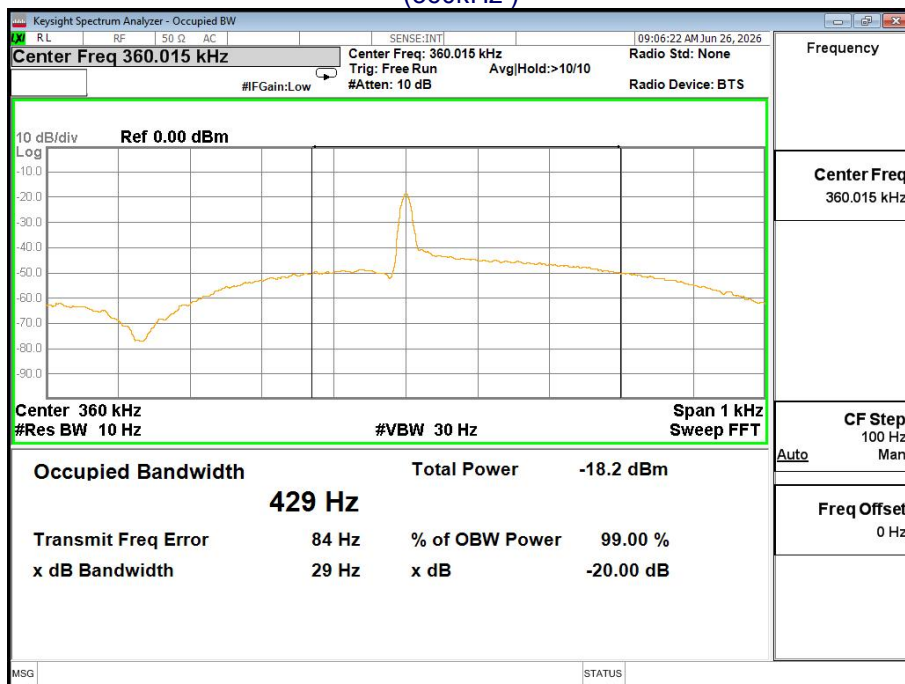

Airpods coil

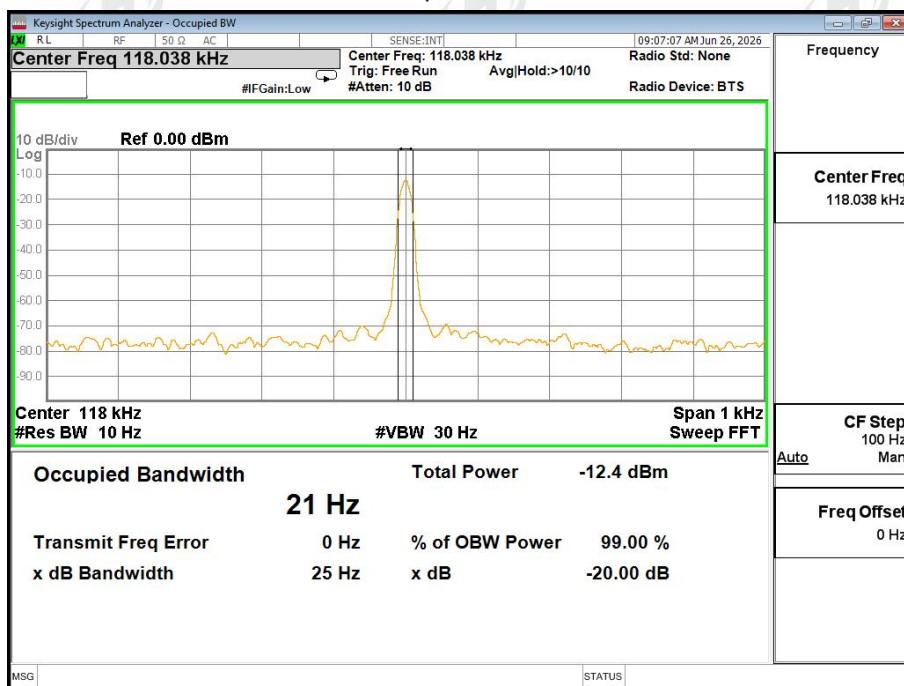

Watch coil



Note: Because the measured signal is CW-like, adjusting the RBW per C63.10 would not be practical since measurement bandwidth will always follow the RBW. The RBW is set to 10 Hz to perform the 20dB bandwidth test.

8.ANTENNA REQUIREMENT

Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
EUT Antenna:	
The antenna is Coil Antenna, the best case gain of the antennas is 0dBi, reference to the appendix II for details	

9.TEST SETUP PHOTO

Reference to the appendix I for details.

10.EUT CONSTRUCTIONAL DETAILS

Reference to the appendix II for details.

******* END OF REPORT *******