

TEST REPORT

Applicant: ZHENGZHOU NISSAN AUTOMOBILE CO., LTD.
Address: No. 3 Lianhu Road, Zhengzhou area of Henan Pilot Free Trade Zone (Zhengdong), 450016 Zhengzhou City, Henan Province, China (PRC)
Equipment Type: Wireless Cell Phone Charger
Model Name: 296352HH0A
Brand Name: ASUS
FCC ID: 2BW3N-296352HH0A
Test Standard: 47 CFR Part 15 Subpart C
ANSI C63.10-2020+Cor 1-2023
Sample Arrival Date: Jul. 02, 2026
Test Date: Jul. 04, 2026
Date of Issue: Jul. 16, 2026

ISSUED BY:

Shenzhen BALUN Technology Co., Ltd.

**Tested by:** Yongming Liang**Checked by:** Xiong Chong**Approved by:** Tolan Tu
(Testing Director)

Revision History

Version	Issue Date	Revisions Content
<u>Rev. 01</u>	<u>Jul. 16, 2026</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION.....	3
1.1	Test Laboratory	3
1.2	Test Location	3
2	PRODUCT INFORMATION	4
2.1	Applicant Information	4
2.2	Manufacturer Information.....	4
2.3	General Description for Equipment under Test (EUT).....	4
2.4	Technical Information	4
3	SUMMARY OF TEST RESULTS	5
3.1	Test Standards	5
3.2	Verdict.....	5
3.3	Test Uncertainty	5
4	GENERAL TEST CONFIGURATIONS	6
4.1	Test Environments.....	6
4.2	Test Ancillary Equipment.....	6
4.3	Test Setups	7
5	TEST ITEMS	9
5.1	Antenna Requirements	9
5.2	Emission Tests	10
ANNEX A	TEST RESULTS	14
A.1	Radiated Emission.....	14
A.2	Conducted Emission.....	22
A.3	20 dB Bandwidth	23
ANNEX B	TEST SETUP PHOTOS	29
ANNEX C	EUT EXTERNAL PHOTOS.....	29

1 GENERAL INFORMATION

1.1 Test Laboratory

Name	Shenzhen BALUN Technology Co., Ltd.
Address	601, Building 2, Intelligent Connected Vehicle Industrial Park, No.55, Xiangshan Road, Luotian Community, Yanluo Sub-district, Bao'an District, Shenzhen
Phone Number	+86 755 6685 0100

1.2 Test Location

Name	Shenzhen BALUN Technology Co., Ltd.
Location	☒ Building 2, Intelligent Connected Vehicle Industrial Park, No.55, Xiangshan Road, Luotian Community, Yanluo Sub-district, Bao'an District, Shenzhen, Guangdong
	☐ 1/F., Building B, Ganghongji High-Tech Intelligent Industrial Park, No.1008, Songbai Road, Yangguang Community, Xili Subdistrict, Nanshan District, Shenzhen, Guangdong
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.The certification body is American Association for Laboratory Accreditation (A2LA).

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	ZHENGZHOU NISSAN AUTOMOBILE CO., LTD.
Address	No. 3 Lianhu Road, Zhengzhou area of Henan Pilot Free Trade Zone (Zhengdong), 450016 Zhengzhou City, Henan Province, China (PRC)

2.2 Manufacturer Information

Manufacturer	ASUSTeK COMPUTER INC.
Address	1F., No 15, Lide Rd., Beitou Dist., Taipei City 112, Taiwan

2.3 General Description for Equipment under Test (EUT)

EUT Name	Wireless Cell Phone Charger
Model Name Under Test	296352HH0A
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	H01.02.03.240712
Software Version	S01.02.04.241127
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.4 Technical Information

Network and Wireless connectivity	WPT, 110.5~205 kHz
-----------------------------------	--------------------

The requirement for the following technical information of the EUT was tested in this report:

Modulation Type	ASK/FSK
Operating Frequency	110.5~205 kHz
Product Type	☒ Mobile ☐ Portable ☐ Fix Location
Antenna Type	Coil Antenna
About Product	The EUT support the Qi technology, and they have the same operating frequency.

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C	Intentional Radiators
2	ANSI C63.10-2020+Cor 1-2023	American National Standard for Testing Unlicensed Wireless Devices

3.2 Verdict

No.	Description	FCC Part No.	Verdict
1	Antenna Requirement	15.203	Pass ^{Note 1}
2	Radiated Emission	15.209,15.215(b)	Pass
3	Conducted Emission, AC Ports	15.207	N/A ^{Note 2}
4	20 dB Bandwidth	15.215(c)	Pass
Note 1: The EUT has a permanently and irreplaceable attached antenna, which complies with the requirement FCC 15.203.			
Note 2: This product is an in-vehicle product, so this test item is not applicable.			

3.3 Test Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Radiated emissions (9 kHz-30 MHz)	3.8 dB
Radiated emissions (30 MHz-1 GHz)-966#1	4.4 dB

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

Relative Humidity	30% to 60%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+22°C to +25°C
Working Voltage of the EUT	NV (Normal Voltage)	9V - 16V


4.2 Test Ancillary Equipment

Description	Manufacturer	Model	Serial No.	Length	Description	Use
DC Power Supply	ITECH	IT6720	N/A	N/A	N/A	☒
Power cord	N/A	N/A	N/A	1.5m	N/A	☒
Wireless Charging Load	YBZ	N/A	N/A	N/A	50W	☒

4.3 Test Setups

Test Setup 1


Radiated Test (Below 30 MHz)

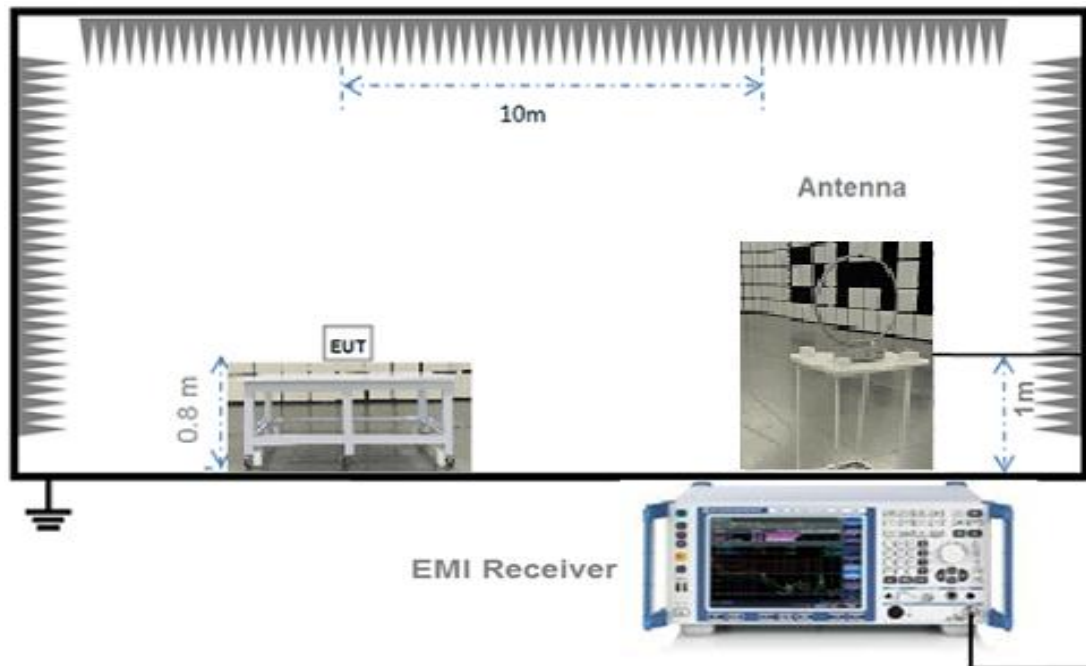

(Diagram 1)

Test Setup 2


Radiated Test (30 MHz-1 GHz)

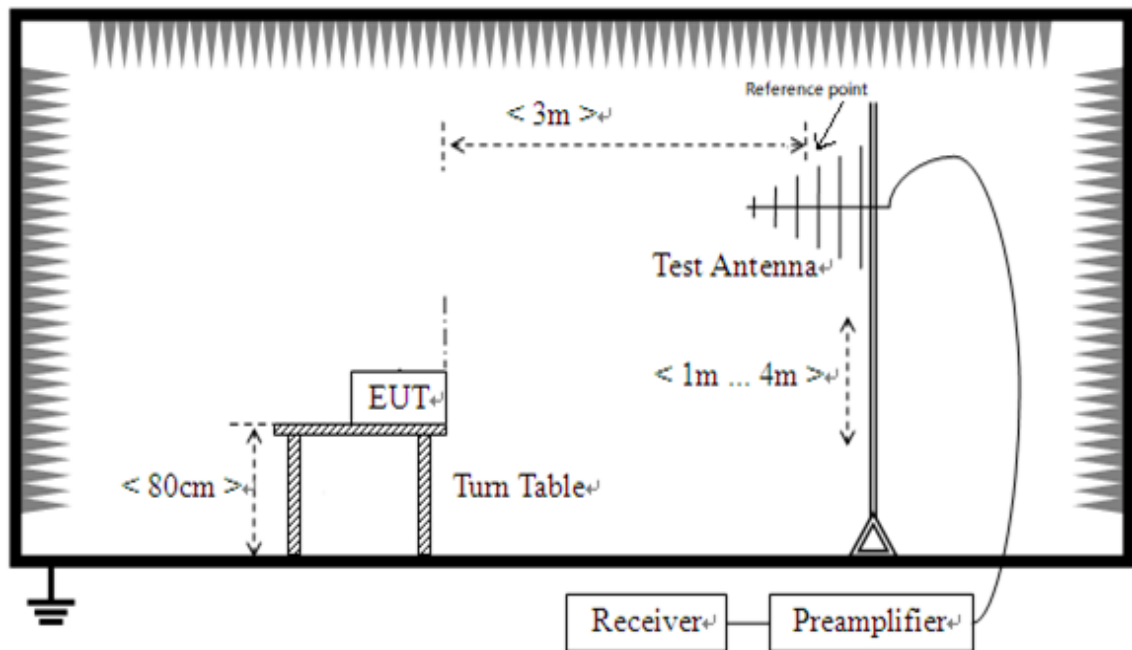

(Diagram 2)

Test Setup 3

AC Power Supply Port Test

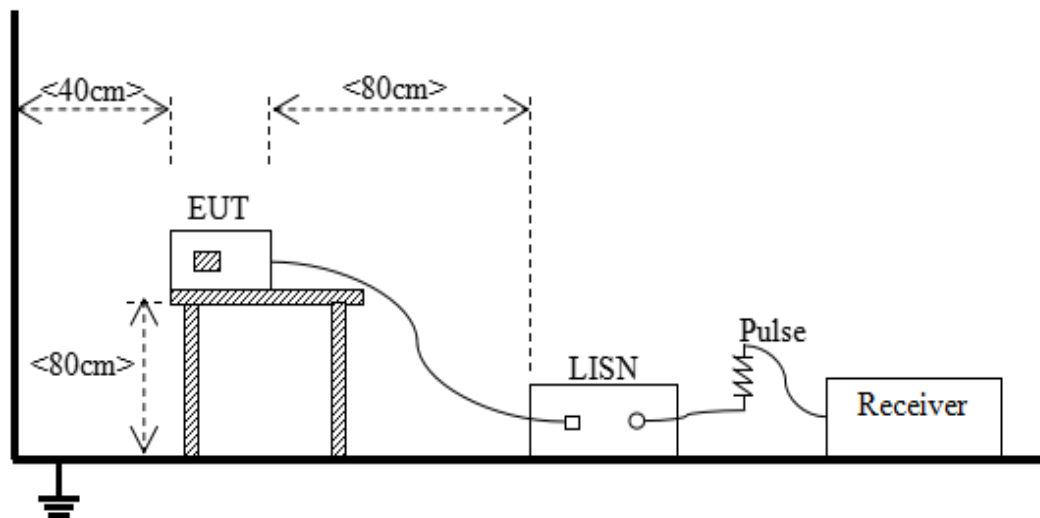

(Diagram 3)

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product.	An embedded-in antenna design is used.

Reference Documents	Item
Photo	Please refer EUT internal photos.

5.2 Emission Tests

5.2.1 Radiated Emission

5.2.1.1 Limit

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

NOTE:

- 1) Field Strength ($\text{dB}\mu\text{V/m}$) = $20 \cdot \log [\text{Field Strength } (\mu\text{V/m})]$.
- 2) In the emission tables above, the tighter limit applies at the band edges.
- 3) For above 1000 MHz, limit field strength of harmonics: $54 \text{ dB}\mu\text{V/m}@3 \text{ m (AV)}$ and $74 \text{ dB}\mu\text{V/m}@3 \text{ m (PK)}$
- 4) At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). For example, at the frequency 9 kHz, limit @10m = $20 \cdot \log (2400/f) + 40 \log (d_{\text{limit}}/d_{\text{measure}})$ where limit = 300m, $d_{\text{measure}}=10\text{m}$. limit @10m = $20 \cdot \log (2400/9) + 40 \log (300/10) = 107.5 \text{ (dB}\mu\text{V/m)}$.
- 5) At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided, When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements). For example, at the frequency 30 MHz, limit @10m = $20 \cdot \log (100) + 20 \log (d_{\text{limit}}/d_{\text{measure}})$ where limit = 3m, $d_{\text{measure}}=10\text{m}$. limit @10m = $20 \cdot \log (100) + 20 \log (3/10) = 29.5 \text{ (dB}\mu\text{V/m)}$.

5.2.1.2 Test Setup

Refer to 4.2 section (test setup 1 to test setup 2) for radiated emission test, the photo of test setup please refer to ANNEX B.

5.2.1.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360° , and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented. The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test

condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $30 \text{ MHz} < f < 1 \text{ GHz}$, 10 kHz for $150 \text{ kHz} < f < 30 \text{ MHz}$,
300 Hz for $f < 150 \text{ kHz}$

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

5.2.1.4 Test Result and Test Equipment List

Please refer to ANNEX A.1.

NOTE:

1. Results (dB μ V/m) = Reading (dB μ V) + Factor (dB/m)

The reading level is calculated by software which is not shown in the sheet

2. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Amplifier Gain (dB)

3. Margin = Limit – Results

5.2.2 Conduct Emission

5.2.2.1 Test Limit

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- 1) The limit is applicable to Class B ITE.
- 2) The lower limit shall apply at the band edges.
- 3) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50 MHz.

5.2.2.2 Test Setup

Refer to 4.2 section test (test setup 3) for conducted emission, the photo of test setup please refer to ANNEX B.

5.2.2.3 Test Procedure

The EUT is connected to the power mains through a LISN which provides 50 Ω /50 μ H of coupling impedance for the measuring instrument. The test frequency range is from 150 kHz to 30 MHz. The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels that are more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.2.2.4 Test Result and Test Equipment List

Please refer to ANNEX A.2.

NOTE:

1. Results (dB μ V) = Reading (dB μ V) + Factor (dB/m)

The reading level is calculated by software which is not shown in the sheet

2. Factor = Insertion loss + Cable loss
3. Margin = Limit – Results

5.2.3 20 dB Bandwidth

5.2.3.1 Limit

FCC §15.215(c)

The 20 dB bandwidth is known as the 99% emission bandwidth, or 20 dB bandwidth ($10 \cdot \log 1\% = 20$ dB) taking the total RF output power.

5.2.3.2 Test Setup

Refer to 4.2 section test (test setup 1) for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.2.3.3 Test Procedure

The 20dB bandwidth is measured with a spectrum analyzer connected via a receiver antenna placed near the EUT while the EUT is operating in transmission mode.

Use the following spectrum analyzer settings:

Span = between 2 to 5 times the OBW

RBW = 1% to 5% the OBW

VBW $\geq$ 3RBW

Sweep = auto

Detector function = peak

Trace = max hold

The 99% emission bandwidth is measured with a spectrum analyzer connected via a receiver antenna placed near the EUT while the EUT is operating in transmission mode.

Use the following spectrum analyzer settings:

Span = between 1.5 to 5 times the OBW

RBW = 1% to 5% OBW

VBW $\geq$ 3RBW

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate, Allow the trace to stabilize.

5.2.3.4 Test Result and Test Equipment List

Please refer to ANNEX A.3.

ANNEX A TEST RESULTS

A.1 Radiated Emission


Note : All Radiated Emissions tests were performed in X, Y, Z axis direction of EUT. And only the worst axis test condition was recorded in this test report.

Standby mode:

Sample No.	AT26070007-001-S06	Temperature	23.3°C
Humidity	64%RH	Pressure	100.3kPa
Test Engineer	Zhou Haonan	Test Date	2026.07.04

Test Data and Plot

9 kHz to 30 MHz, ANT-V

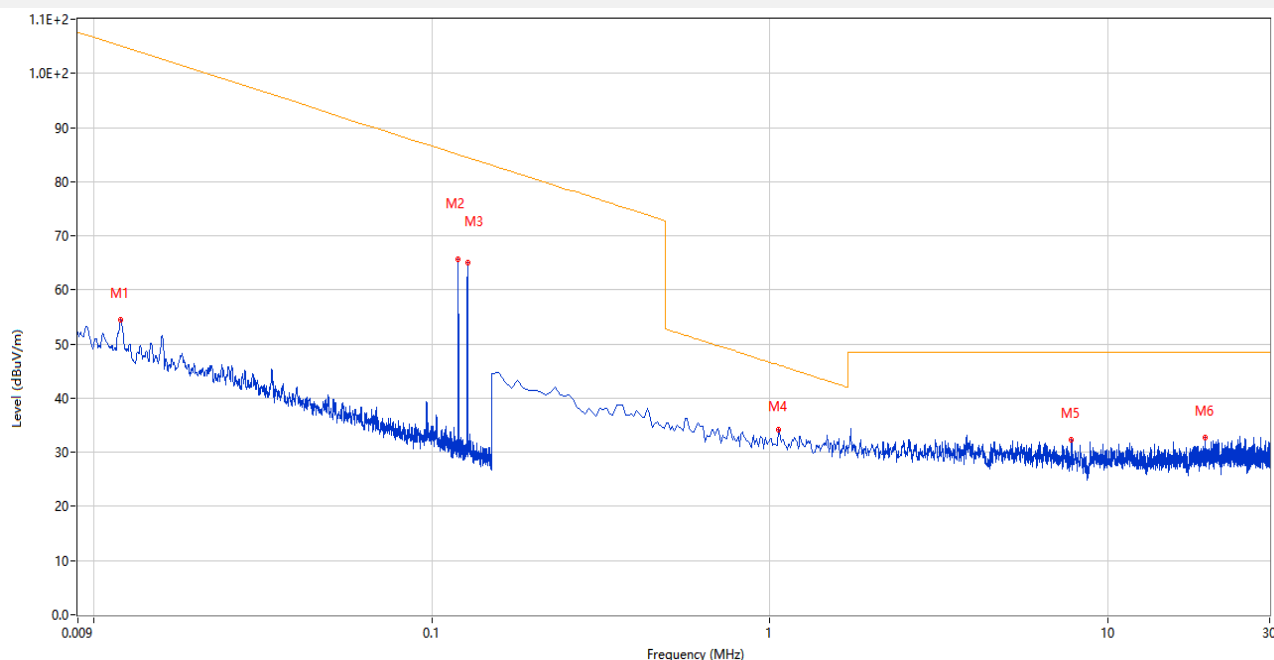

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	0.012	54.49	19.74	105.0	50.51	Peak	332.00	100	Vertical	Pass
2	0.120	65.63	19.84	85.0	19.37	Peak	41.00	100	Vertical	Pass
3	0.128	65.08	19.84	84.5	19.42	Peak	322.00	100	Vertical	Pass
4	1.060	34.14	20.03	46.1	11.96	Peak	70.00	100	Vertical	Pass
5	7.792	32.28	20.67	48.5	16.22	Peak	86.00	100	Vertical	Pass
6	19.306	32.82	21.26	48.5	15.68	Peak	136.00	100	Vertical	Pass


Wireless charging mode:

Sample No.	AT26070007-001-S06	Temperature	23.3℃
Humidity	64%RH	Pressure	100.3kPa
Test Engineer	Zhou Haonan	Test Date	2026.07.04

Test Data and Plot

9 kHz to 30 MHz, ANT-V

10m RE Test Case_FCC Certification_FCC 15C 9K-30MHz

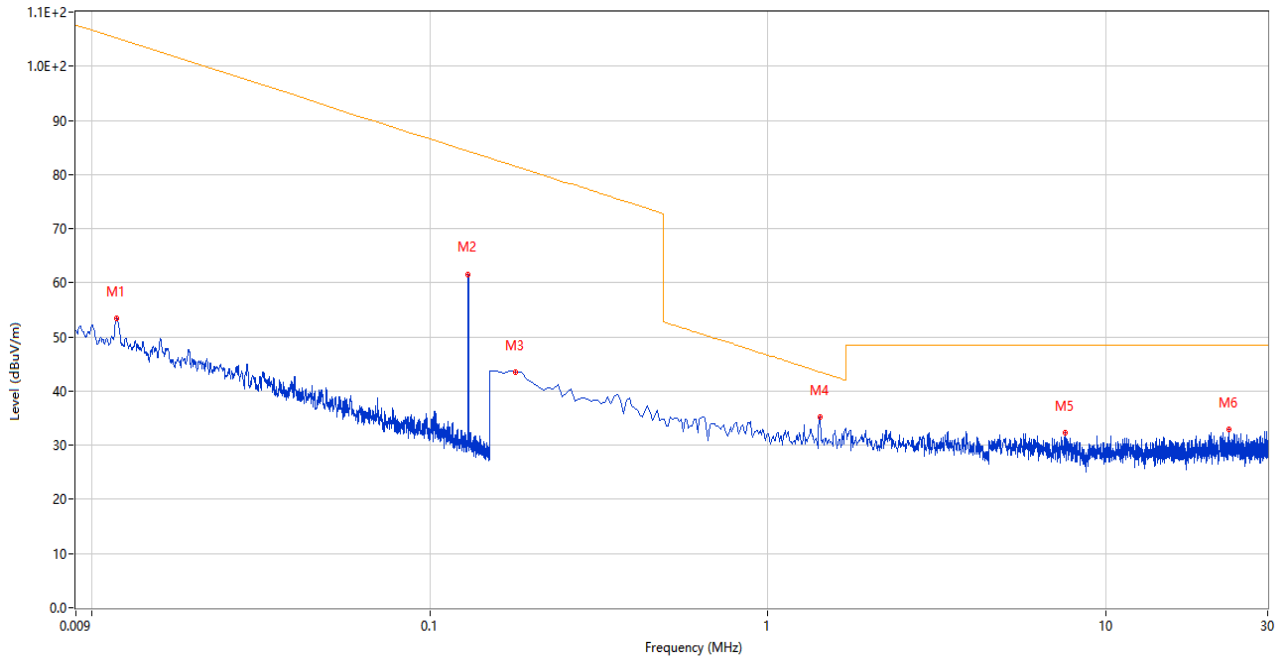

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	0.012	53.43	19.74	105.1	51.67	Peak	345.00	100	Vertical	Pass
2	0.130	61.61	19.84	84.3	22.69	Peak	166.00	100	Vertical	Pass
3	0.180	43.47	19.84	81.5	38.03	Peak	58.00	100	Vertical	Pass
4	1.426	35.24	20.11	43.5	8.26	Peak	96.00	100	Vertical	Pass
5	7.545	32.23	20.66	48.5	16.27	Peak	3.00	100	Vertical	Pass
6	23.067	32.84	21.35	48.5	15.66	Peak	96.00	100	Vertical	Pass

Equipment Information						
Equipment Name	Supplier	Model	Serial No.	Cal. Date	Cal. Due	Use
EMI Receiver	ROHDE&SCHWARZ	ESR7	103027	2025.10.30	2026.10.29	☒
Test Antenna-Loop	SCHWARZBECK	FMZB 1519	1519-037	2024.01.23	2027.01.22	☒
Anechoic Chamber(10m#2)	YiHeng	21m*11m*8m	101-1	2025.10.16	2028.10.15	☒
Description	Supplier	Name	Version	/		Use
Test Software	BALUN	BL410-E	V22.930	/		☒


Standby mode:

Sample No.	AT26070007-001-S06	Temperature	25.4℃
Humidity	62%RH	Pressure	100.3kPa
Test Engineer	Zou Yuanxin	Test Date	2026.07.04

Test Data and Plot

30 MHz to 1 GHz, ANT-H


RE Test case_FCC Part 15C_FCC Part 15C-30MHz-1GHz

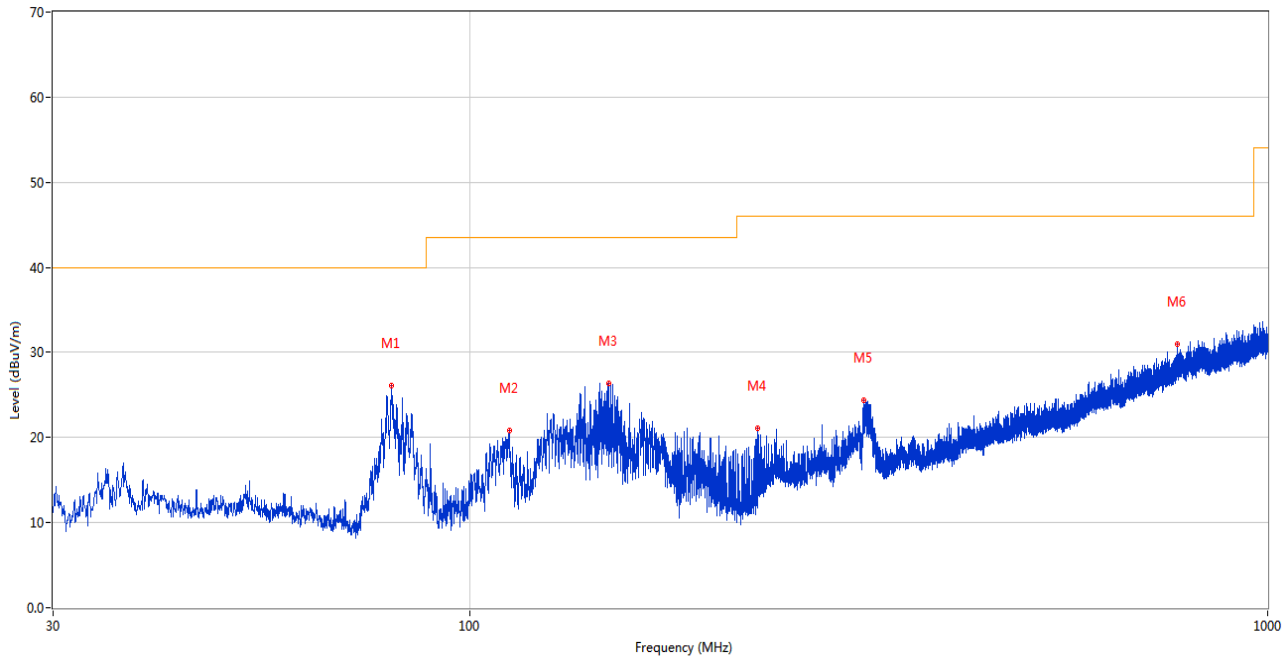

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	79.664	26.10	-28.73	40.0	13.90	Peak	142.00	200	Horizontal	Pass
2	111.916	20.89	-27.49	43.5	22.61	Peak	360.00	200	Horizontal	Pass
3	149.019	26.40	-23.63	43.5	17.10	Peak	213.00	200	Horizontal	Pass
4	229.578	21.05	-25.94	46.0	24.95	Peak	0.00	100	Horizontal	Pass
5	312.027	24.45	-21.76	46.0	21.55	Peak	335.00	100	Horizontal	Pass
6	770.013	30.93	-9.50	46.0	15.07	Peak	0.00	100	Horizontal	Pass

30 MHz to 1 GHz, ANT-V

RE Test case_FCC Part 15C_FCC Part 15C-30MHz-1GHz

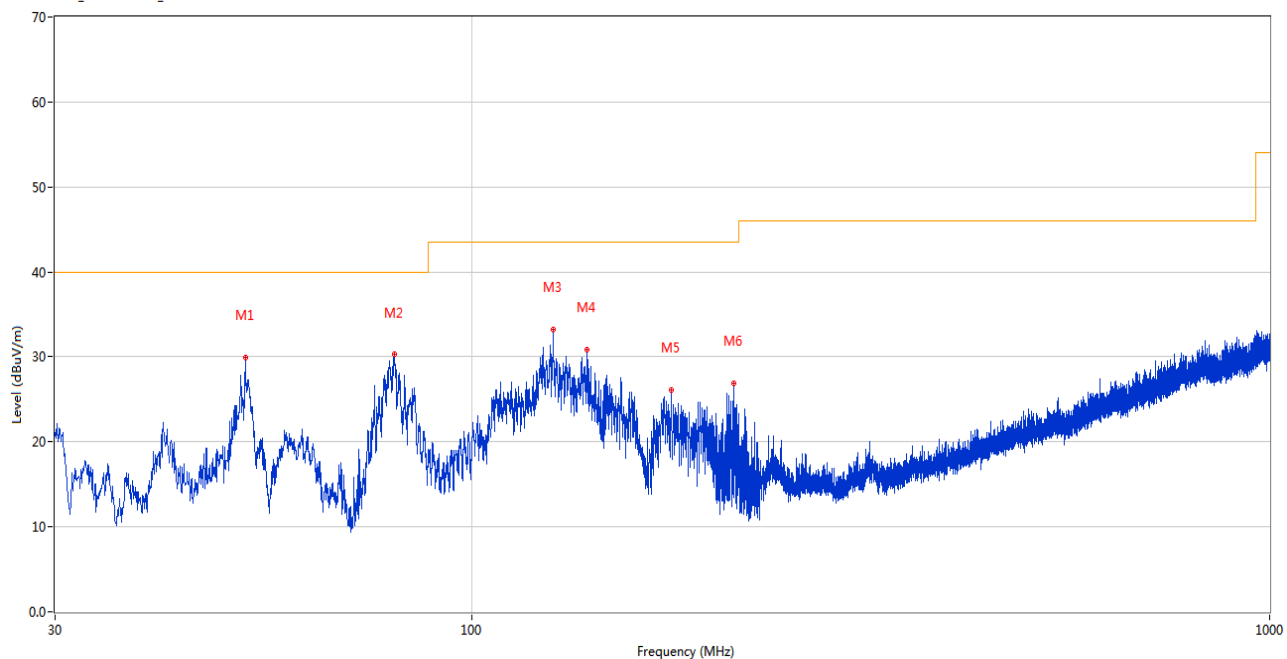


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	51.971	29.88	-24.86	40.0	10.12	Peak	139.00	100	Vertical	Pass
2	79.810	30.26	-28.76	40.0	9.74	Peak	211.00	100	Vertical	Pass
3	126.321	33.29	-26.22	43.5	10.21	Peak	185.00	100	Vertical	Pass
4	139.513	30.83	-24.61	43.5	12.67	Peak	52.00	100	Vertical	Pass
5	177.876	26.11	-25.02	43.5	17.39	Peak	339.00	100	Vertical	Pass
6	212.602	26.94	-27.00	43.5	16.56	Peak	194.00	100	Vertical	Pass

Wireless charging mode:

Sample No.	AT26070007-001-S06	Temperature	25.4℃
Humidity	62%RH	Pressure	100.3kPa
Test Engineer	Zou Yuanxin	Test Date	2026.07.04

Test Data and Plot


30 MHz to 1 GHz, ANT-H

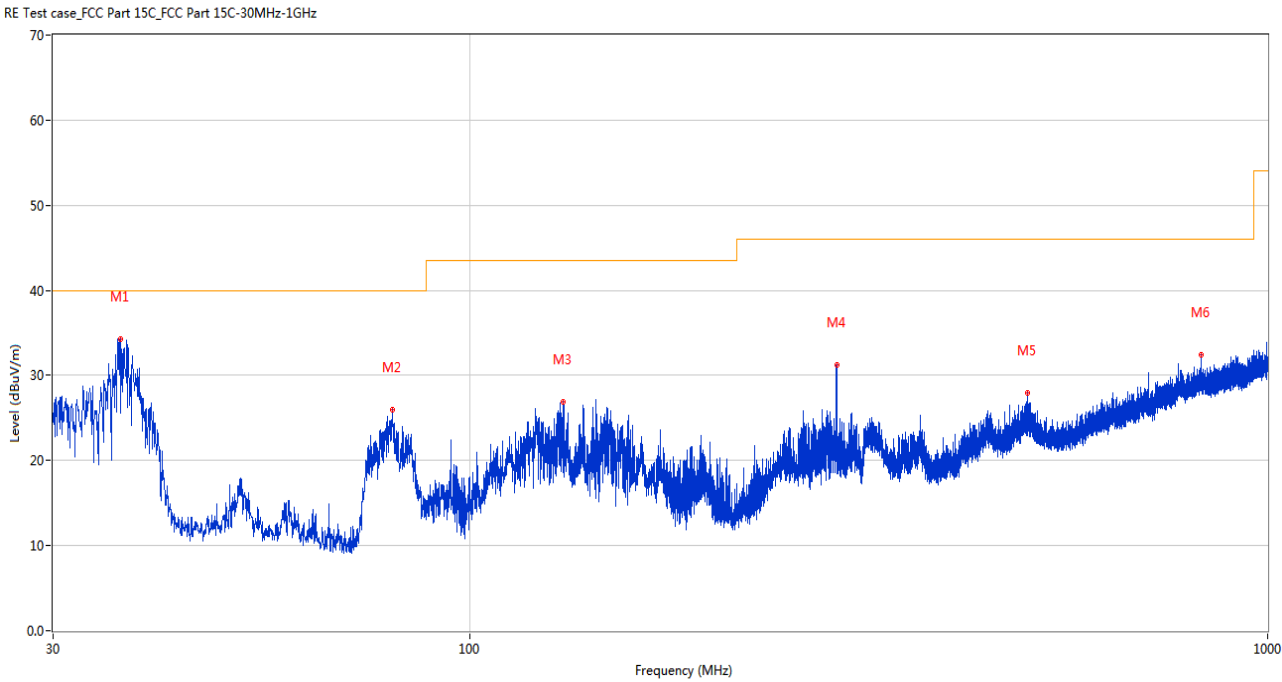

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	36.402	34.21	-26.09	40.0	5.79	Peak	253.00	100	Horizontal	Pass
2	79.858	25.96	-28.77	40.0	14.04	Peak	161.00	200	Horizontal	Pass
3	130.977	26.92	-25.52	43.5	16.58	Peak	290.00	200	Horizontal	Pass
4	288.020	31.29	-22.66	46.0	14.71	Peak	0.00	100	Horizontal	Pass
5	500.402	28.01	-15.70	46.0	17.99	Peak	314.00	100	Horizontal	Pass
6	825.497	32.43	-8.41	46.0	13.57	Peak	41.00	200	Horizontal	Pass

30 MHz to 1 GHz, ANT-V

RE Test case_FCC Part 15C_FCC Part 15C-30MHz-1GHz

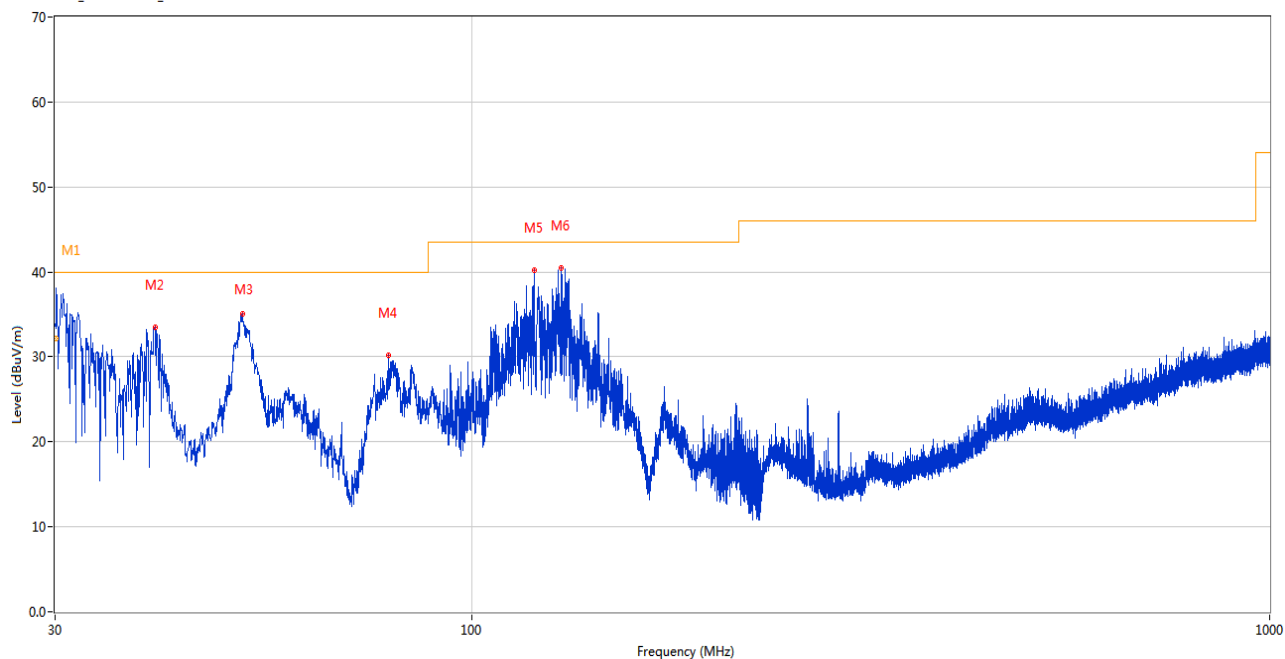

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	30.097	38.15	-26.88	40.0	1.85	Peak	271.00	100	Vertical	N/A
1*	30.097	32.22	-26.88	40.0	7.78	QP	271.00	100	Vertical	Pass
2	40.039	33.50	-25.45	40.0	6.50	Peak	252.00	100	Vertical	Pass
3	51.486	35.10	-24.84	40.0	4.90	Peak	271.00	100	Vertical	Pass
4	78.549	30.18	-28.48	40.0	9.82	Peak	281.00	100	Vertical	Pass
5	119.628	40.18	-26.69	43.5	3.32	Peak	154.00	100	Vertical	Pass
6	129.376	40.43	-25.85	43.5	3.07	Peak	41.00	100	Vertical	Pass

Equipment Information						
Equipment Name	Supplier	Model	Serial No.	Cal. Date	Cal. Due	Use
EMI Receiver	Keysight	N9038A	MY55330120	2026.06.02	2027.06.01	☒
Amplifier (30MHz-1GHz)	COM-MV	ZT30- 1000M	B2017119081	2025.11.26	2026.11.25	☒
Test Antenna- Bi-Log	SCHWARZBE CK	VULB 9168	9168-00867	2025.03.23	2028.03.22	☒
Anechoic Chamber(966#2)	YiHeng	9m*6m*6m	106-1	2026.01.20	2029.01.19	☒
Description	Supplier	Name	Version	/		Use
Test Software	BALUN	BL410-E	V22.930	/		☒

A.2 Conducted Emission

Note: Not applicable.

A.3 20 dB Bandwidth

Note: Because the measured signal is CW adjusting the RBW per C63.10 would not be practical since measured bandwidth will always follow the RBW and the result will be approximately twice the RBW.

Standby mode (120kHz) :


Sample No.	AT26070007-001-S06	Temperature	23.3°C
Humidity	64%RH	Pressure	100.3kPa
Test Engineer	Zhou Haonan	Test Date	2026.07.04


Test Data

Frequency (MHz)	Emission Bandwidth (20dB down) (kHz)	Occupied Bandwidth (99%) (kHz)
0.11999	0.73857	0.62684

Test Plots

Emission Bandwidth

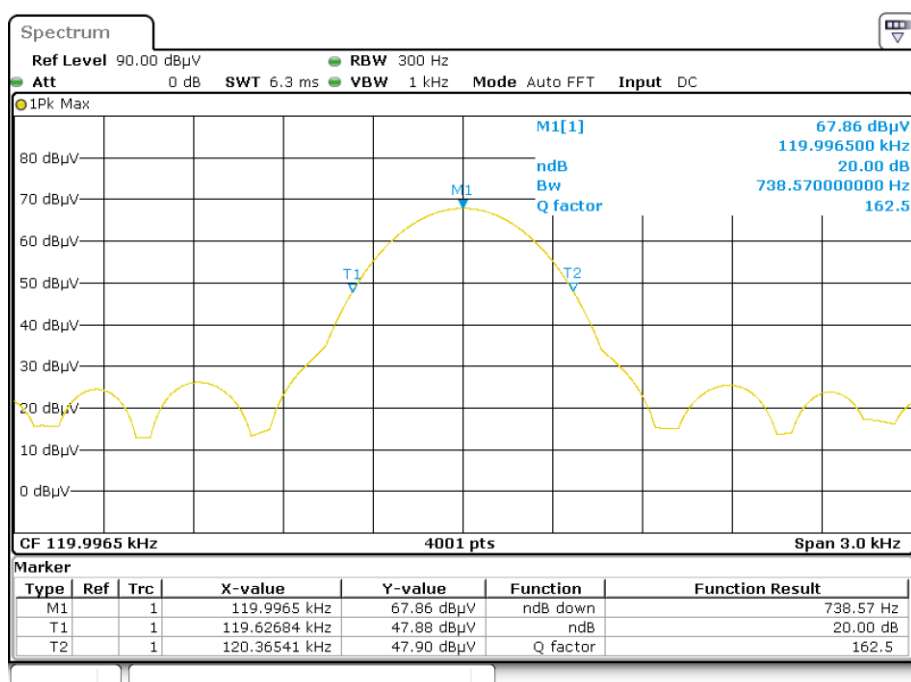

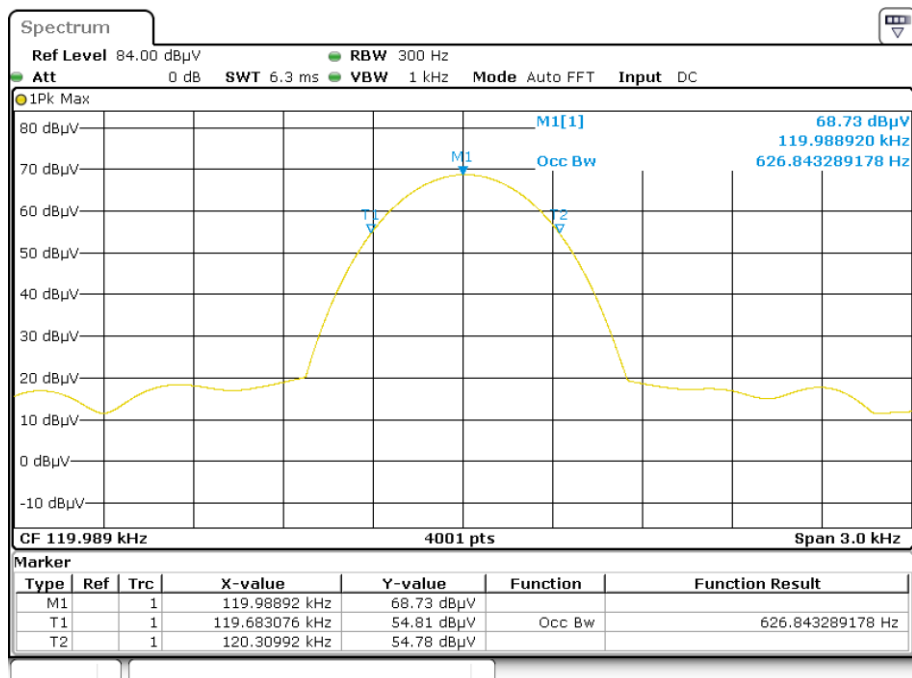
99% Occupied Bandwidth

Standby mode (128kHz) :


Frequency (MHz)	Emission Bandwidth (20dB down) (kHz)	Occupied Bandwidth (99%) (kHz)
0.12766	0.73932	0.64784

Test Plots

Emission Bandwidth

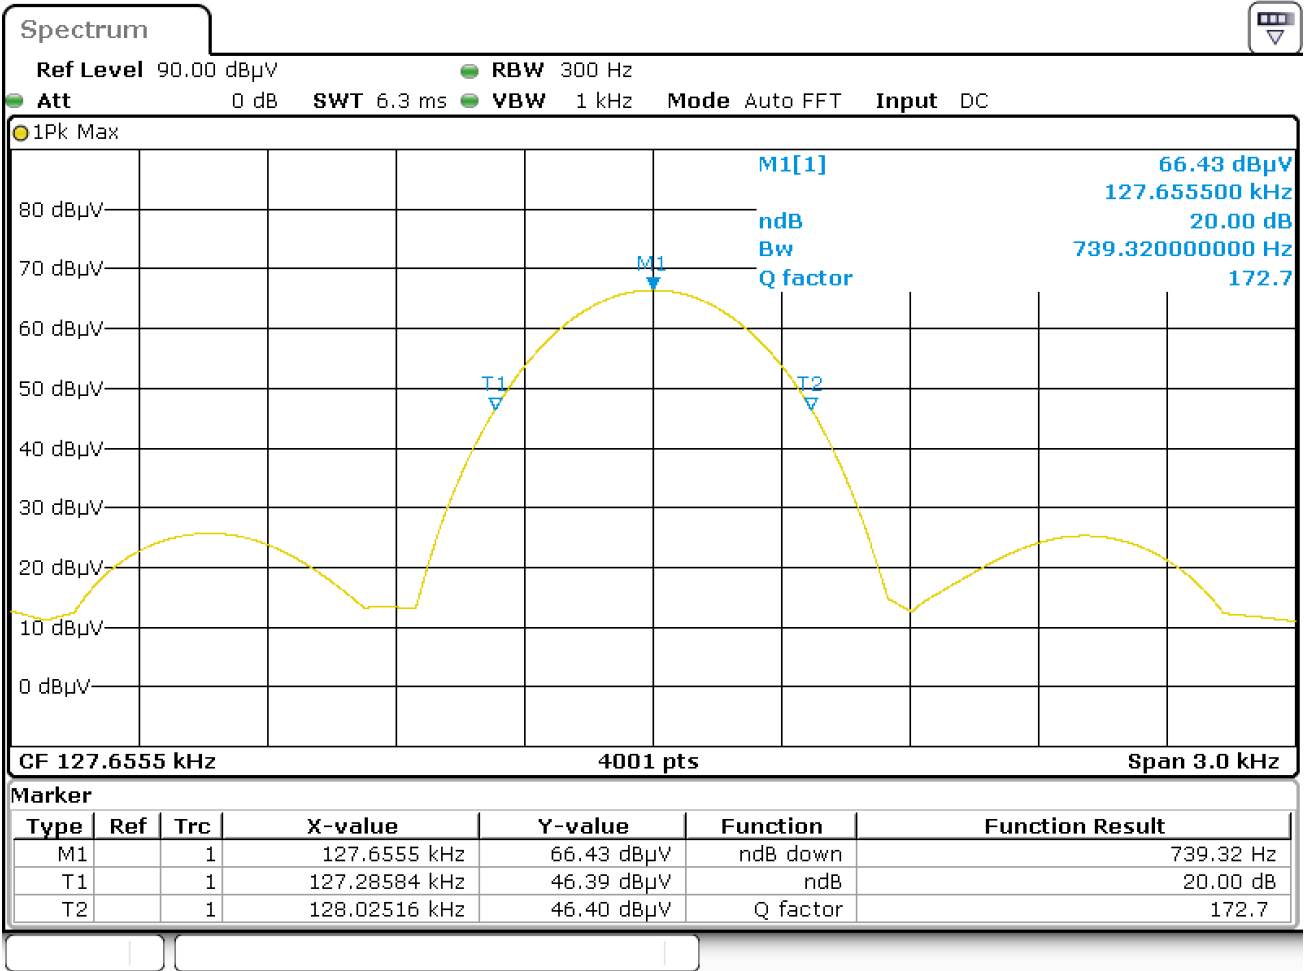

99% Occupied Bandwidth

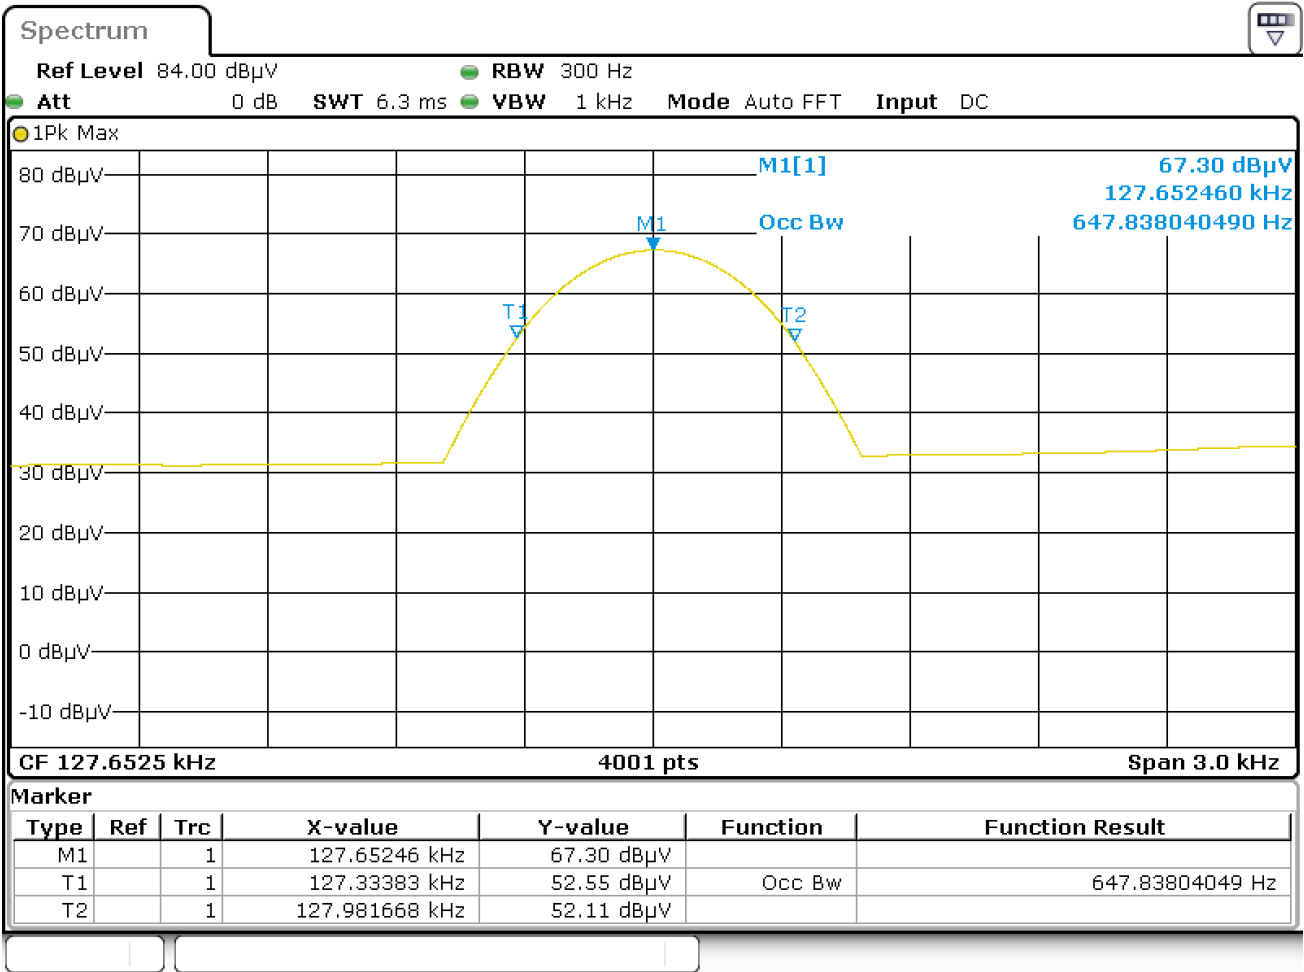


Wireless charging mode (130kHz) :


Frequency (MHz)	Emission Bandwidth (20dB down) (kHz)	Occupied Bandwidth (99%) (kHz)
0.13009	0.74316	0.63059

Test Plots

Emission Bandwidth

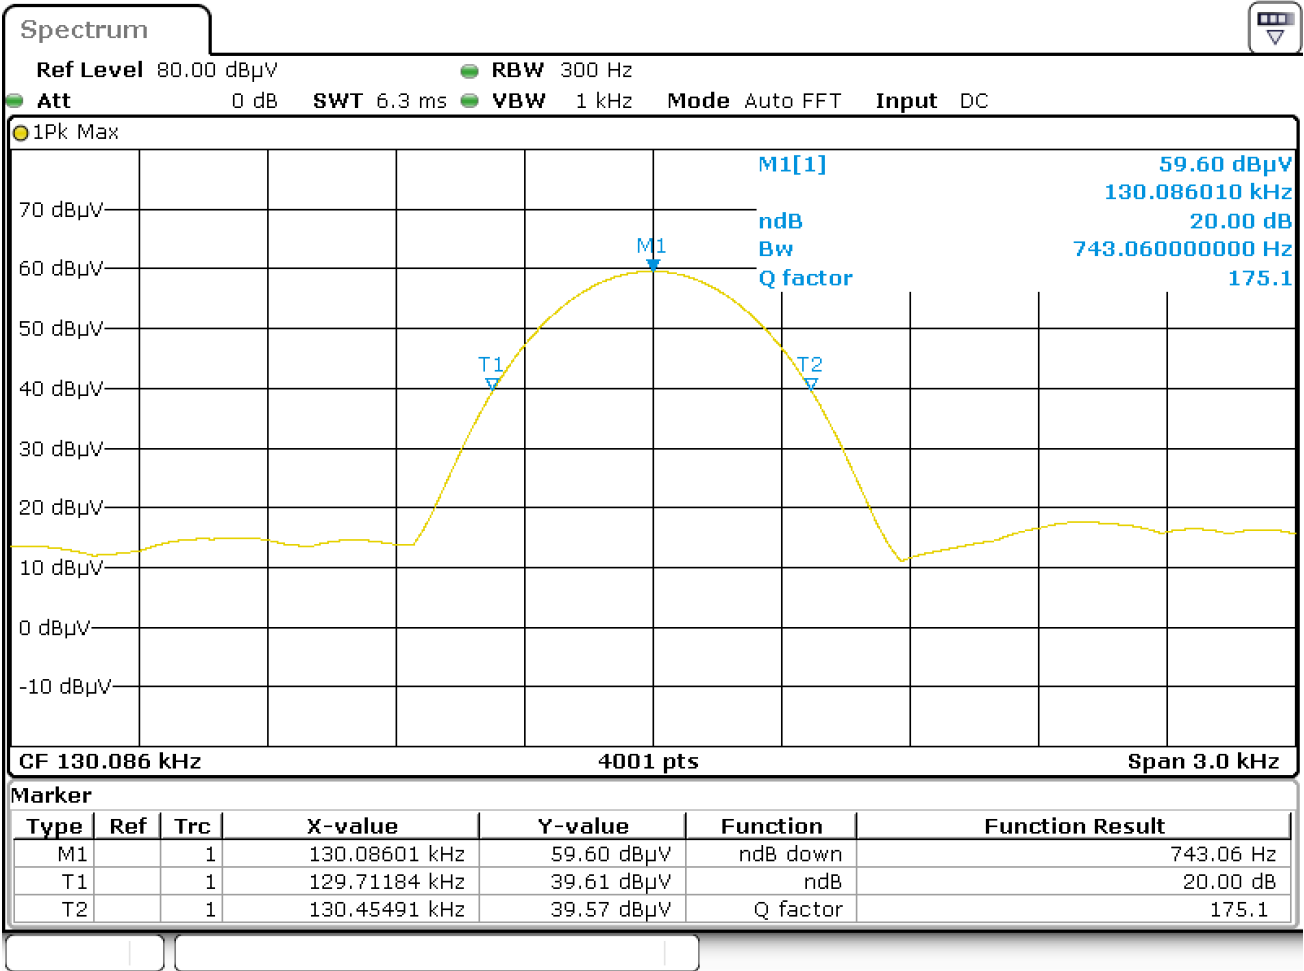

99% Occupied Bandwidth

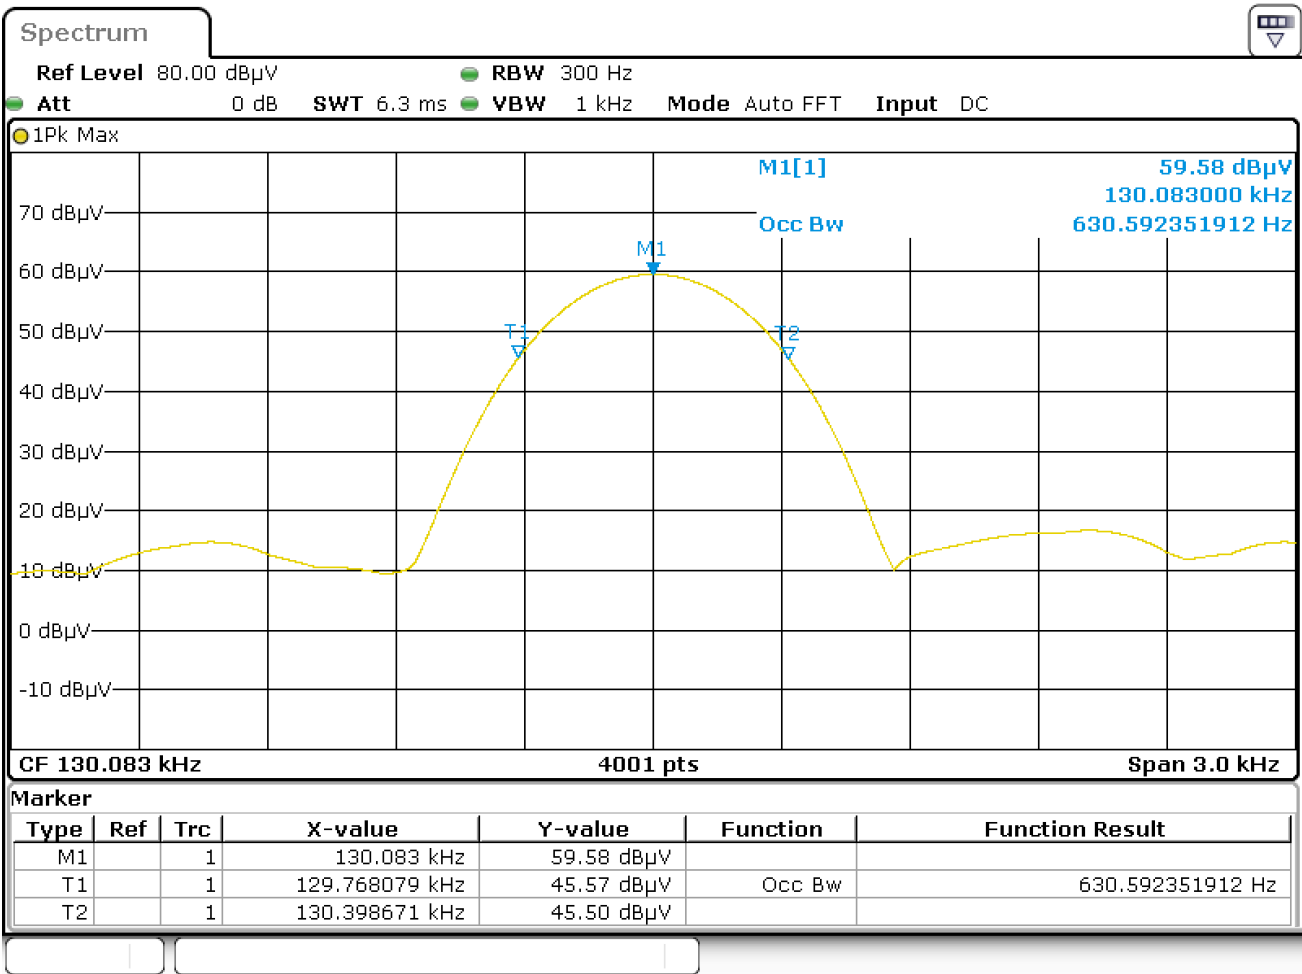

Equipment Information						
Equipment Name	Supplier	Model	Serial No.	Cal. Date	Cal. Due	Use
EMI Receiver	ROHDE&SCHW ARZ	ESR7	103027	2025.10.30	2026.10.29	☒
Test Antenna- Loop	SCHWARZBECK	FMZB 1519	1519-037	2024.01.23	2027.01.22	☒
Anechoic Chamber(10m#2)	YiHeng	21m*11m*8 m	101-1	2025.10.16	2028.10.15	☒

ANNEX B TEST SETUP PHOTOS

Please refer the document “Ti-AT26070054-AE-2.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “Ti-AT26070054-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “Ti-AT26070054-AI.PDF”.

Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--