


Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2412MHz
Remark:	\	Test_Date	2026/7/13


Test Graph

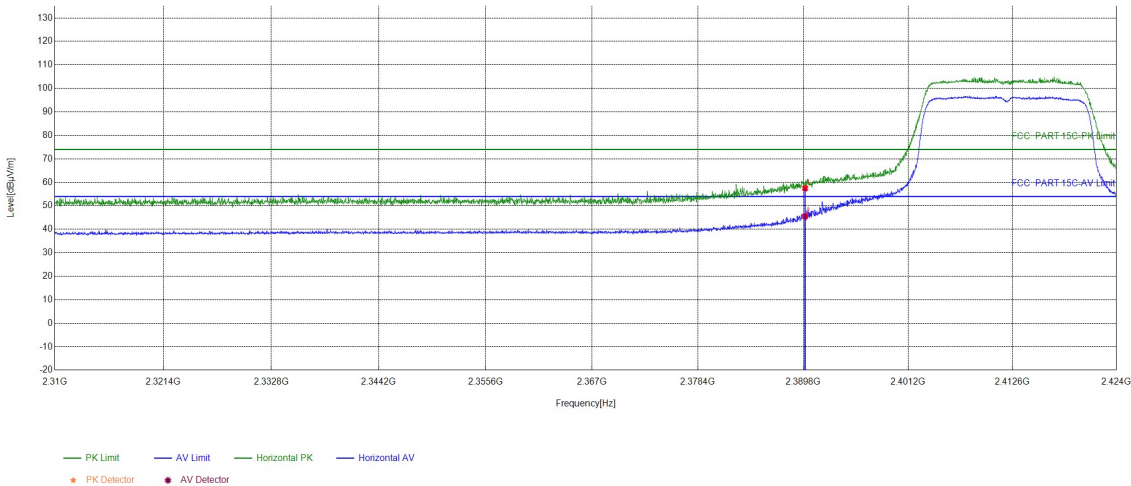

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	41.51	57.47	74.00	16.53	PASS	Horizontal	PK
2	2390	15.96	29.54	45.50	54.00	8.50	PASS	Horizontal	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2412MHz
Remark:	\	Test_Date	2026/7/13


Test Graph

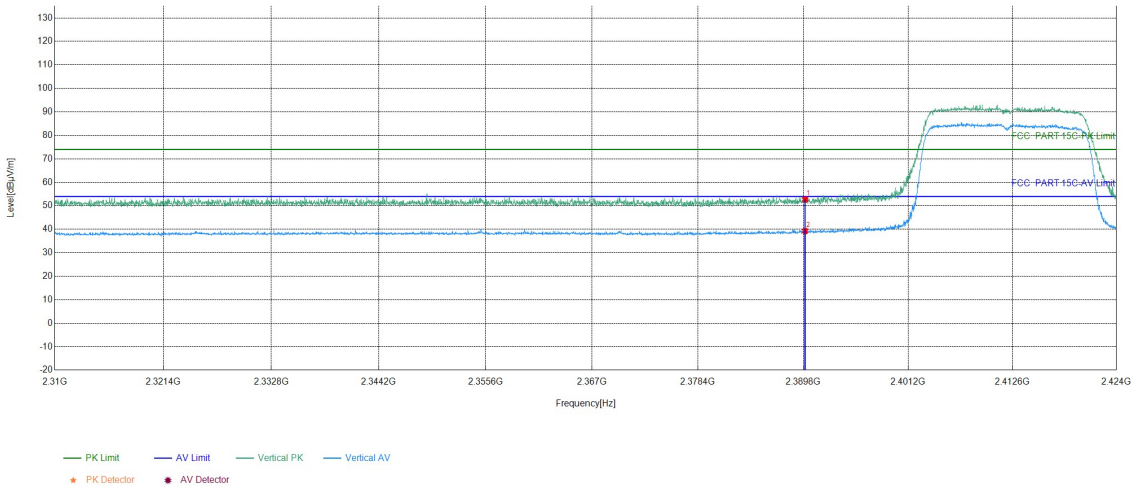

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	36.72	52.68	74.00	21.32	PASS	Vertical	PK
2	2390	15.96	23.28	39.24	54.00	14.76	PASS	Vertical	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2462MHz
Remark:	\	Test_Date	2026/7/13


Test Graph

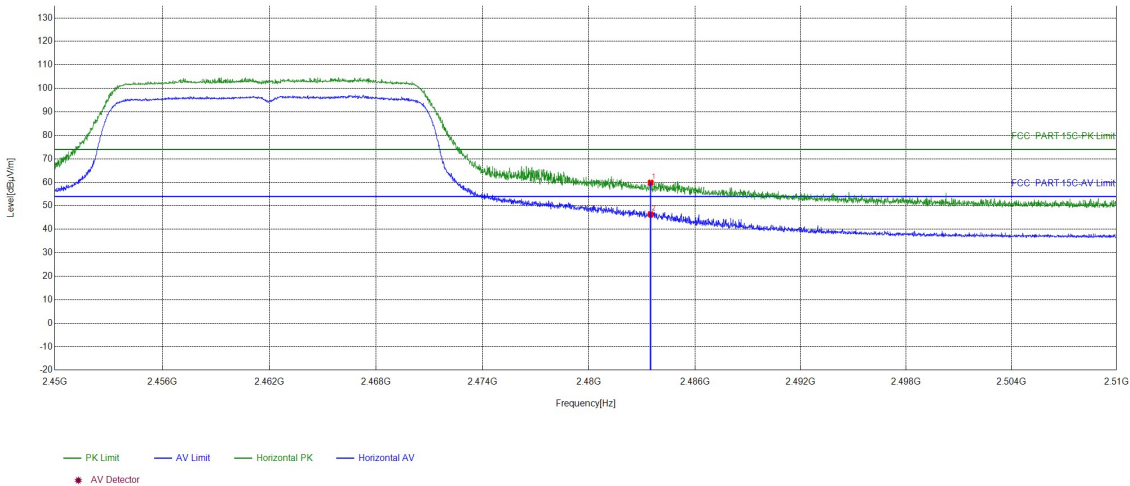

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	43.57	59.86	74.00	14.14	PASS	Horizontal	PK
2	2483.5	16.29	30.01	46.30	54.00	7.70	PASS	Horizontal	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2462MHz
Remark:	\	Test_Date	2026/7/13


Test Graph

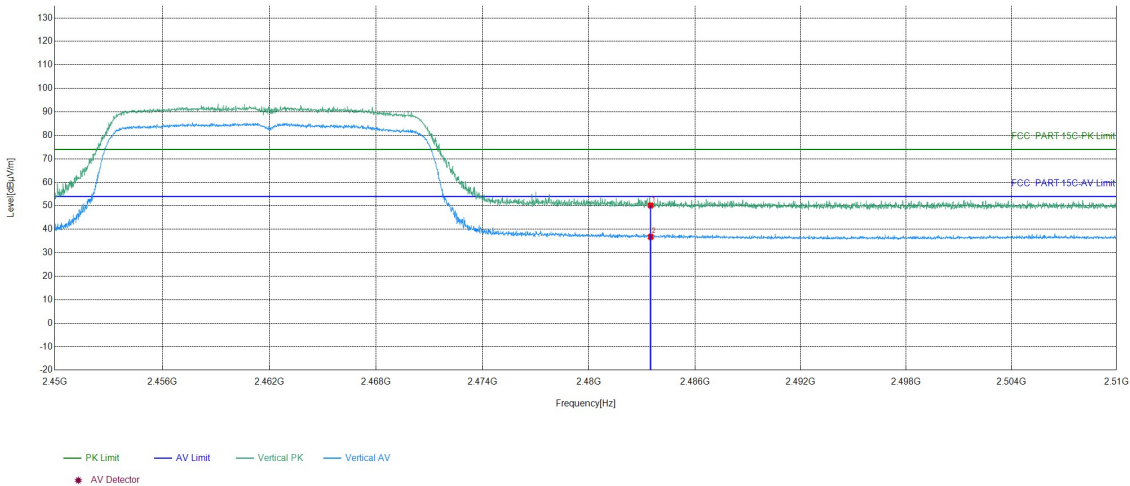

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	33.86	50.15	74.00	23.85	PASS	Vertical	PK
2	2483.5	16.29	20.49	36.78	54.00	17.22	PASS	Vertical	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2422MHz
Remark:	\	Test_Date	2026/7/13


Test Graph

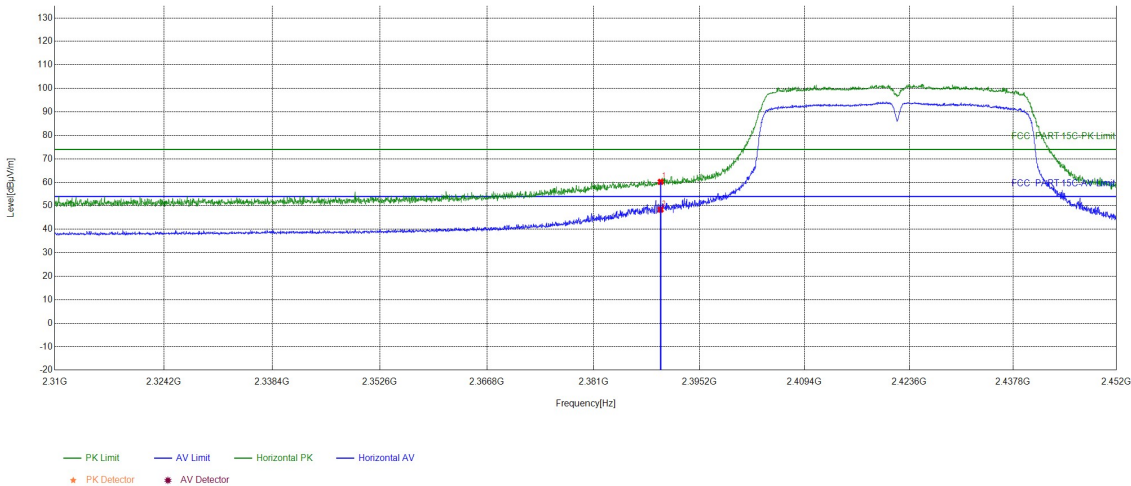

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	44.25	60.21	74.00	13.79	PASS	Horizontal	PK
2	2390	15.96	32.41	48.37	54.00	5.63	PASS	Horizontal	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2422MHz
Remark:	\	Test_Date	2026/7/13


Test Graph

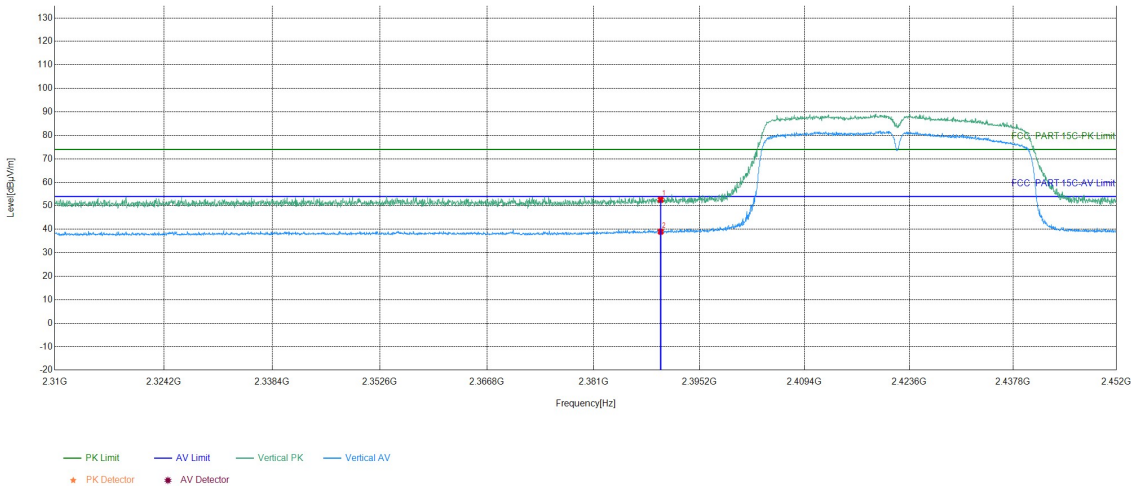

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	36.66	52.62	74.00	21.38	PASS	Vertical	PK
2	2390	15.96	23.03	38.99	54.00	15.01	PASS	Vertical	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2452MHz
Remark:	\	Test_Date	2026/7/13


Test Graph

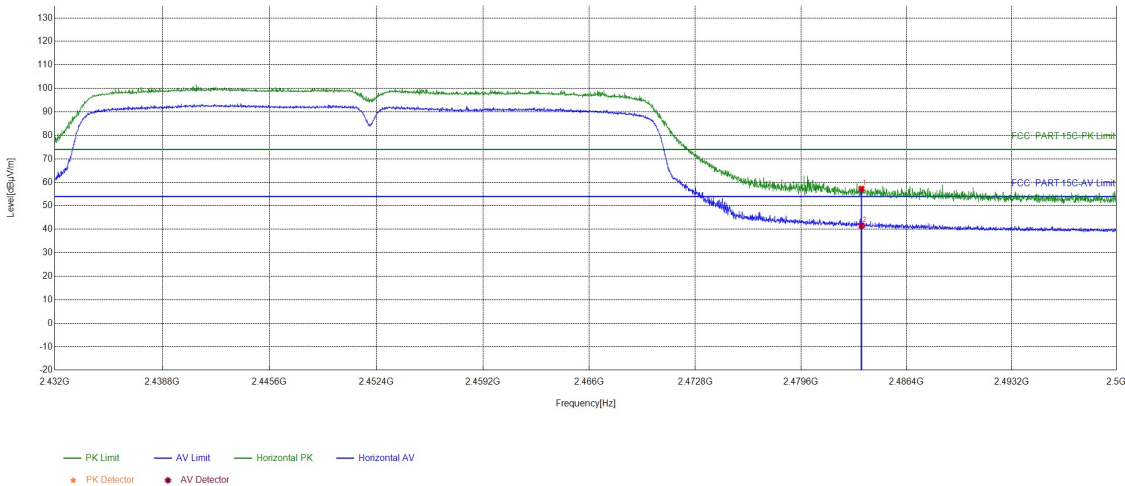

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	40.95	57.24	74.00	16.76	PASS	Horizontal	PK
2	2483.5	16.29	25.21	41.50	54.00	12.50	PASS	Horizontal	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2452MHz
Remark:	\	Test_Date	2026/7/13

Test Graph

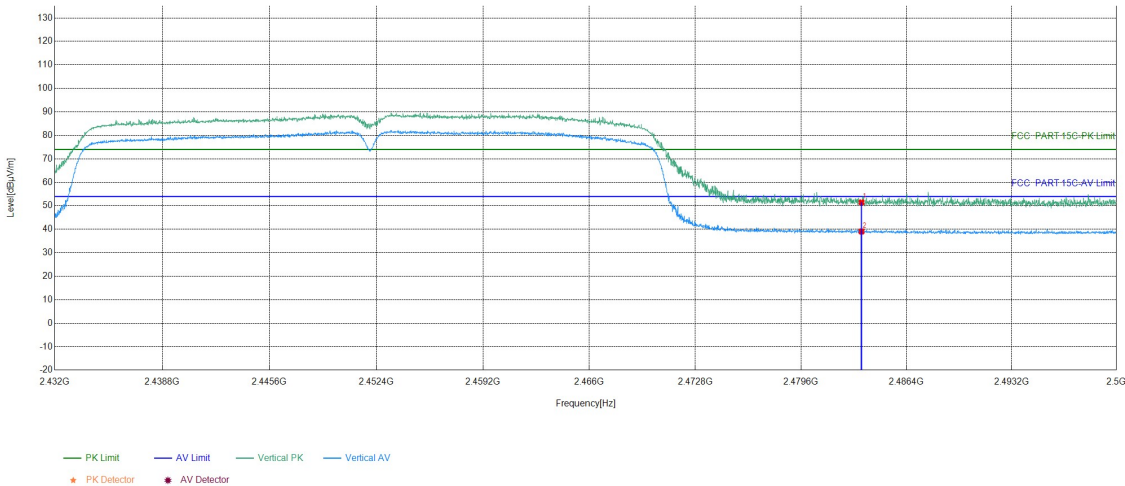

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	35.16	51.45	74.00	22.55	PASS	Vertical	PK
2	2483.5	16.29	22.78	39.07	54.00	14.93	PASS	Vertical	AV

Note:
The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level =Receiver Reading - Correct Factor
Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor

6 Appendix A

Refer to Appendix: 2.4G Wi-Fi of EED32S814640

7 PHOTOGRAPHS

Refer to Appendix Photographs of Report No. EED32S814639.