



FCC TEST REPORT

Applicant	:	Shenzhen BLS Electronics Co., Ltd
Address of Applicant	:	Room 203, Building A, Xinshabian Industrial Park, Hangcheng Avenue, Bao'an District, Shenzhen
Manufacturer	:	Shenzhen BLS Electronics Co., Ltd
Address of Manufacturer	:	Room 203, Building A, Xinshabian Industrial Park, Hangcheng Avenue, Bao'an District, Shenzhen
FCC ID	:	2BW57-RX85
Equipment under Test	:	Radar Detector
Model No.	:	RX85ST, RX86ST, RX88ST, RX89ST, B528
Test Standard(s)	:	FCC Rules and Regulations Part 15 Subpart B ANSI C63.4:2014 ANSI C63.4a-2017
Report No.	:	DDT-RE26060324-2E01
Issue Date	:	2026/07/23
Issued By	:	Guangdong Dongdian Testing Service Co., Ltd. Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808

REPORT

Table of Contents

1.	Summary of Test Results	5
2.	General Test Information.....	6
2.1.	Description of EUT	6
2.2.	Primary function of EUT	6
2.3.	Port of EUT.....	6
2.4.	Accessories of EUT	6
2.5.	Block diagram EUT configuration for test.....	7
2.6.	Decision of final test mode	7
2.7.	Deviations of test standard	7
2.8.	Test environment conditions	7
2.9.	Test laboratory	7
2.10.	Measurement uncertainty.....	8
3.	Radiated Emissions Test.....	9
3.1.	Test equipment.....	9
3.2.	Block diagram of test setup	9
3.3.	Limits	12
3.4.	Assistant equipment used for test	12
3.5.	Test procedure	12
3.6.	Test result.....	13
3.7.	Test data	14
3.8.	Test photo	18
4.	Photos of the EUT	18

Test Report Declare

Applicant	:	Shenzhen BLS Electronics Co., Ltd
Address	:	Room 203, Building A, Xinshabian Industrial Park, Hangcheng Avenue, Bao'an District, Shenzhen
Manufacturer	:	Shenzhen BLS Electronics Co., Ltd
Address	:	Room 203, Building A, Xinshabian Industrial Park, Hangcheng Avenue, Bao'an District, Shenzhen
Equipment under Test	:	Radar Detector
Model No.	:	RX85ST, RX86ST, RX88ST, RX89ST, B528

Test Standard Used:

FCC Rules and Regulations Part 15 Subpart B

ANSI C63.4:2014

ANSI C63.4a-2017

We Declare:

The equipment described above is tested by Guangdong Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Guangdong Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

Report No.:	DDT-RE26060324-2E01		
Date of Receipt:	2026/06/11	Date of Test:	2026/06/11-2026/07/06

Created: Zane Deng	Reviewed: Caesar Peng	Approved: Damon Hu
		
2026/07/21	2026/07/23	2026/07/23

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Guangdong Dongdian Testing Service Co., Ltd.

Revision History

Version	Revision Content	Issue Date	Approved
V0	Initial issue	2026/07/23	Damon Hu

1. Summary of Test Results

EMISSION (EMI)			
Description of Test Item	Standard	Result	Memo
Radiated Emissions Test	FCC Rules and Regulations Part 15 Subpart B,ANSI C63.4:2014,ANSI C63.4a-2017	PASS	/
AC Power Port Conducted Emission	FCC Rules and Regulations Part 15 Subpart B,ANSI C63.4:2014,ANSI C63.4a-2017	N/A	Only for AC power port
Antenna Power Conduction Measurement for Antenna port of Receivers	FCC Rules and Regulations Part 15 Subpart B,ANSI C63.4:2014,ANSI C63.4a-2017	N/A	Only for antenna port

Note 1: N/A is an abbreviation for Not Applicable, and means this item is not applicable for this device or no need to test according to standard.

Note 2: For the EMI measurements have made the EUT operated in a mode producing the highest emission level, and attempted to vary the configuration of the EUT radiated the highest emission.

2. General Test Information

2.1. Description of EUT

EUT* Name	: Radar Detector
Model Number	: RX85ST, RX86ST, RX88ST, RX89ST, B528
Difference of model number	: Only the model is different, therefore the test performed on the Model RX85ST
EUT Function Description	: Please reference user manual of this device
Power Supply	: DC 12V
EUT Class (Only For EMI)	: Class B
Maximum Work Frequency	: >108MHz
Sample Number	: S26060324-001

Note 1: EUT is the abbreviation of equipment under test.

Note 2: “☑” means to be chosen or applicable; “☐” means don't to be chosen or not applicable; This note applies to entire report.

Note 3: Equipment meeting Class A requirements may not offer adequate protection to broadcast services within a residential environment; The Class B requirements for equipment are intended to offer adequate protection to broadcast services within the residential environment. Equipment compliant with the class A requirements should have a warning notice in the user manual stating that it could cause radio interference. For example, Warning: Operation of this equipment in a residential environment could cause radio interference.

Note 4: The accessories of this product are only power cables, and the length of other signal cables and control cables used during the test is less than 3 meters.

2.2. Primary function of EUT

Function	Description
☑/	/

2.3. Port of EUT

Port	Description
☑Enclosure port	Enclosure port
☑DC network power port	DC 12V

2.4. Accessories of EUT

Accessories	Manufacturer	Model number	Description
/	/	/	/

2.5. Block diagram EUT configuration for test

Mode 1: Working mode



2.6. Decision of final test mode

According pre-test, the worst test modes were reported as below.

Emission	Radiated Emissions Test	Mode 1: Working mode
----------	-------------------------	----------------------

2.7. Deviations of test standard

No deviation.

2.8. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	15-30°C
Humidity range:	25-75%
Pressure range:	86-106 kPa

Note: The specific temperature and humidity information of each test item refers to the temperature and humidity record in the corresponding test data.

2.9. Test laboratory

Guangdong Dongdian Testing Service Co., Ltd.

Add.: Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808.

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: ddt@dgddt.com.

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, R-20240, G-20118

2.10. Measurement uncertainty

Test Item	Uncertainty
Uncertainty for radiation emission test (30 MHz-1 GHz)	1#: 4.94 dB (Antenna Polarize: V) 4.68 dB (Antenna Polarize: H)
	2#: 4.94 dB (Antenna Polarize: V) 4.68 dB (Antenna Polarize: H)
	3#: 4.96 dB (Antenna Polarize: V) 4.98 dB (Antenna Polarize: H)
	10m: 4.48 dB (Antenna Polarize: V) 4.64 dB (Antenna Polarize: H)
Uncertainty for radiation disturbance test (1 GHz to 6 GHz)	1#: 4.10 dB (1-6 GHz)
	3#: 4.54 dB (1-6 GHz)
Uncertainty for Radiation disturbance test (6GHz to 18GHz)	1#: 4.40 dB (6-18 GHz)
	3#: 4.80 dB (6-18 GHz)
Temperature	0.4 °C
Humidity	2%
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

3. Radiated Emissions Test


3.1. Test equipment

Equipment	Manufacturer	Model No.	Equipment No.	Cal Due To
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	DDT-ZC00246	2026/07/18
EXG Vector Generator	Agilent	N5172B	DDT-ZC00240	2026/07/06
Vector Signal Generator	R&S	SMBV100A	DDT-ZC02806	2026/07/06
Cable + Power Divider	MINI-Circuits	1m cable + 1m cable + ZFRSC-183-S	DDT-ZC01613	/
Active loop antenna	ZHINAN	ZN30403F	DDT-ZC00507	/
Audio Analyzer	R&S	UPV	DDT-ZC01246	/
Spectrum Analyzer	Agilent	E4440A	DDT-ZC01445	2027/02/27
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2027/03/04
Horn Antenna	SCHWARZBEC K	BBHA9120 D	DDT-ZC01218	2026/08/13
Preamplifier	COM-POWER	PAM-118A	DDT-ZC01489	2026/08/10
Pre-amplifier	COM-POWER	PAM-840A	DDT-ZC01693	2027/03/05
EMI Test Software	Audix	e3	DDT-ZC01252	/
RF cable	Zhongke Junchuang	JCTB810-NJ-NJ-7M	DDT-ZC02759	2026/07/22
EMI Test Receiver	R&S	ESCI 7	DDT-ZC01819	2027/02/27


3.2. Block diagram of test setup

Below 1 GHz


For table-top equipment

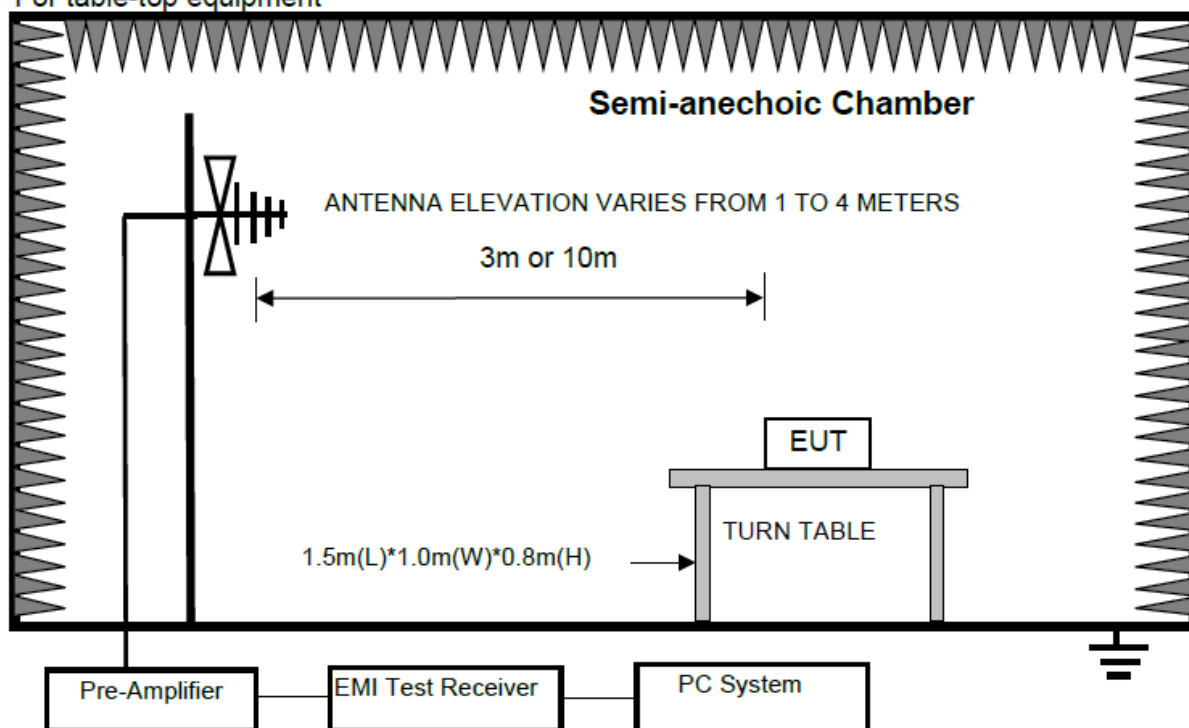


For floor standing equipment

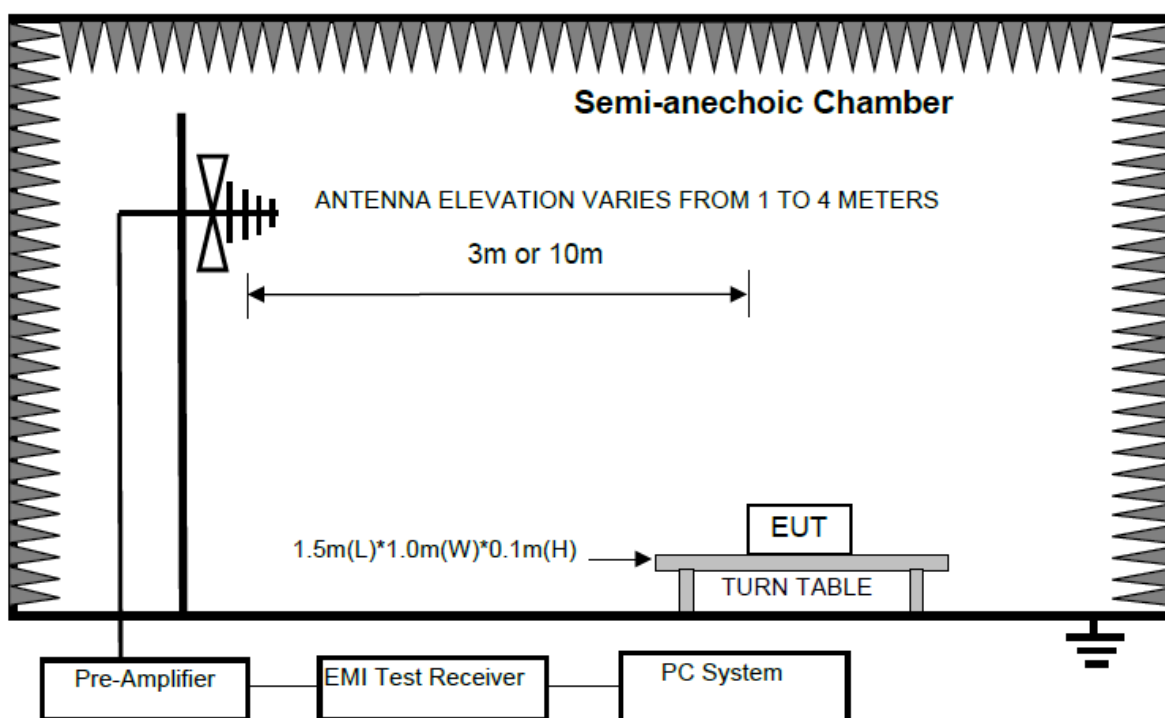


For combinations equipment

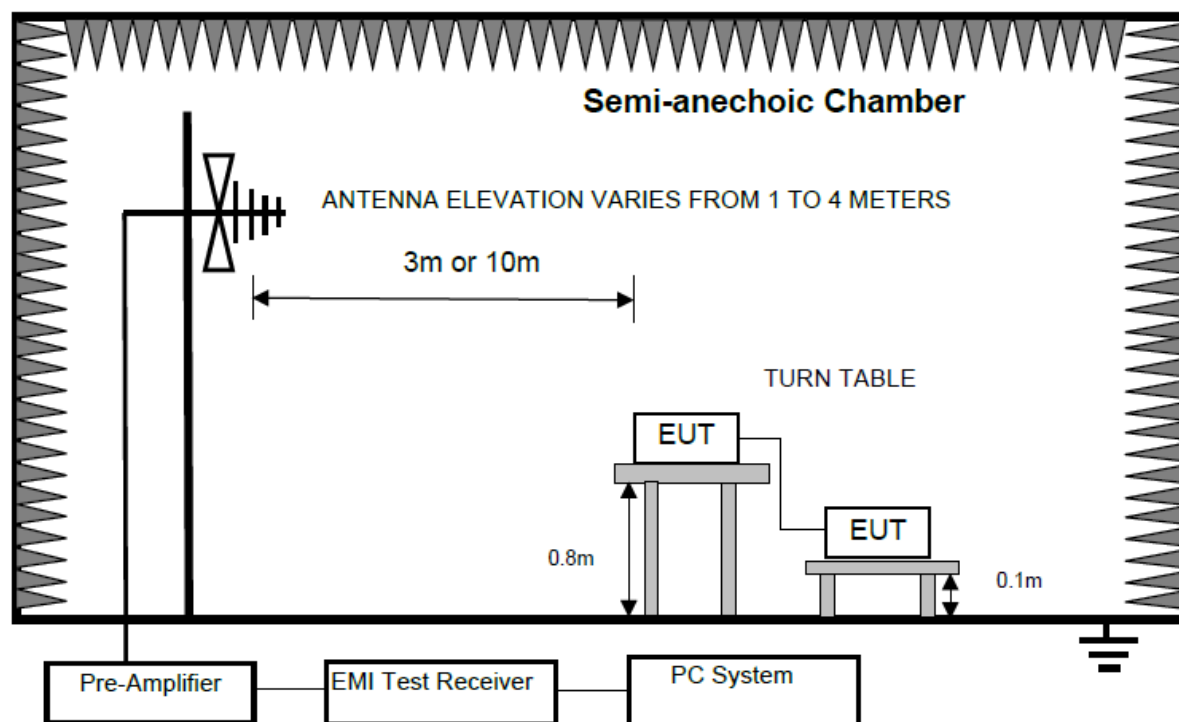


Above 1 GHz
For table-top equipment

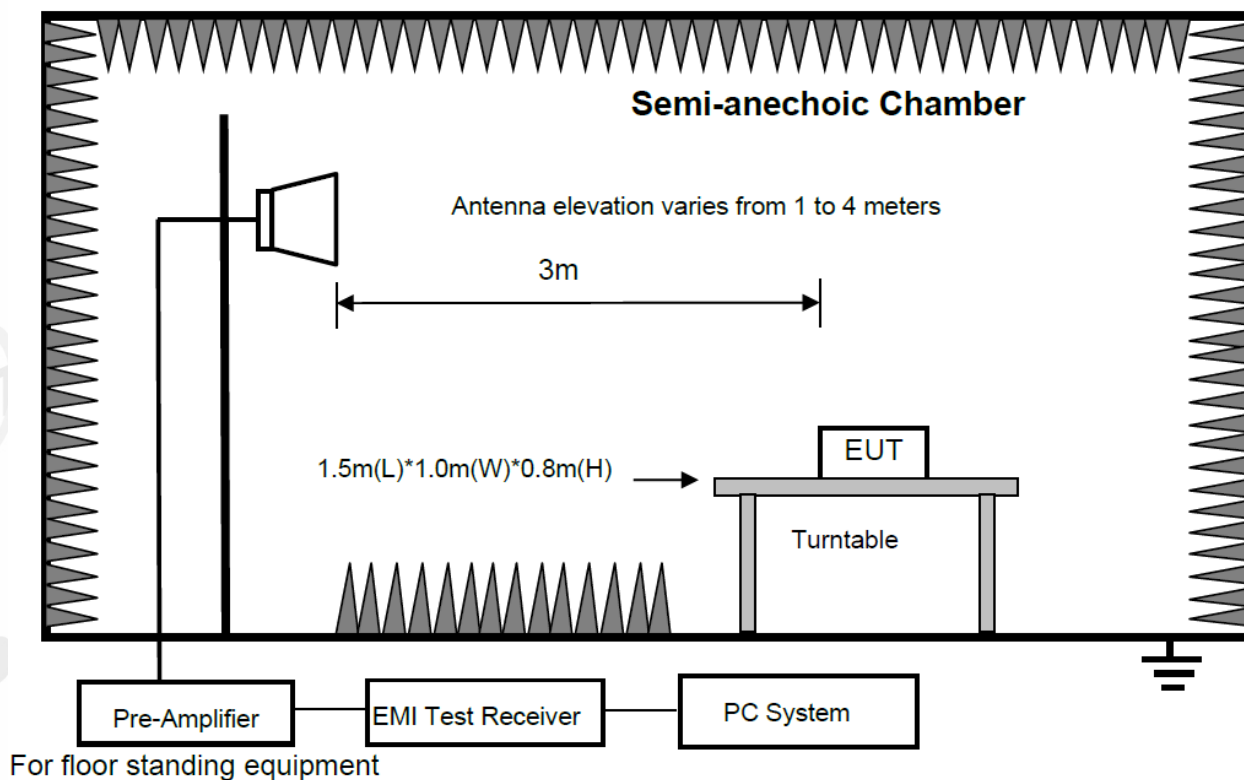

For floor standing equipment

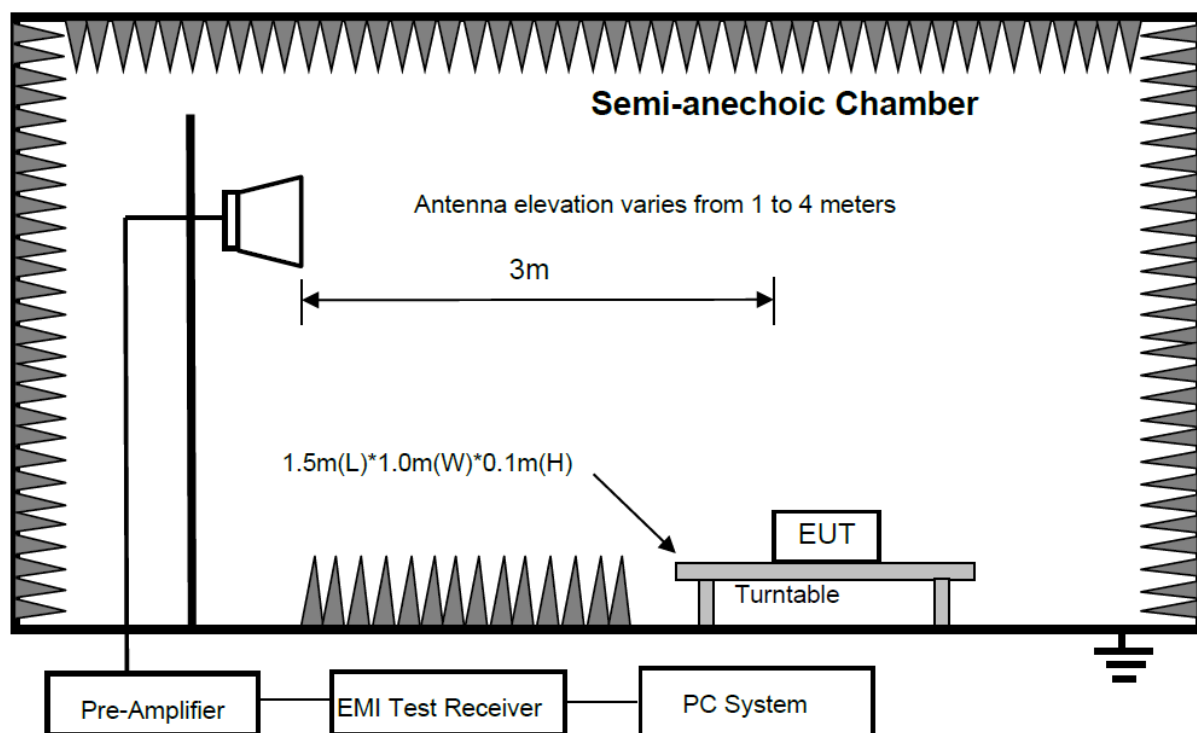

For combinations equipment

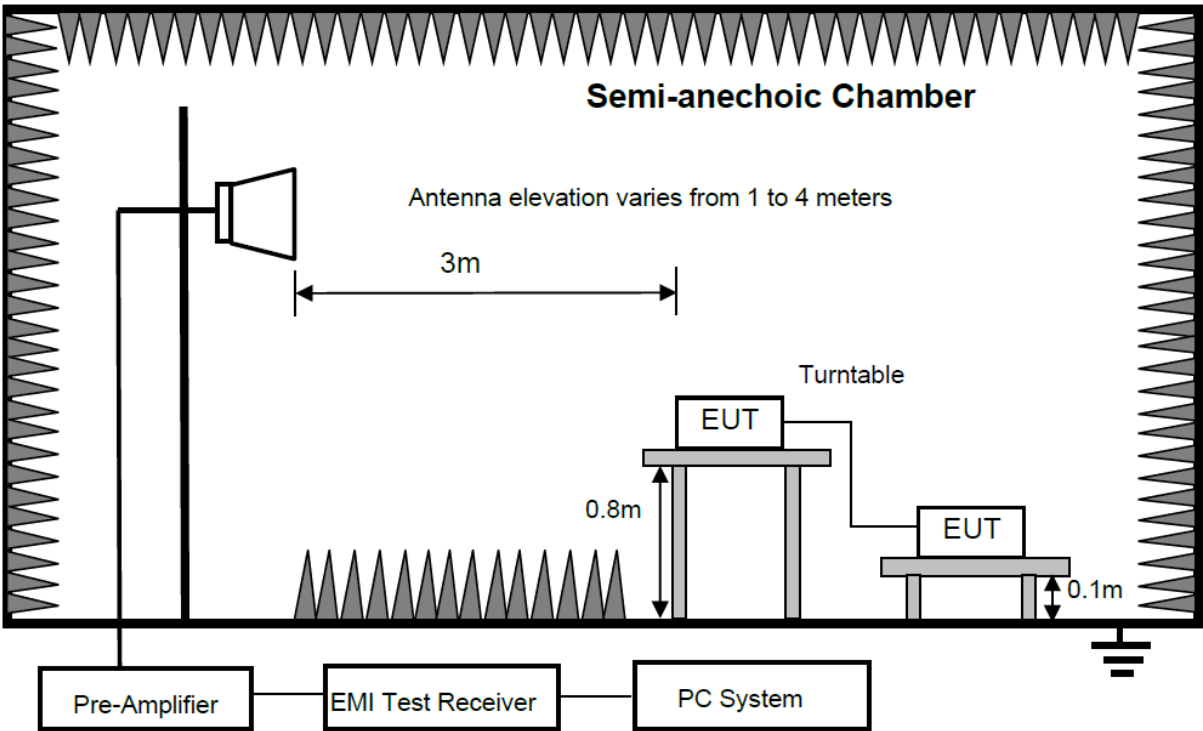

3.3. Limits

Limits:				
Frequency (MHz)	Class A Field Strengths Limits at 10m measuring distance dB(μV)/m	Class A Field Strengths Limits at 3m measuring distance dB(μV)/m	Class B Field Strengths Limits at 10m measuring distance dB(μV)/m	Class B Field Strengths Limits at 3m measuring distance dB(μV)/m
30--88	39.0	49.5	29.5	40.0
88--216	43.5	54.0	33.0	43.5
216--960	46.4	57.0	35.5	46.0
960--1000	49.5	60.0	43.5	54.0
Above 1000	/	80.0 Peak), 60.0 (Average)	/	74.0 (Peak), 54.0 (Average)

3.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
/	/	/	/	/

3.5. Test procedure

Procedure of Preliminary Test

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 0.8m (table-top device)/0.1m (floor stand device) above the ground plane.

Configuration EUT to simulate typical usage as described in as shown above block diagram and equipment list of this report.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.

Mains cables, telephone lines or other connections to auxiliary equipment located outside the test are shall drape to the floor, be fitted with ferrite clamps or ferrite tubes placed on the floor at the point where the cable reaches the floor and then routed to the place where they leave the turntable. No extension cords shall be used to mains receptacle.

The antenna was placed at 3 meter away from the EUT as stated in ANSI C63.4. The antenna connected to the Spectrum Analyzer via a cable and at times a pre-amplifier would be used.

The Analyzer / Receiver quickly scanned from 30 MHz to 18 GHz. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.

After the preliminary scan, we found the test mode producing the highest emission level. The EUT and cable configuration, antenna position, polarization and turntable position of the above highest emission level were recorded for the final test.

Procedure of Final Test

EUT and support equipment were set up on the turntable as per the configuration with highest emission level in the preliminary test.

The Analyzer / Receiver scanned from 30 MHz to 18 GHz. Emissions were scanned and measured rotating the EUT to 360 degrees, varying cable placement and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.

Recorded at least the six highest emissions. Emission frequency, amplitude, antenna position, polarization and turntable position were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit and only Q.P. reading is presented.

For emissions from 30 MHz to 1 GHz, Quasi-Peak values were measured with EMI Receiver and the bandwidth of Receiver is 120 kHz.

For emissions above 1 GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz VBW is set at 3 MHz.

The test data of the worst-case condition(s) was recorded.

3.6. Test result

Pass. (See below detailed test result)

Note 1: All emissions not reported below are too low against the prescribed limits.

Note 2: "----" means Peak detection.

Note 3: According exploratory test, the emission levels are 20 dB below the limit detected from 18 GHz to 40 GHz, so the final test was performed with frequency range from 30 MHz to 18 GHz and recorded in below.

3.7. Test data

TR-4-E-009 Radiated Emission Test Result

Test Site

: DDT 3m Chamber 2#

Test Date

: 2026-06-11

Power Supply

: DC 12V

Condition

: Temp:21.7°C,Humi:70.4%

Sample No.

: S26060324-001

D:\2026 RE2# Report Data\Q26060324-2E\0611 RE.EM6

Tested By

: Jiahao Yang


Test Mode

: Working mode

Antenna/Distance

: 2025 2# ANT 9163/3m/VERTICAL

Data: 1

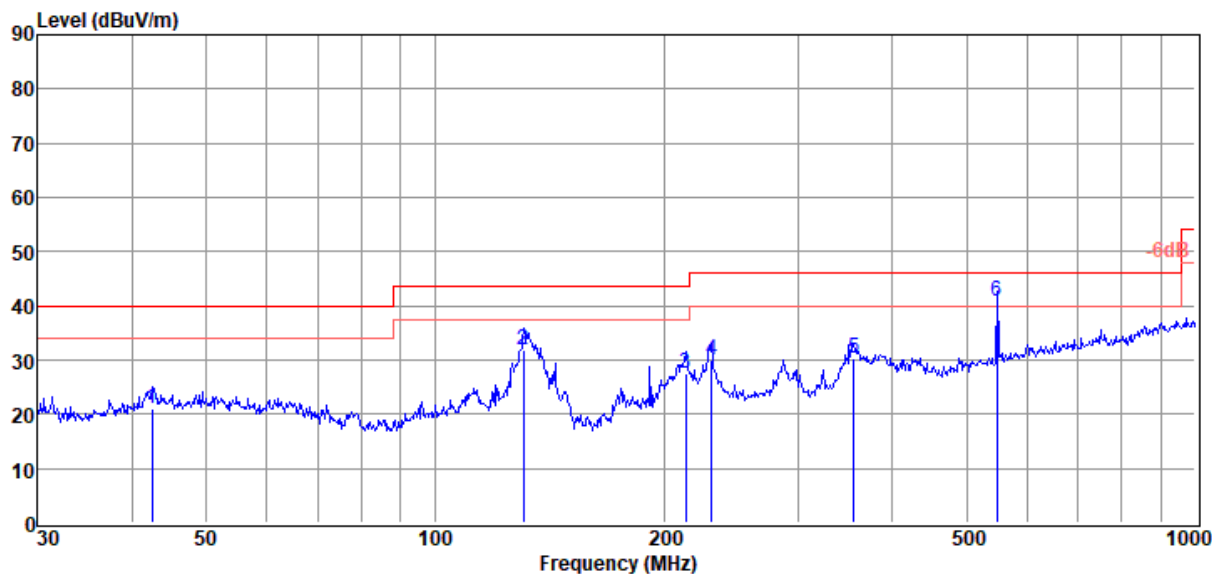

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	42.45	3.83	13.34	3.89	21.06	40.00	18.94	QP	VERTICAL
2	130.84	18.31	8.78	4.75	31.84	43.50	11.66	QP	VERTICAL
3	213.76	11.45	10.83	5.33	27.61	43.50	15.89	QP	VERTICAL
4	230.91	12.70	11.80	5.47	29.97	46.00	16.03	QP	VERTICAL
5	355.43	8.97	15.07	6.12	30.16	46.00	15.84	QP	VERTICAL
6	549.02	16.22	17.36	7.18	40.76	46.00	5.24	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

Test Date : 2026-06-11

Power Supply : DC 12V

Condition : Temp:21.7°C,Humi:70.4%

Sample No. : S26060324-001


D:\2026 RE2# Report Data\Q26060324-2E\0611 RE.EM6

Tested By : Jiahao Yang

Test Mode : Working mode

Antenna/Distance : 2025 2# ANT 9163/3m/HORIZONTAL

Data: 2

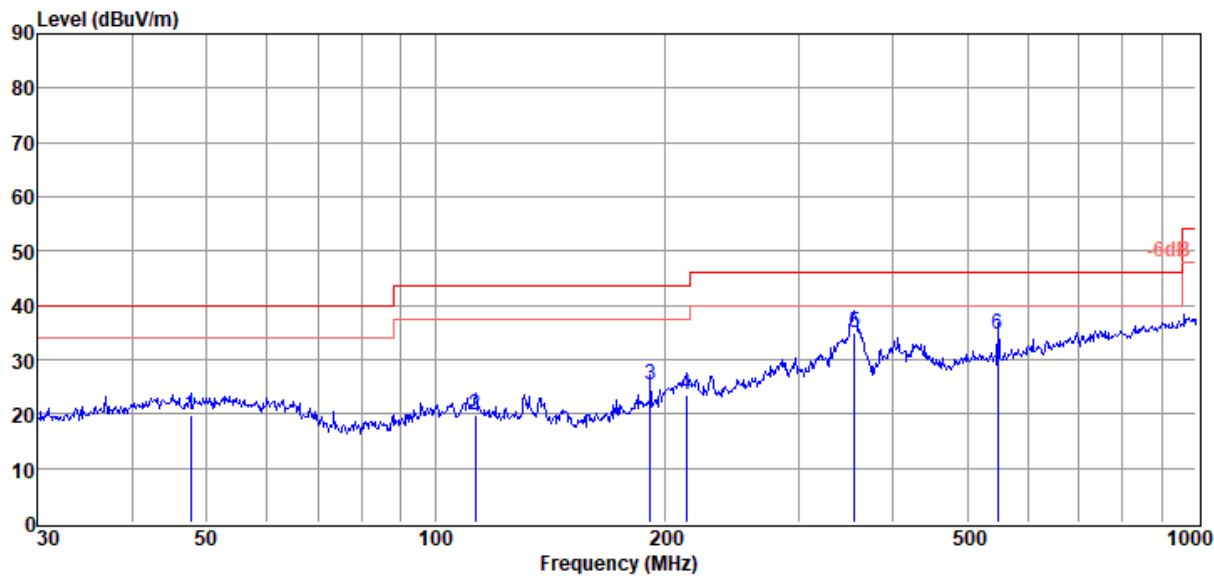

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	47.66	2.46	13.30	3.97	19.73	40.00	20.27	QP	HORIZONTAL
2	112.92	3.67	11.49	4.59	19.75	43.50	23.75	QP	HORIZONTAL
3	191.75	10.35	9.78	5.16	25.29	43.50	18.21	QP	HORIZONTAL
4	213.76	7.22	10.83	5.33	23.38	43.50	20.12	QP	HORIZONTAL
5	355.43	13.63	15.07	6.12	34.82	46.00	11.18	QP	HORIZONTAL
6	549.02	10.11	17.36	7.18	34.65	46.00	11.35	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2026 RE 1# Report data\Q26060324-2E\0706 RE-H.EM6

Test Date : 2026-07-06

Tested By : Jackey Mao

Power Supply : DC 12V


Test Mode : Working mode

Condition : Temp:22.2°C,Humi:69.4%

Antenna/Distance : 2025 9120D 1#/3m/VERTICAL

Memo : S26060324-001

Data: 1

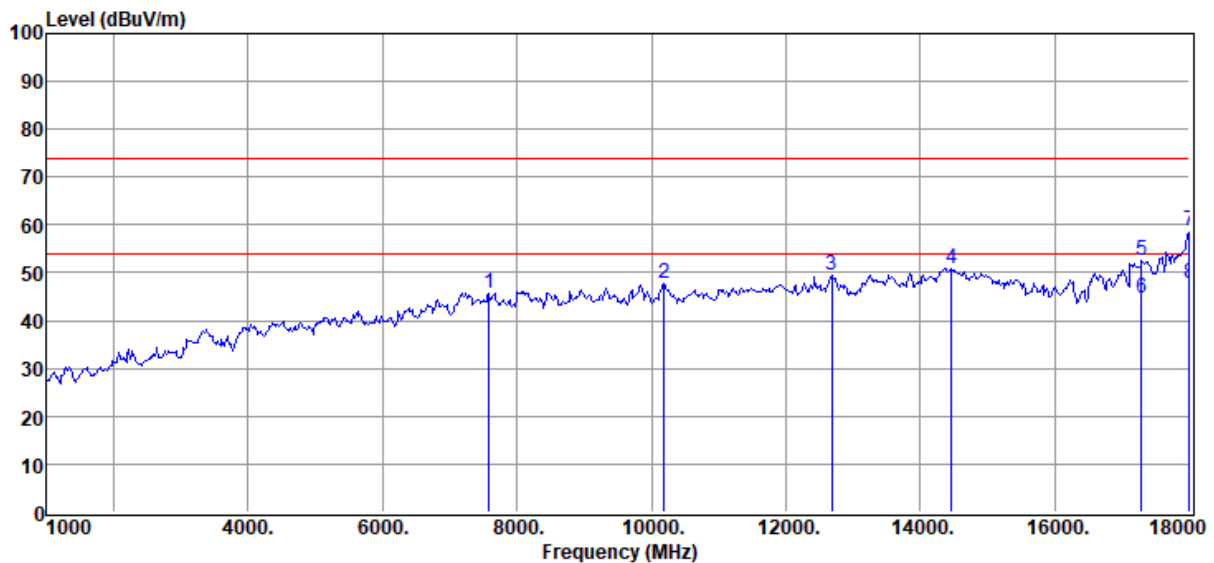

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	7579.00	54.29	36.90	53.83	8.46	45.82	74.00	28.18	Peak	VERTICAL
2	10180.00	51.98	39.38	52.51	8.95	47.80	74.00	26.20	Peak	VERTICAL
3	12679.00	52.10	39.17	52.54	10.71	49.44	74.00	24.56	Peak	VERTICAL
4	14464.00	51.44	41.84	53.61	11.19	50.86	74.00	23.14	Peak	VERTICAL
5	17286.00	49.49	42.02	52.04	13.22	52.69	74.00	21.31	Peak	VERTICAL
6	17286.00	41.49	42.02	52.04	13.22	44.69	54.00	9.31	Average	VERTICAL
7	18000.00	49.44	46.00	51.40	14.85	58.89	74.00	15.11	Peak	VERTICAL
8	18000.00	38.44	46.00	51.40	14.85	47.89	54.00	6.11	Average	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site

: DDT 3m Chamber 1#

D:\2026 RE 1# Report data\Q26060324-2E\0706 RE-H.EM6

Test Date

: 2026-07-06

Tested By

: Jackey Mao

Power Supply

: DC 12V

Test Mode

: Working mode

Condition

: Temp:22.2°C,Humi:69.4%


Antenna/Distance

: 2025 9120D 1#/3m/HORIZONTAL

Memo

: S26060324-001

Data: 2

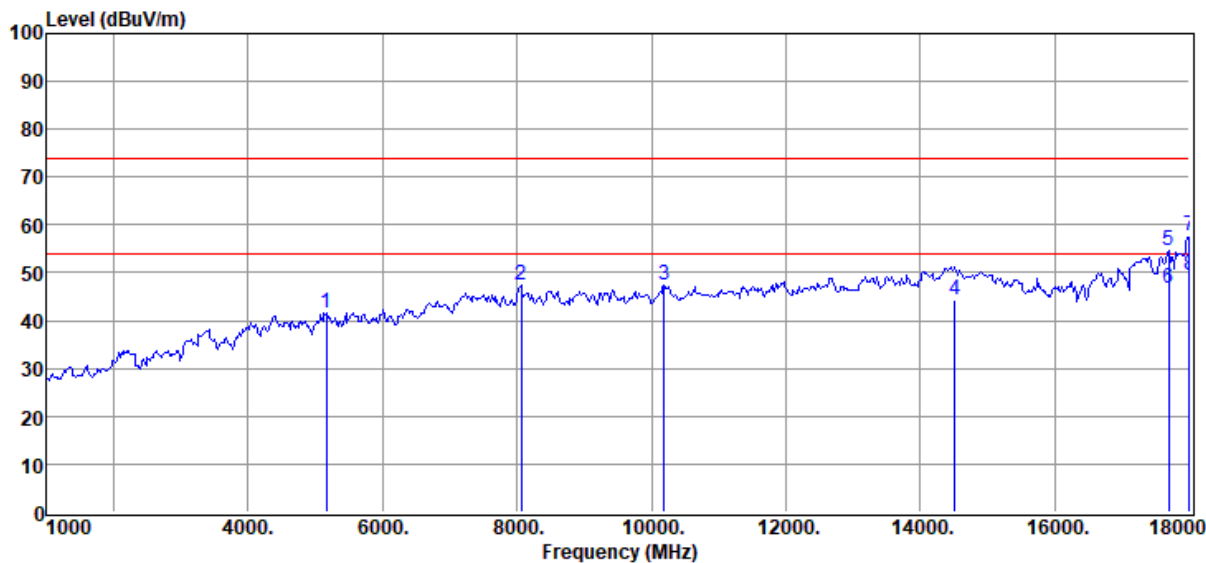

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	5165.00	55.72	32.18	53.41	7.12	41.61	74.00	32.39	Peak	HORIZONTAL
2	8055.00	54.88	37.29	53.64	8.78	47.31	74.00	26.69	Peak	HORIZONTAL
3	10180.00	51.65	39.38	52.51	8.95	47.47	74.00	26.53	Peak	HORIZONTAL
4	14515.00	44.87	41.77	53.52	11.20	44.32	74.00	29.68	Peak	HORIZONTAL
5	17694.00	49.46	42.75	51.68	14.15	54.68	74.00	19.32	Peak	HORIZONTAL
6	17694.00	41.46	42.75	51.68	14.15	46.68	54.00	7.32	Average	HORIZONTAL
7	18000.00	48.18	46.00	51.40	14.85	57.63	74.00	16.37	Peak	HORIZONTAL
8	18000.00	40.18	46.00	51.40	14.85	49.63	54.00	4.37	Average	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Note:

Regulatory Statement and Label Marking Advice for the FCC SDoC

1. Marking Suggested for the label:

Trade Name and model number

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

2. Statement suggested for the User Manual:

Warning: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user authority to operate the equipment.

Notes: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Note: If shielded cables or special accessories are required for compliance, a statement must be included which instructs the user to employ them, for example, shielded cables must be used with this unit to ensure compliance with the Class B FCC limits.

-----End Report-----