

Device Under Test Properties

Model	Dimensions [mm]	DUT Type
Device	190.0 x 150.0 x 50.0	Other

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Headstand, HSL	DEFAULT, 0.00	WLAN 2.4GHz	WLAN, 10415-AAA	2437.000, 6	7.06	1.86	39.8

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
SAM-HeadStand V10.0 - 0717	HSL_600-7200, 2026-09-07	EX3DV4 - SN7625, 2025-12-09	DAE4 Sn1696, 2026-06-02

Scans Setup

	FastVolume Scan	Zoom Scan
Grid Extents [mm]	110.0 x 100.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	3.0
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
Measurement Software		16.4.0.5005
Scan Method	Measured	Measured

SAR Pattern

Measurement Results


	FastVolume Scan	Zoom Scan
Date	2026-09-07	2026-09-07
psSAR1g [W/Kg]	0.433	0.494
psSAR10g [W/Kg]	0.185	0.217
Power Drift [dB]	-0.08	-0.05
TSL Correction	Positive only	Positive only
M2/M1 [%]		81.4
Dist 3dB Peak [mm]		8.9

1g IEEE/IEC62704-1 Avg.SAR on surface [dB(0.433W/kg)]

0



-10

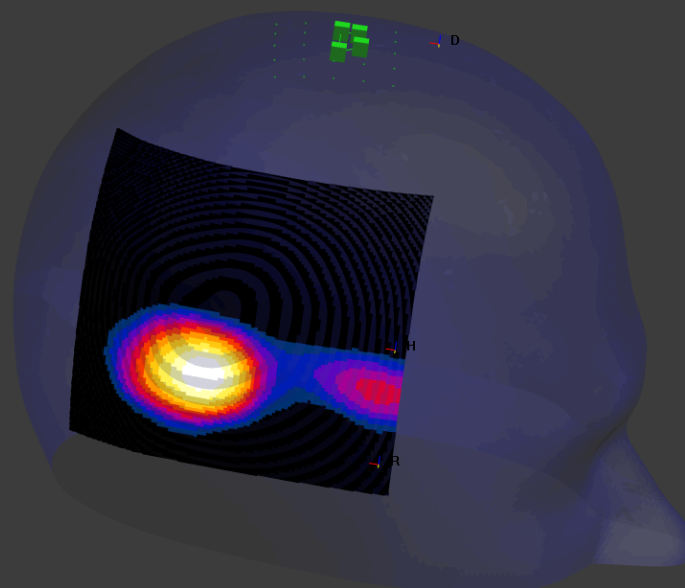

Device Under Test Properties

Model	Dimensions [mm]	DUT Type
Device	190.0 x 150.0 x 50.0	Other

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Headstand, HSL	DEFAULT, 0.00	WLAN 5GHz	WLAN, 10544-AAD	5210.000, 42	5.46	4.59	34.9

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
SAM-HeadStand V10.0 – 0717	HSL_600-7200, 2026-09-07	EX3DV4 – SN7625, 2025-12-09	DAE4 Sn1696, 2026-06-02

Scans Setup

	FastVolume Scan	Zoom Scan
Grid Extents [mm]	75.0 x 60.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	5.0 x 5.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	3.0
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
Measurement Software		16.4.0.5005
Scan Method	Measured	Measured

SAR Pattern

Measurement Results


	FastVolume Scan	Zoom Scan
Date	2026-09-07	2026-09-07
psSAR1g [W/Kg]	0.174	0.149
psSAR10g [W/Kg]	0.058	0.047
Power Drift [dB]	-0.08	-0.19
TSL Correction	Positive only	Positive only
M2/M1 [%]		67.5
Dist 3dB Peak [mm]		5.4

1g IEEE/IEC62704-1 Avg.SAR on surface [dB(0.174W/kg)]

0



-10

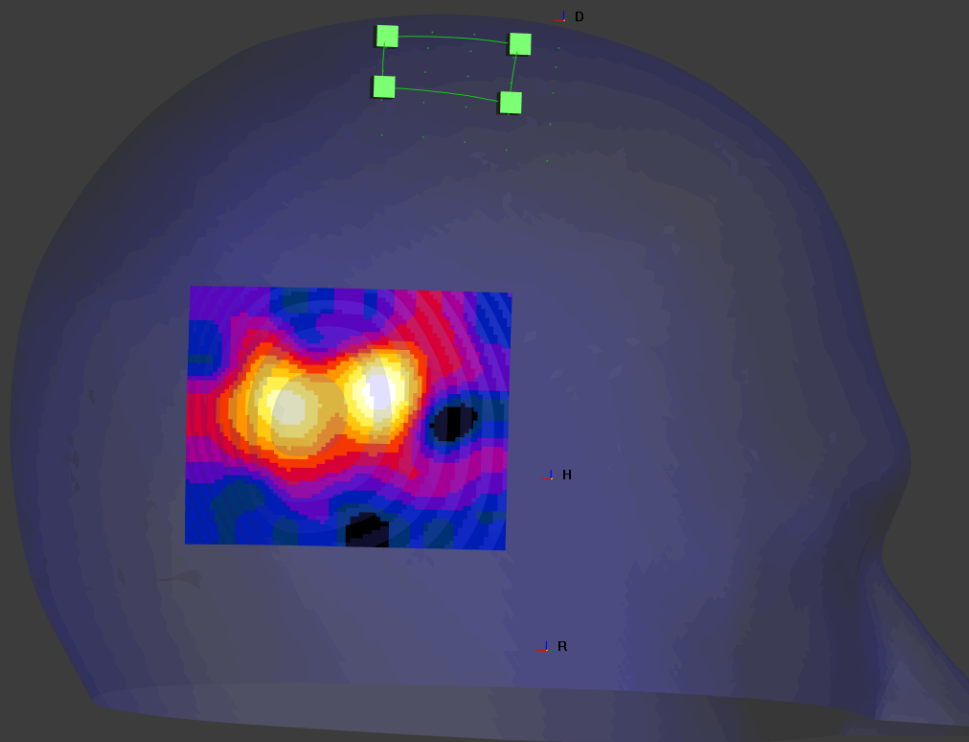

Device Under Test Properties

Model	Dimensions [mm]	DUT Type
Device	190.0 x 150.0 x 50.0	Other

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Headstand, HSL	DEFAULT, 0.00	WLAN 5GHz	WLAN, 10544-AAD	5610.000, 122	5.03	5.01	34.0

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
SAM-HeadStand V10.0 – 0717	HSL_600-7200, 2026-09-07	EX3DV4 – SN7625, 2025-12-09	DAE4 Sn1696, 2026-06-02

Scans Setup

	FastVolume Scan	Zoom Scan
Grid Extents [mm]	75.0 x 60.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	5.0 x 5.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	3.0
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
Measurement Software		16.4.0.5005
Scan Method	Measured	Measured

SAR Pattern

Measurement Results


	FastVolume Scan	Zoom Scan
Date	2026-09-07	2026-09-07
psSAR1g [W/Kg]	0.208	0.220
psSAR10g [W/Kg]	0.093	0.077
Power Drift [dB]	0.05	-0.18
TSL Correction	Positive only	Positive only
M2/M1 [%]		64.0
Dist 3dB Peak [mm]		8.8

1g IEEE/IEC62704-1 Avg.SAR on surface [dB(0.208W/kg)]

0



-10

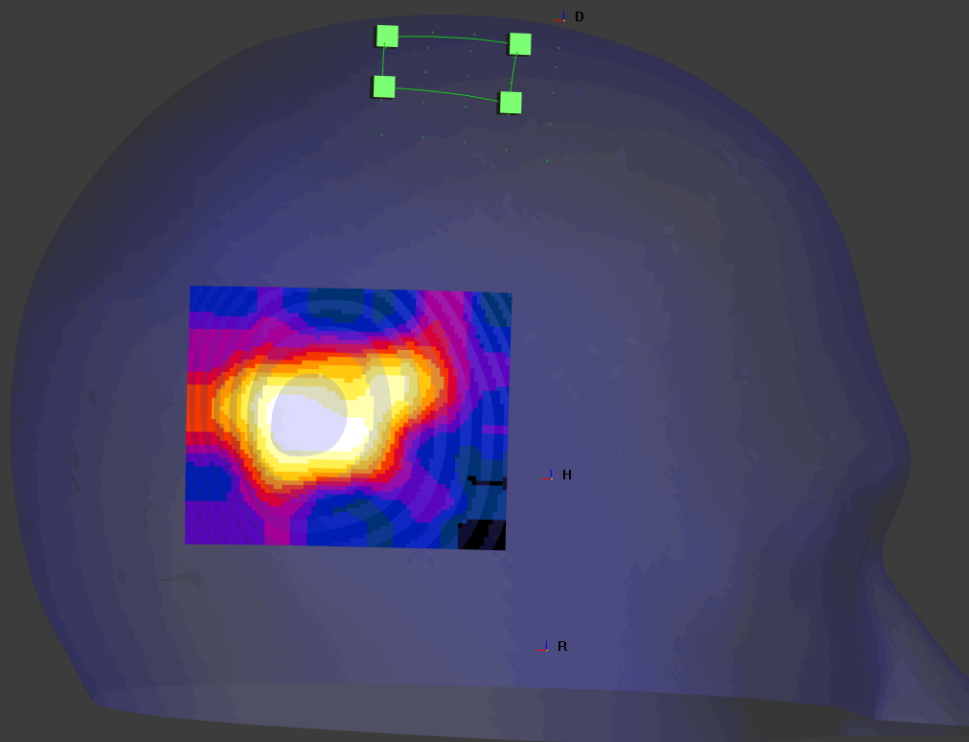

Device Under Test Properties

Model	Dimensions [mm]	DUT Type
Device	190.0 x 150.0 x 50.0	Other

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Headstand, HSL	DEFAULT, 0.00	WLAN 5GHz	WLAN, 10544-AAD	5775.000, 155	4.92	5.24	33.8

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
SAM-HeadStand V10.0 – 0717	HSL_600-7200, 2026-09-07	EX3DV4 – SN7625, 2025-12-09	DAE4 Sn1696, 2026-06-02

Scans Setup

	FastVolume Scan	Zoom Scan
Grid Extents [mm]	75.0 x 60.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	5.0 x 5.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	3.0
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
Measurement Software		16.4.0.5005
Scan Method	Measured	Measured

SAR Pattern

Measurement Results


	FastVolume Scan	Zoom Scan
Date	2026-09-07	2026-09-07
psSAR1g [W/Kg]	0.211	0.217
psSAR10g [W/Kg]	0.086	0.077
Power Drift [dB]	0.04	-0.16
TSL Correction	Positive only	Positive only
M2/M1 [%]		61.1
Dist 3dB Peak [mm]		6.7

1g IEEE/IEC62704-1 Avg.SAR on surface [dB(0.211W/kg)]

0



-10

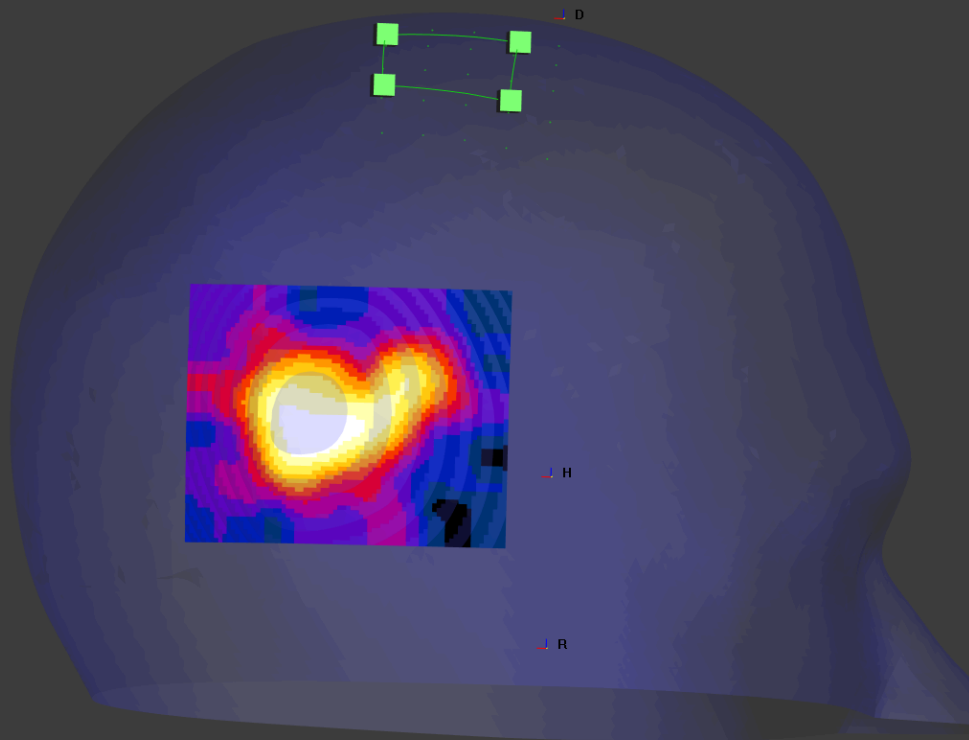

Device Under Test Properties

Model	Dimensions [mm]	DUT Type
Device	190.0 x 150.0 x 50.0	Other

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Headstand, HSL	DEFAULT, 0.00	U-NII-5	WLAN, 11026-AAB	6265.000, 63	5.3	5.86	32.9

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
SAM-HeadStand V10.0 – 0717	HSL_600-7200, 2026-09-07	EX3DV4 – SN7625, 2025-12-09	DAE4 Sn1696, 2026-06-02

Scans Setup

	FastVolume Scan	Zoom Scan
Grid Extents [mm]	90.0 x 70.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	5.0 x 5.0	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	3.0
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
Measurement Software		16.4.0.5005
Scan Method	Measured	Measured

SAR Pattern

Measurement Results


	FastVolume Scan	Zoom Scan
Date	2026-09-07	2026-09-07
psSAR1g [W/Kg]	0.238	0.206
psSAR10g [W/Kg]	0.080	0.066
Power Drift [dB]	0.07	-0.06
TSL Correction	Positive only	Positive only
psAPD (1.0cm2, sq) [W/m2]		2.06
psAPD (4.0cm2, sq) [W/m2]		1.44

1g IEEE/IEC62704-1 Avg.SAR on surface [dB(0.238W/kg)]

0



-10

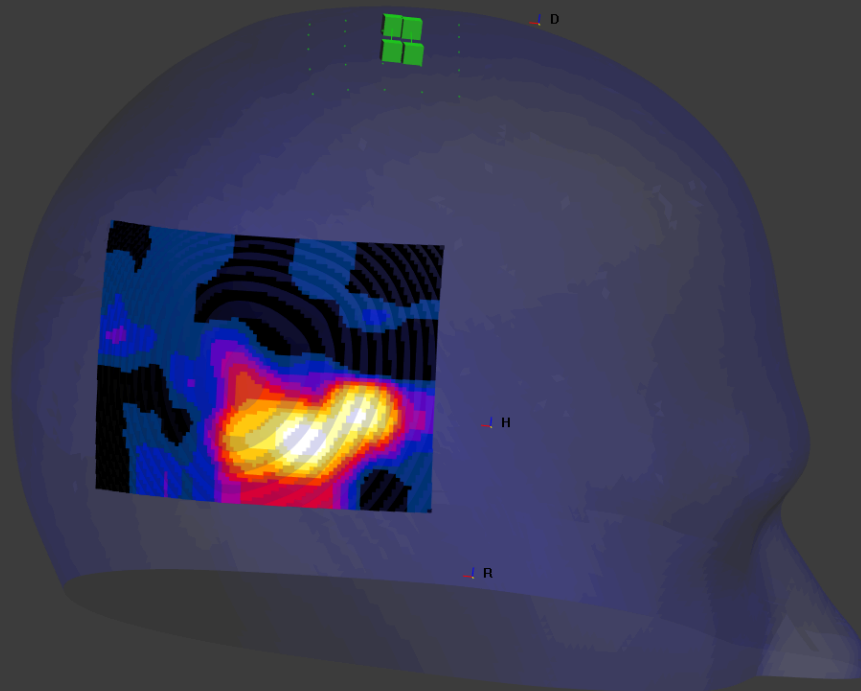

Device Under Test Properties

Model	Dimensions [mm]	DUT Type
Device	190.0 x 150.0 x 50.0	Other

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Headstand, HSL	DEFAULT, 0.00	ISM 2.4 GHz Band	Bluetooth, 10032-CAA	2441.000, 39	7.06	1.86	39.8

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
SAM-HeadStand V10.0 – 0717	HSL_600-7200, 2026-09-07	EX3DV4 – SN7625, 2025-12-09	DAE4 Sn1696, 2026-06-02

Scans Setup

	FastVolume Scan	Zoom Scan
Grid Extents [mm]	100.0 x 90.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	3.0
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
Measurement Software		16.4.0.5005
Scan Method	Measured	Measured

SAR Pattern

Measurement Results


	FastVolume Scan	Zoom Scan
Date	2026-09-07	2026-09-07
psSAR1g [W/Kg]	0.128	0.133
psSAR10g [W/Kg]	0.056	0.058
Power Drift [dB]	-0.08	0.07
TSL Correction	Positive only	Positive only
M2/M1 [%]		88.8
Dist 3dB Peak [mm]		5.0

1g IEEE/IEC62704-1 Avg.SAR on surface [dB(0.128W/kg)]

0



-10

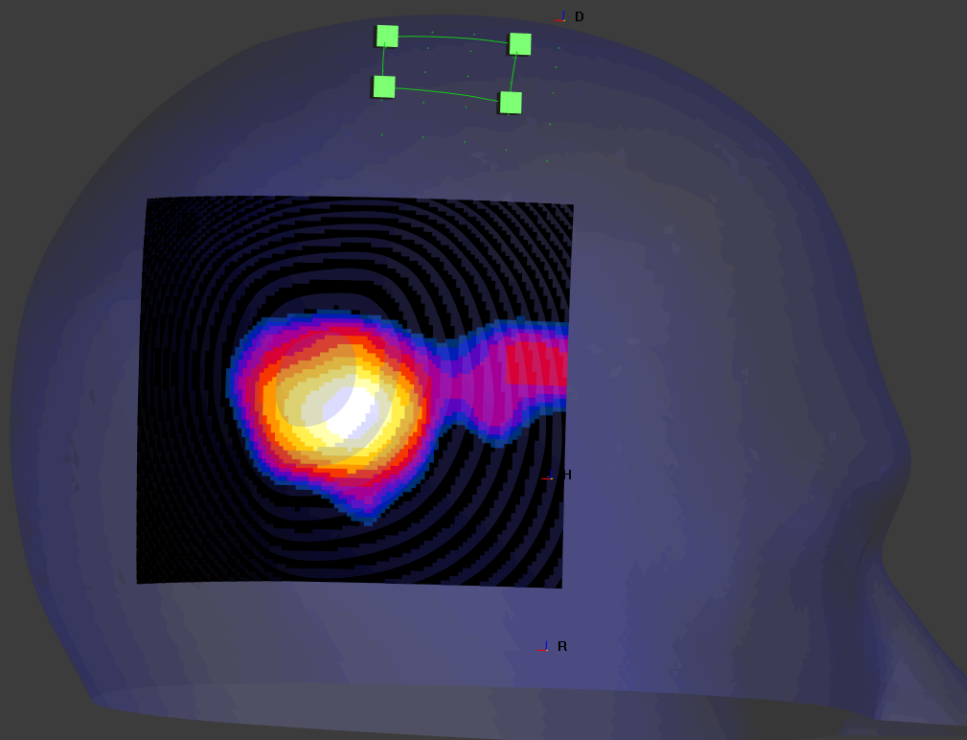

#07_WLAN2.4GHz_802.11b 1Mbps_Right_5mm_Ch1

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2412.000 MHz

Medium: HSL_600-7200_260722 Medium parameters used: $f=2412.000$ MHz; $\sigma=1.82$ S/m; $\epsilon_r=42.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7590; ConvF(7.28, 7.08, 7.07); Calibrated: 2026-03-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1805; Calibrated: 2026-05-19
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2055; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10415-AAA

Area Scan (160.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.313 W/kg; SAR (10g) = 0.165 W/kg;

TSL Correction: Positive only

Zoom Scan (40.0 mm x 40.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.01 dB

SAR (1g) = 0.302 W/kg; SAR (8g) = 0.172 W/kg; SAR (10g) = 0.159 W/kg

Smallest distance from peaks to all points 3 dB below = 10.0 mm

Ratio of SAR at M2 to SAR at M1 = 76.0 %

TSL Correction: Positive only

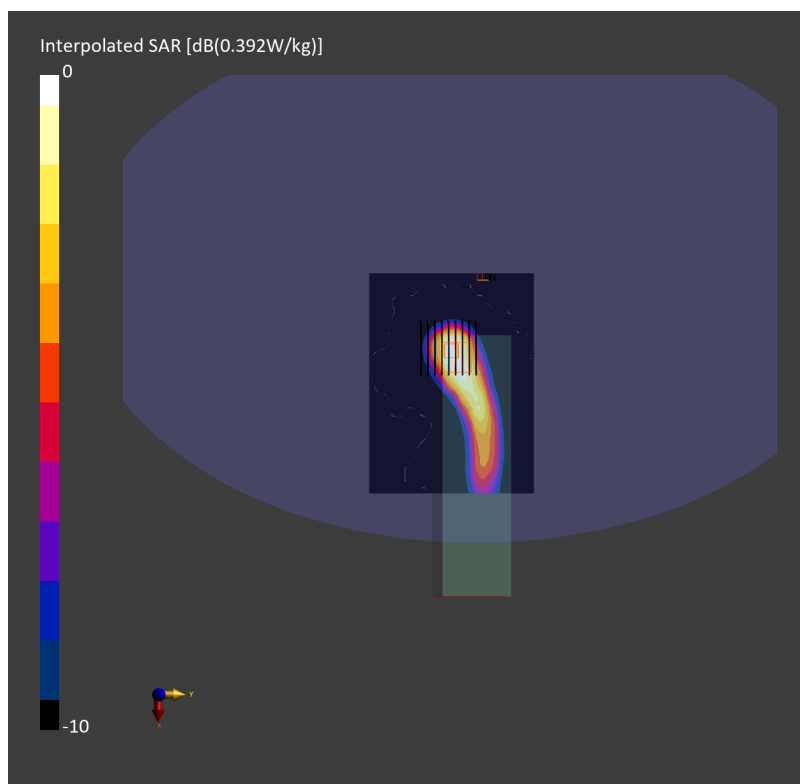

#08_WLAN5GHz_802.11n-HT40 MCS0_Right_5mm_Ch38

Communication System: IEEE 802.11n; Frequency: 5190.000 MHz

Medium: HSL_600-7200_260723 Medium parameters used: $f = 5190.000$ MHz; $\sigma = 4.66$ S/m; $\epsilon_r = 37.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7590; ConvF(5.98, 5.82, 5.82); Calibrated: 2026-03-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1805; Calibrated: 2026-05-19
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2055; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10599-AAD

Area Scan (160.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.709 W/kg; SAR (10g) = 0.237 W/kg;

TSL Correction: Positive only

Zoom Scan (32.0 mm x 32.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = -0.03 dB

SAR (1g) = 0.758 W/kg; SAR (8g) = 0.282 W/kg; SAR (10g) = 0.248 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 60.6 %

TSL Correction: Positive only

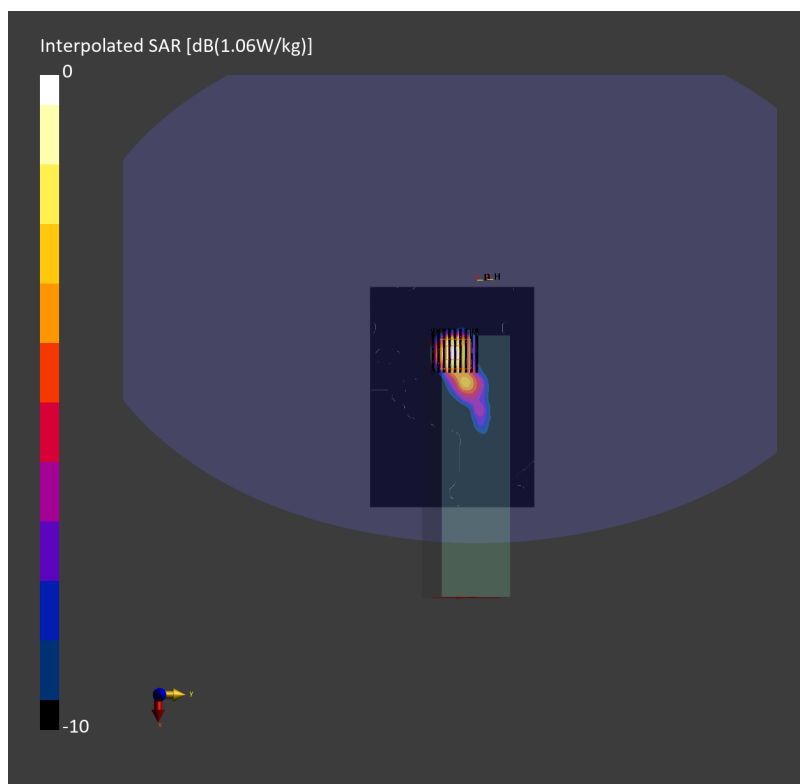

#09_WLAN5GHz_802.11ac-VHT80 MCS0_Right_5mm_Ch122

Communication System: IEEE 802.11ac WiFi; Frequency: 5610.000 MHz

Medium: HSL_600-7200_260902 Medium parameters used: $f = 5610.000$ MHz; $\sigma = 4.98$ S/m; $\epsilon_r = 34.7$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(5.15, 5.24, 5.01); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2155; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (160.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.535 W/kg; SAR (10g) = 0.210 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = 0.03 dB

SAR (1g) = 0.639 W/kg; SAR (8g) = 0.312 W/kg; SAR (10g) = 0.282 W/kg

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 69.0 %

TSL Correction: Positive only

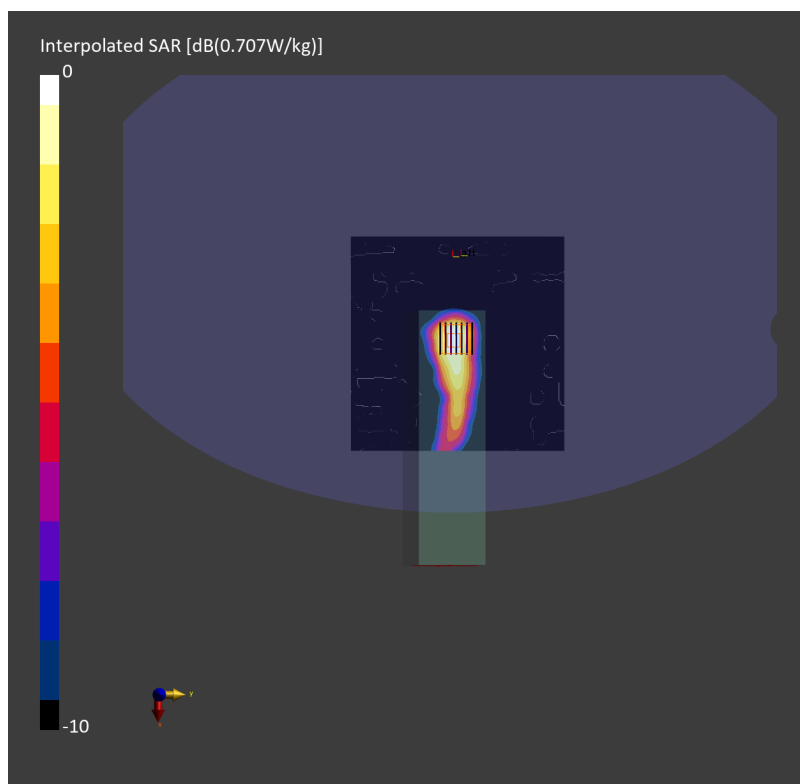

#10_WLAN5GHz_802.11ac-VHT80 MCS0_Left_5mm_Ch155

Communication System: IEEE 802.11ac WiFi; Frequency: 5775.000 MHz

Medium: HSL_600-7200_260723 Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.35$ S/m; $\epsilon_r = 36.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7590; ConvF(5.27, 5.13, 5.13); Calibrated: 2026-03-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1805; Calibrated: 2026-05-19
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2055; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (100.0 mm x 100.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.431 W/kg; SAR (10g) = 0.158 W/kg;

TSL Correction: Positive only

Zoom Scan (36.0 mm x 32.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = 0.01 dB

SAR (1g) = 0.493 W/kg; SAR (8g) = 0.184 W/kg; SAR (10g) = 0.162 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 55.8 %

TSL Correction: Positive only

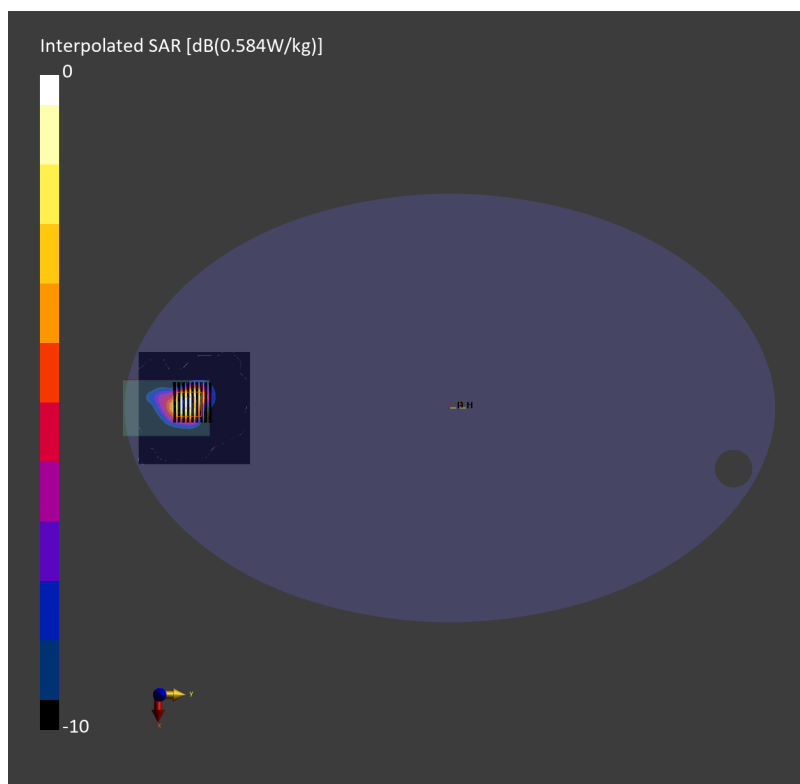

#11_WLAN6GHz_802.11be-EHT320 MCS0_Left_5mm_Ch31

Communication System: IEEE 802.11be; Frequency: 6105.000 MHz

Medium: HSL_600-7200_260901 Medium parameters used: $f = 6105.000$ MHz; $\sigma = 5.49$ S/m; $\epsilon_r = 33.8$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.1°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(5.51, 5.61, 5.37); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2155; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 11026-AAB

Area Scan (85.0 mm x 85.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.293 W/kg; SAR (10g) = 0.104 W/kg;

TSL Correction: Positive only

Zoom Scan (27.2 mm x 27.2 mm x 22.9 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = -0.05 dB


SAR (1g) = 0.307 W/kg; SAR (8g) = 0.125 W/kg; SAR (10g) = 0.111 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 54.9 %

psAPD (1.0cm², sq) = 3.07 [W/m²]; psAPD (4.0cm², sq) = 2.50 [W/m²]

TSL Correction: Positive only

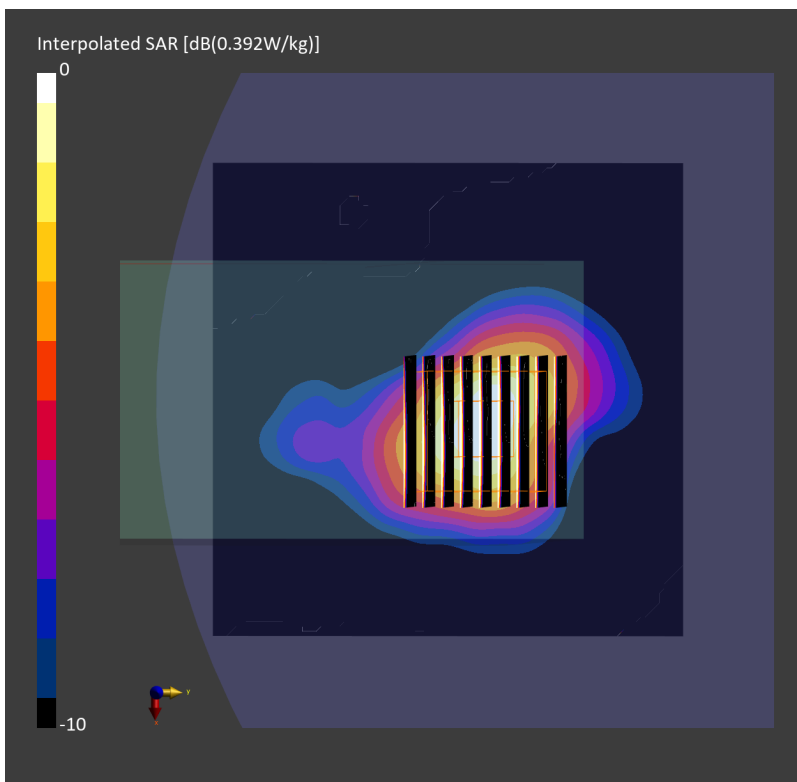

#12_Bluetooth_1Mbps_Right_5mm_Ch39

Communication System: IEEE 802.15.1 Bluetooth; Frequency: 2441.000 MHz

Medium: HSL_600-7200_260722 Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.84$ S/m; $\epsilon_r = 42.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7590; ConvF(7.28, 7.08, 7.07); Calibrated: 2026-03-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1805; Calibrated: 2026-05-19
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2055; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (220.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.117 W/kg; SAR (10g) = 0.062 W/kg;

TSL Correction: Positive only

Zoom Scan (50.0 mm x 50.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.09 dB

SAR (1g) = 0.116 W/kg; SAR (8g) = 0.065 W/kg; SAR (10g) = 0.060 W/kg

Smallest distance from peaks to all points 3 dB below = 9.9 mm

Ratio of SAR at M2 to SAR at M1 = 72.5 %

TSL Correction: Positive only

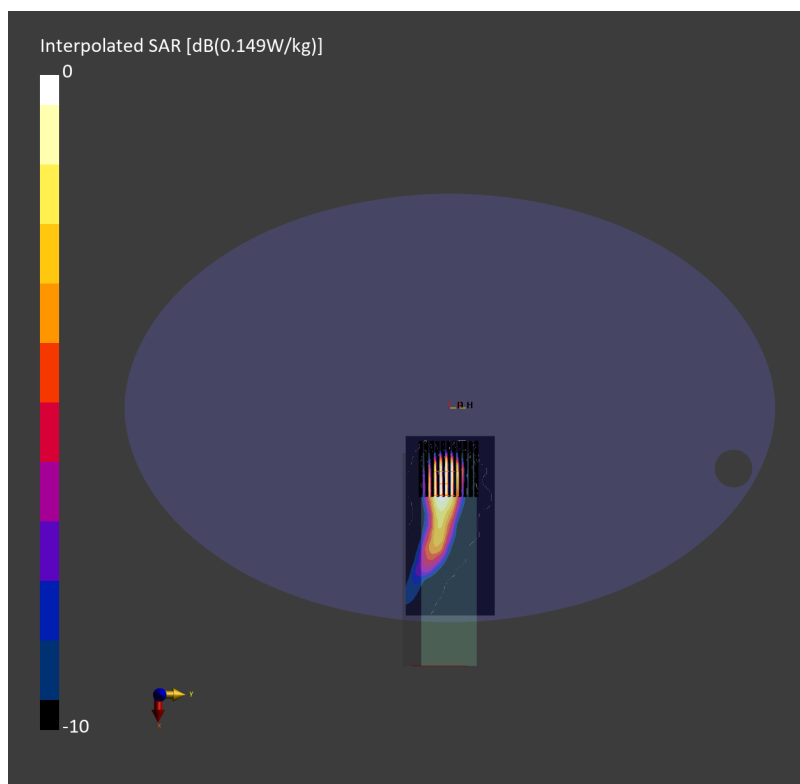

#13_WLAN2.4GHz_802.11b 1Mbps_Left_0mm_Ch1

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2412.000 MHz

Medium: HSL_600-7200_260901 Medium parameters used: $f = 2412.000$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 40.0$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.1°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.16, 7.29, 6.97); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2155; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10415-AAA

Area Scan (80.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.680 W/kg; SAR (10g) = 0.349 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 35.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.04 dB

SAR (1g) = 0.729 W/kg; SAR (8g) = 0.405 W/kg; SAR (10g) = 0.371 W/kg

Smallest distance from peaks to all points 3 dB below = 8.3 mm

Ratio of SAR at M2 to SAR at M1 = 80.9 %

TSL Correction: Positive only

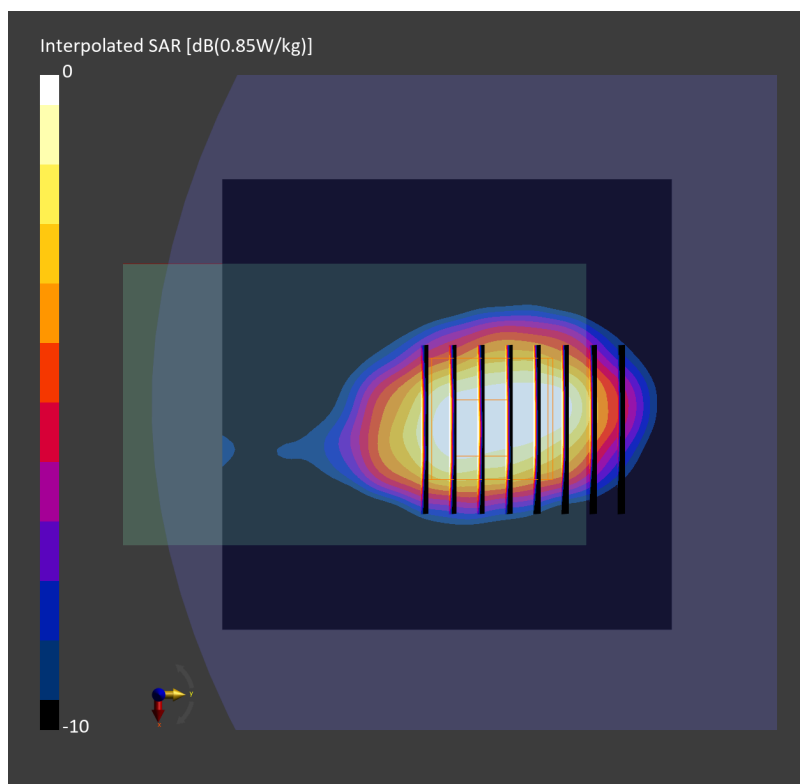

#14_WLAN5GHz_802.11ac-VHT80 MCS0_Left_0mm_Ch42

Communication System: IEEE 802.11ac WiFi; Frequency: 5210.000 MHz

Medium: HSL_600-7200_260902 Medium parameters used: $f = 5210.000$ MHz; $\sigma = 4.53$ S/m; $\epsilon_r = 35.4$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(5.52, 5.62, 5.37); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2155; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (80.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 1.39 W/kg; SAR (10g) = 0.455 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = -0.06 dB

SAR (1g) = 1.72 W/kg; SAR (8g) = 0.598 W/kg; SAR (10g) = 0.519 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 64.1 %

TSL Correction: Positive only

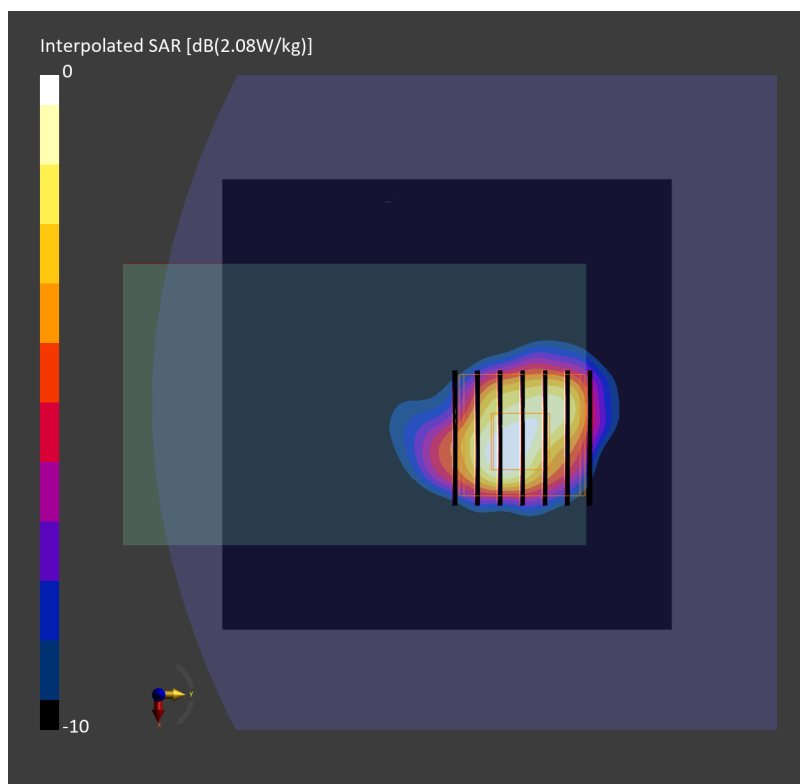

#15_WLAN5GHz_802.11ac-VHT80 MCS0_Right_0mm_Ch122

Communication System: IEEE 802.11ac WiFi; Frequency: 5610.000 MHz

Medium: HSL_600-7200_260902 Medium parameters used: $f = 5610.000$ MHz; $\sigma = 4.98$ S/m; $\epsilon_r = 34.7$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(5.15, 5.24, 5.01); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2155; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (160.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 1.67 W/kg; SAR (10g) = 0.586 W/kg;

TSL Correction: Positive only

Zoom Scan (32.0 mm x 32.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = -0.09 dB

SAR (1g) = 1.90 W/kg; SAR (8g) = 0.856 W/kg; SAR (10g) = 0.768 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 70.3 %

TSL Correction: Positive only

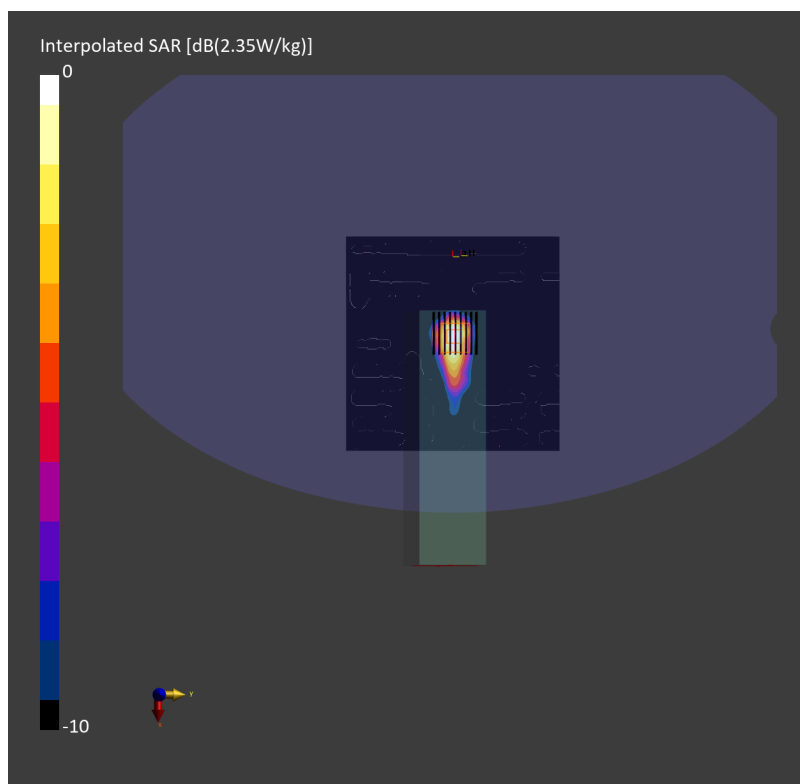

#16_WLAN5GHz_802.11ac-VHT80 MCS0_Left_0mm_Ch155

Communication System: IEEE 802.11ac WiFi; Frequency: 5775.000 MHz

Medium: HSL_600-7200_260723 Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.35$ S/m; $\epsilon_r = 36.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7590; ConvF(5.27, 5.13, 5.13); Calibrated: 2026-03-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1805; Calibrated: 2026-05-19
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2055; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (100.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 1.41 W/kg; SAR (10g) = 0.461 W/kg;

TSL Correction: Positive only

Zoom Scan (32.0 mm x 32.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = -0.07 dB

SAR (1g) = 1.68 W/kg; SAR (8g) = 0.596 W/kg; SAR (10g) = 0.518 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 56.9 %

TSL Correction: Positive only

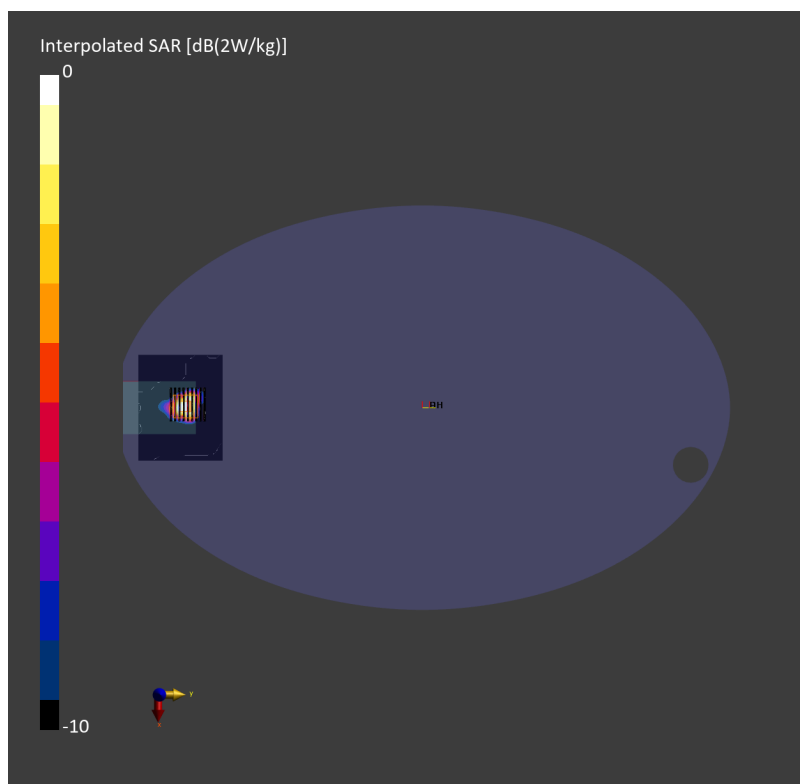

#17_WLAN6GHz_802.11be-EHT320 MCS0_Front_0mm_Ch191

Communication System: IEEE 802.11be; Frequency: 6905.000 MHz

Medium: HSL_600-7200_260901 Medium parameters used: $f = 6905.000$ MHz; $\sigma = 6.44$ S/m; $\epsilon_r = 32.3$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.1°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(5.51, 5.61, 5.37); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2155; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 11026-AAB

Area Scan (153.0 mm x 153.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 1.64 W/kg; SAR (10g) = 0.409 W/kg;

TSL Correction: Positive only

Zoom Scan (30.6 mm x 34.0 mm x 22.9 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = -0.14 dB


SAR (1g) = 2.34 W/kg; SAR (8g) = 0.587 W/kg; SAR (10g) = 0.497 W/kg

Smallest distance from peaks to all points 3 dB below = 4.4 mm

Ratio of SAR at M2 to SAR at M1 = 50.3 %

psAPD (1.0cm², sq) = 23.4 [W/m²]; psAPD (4.0cm², sq) = 11.7 [W/m²]

TSL Correction: Positive only

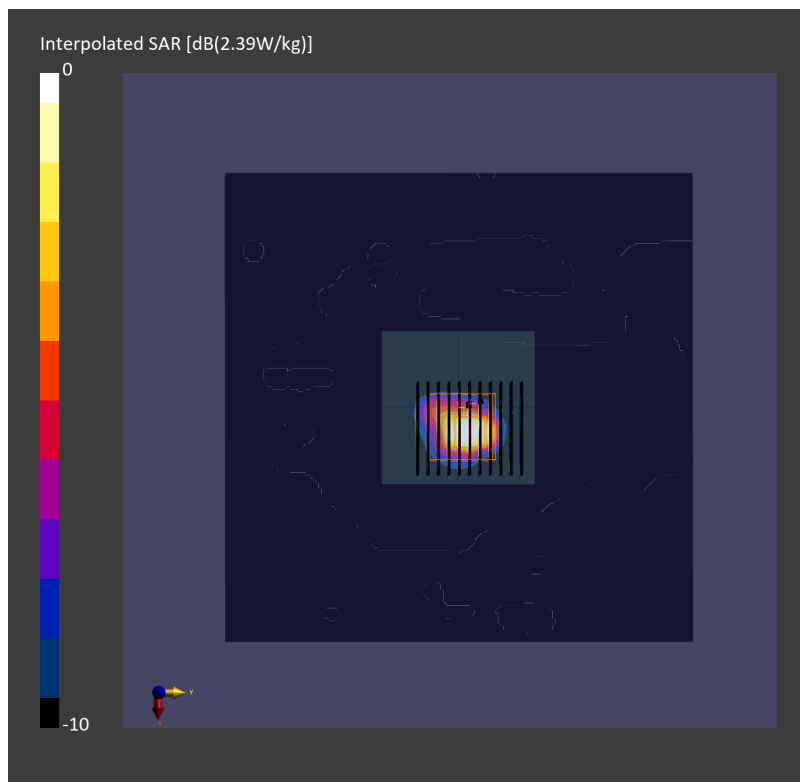

#18_Bluetooth_1Mbps_Right_0mm_Ch39

Communication System: IEEE 802.15.1 Bluetooth; Frequency: 2441.000 MHz

Medium: HSL_600-7200_260901 Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.84$ S/m; $\epsilon_r = 39.9$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.1°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.16, 7.29, 6.97); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2155; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (160.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.247 W/kg; SAR (10g) = 0.111 W/kg;

TSL Correction: Positive only

Zoom Scan (40.0 mm x 40.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.252 W/kg; SAR (8g) = 0.130 W/kg; SAR (10g) = 0.118 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 79.7 %

TSL Correction: Positive only

